



THE DATASHEET OF 8N4SV76LC-0162CDI8

Factory Datasheet. Contains Confidential Information. Do not send to customers.

General Description


The IDT8N4SV76 is an LVDS Frequency-Programmable VCXO with very flexible frequency and pull-range programming capabilities. The device uses IDT's fourth generation FemtoClock® NG technology for an optimum of high clock frequency and low phase noise performance. The device accepts 2.5V or 3.3V supply and is packaged in a small, lead-free (RoHS 6) 6-lead ceramic 5mm x 7mm x 1.55mm package.

The device can be factory-programmed to any frequency in the range of 15.476MHz to 866.67MHz and from 975MHz to 1,300MHz to the very high degree of frequency precision of 218Hz or better. The extended temperature range supports wireless infrastructure, telecommunication and networking end equipment requirements.


Features

- Fourth generation FemtoClock® NG technology
- Programmable clock output frequency from 15.476MHz to 866.67MHz and from 975MHz to 1,300MHz
- Frequency programming resolution is 218Hz and better
- Factory-programmable VCXO pull range and control voltage polarity
- Absolute pull-range (APR) programmable from ± 4.5 to ± 754.5 ppm
- One 2.5V or 3.3V LVDS clock output
- Output enable control input, LVCMOS/LVTTL compatible
- RMS phase jitter @ 156.25MHz (12kHz - 20MHz): 0.53ps (typical)
- 2.5V or 3.3V supply voltage
- -40°C to 85°C ambient operating temperature
- Lead-free (RoHS 6) 6-lead ceramic 5mm x 7mm x 1.55mm package

Block Diagram

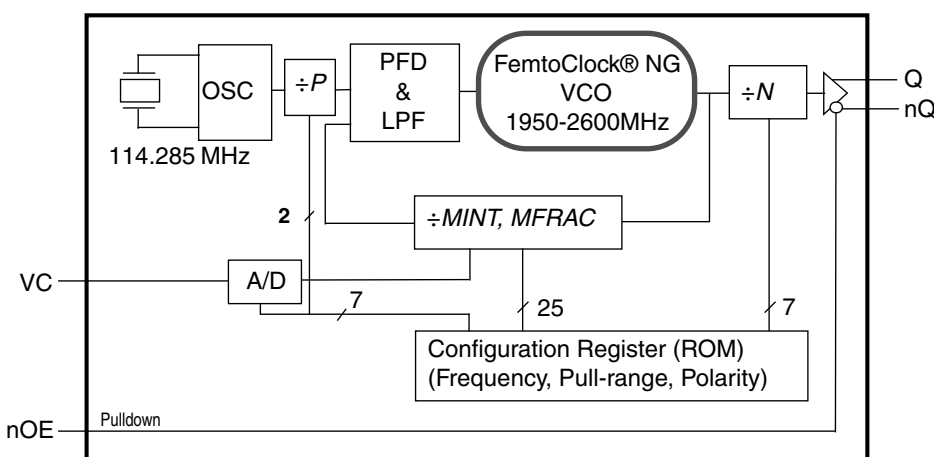

Pin Assignment



IDT8N4SV76
6-lead ceramic 5mm x 7mm x 1.55mm
package body
CD Package
Top View

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Pin Description and Characteristic Tables

Table 1. Pin Descriptions

Number	Name	Type		Description
1	VC	Input		VCXO Control Voltage input.
2	nOE	Input	Pulldown	Output enable pin. See Table 3A for function. LVCMOS/LVTTL interface levels.
3	GND	Power		Power supply ground.
4, 5	Q, nQ	Output		Differential clock output pair. LVDS interface levels.
6	V _{DD}	Power		Power supply pin.

NOTE: *Pulldown* refers to an internal input resistors. See Table 2, *Pin Characteristics*, for typical values.

Table 2. Pin Characteristics

Symbol	Parameter		Test Conditions	Minimum	Typical	Maximum	Units
C _{IN}	Input Capacitance	nOE			5.5		pF
		VC			10		pF
R _{PULLDOWN}	Input Pulldown Resistor				50		kΩ

Function Tables

Table 3A. nOE Configuration

Input	Output Enable
nOE	
0 (default)	Outputs are enabled.
1	Outputs Q, nQ are in high-impedance state.


Table 3B. Output Frequency Range

15.476MHz to 866.67MHz
975MHz to 1,300MHz

NOTE: Supported output frequency range. The output frequency can be programmed to any frequency in this range and to a precision of 218Hz or better.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Block Diagram with Factory-Configuration Registers

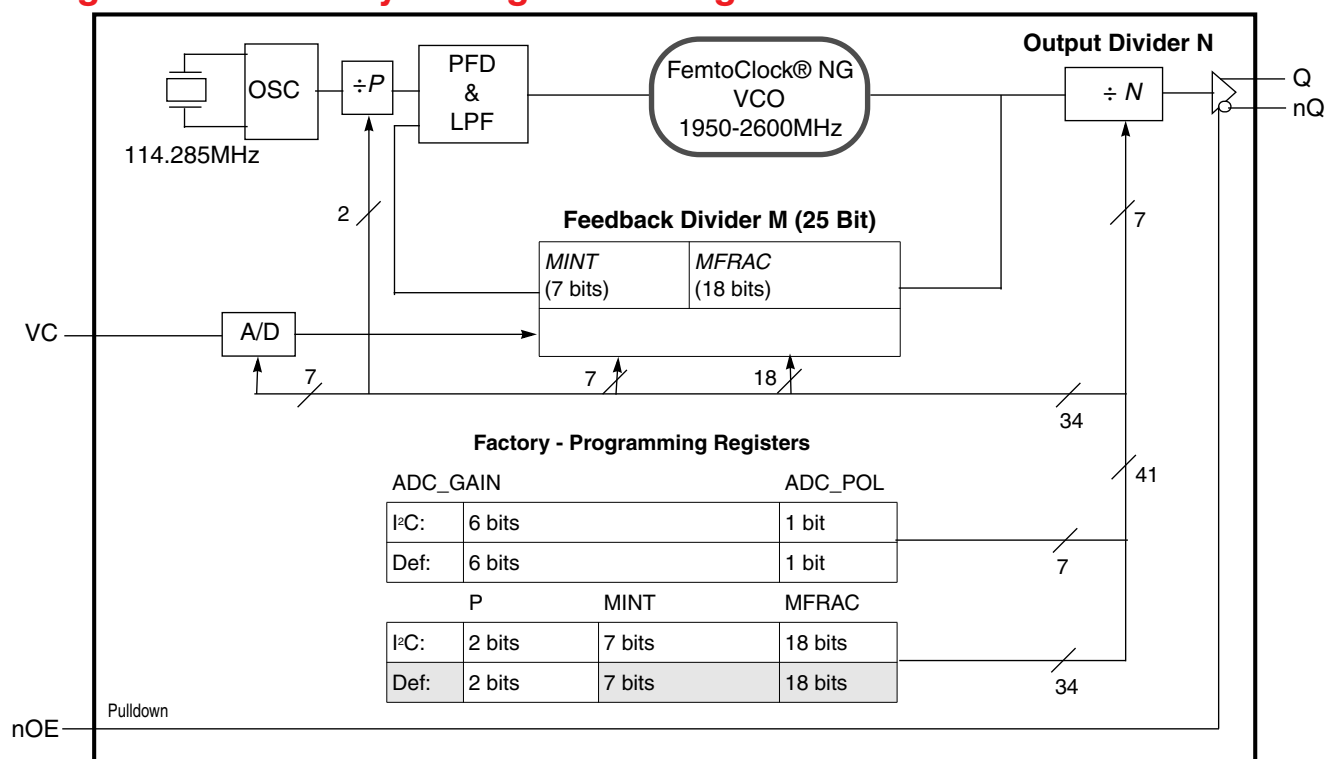

©2013 Integrated Device Technology, Inc.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Principles of Operation

The block diagram consists of the internal 3rd overtone crystal and oscillator which provide the reference clock f_{XTAL} of 114.285MHz. The PLL includes the FemtoClock® VCO along with the Pre-divider (P), the feedback divider (M) and the post divider (N). The P , M , and N dividers determine the output frequency based on the f_{XTAL} reference. The feedback divider is fractional supporting a huge number of output frequencies. Internal registers are used to hold up the factory pre-set configuration setting. The P , M , and N frequency configurations support an output frequency range 15.476MHz to 866.67MHz and 975MHz to 1,300MHz.

The devices use the fractional feedback divider with a delta-sigma modulator for noise shaping and robust frequency synthesis capability. The relatively high reference frequency minimizes phase noise generated by frequency multiplication and allows more efficient shaping of noise by the delta-sigma modulator. The output frequency is determined by the 2-bit pre-divider (P), the feedback divider (M) and the 7-bit post divider (N). The feedback divider (M) consists of both a 7-bit integer portion ($MINT$) and an 18-bit fractional portion ($MFRAC$) and provides the means for high-resolution frequency generation. The output frequency f_{OUT} is calculated by:

$$f_{OUT} = f_{XTAL} \cdot \frac{1}{P \cdot N} \cdot \left[MINT + \frac{MFRAC + 0.5}{2^{18}} \right]$$

Frequency Configuration

An order code is assigned to each frequency configuration and the VCXO pull-range programmed by the factory (default frequencies). For more information on the available default frequencies and order codes, please see the Ordering Information Section in this document. For available order codes, see the *FemtoClock NG Ceramic-Package XO and VCXO Ordering Product Information* document.

For more information on programming capabilities of the device for custom frequency and pull-range configurations, see the *FemtoClock NG Ceramic 5x7 Module Programming Guide*.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Absolute Maximum Ratings

NOTE: Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of the product at these conditions or any conditions beyond those listed in the *DC Characteristics* or *AC Characteristics* is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

Item	Rating
Supply Voltage, V_{DD}	3.63V
Inputs, V_I	-0.5V to $V_{DD} + 0.5V$
Outputs, I_O (LVDS) Continuous Current Surge Current	10mA 15mA
Package Thermal Impedance, θ_{JA}	49.4°C/W (0 mps)
Storage Temperature, T_{STG}	-65°C to 150°C

DC Electrical Characteristics

Table 4A. Power Supply DC Characteristics, $V_{DD} = 3.3V \pm 5\%$, $T_A = -40^\circ C$ to $85^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
V_{DD}	Power Supply Voltage		3.135	3.3	3.465	V
I_{DD}	Power Supply Current			140	175	mA

Table 4B. Power Supply DC Characteristics, $V_{DD} = 2.5V \pm 5\%$, $T_A = -40^\circ C$ to $85^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
V_{DD}	Power Supply Voltage		2.375	2.5	2.625	V
I_{DD}	Power Supply Current			135	170	mA

Table 4C. LVCMOS/LVTTL DC Characteristic, $V_{DD} = 3.3V \pm 5\%$ or $2.5V \pm 5\%$, $T_A = -40^\circ C$ to $85^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
V_{IH}	Input High Voltage	$V_{DD} = 3.3V$	2		$V_{DD} + 0.3$	V
		$V_{DD} = 2.5V$	1.7		$V_{DD} + 0.3$	V
V_{IL}	Input Low Voltage	$V_{DD} = 3.3V$	-0.3		0.8	V
		$V_{DD} = 2.5V$	-0.3		0.7	V
I_{IH}	Input High Current	nOE $V_{DD} = V_{IN} = 3.465V$ or $2.625V$			150	μA
I_{IL}	Input Low Current	nOE $V_{DD} = 3.465V$ or $2.625V$, $V_{IN} = 0V$	-5			μA

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Table 4D. LVDS DC Characteristics, $V_{DD} = 3.3V \pm 5\%$, $T_A = -40^\circ\text{C}$ to 85°C

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
V_{OD}	Differential Output Voltage		247	330	454	mV
ΔV_{OD}	V_{OD} Magnitude Change				50	mV
V_{OS}	Offset Voltage		1.14	1.23	1.31	V
ΔV_{OS}	V_{OS} Magnitude Change				50	mV

Table 4E. LVDS DC Characteristics, $V_{DD} = 2.5V \pm 5\%$, $T_A = -40^\circ\text{C}$ to 85°C

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
V_{OD}	Differential Output Voltage		247	320	454	mV
ΔV_{OD}	V_{OD} Magnitude Change				50	mV
V_{OS}	Offset Voltage		1.13	1.22	1.30	V
ΔV_{OS}	V_{OS} Magnitude Change				50	mV

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

AC Electrical Characteristics

Table 5A. AC Characteristics, $V_{DD} = 3.3V \pm 5\%$ or $2.5V \pm 5\%$, $T_A = -40^\circ C$ to $85^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
f_{OUT}	Output Frequency Q, nQ		15.476		866.67	MHz
			975		1,300	MHz
f_I	Initial Accuracy	Measured @ $25^\circ C$, $V_C = V_{DD}/2$			± 10	ppm
f_S	Temperature Stability	Option code = A or B			± 100	ppm
		Option code = E or F			± 50	ppm
		Option code = K or L			± 20	ppm
f_A	Aging	Frequency drift over 10 year life			± 3	ppm
		Frequency drift over 15 year life			± 5	ppm
f_T	Total Stability	Option code A, B (10 year life)			± 113	ppm
		Option code E, F (10 year life)			± 63	ppm
		Option code K, L (10 year life)			± 33	ppm
jit(cc)	Cycle-to-Cycle Jitter; NOTE 1			6	14	ps
jit(per)	Period Jitter; NOTE 1			4	6	ps
$\text{jit}(\emptyset)$	RMS Phase Jitter (Random); NOTE 2,3	156.25MHz, Integration Range: 12kHz - 20MHz		0.53	0.73	ps
$\text{jit}(\emptyset)$	RMS Phase Jitter (Random); NOTE 2,3 $f_{XTAL} = 114.285\text{mhz}$	$500\text{MHz} < f_{OUT} \leq 1300\text{MHz}$		0.46	0.67	ps
		$100\text{MHz} < f_{OUT} \leq 500\text{MHz}$		0.48	0.63	ps
		$15\text{MHz} \leq f_{OUT} \leq 100\text{MHz}$		0.76	1.4	ps
$\Phi_N(100)$	Single-side Band Phase Noise, 100Hz from Carrier	156.25MHz		-67		dBc/Hz
$\Phi_N(1k)$	Single-side Band Phase Noise, 1kHz from Carrier	156.25MHz		-89		dBc/Hz
$\Phi_N(10k)$	Single-side Band Phase Noise, 10kHz from Carrier	156.25MHz		-113		dBc/Hz
$\Phi_N(100k)$	Single-side Band Phase Noise, 100kHz from Carrier	156.25MHz		-118		dBc/Hz
$\Phi_N(1M)$	Single-side Band Phase Noise, 1MHz from Carrier	156.25MHz		-127		dBc/Hz
$\Phi_N(10M)$	Single-side Band Phase Noise, 10MHz from Carrier	156.25MHz		-137		dBc/Hz
PSNR	Power Supply Noise Rejection	50mV Sinusoidal Noise 1kHz - 50MHz		-58.7		dBc
t_R / t_F	Output Rise/Fall Time	20% to 80%	80		500	ps
odc	Output Duty Cycle		45		55	%
$t_{STARTUP}$	Device Startup Time after Power-up				15	ms

Notes are continued on next page.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

Notes continued on next page.

NOTE: XTAL parameters (initial accuracy, temperature stability, aging and total stability) are guaranteed by manufacturing.

NOTE: Characterized with $V_C = V_{DD}/2$.

NOTE: XTAL parameters (initial accuracy, temperature stability, aging and total stability) are guaranteed by manufacturing.

NOTE 1: This parameter is defined in accordance with JEDEC standard 65.

NOTE 2: Please refer to the phase noise plots.

NOTE 3: Please see the FemtoClock NG Ceramic 5x7 Modules Programming guide for more information on PLL feedback modes and the optimum configuration for phase noise.

Table 5B. VCXO Control Voltage Input (V_C) Characteristics, $V_{DD} = 3.3V \pm 5\%$ or $2.5V \pm 5\%$, $T_A = -40^\circ C$ to $85^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
K_V	Oscillator Gain, NOTE 1, 2, 3	$V_{DD} = 3.3V$	7.57		477.27	ppm/V
	Oscillator Gain, NOTE 1, 2, 3	$V_{DD} = 2.5V$	10		630	ppm/V
L_{VC}	Control Voltage Linearity; NOTE 4	BSL Variation	-1	± 0.1	+1	%
BW	Modulation Bandwidth			100		kHz
Z_{VC}	VC Input Impedance			500		k Ω
$V_{C_{NOM}}$	Nominal Control Voltage			$V_{DD}/2$		V
V_C	Control Voltage Tuning Range; NOTE 4		0		V_{DD}	V

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

NOTE 1: $V_C = 10\%$ to 90% of V_{DD} .

NOTE 2: Nominal oscillator gain: Pull range divided by the control voltage tuning range of 3.3V. E.g. for ADC_GAIN [6:0] = 000001 the pull range is $\pm 12.5\text{ppm}$, resulting in an oscillator gain of $25\text{ppm} \div 3.3V = 7.57\text{ppm/V}$.


NOTE 3: For best phase noise performance, use the lowest K_V that meets the requirements of the application.

NOTE 4: BSL = Best Straight Line Fit: Variation of the output frequency vs. control voltage V_C , in percent. V_C ranges from 10% to 90% V_{DD} .

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.


Typical Phase Noise at 156.25MHz (12kHz - 20MHz)

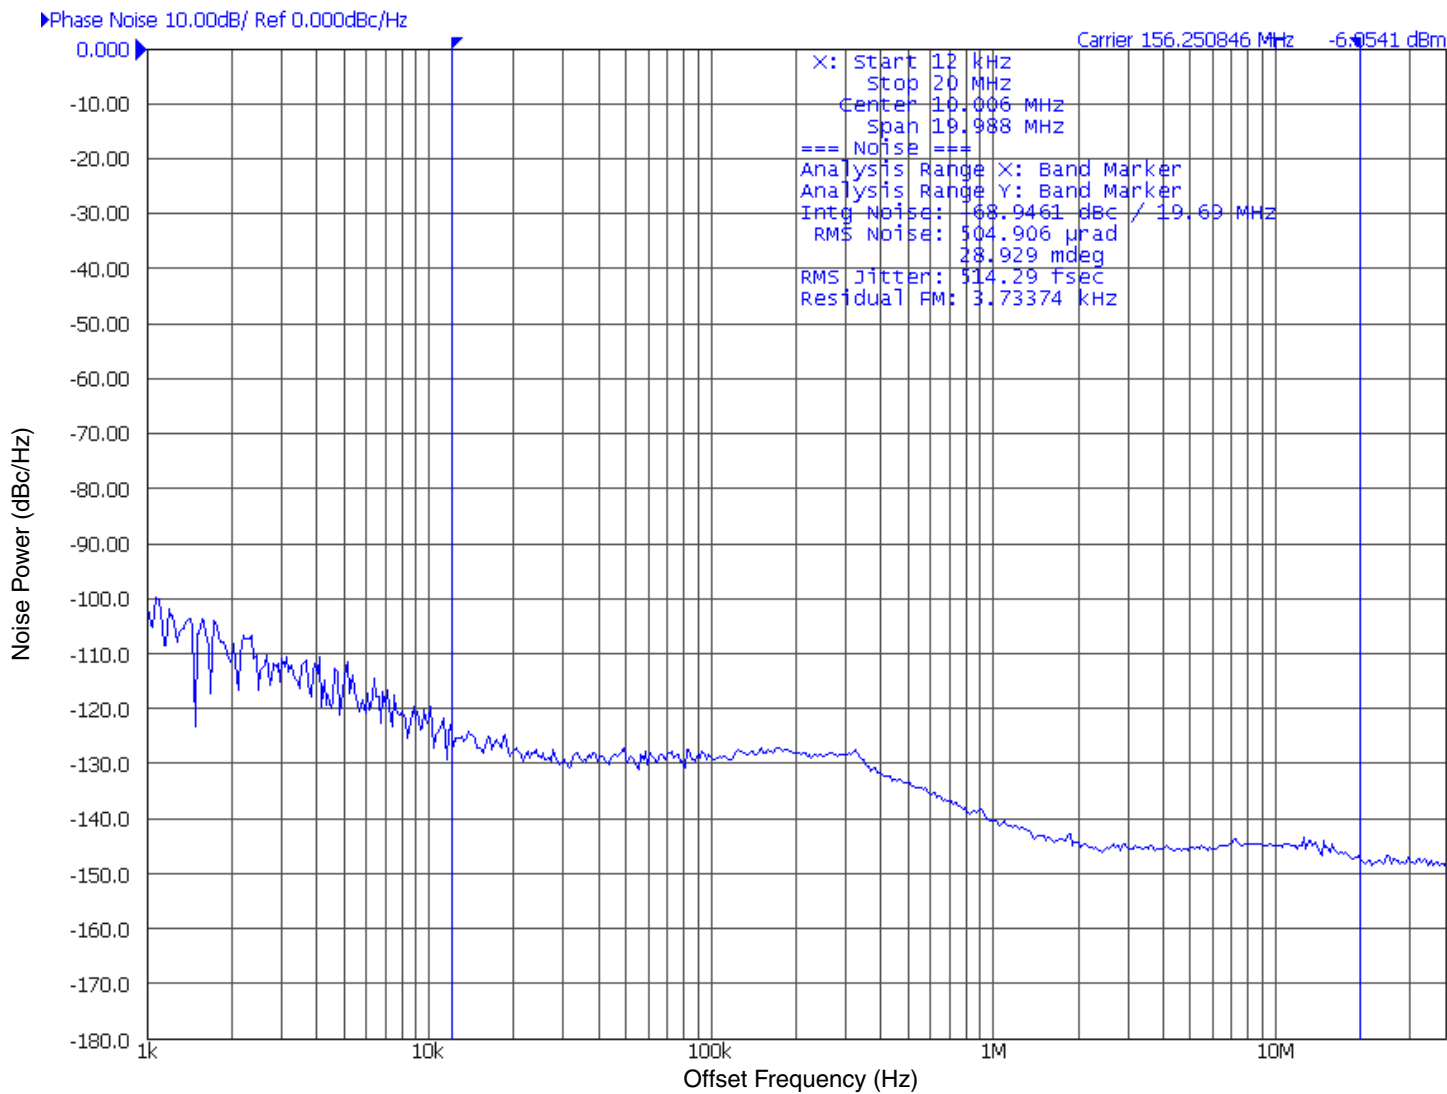


Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.


Parameter Measurement Information

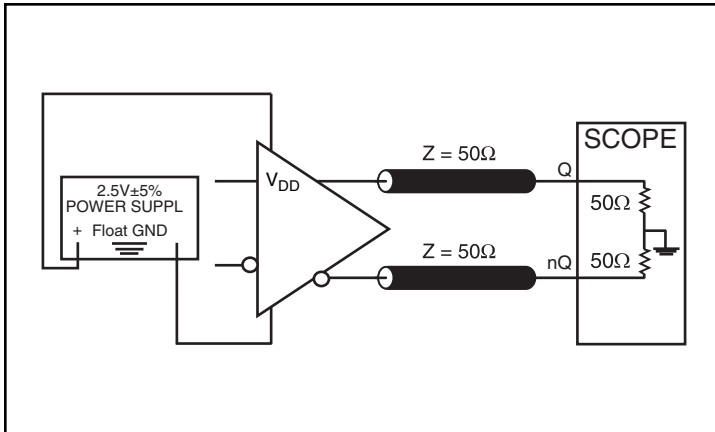


2.5V LVDS Output Load AC Test Circuit

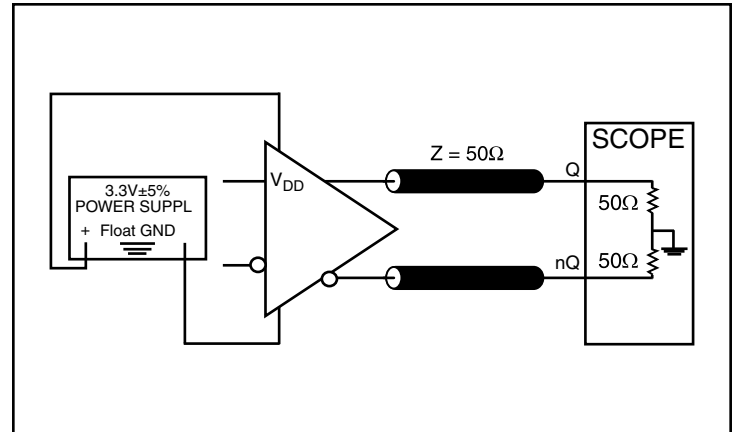


3.3V LVDS Output Load AC Test Circuit

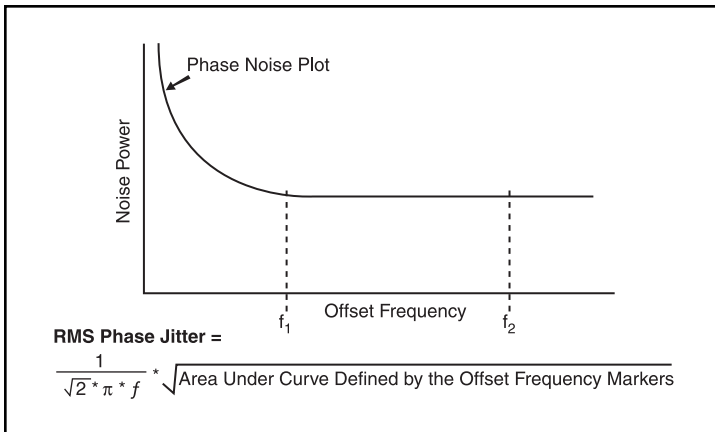


RMS Phase Jitter

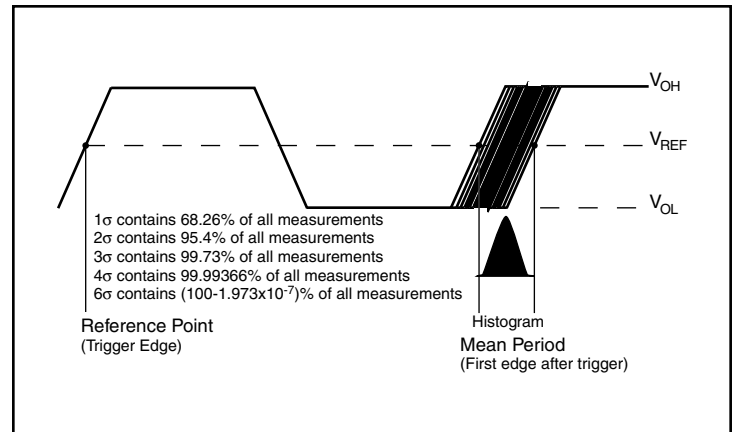

Period Jitter

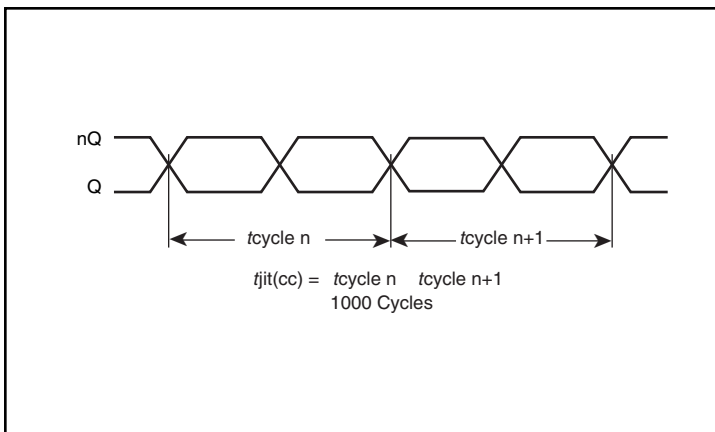

Cycle-to-Cycle Jitter

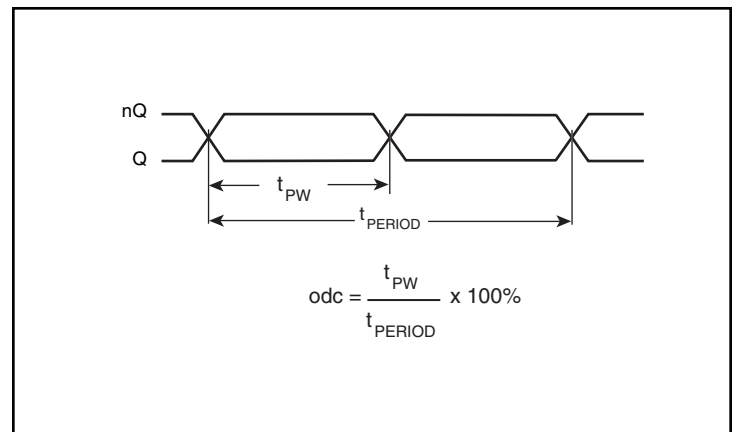


Output Duty Cycle/Pulse Width/Period


Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.


Parameter Measurement Information, continued

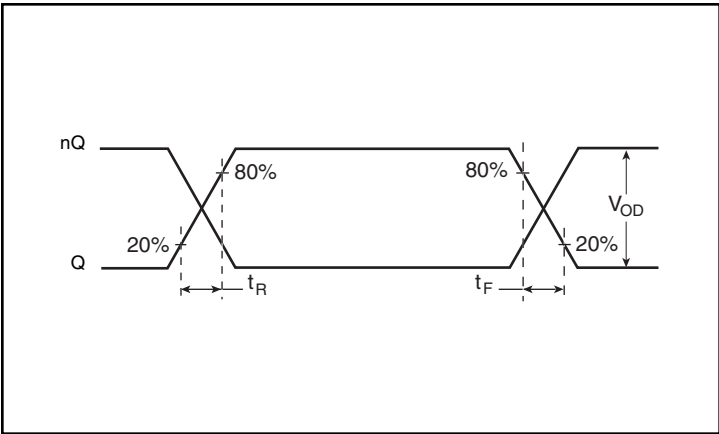

Output Rise/Fall Time

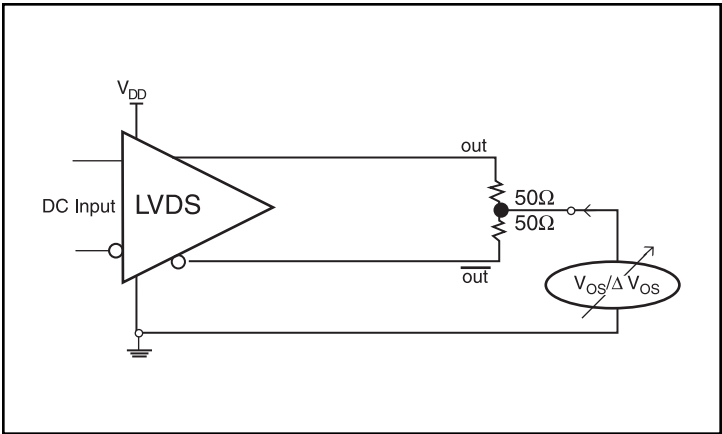

Offset Voltage Setup

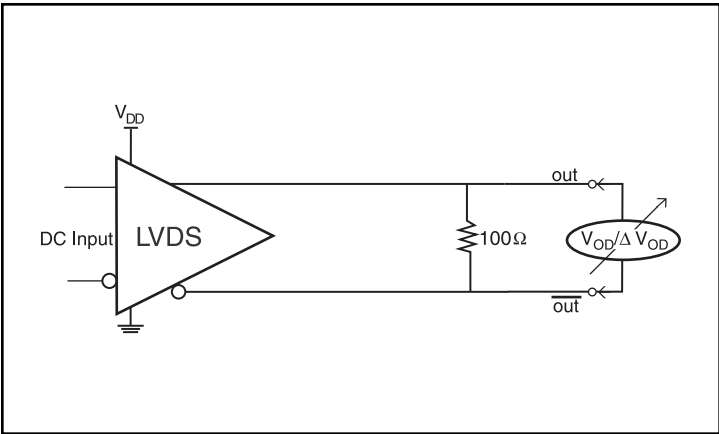

Differential Output Voltage Setup

Factory Datasheet. Contains Confidential Information. Do not send to customers.


Factory Datasheet. Contains Confidential Information. Do not send to customers.

Applications Information

LVDS Driver Termination

For a general LVDS interface, the recommended value for the termination impedance (Z_T) is between 90Ω and 132Ω . The actual value should be selected to match the differential impedance (Z_0) of your transmission line. A typical point-to-point LVDS design uses a 100Ω parallel resistor at the receiver and a 100Ω differential transmission-line environment. In order to avoid any transmission-line reflection issues, the components should be placed as close to the receiver as possible. IDT offers a full line of LVDS compliant devices with two types of output structures: current source and voltage source. The

standard termination schematic as shown in *Figure 1A* can be used with either type of output structure. *Figure 1B*, which can also be used with both output types, is an optional termination with center tap capacitance to help filter common mode noise. The capacitor value should be approximately 50pF . If using a non-standard termination, it is recommended to contact IDT and confirm if the output structure is current source or voltage source type. In addition, since these outputs are LVDS compatible, the input receiver's amplitude and common-mode input range should be verified for compatibility with the output.

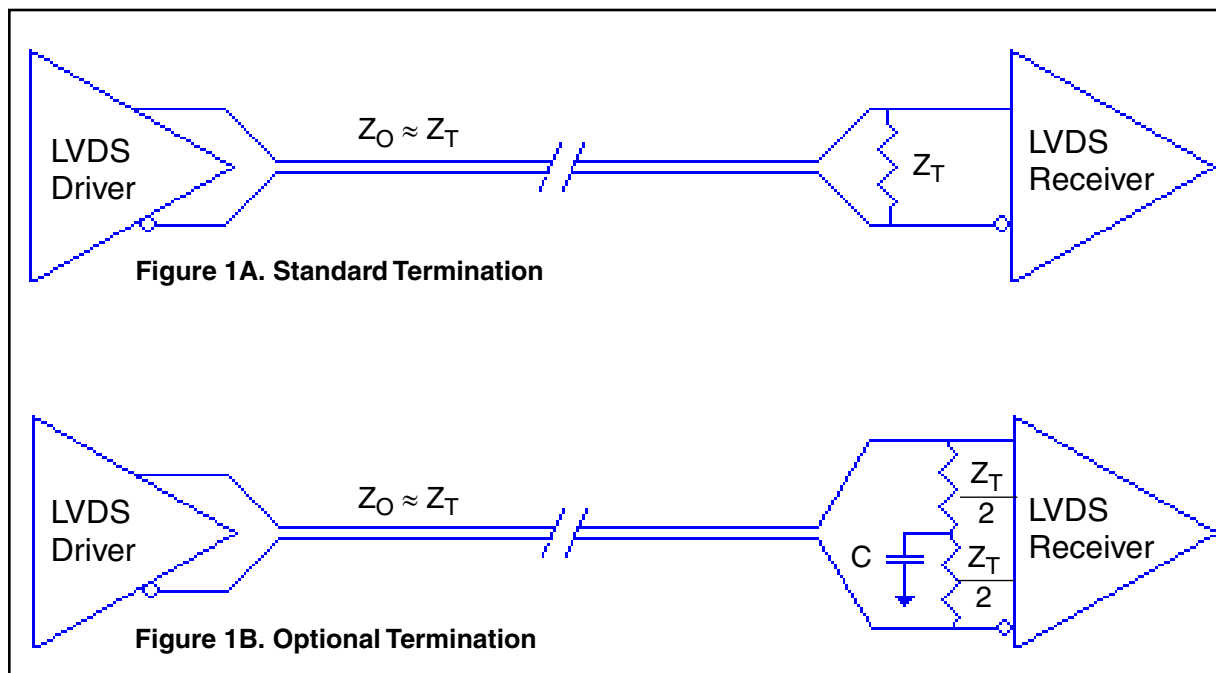

LVDS Termination

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Schematic Layout

Figure 2 shows an example of IDT8N4SV76 application schematic. In this example, the device is operated at $V_{DD} = 3.3V$. As with any high speed analog circuitry, the power supply pins are vulnerable to random noise. To achieve optimum jitter performance, power supply isolation is required.

In order to achieve the best possible filtering, it is recommended that the placement of the filter components be on the device side of the PCB as close to the power pins as possible. If space is limited, the $0.1\mu F$ capacitor in each power pin filter should be placed on the device side of the PCB and the other components can be placed on the opposite side.

Power supply filter recommendations are a general guideline to be used for reducing external noise from coupling into the devices. The

filter performance is designed for a wide range of noise frequencies. This low-pass filter starts to attenuate noise at approximately 10 kHz. If a specific frequency noise component is known, such as switching power supplies frequencies, it is recommended that component values be adjusted and if required, additional filtering be added.

Additionally, good general design practices for power plane voltage stability suggests adding bulk capacitance in the local area of all devices.

The schematic example focuses on functional connections and is not configuration specific. Refer to the pin description and functional tables in the datasheet to ensure that the logic control inputs are properly set.

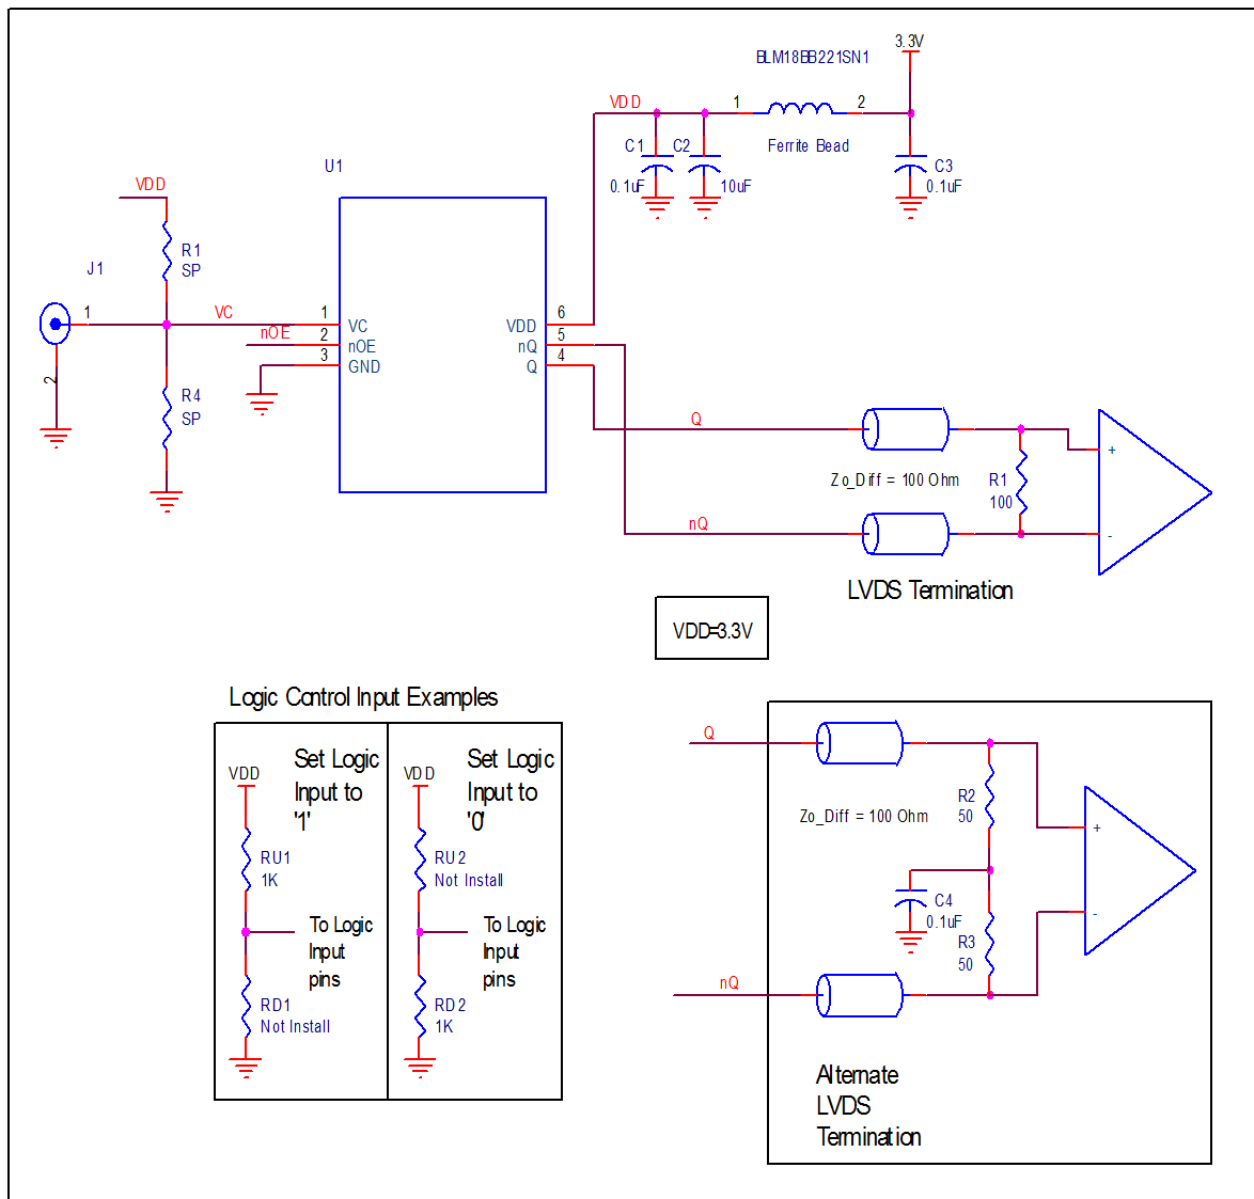


Figure 2. IDT8N4SV76 Application Schematic

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Power Considerations

This section provides information on power dissipation and junction temperature for the IDT8N4SV76. Equations and example calculations are also provided.

1. Power Dissipation.

The total power dissipation for the IDT8N4SV76 is the sum of the core power plus the power dissipated in the load(s). The following is the power dissipation for $V_{CC} = 3.3V + 5\% = 3.465V$, which gives worst case results.

NOTE: Please refer to Section 3 for details on calculating power dissipated in the load.

- Power (core)_{MAX} = $V_{CC_MAX} * I_{EE_MAX} = 3.465V * 175mA = 606mW$
- Power (outputs)_{MAX} = **30mW/Loaded Output pair**

Total Power_{MAX} (3.3V, with all outputs switching) = 606mW + 30mW = **636.38mW**

2. Junction Temperature.

Junction temperature, T_j , is the temperature at the junction of the bond wire and bond pad directly affects the reliability of the device. The maximum recommended junction temperature is 125°C. Limiting the internal transistor junction temperature, T_j , to 125°C ensures that the bond wire and bond pad temperature remains below 125°C.

The equation for T_j is as follows: $T_j = \theta_{JA} * Pd_total + T_A$

T_j = Junction Temperature

θ_{JA} = Junction-to-Ambient Thermal Resistance

Pd_total = Total Device Power Dissipation (example calculation is in section 1 above)

T_A = Ambient Temperature

In order to calculate junction temperature, the appropriate junction-to-ambient thermal resistance θ_{JA} must be used. Assuming no air flow and a multi-layer board, the appropriate value is 49.4°C/W per Table 6 below.

Therefore, T_j for an ambient temperature of 85°C with all outputs switching is:

$85^\circ C + 0.636W * 49.4^\circ C/W = 116.4^\circ C$. This is below the limit of 125°C.

This calculation is only an example. T_j will obviously vary depending on the number of loaded outputs, supply voltage, air flow and the type of board (multi-layer).

Table 6. Thermal Resistance θ_{JA} for 6 Lead Ceramic VFQFN, Forced Convection

θ_{JA} by Velocity			
Meters per Second	0	1	2
Multi-Layer PCB, JEDEC Standard Test Boards	49.4°C/W	44.2°C/W	42.1°C/W

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Reliability Information

Table 7. θ_{JA} vs. Air Flow Table for a 6-lead Ceramic 5mm x 7mm Package

θ_{JA} vs. Air Flow			
Meters per Second	0	1	2
Multi-Layer PCB, JEDEC Standard Test Boards	49.4°C/W	44.2°C/W	42.1°C/W


Transistor Count

The transistor count for IDT8N4SV76 is: 47,414

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Package Outline and Package Dimensions

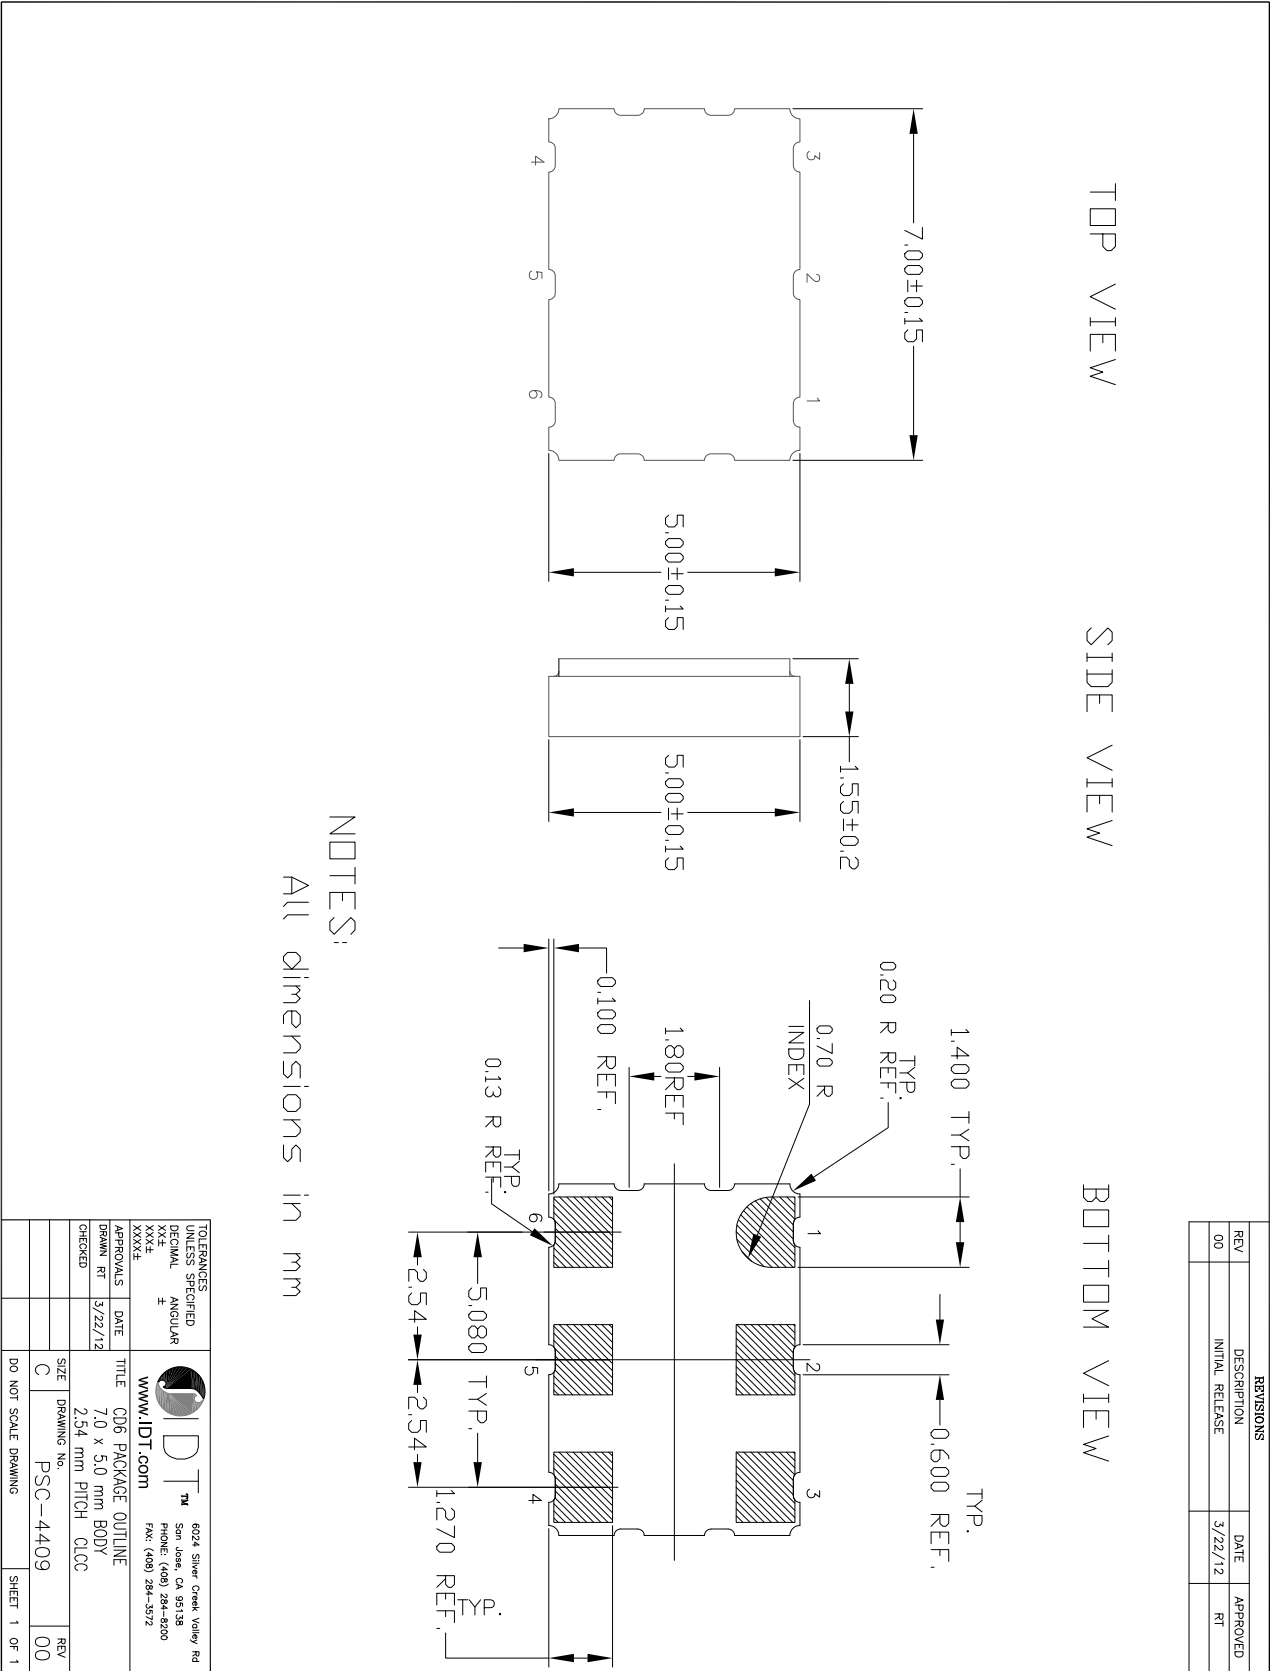

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Ordering Information for FemtoClock NG Ceramic-Package XO and VCXO Products

The programmable VCXO and XO devices support a variety of device options such as the output type, number of default frequencies, internal crystal frequency, power supply voltage, ambient temperature range and the frequency accuracy. The device options, default frequencies and default VCXO pull range must be specified at the time of order and are programmed by IDT before the shipment. Table 8 specifies the available order codes, including the device options, the default frequency codes can be obtained from the *FemtoClock NG Ceramic-Package XO and VCXO Ordering Product Information* document. Example part number: the order code 8N4SV76FC-0001CDI specifies a programmable, quad

default-frequency VCXO with a voltage supply of 2.5V, a LVPECL output, a ± 50 ppm crystal frequency accuracy, contains a 114.285MHz internal crystal as frequency source, industrial temperature range, a lead-free (6/6 RoHS) 6-lead ceramic 5mm x 7mm x 1.55mm package and is factory-programmed to the default frequencies of 100MHz, 122.88MHz, 125MHz and 156.25MHz and to the VCXO pull range of min. ± 100 ppm.

Other default frequencies and order codes are available from IDT on request.

Table 8. Order Codes

Part/Order Number																																																											
8N	X	X	XXX	X	X	- dddd	XX	X	X																																																		
FemtoClock NG				I/O Identifier 0: LVCMOS 3: LVPECL 4: LVDS				Shipping Package 8: Tape & Reel (no letter): Tray																																																			
Number of Default Frequencies S: 1: Single D: 2: Dual Q: 4: Quad				Ambient Temperature Range "I": Industrial: (T _A = -40°C to 85°C) (no letter) : (T _A = 0°C to 70°C)				Package Code CD: Lead-Free, 6/10-lead ceramic 5mm x 7mm x 1.55mm																																																			
Part Number				Default-Frequency and VCXO Pull Range See document <i>FemtoClock NG Ceramic-Package XO and VCXO Ordering Product Information</i> .				Die Revision C (opt. 208)																																																			
	Function	#pins	OE fct. at pin	<table><thead><tr><th>dddd</th><th>f_{XTAL} (MHz)</th><th>PLL feedback</th><th>Use for</th></tr></thead><tbody><tr><td>0000 to 0999</td><td>114.285</td><td>Fractional</td><td>VCXO, XO</td></tr><tr><td>1000 to 1999</td><td rowspan="2">100.000</td><td>Integer</td><td>XO</td></tr><tr><td>2000 to 2999</td><td>Fractional</td><td>XO</td></tr></tbody></table>				dddd	f _{XTAL} (MHz)	PLL feedback	Use for	0000 to 0999	114.285	Fractional	VCXO, XO	1000 to 1999	100.000	Integer	XO	2000 to 2999	Fractional	XO	Last digit = L: configuration pre-programmed and not changeable																																				
dddd	f _{XTAL} (MHz)	PLL feedback	Use for																																																								
0000 to 0999	114.285	Fractional	VCXO, XO																																																								
1000 to 1999	100.000	Integer	XO																																																								
2000 to 2999		Fractional	XO																																																								
<table><thead><tr><th></th><th>Function</th><th>#pins</th><th>OE fct. at pin</th></tr></thead><tbody><tr><td>001</td><td>XO</td><td>10</td><td>OE@2</td></tr><tr><td>003</td><td>XO</td><td>10</td><td>OE@1</td></tr><tr><td>V01</td><td>VCXO</td><td>10</td><td>OE@2</td></tr><tr><td>V03</td><td>VCXO</td><td>10</td><td>OE@1</td></tr><tr><td>V75</td><td>VCXO</td><td>6</td><td>OE@2</td></tr><tr><td>V76</td><td>VCXO</td><td>6</td><td>nOE@2</td></tr><tr><td>V85</td><td>VCXO</td><td>6</td><td>—</td></tr><tr><td>085</td><td>XO</td><td>6</td><td>OE@1</td></tr><tr><td>270</td><td>XO</td><td>6</td><td>OE@1</td></tr><tr><td>271</td><td>XO</td><td>6</td><td>OE@2</td></tr><tr><td>272</td><td>XO</td><td>6</td><td>nOE@2</td></tr><tr><td>273</td><td>XO</td><td>6</td><td>nOE@1</td></tr></tbody></table>					Function	#pins	OE fct. at pin	001	XO	10	OE@2	003	XO	10	OE@1	V01	VCXO	10	OE@2	V03	VCXO	10	OE@1	V75	VCXO	6	OE@2	V76	VCXO	6	nOE@2	V85	VCXO	6	—	085	XO	6	OE@1	270	XO	6	OE@1	271	XO	6	OE@2	272	XO	6	nOE@2	273	XO	6	nOE@1	Option Code (Supply Voltage and Frequency-Stability) A: V _{CC} = 3.3V±5%, ±100ppm B: V _{CC} = 2.5V±5%, ±100ppm E: V _{CC} = 3.3V±5%, ±50ppm F: V _{CC} = 2.5V±5%, ±50ppm K: V _{CC} = 3.3V±5%, ±20ppm L: V _{CC} = 2.5V±5%, ±20ppm			
	Function	#pins	OE fct. at pin																																																								
001	XO	10	OE@2																																																								
003	XO	10	OE@1																																																								
V01	VCXO	10	OE@2																																																								
V03	VCXO	10	OE@1																																																								
V75	VCXO	6	OE@2																																																								
V76	VCXO	6	nOE@2																																																								
V85	VCXO	6	—																																																								
085	XO	6	OE@1																																																								
270	XO	6	OE@1																																																								
271	XO	6	OE@2																																																								
272	XO	6	nOE@2																																																								
273	XO	6	nOE@1																																																								

NOTE: For order information, also see the *FemtoClock NG Ceramic-Package XO and VCXO Ordering Product Information* document.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Table 9. Device Marking

Marking	Industrial Temperature Range (T _A = -40°C to 85°C)	Commercial Temperature Range (T _A = 0°C to 70°C)
	IDT8N4SV76yC- ddddCDI	IDT8N4SV76yC- ddddCD
	y = Option Code, dddd=Default-Frequency and VCXO Pull Range	

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Revision History Sheet

Rev	Table	Page	Description of Change	Date
A	T7	5	Absolute Maximum Ratings - Thermal Impedance changed from 41.4 to 41.9.	4/25/12
		14	Power Considerations - corrected Thermal Resistance table and updated calculations.	
		15	Reliability Information - corrected thermal table.	
B	T4D	6	3.3V LVDS DC Characteristics Table - updated specs.	8/22/12
	T4E	6	2.5V LVDS DC Characteristics Table - updated specs. Per PCN #N1206-02.	
B	5A	7	RMS Phase Jitter, Test Conditions, corrected typos for 500MHz and 100MHz; “≤” to “<”	11/20/2013

Factory Datasheet. Contains Confidential Information. Do not send to customers.

Factory Datasheet. Contains Confidential Information. Do not send to customers.

We've Got Your Timing Solution



6024 Silver Creek Valley Road
San Jose, California 95138

Sales
800-345-7015 (inside USA)
+408-284-8200 (outside USA)
Fax: 408-284-2775
www.IDT.com/go/contactIDT

Technical Support Sales
netcom@idt.com
+480-763-2056

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners.

Copyright 2013. All rights reserved.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 8N4SV76LC-0162CDI8](#) on WIN SOURCE

 [Renesas Electronics America](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management