



# THE DATASHEET OF HMC891LP5ETR






### Typical Applications

The HMC891LP5E is ideal for:

- Test & Measurement Equipment
- Military RADAR & EW/ECM
- SATCOM & Space
- Industrial & Medical Equipment

### Functional Diagram

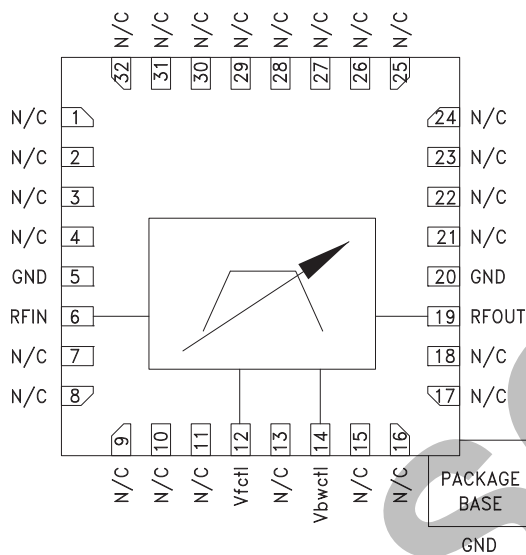

### Features

- Fast Tuning Response; 200 ns
- Excellent Wideband Rejection; 30 dB
- Single Chip Replacement for Mechanically Tuned Designs
- 32 Lead 5x5 mm SMT Package

### General Description

The HMC891LP5E is a MMIC band pass filter which features a user selectable passband frequency. The 3 dB filter bandwidth is approximately 9%. The 20 dB filter bandwidth is approximately 27%. The center frequency can be varied between 2 and 3.9 GHz by applying an analog tune voltage between 0 and 14V. This tunable filter can be used as a much smaller alternative to physically large switched filter banks and cavity tuned filters. The HMC891LP5E has excellent microphonics due to the monolithic design, and provides a dynamically adjustable solution in advanced communications applications.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $V_{ctl} = V_{bwctl}$ Unless Otherwise Stated

| Parameter  | Min. | Typ.                       | Max. | Units  |
|--|------|----------------------------|------|--------|
| F <sub>center</sub> Tuning Range   | 2    |                            | 3.9  | GHz    |
| 3 dB Bandwidth   |      | 9                          |      | %      |
| Low Side Rejection Frequency (Rejection >20 dB)  |      | 0.88 * F <sub>center</sub> |      | GHz    |
| High Side Rejection Frequency (Rejection >20 dB)   |      | 1.15 * F <sub>center</sub> |      | GHz    |
| Re-entry Frequency (Rejection <30 dB)  |      | 22                         |      | GHz    |
| 3 dB Bandwidth Control (V <sub>bwctl</sub> )   |      | ±3                         |      | %      |
| Insertion Loss   |      | 7                          |      | dB     |
| Return Loss  |      | 10                         |      | dB     |
| Maximum Input Power for Linear Operation   |      |                            | 10   | dBm    |
| Frequency Control Voltage (V <sub>ctl</sub> )  | 0    |                            | 14   | V      |
| Source/Sink Current (I <sub>ctl</sub> )  |      |                            | ±1   | mA     |
| Bandwidth Control Voltage (V <sub>bwctl</sub> )  | 0    |                            | 14   | V      |
| Source/Sink Current (I <sub>bwctl</sub> )  |      |                            | ±1   | mA     |
| Residual Phase Noise <sup>[1]</sup> (1 MHz Offset)   |      | -155                       |      | dBc/Hz |
| F <sub>center</sub> Drift Rate   |      | -0.5                       |      | MHz/°C |
| Tuning Characteristics <sup>[2]</sup><br>t <sub>FULLBAND</sub> (0% V <sub>ctl</sub> to 90% RF) |      | 200                        |      | ns     |

[1] Optimum residual phase noise performance requires the use of a low noise driver circuit.

[2] Tuning speed is dependent on driver circuit. Data measured with a high speed op-amp driver and includes driver slew rate delay.




**FILTER - TUNABLE, BAND PASS SMT  
2.0 - 3.9 GHz**


**3**

**FILTERS - TUNABLE - SMT**


**Broadband Insertion Loss vs. Control Voltages, Vfctl = Vbwctl**

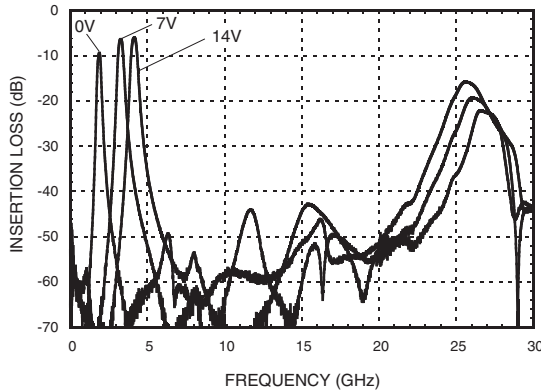


**Broadband Return Loss vs. Control Voltages, Vfctl = Vbwctl**

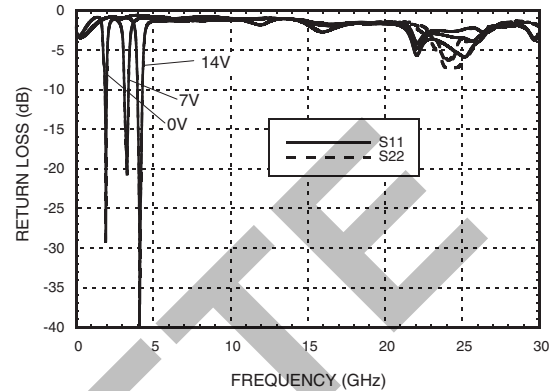


**Insertion Loss vs. Control Voltages, Vfctl = Vbwctl**

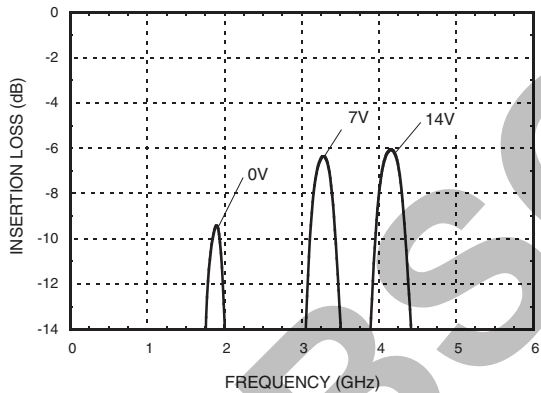


**Return Loss vs. Control Voltages, Vfctl = Vbwctl**

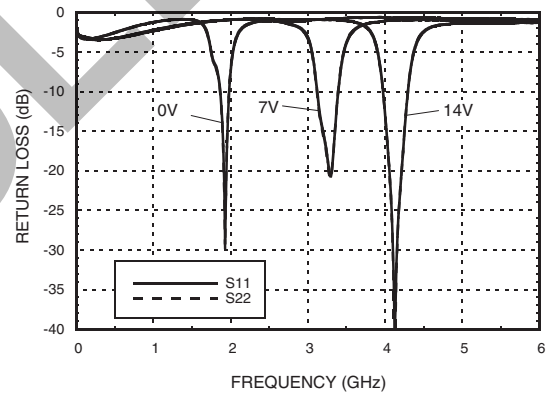

**Insertion Loss vs. Temperature, Vfctl = Vbwctl = 7V**

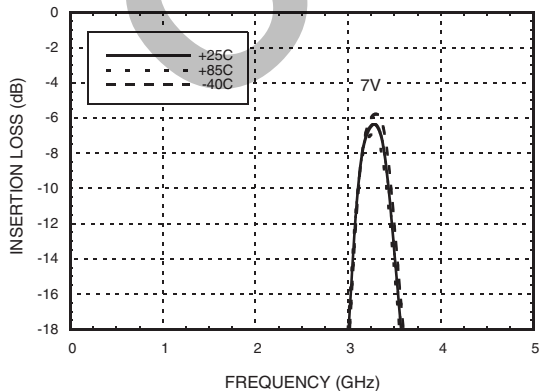

**Return Loss vs. Temperature, Vfctl = Vbwctl = 7V**

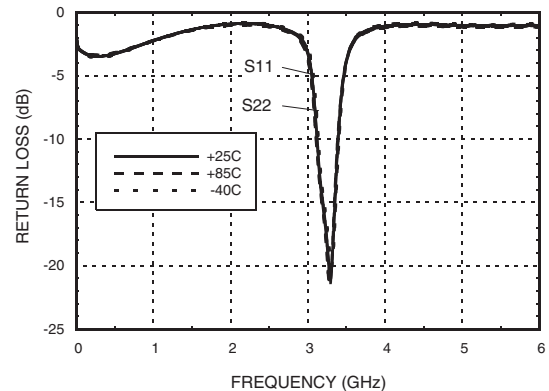

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**FILTER - TUNABLE, BAND PASS SMT  
2.0 - 3.9 GHz**


3

FILTERS - TUNABLE - SMT


**Broadband Insertion Loss vs.  $V_{bwctl}$ ,  $V_{fctl} = 7V$**

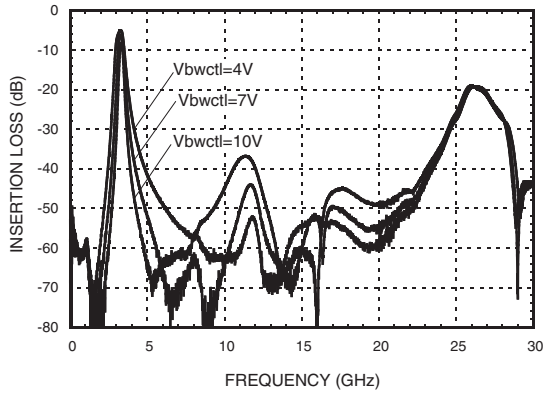


**Broadband Return Loss vs.  $V_{bwctl}$ ,  $V_{fctl} = 7V$**

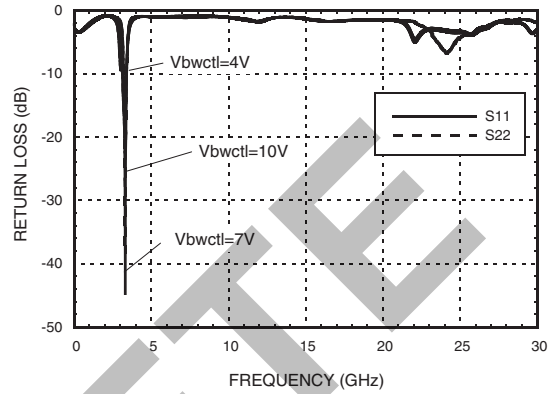


**Insertion Loss vs.  $V_{bwctl}$ ,  $V_{fctl} = 7V$**

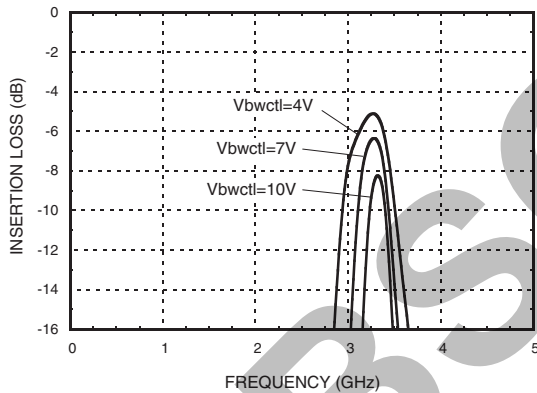


**Return Loss vs.  $V_{bwctl}$ ,  $V_{fctl} = 7V$**

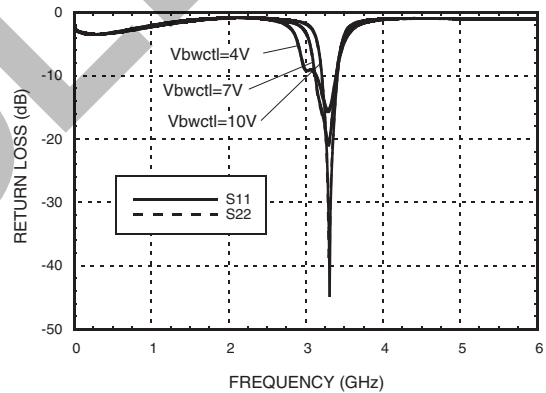

**Center Frequency vs. Temperature,  $V_{fctl} = V_{bwctl}$**

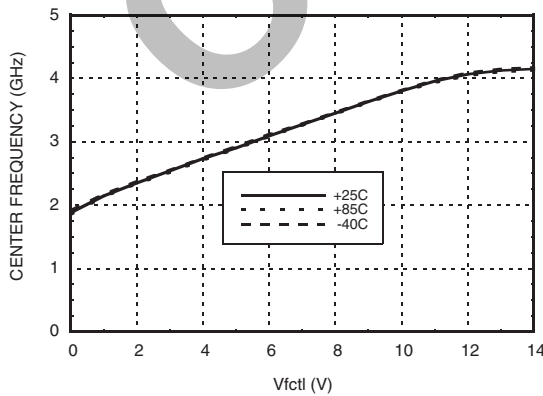

**Insertion Loss vs. Temperature,  $V_{fctl} = V_{bwctl}$**

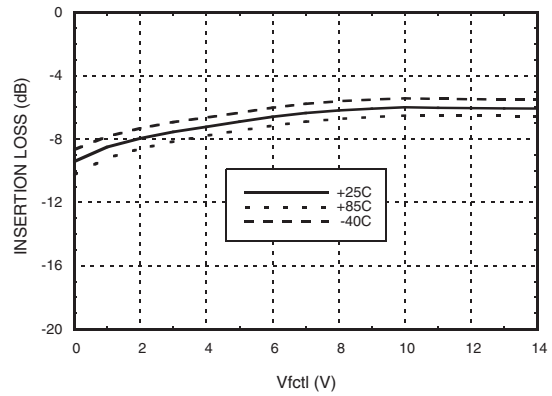

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**FILTER - TUNABLE, BAND PASS SMT  
2.0 - 3.9 GHz**


**3**

**FILTERS - TUNABLE - SMT**


**3 dB Bandwidth vs. Temperature,  
 $V_{fctl} = V_{bwctl}$**

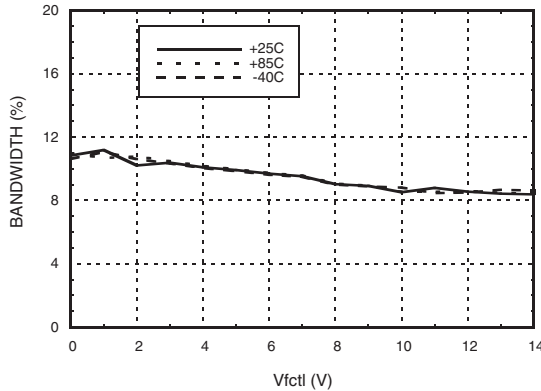


**Maximum Return Loss in a 2 dB Bandwidth  
vs. Temperature,  $V_{fctl} = V_{bwctl}$**

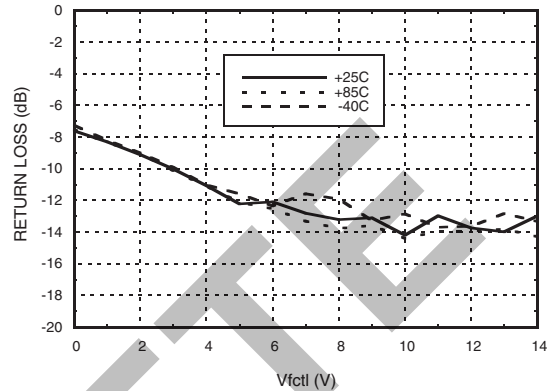


**Low Side Rejection Ratio vs.  
Temperature,  $V_{fctl} = V_{bwctl}$  [1]**

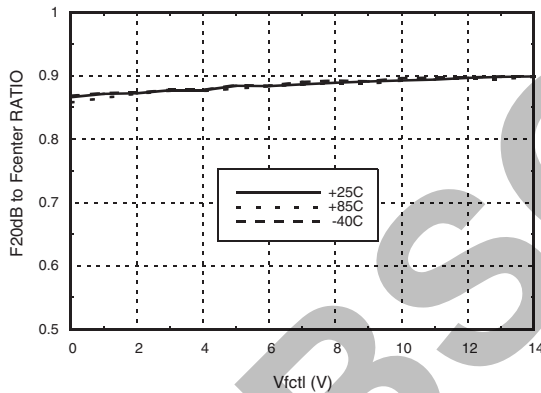


**High Side Rejection Ratio vs.  
Temperature,  $V_{fctl} = V_{bwctl}$  [1]**

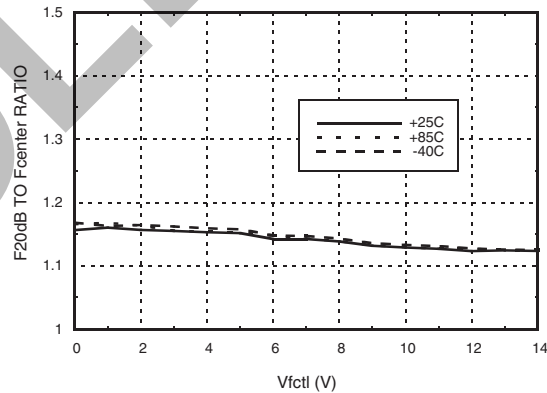

**Tuning Sensitivity vs.  
Temperature,  $V_{fctl} = V_{bwctl}$**

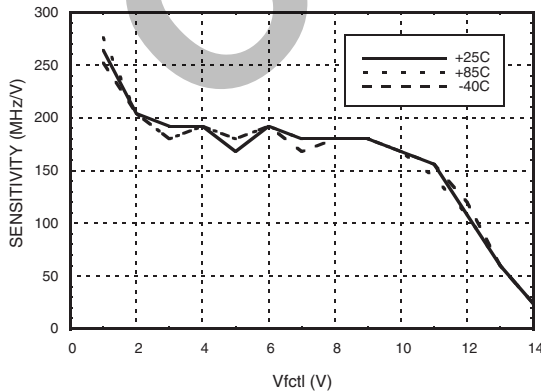

**Group Delay**

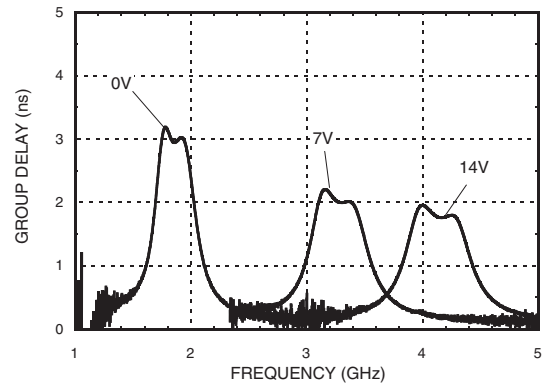

[1] Rejection ratio is defined as the ratio of the frequency at which the relative insertion loss is 20 dB to  $f_{center}$




**FILTER - TUNABLE, BAND PASS SMT  
2.0 - 3.9 GHz**


3

FILTERS - TUNABLE - SMT


**3 dB Bandwidth vs. Bandwidth Control**

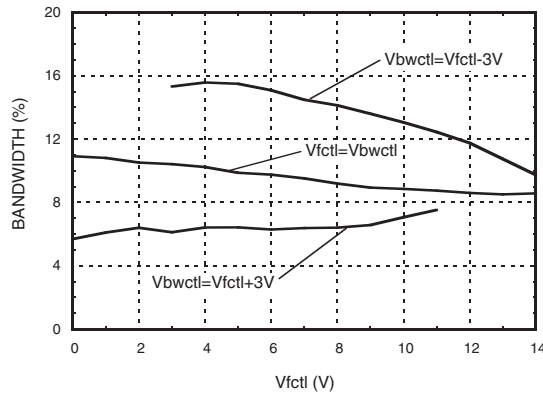


**Insertion Loss vs. Bandwidth Control**

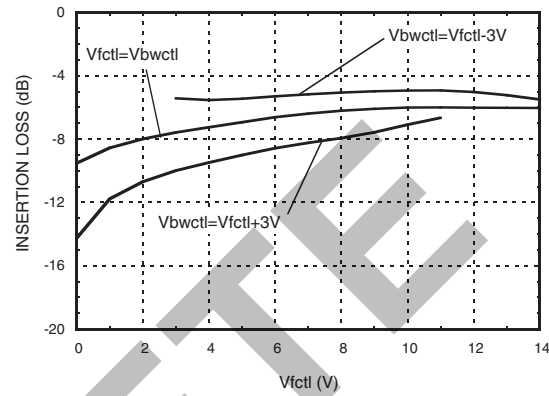


**Low Side Rejection Ratio vs. Bandwidth Control [1]**

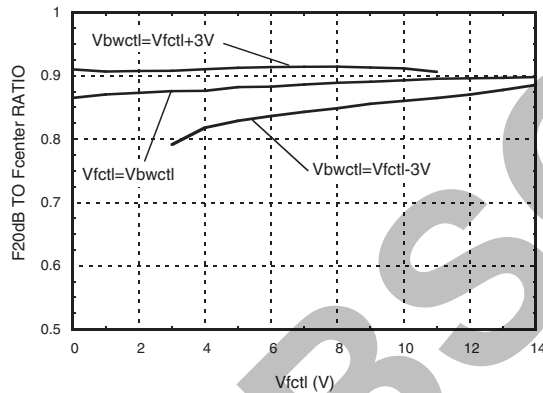

**High Side Rejection Ratio vs. Bandwidth Control [1]**

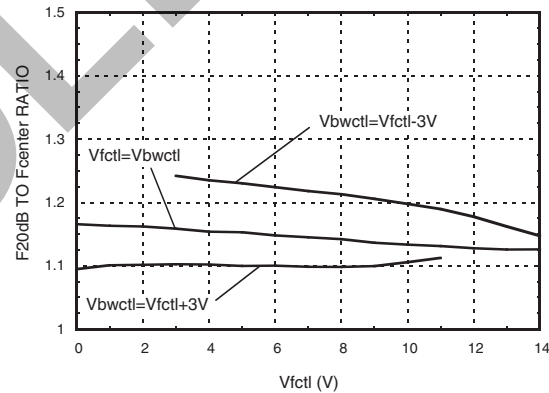

**Maximum Return Loss in a 2 dB Bandwidth vs. Bandwidth Control**

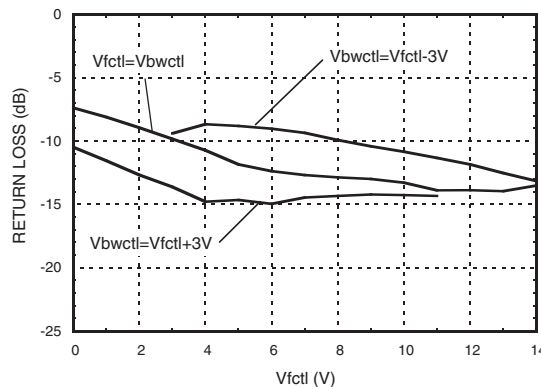

[1] Rejection ratio is defined as the ratio of the frequency at which the relative insertion loss is 20 dB to *f*<sub>center</sub>

## FILTER - TUNABLE, BAND PASS SMT 2.0 - 3.9 GHz



### Absolute Maximum Ratings

|                                    |                |
|------------------------------------|----------------|
| Frequency Control Voltage (Vfctl)  | -0.5 to +15V   |
| Bandwidth Control Voltage (Vbwctl) | -0.5 to +15V   |
| RF Power Input                     | 27 dBm         |
| Storage Temperature                | -65 to +150 °C |
| ESD Rating (HBM)                   | Class 1B       |


### Reliability Information

|  |               |
|--|---------------|
| Junction Temperature to Maintain 1 Million Hour MTTF     | 150 °C        |
| Nominal Junction Temperature (T= 85 °C and Pin = 10 dBm) | 90 °C         |
| Operating Temperature                                    | -40 to +85 °C |



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

### Outline Drawing

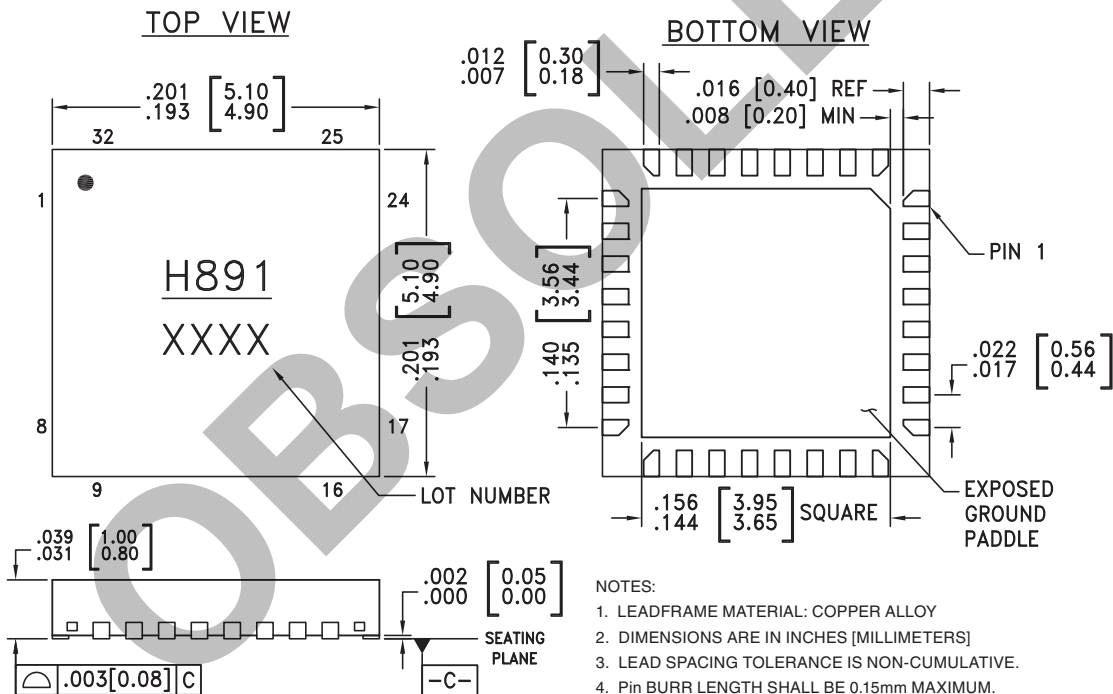

#### NOTES:

- LEADFRAME MATERIAL: COPPER ALLOY
- DIMENSIONS ARE IN INCHES [MILLIMETERS]
- LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
- PIN BURR LENGTH SHALL BE 0.15mm MAXIMUM.  
PIN BURR HEIGHT SHALL BE 0.05mm MAXIMUM.
- PACKAGE WARP SHALL NOT EXCEED 0.05mm.
- ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.
- REFER TO HITTITE APPLICATION NOTE FOR SUGGESTED LAND PATTERN.

### Package Information

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[1]</sup> |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC891LP5E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H891<br>XXXX                   |

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C



**FILTER - TUNABLE, BAND PASS SMT  
2.0 - 3.9 GHz**


3

FILTERS - TUNABLE - SMT

**Pin Descriptions**

| Pin Number                            | Function | Description  | Interface Schematic |
|---------------------------------------|----------|--|---------------------|
| 1 - 4, 7 - 11, 13<br>15 - 18, 21 - 32 | N/C      | The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally. |                     |
| 5, 20                                 | GND      | These pins and exposed paddle must be connected to RF/DC ground.   |                     |
| 6                                     | RFIN     | This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin.   |                     |
| 12                                    | Vfctl    | Center frequency control voltage.  |                     |
| 14                                    | Vbwctl   | Bandwidth control voltage.   |                     |
| 19                                    | RFOUT    | This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin.   |                     |

**Application Circuit**

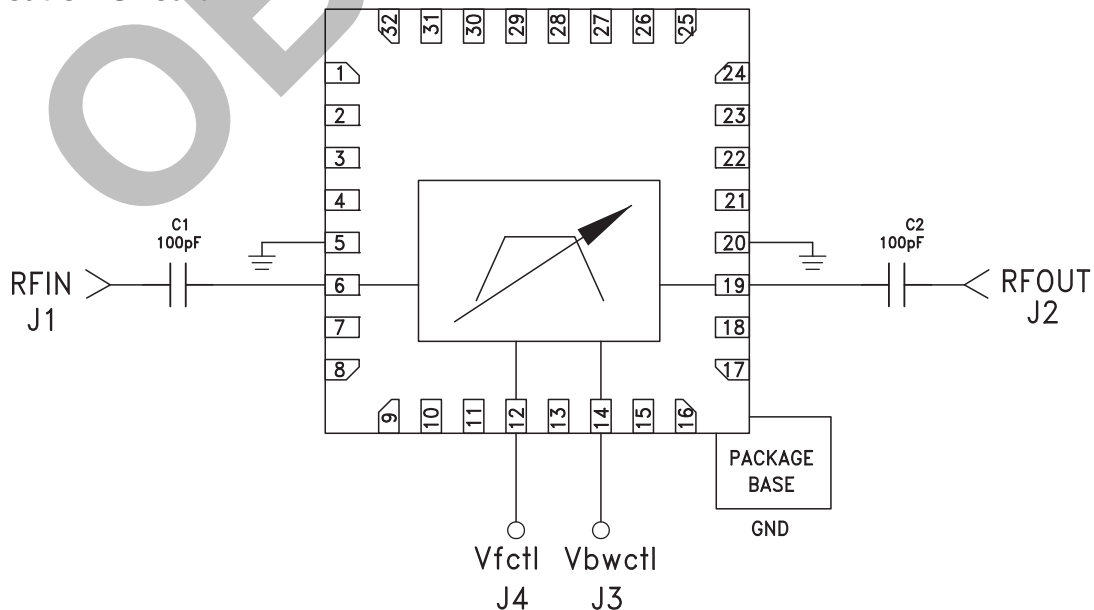


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D



**Evaluation PCB**

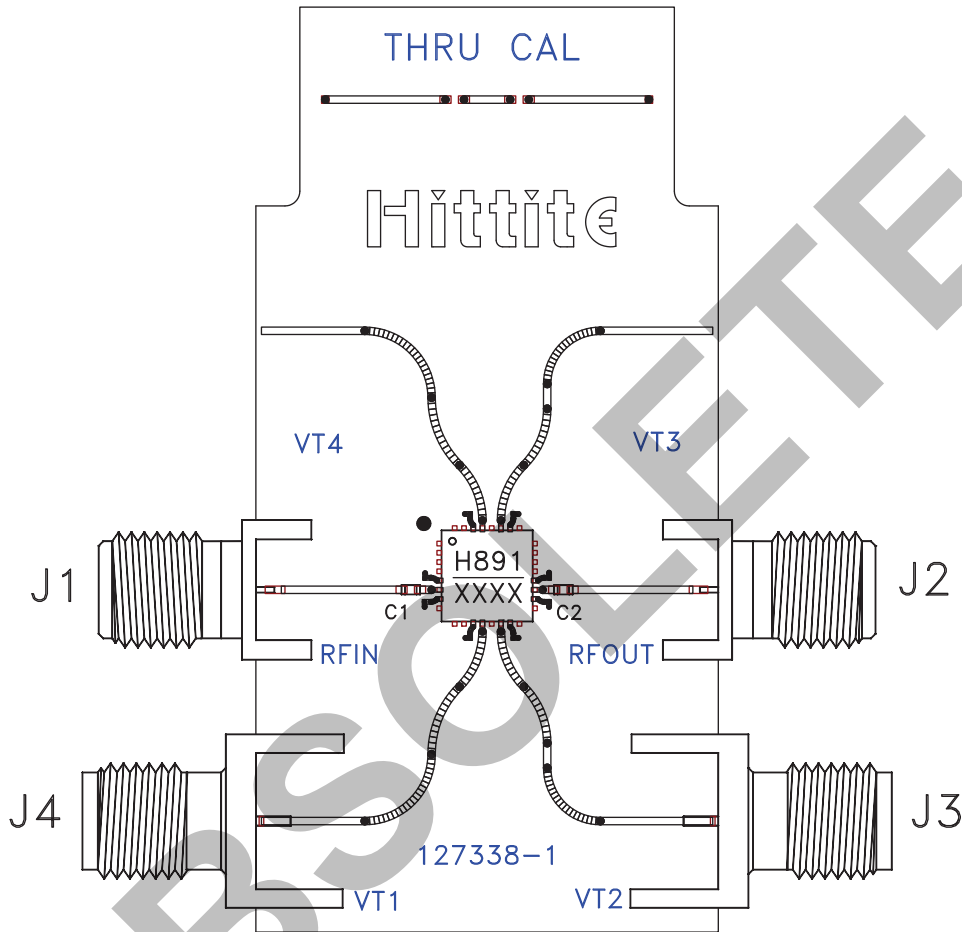

**List of Materials for Evaluation PCB 128531 [1]**

| Item    | Description                 |
|---------|-----------------------------|
| J1 - J4 | SMA - SRI                   |
| C1, C2  | 100 pF Capacitor, 0402 Pkg. |
| U1      | HMC891LP5E Filter           |
| PCB [2] | 127338 Evaluation PCB       |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 25FR

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohms impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View HMC891LP5ETR on WIN SOURCE](#)

 [Analog Devices Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management