






**THE DATASHEET OF
3020-10-0100-00**






Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC, DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1,000M ohm Min
 Withstanding Voltage:600V AC/minute
 Operating Temperature Range:-40°C ~ +105°C

Materials:
 Insulator:Nylon 9T(UL94V-0)
 Insulator Color:Black
 Terminal:Copper Alloy
 Finish:Gold Flash

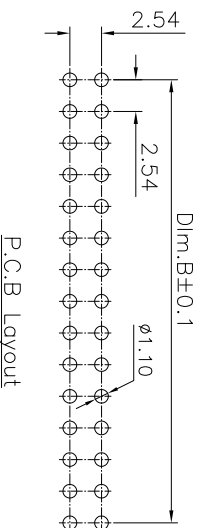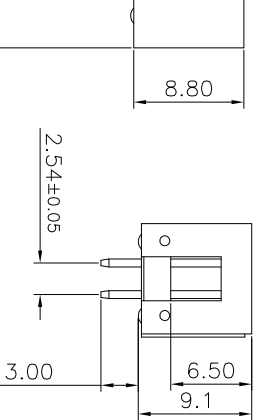

P.C.B. Layout

MATING PART
 3030-XX-01101-00

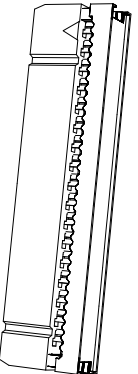

Pos	Dim A	Dim B	Dim C	Pos	Dim A	Dim B	Dim C
6	15.28	5.08	12.96	20	33.06	22.86	30.74
8	17.82	7.62	15.50	26	40.68	30.48	38.36
10	20.36	10.16	18.04	40	58.46	48.26	56.14
14	25.44	15.24	23.12	50	71.16	60.96	68.84
16	27.98	17.78	25.66				

RoHS Compliant

DRAWN: GENERAL TOLERANCE:

.X = ±0.20
 .XX = ±0.15

CHECKED:

UNIT: MM

SCALE:1:1

APPROVAL:

SHEET: 1 / 2

PROJECTION:



DESCRIPTION:

CnC Tech
 Industrial Cable and Connector Technology

2.54mm Box Header Straight Type

SIZE

PART NO:

3020-XX-0100-00

A4

C

B

A

D

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 3020-10-0100-00 on WIN SOURCE](#)
- [CNC Tech Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management