



**THE DATASHEET OF  
XR76115EL-F**



# 15A Synchronous Step Down COT Regulator

## General Description

The **XR76115** is a synchronous step-down regulator combining the controller, drivers, bootstrap diode and MOSFETs in a single package for point-of-load supplies. The XR76115 has a load current rating of 15A. A wide 5V to 22V input voltage range allows for single supply operation from industry standard 5V, 12V and 19.6V rails.

With a proprietary emulated current mode Constant On-Time (COT) control scheme, the XR76115 provides extremely fast line and load transient response using ceramic output capacitors. It requires no loop compensation, simplifying circuit implementation and reducing overall component count. The control loop also provides 0.25% load and 0.12% line regulation and maintains constant operating frequency. A selectable power saving mode allows the user to operate in discontinuous mode (DCM) at light current loads, thereby significantly increasing the converter efficiency.

A host of protection features, including over-current, over-temperature, short-circuit and UVLO, help achieve safe operation under abnormal operating conditions.

The XR76115 is available in a RoHS-compliant, green / halogen-free, space-saving QFN 6x6mm package.


## FEATURES

- 15A capable step down regulator
  - 4.5V to 5.5V low  $V_{IN}$  operation
  - 5V to 22V wide single input voltage
  - $\geq 0.6V$  adjustable output voltage
- Controller, drivers, bootstrap diode and MOSFETs integrated in one package
- Proprietary Constant On-Time control
  - No loop compensation required
  - Ceramic output capacitor stable operation
  - Programmable 200ns - 2 $\mu$ s on-time
  - Quasi constant 200kHz - 800kHz frequency
  - Selectable CCM or CCM / DCM operation
- Precision enable and Power-Good flag
- Programmable soft-start
- 6x6mm 37-pin QFN package

## APPLICATIONS

- Distributed power architecture
- Point-of-Load converters
- Power supply modules
- FPGA, DSP, and processor supplies
- Base stations, switches / routers, and server

## Typical Application

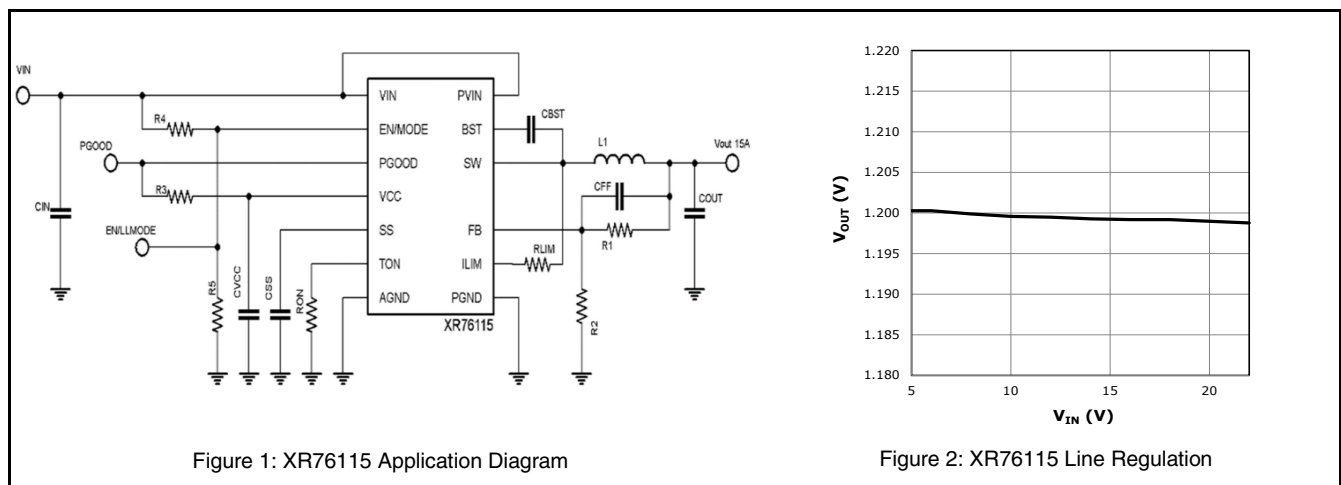

## Absolute Maximum Ratings

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

PV <sub>IN</sub> , V <sub>IN</sub> .....	-0.3V to 25V
V <sub>CC</sub> .....	-0.3V to 6.0V
BST .....	-0.3V to 31V <sup>(1)</sup>
BST-SW .....	-0.3V to 6V
SW, I <sub>LIM</sub> .....	-1V to 25V <sup>(1,2)</sup>
All other pins.....	-0.3V to V <sub>CC</sub> +0.3V
Storage temperature.....	-65°C to 150°C
Junction temperature.....	150°C
Power dissipation .....	Internally Limited
Lead temperature (soldering, 10 sec) .....	300°C
ESD rating (HBM - Human Body Model).....	2kV

## Operating Ratings

PV <sub>IN</sub> .....	3V to 22V
V <sub>IN</sub> .....	4.5V to 22V
V <sub>CC</sub> .....	4.5V to 5.5V
SW, I <sub>LIM</sub> .....	-1V to 22V <sup>(2)</sup>
PGOOD, V <sub>CC</sub> , T <sub>ON</sub> , SS, EN.....	-0.3V to 5.5V
Switching Frequency .....	200kHz - 800kHz <sup>(3)</sup>
Junction Temperature Range (T <sub>J</sub> ) .....	-40°C to 125°C
XR76115 Package Power Dissipation max at 25°C .....	5.2W
XR76115 JEDEC51 Package Thermal Resistance θ <sub>JA</sub> .....	19°C/W

Note 1: No external voltage applied

Note 2: SW pin's DC range is -1V, transient is -5V for less than 50ns

Note 3: Recommended

## Ordering Information<sup>(1)</sup>

Part Number	Operating Temperature Range	Package	Packing Method	Lead-Free <sup>(2)</sup>
XR76115EL-F	-40°C ≤ T <sub>J</sub> ≤ +125°C	6x6mm QFN	Bulk	Yes
XR76115ELTR-F	-40°C ≤ T <sub>J</sub> ≤ +125°C	6x6mm QFN	Tape & Reel	Yes
XR76115EVB	XR76115 Evaluation Board			

### NOTES:

1. Refer to [www.maxlinear.com/XR76115](http://www.maxlinear.com/XR76115) for most up-to-date Ordering Information.
2. Visit [www.maxlinear.com](http://www.maxlinear.com) for additional information on Environmental Rating.

## Electrical Characteristics

Specifications are for the operating junction temperature of T<sub>J</sub> = 25°C only; limits applying over the full operating junction temperature range are denoted by a "\*". Typical values represent the most likely parametric norm at T<sub>J</sub> = 25°C, and are provided for reference purposes only. Unless otherwise indicated, V<sub>IN</sub>=12V.

Parameter	Min.	Typ.	Max.	Units	Conditions
<b>Power Supply Characteristics</b>					
V <sub>IN</sub> , input voltage range	5	12	22	V	• V <sub>CC</sub> regulating • V <sub>CC</sub> tied to V <sub>IN</sub>
	4.5	5.0	5.5		
I <sub>VIN</sub> , V <sub>IN</sub> supply current		0.7	1.3	mA	• Not switching, V <sub>IN</sub> = 12V, V <sub>FB</sub> = 0.7V
I <sub>VCC</sub> , V <sub>CC</sub> quiescent current		0.7	1.3	mA	• Not switching, V <sub>CC</sub> = V <sub>IN</sub> = 5V, V <sub>FB</sub> = 0.7V
I <sub>VIN</sub> , V <sub>IN</sub> supply current		11		mA	f = 300kHz, R <sub>ON</sub> = 107k, V <sub>FB</sub> = 0.58V
I <sub>OFF</sub> , shutdown current		0.5		µA	Enable = 0V, V <sub>IN</sub> = 12V, V <sub>IN</sub> = PV <sub>IN</sub>
<b>Enable and Under-Voltage Lock-Out UVLO</b>					
V <sub>IH_EN</sub> , EN pin rising threshold	1.8	1.9	2.0	V	•
V <sub>EN_HYS</sub> , EN pin hysteresis		50		mV	
V <sub>IH_EN</sub> , EN pin rising threshold for DCM / CCM operation	2.8	3.0	3.1	V	•
V <sub>EN_HYS</sub> , EN pin hysteresis		100		mV	
V <sub>CC</sub> UVLO start threshold, rising edge	4.00	4.25	4.50	V	•
V <sub>CC</sub> UVLO hysteresis		200		mV	

Parameter	Min.	Typ.	Max.	Units	Conditions
<b>Reference Voltage</b>					
V <sub>REF</sub> , reference voltage	0.597	0.600	0.603	V	V <sub>IN</sub> = 5V - 22V → V <sub>CC</sub> regulating
	0.596	0.600	0.604	V	V <sub>IN</sub> = 4.5V - 5.5V → V <sub>CC</sub> tied to V <sub>IN</sub>
	0.594	0.600	0.606	V	• V <sub>IN</sub> = 5V - 22V → V <sub>CC</sub> regulating, V <sub>IN</sub> = 4.5V - 5.5V → V <sub>CC</sub> tied to V <sub>IN</sub>
DC load regulation		±0.25		%	CCM operation, closed loop, applies to any C <sub>OUT</sub>
DC line regulation		±0.12		%	
<b>Programmable Constant On-Time</b>					
On-time 1	1.66	1.95	2.24	μs	• R <sub>ON</sub> = 140kΩ, V <sub>IN</sub> = 22V
f corresponding to on-time 1	243	280	329	kHz	V <sub>IN</sub> = 22V, V <sub>OUT</sub> = 12V
Minimum programmable on-time		109		ns	R <sub>ON</sub> = 6.98kΩ, V <sub>IN</sub> = 22V
On-time 2	170	200	230	ns	• R <sub>ON</sub> = 6.98kΩ, V <sub>IN</sub> = 12V
f corresponding to on-time 2	362	417	490	kHz	V <sub>OUT</sub> = 1.0V
On-time 3	365	430	495	ns	• R <sub>ON</sub> = 16.2kΩ, V <sub>IN</sub> = 12V
Minimum off-time		250	350	ns	•
<b>Diode Emulation Mode</b>					
Zero crossing threshold		-2		mV	DC value measured during test
<b>Soft-Start</b>					
SS charge current	-14	-10	-6	μA	•
SS discharge current	1	3		mA	• Fault present
<b>V<sub>CC</sub> Linear Regulator</b>					
V <sub>CC</sub> output voltage	4.8	5.0	5.2	V	• V <sub>IN</sub> = 6V to 22V, I <sub>load</sub> = 0 to 30mA
	4.51	4.7			• V <sub>IN</sub> = 5V, I <sub>load</sub> = 0 to 20mA
Dropout voltage	100	300	490	mV	• I <sub>VCC</sub> = 30mA
<b>Power Good Output</b>					
Power Good threshold	-10	-7.5	-5	%	
Power Good hysteresis		2	4	%	
Power Good sink current	1	15		mA	
<b>Protection: OCP, OTP, Short-Circuit</b>					
Hiccup timeout		110		ms	
I <sub>LIM</sub> pin source current	45	50	55	μA	
I <sub>LIM</sub> current temperature coefficient		0.4		%/°C	
I <sub>LIM</sub> comparator offset	-8	0	+8	mV	•
Current limit blanking		100		ns	
Thermal shutdown threshold		150		°C	Rising temperature
Thermal hysteresis		15		°C	
Feedback pin short-circuit threshold	50	60	70	%	• Percent of V <sub>REF</sub> , short circuit is active After PGOOD is up
<b>Output Power Stage</b>					
High-side MOSFET R <sub>DS(on)</sub>		7	10	mΩ	V <sub>GS</sub> = 4.5V, I <sub>DS</sub> = 2A
Low-side MOSFET R <sub>DS(on)</sub>		4	4.6	mΩ	V <sub>GS</sub> = 4.5V, I <sub>DS</sub> = 2A
Maximum output current	15			A	•

Block Diagram

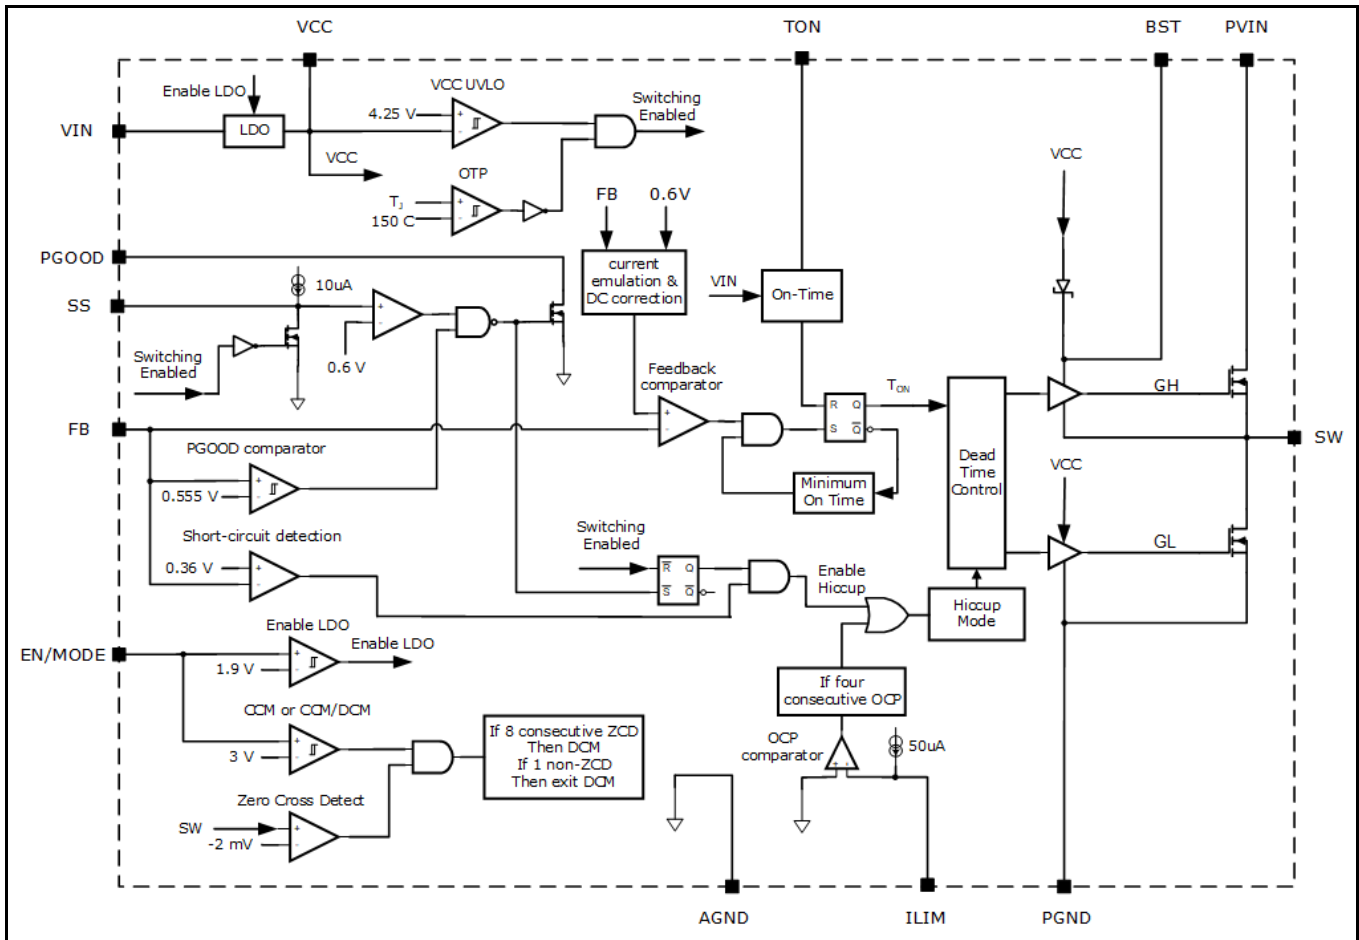


Figure 3: XR76115 Block Diagram

Pin Assignment

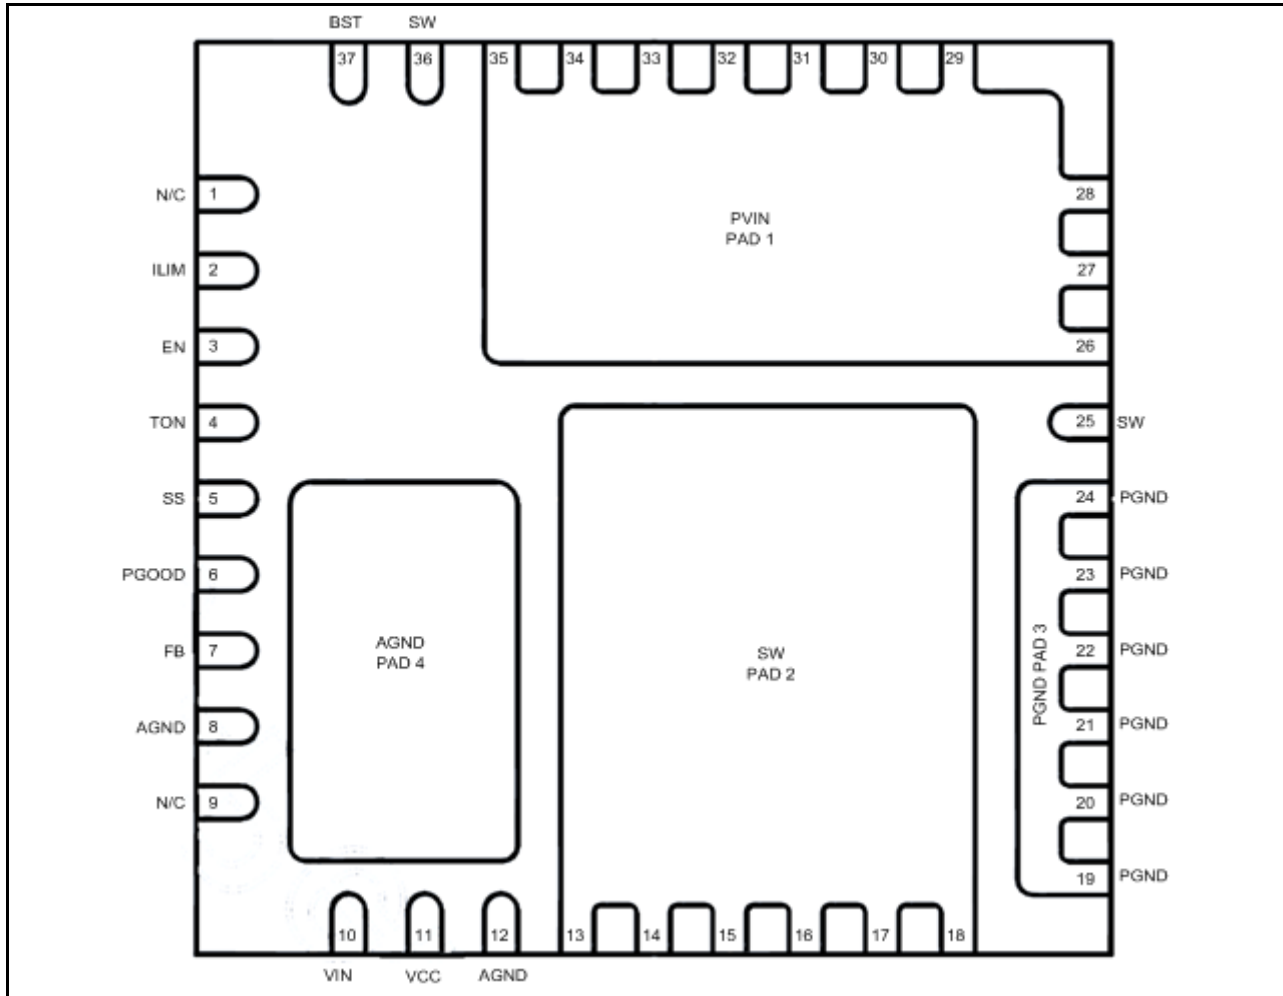


Figure 4: XR76115 Pin Assignment, Top View

## Pin Description

Name	Pin Number	Description
NC	1,9	Not connected.
ILIM	2	Over-current protection programming. Connect with a resistor to SW.
EN/MODE	3	Precision enable pin. Pulling this pin above 1.9V will turn the regulator on and it will operate in CCM. If the voltage is raised above 3.0V then the regulator will operate in DCM / CCM depending on load.
TON	4	Constant on-time programming pin. Connect with a resistor to AGND.
SS	5	Soft-start pin. Connect an external capacitor between SS and AGND to program the soft-start rate based on the 10 $\mu$ A internal source current.
PGOOD	6	Power-good output. This open-drain output is pulled low when V <sub>OUT</sub> is outside the regulation.
FB	7	Feedback input to feedback comparator. Connect with a set of resistors to V <sub>OUT</sub> and AGND in order to program V <sub>OUT</sub> .
AGND	8, 12, AGND Pad	Signal ground for control circuitry. Connect AGND Pad with a short trace to pins 8 and 12.
VIN	10	Supply input for the regulator's LDO. Normally it is connected to PVIN.
VCC	11	The output of regulator's LDO. For operation using a 5V rail, VCC should be shorted to VIN.
SW	13-18, 25, 36, SW Pad	Switch node. The drain of the low-side N-channel MOSFET. The source of the high-side MOSFET is wire-bonded to the SW pad.
PGND	19-24, PGND Pad	Ground of the power stage. Should be connected to the system's power ground plane. The source of the low-side MOSFET is wire-bonded to PGND Pad.
PVIN	26-35, PVIN Pad	Input voltage for the power stage. The drain of the high-side N-channel MOSFET.
BST	37	High-side driver supply pin. Connect a 1 $\mu$ F bootstrap capacitor between BST and SW.

## Typical Performance Characteristics

All data taken at  $V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $f = 600kHz$ ,  $T_A = 25^\circ C$ , no air flow, Forced CCM, unless otherwise specified. The schematic and BOM are from the Applications Circuit section of this datasheet.

### REGULATION

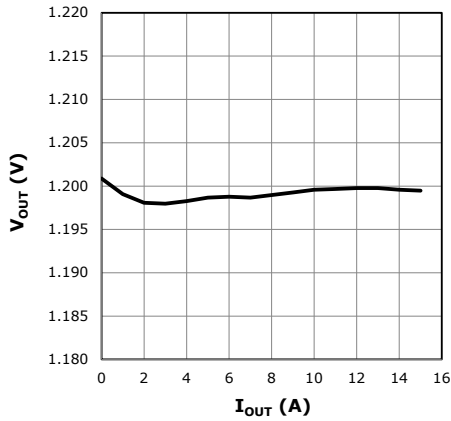


Figure 5: Load Regulation,  $V_{IN}=12V$

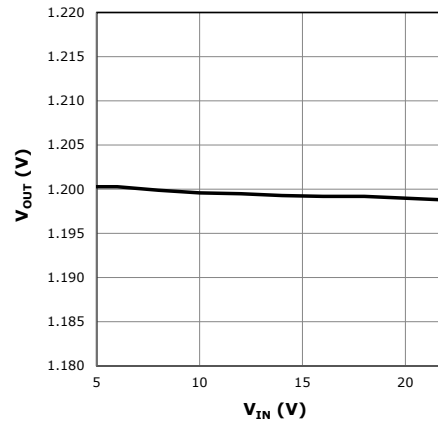


Figure 6: Line Regulation,  $I_{OUT}=15A$

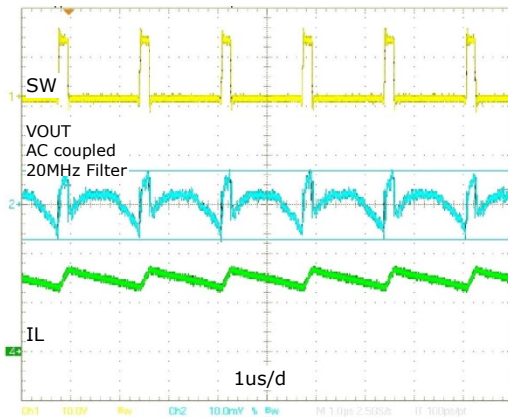


Figure 7:  $V_{OUT}$  Ripple is 14mV at 15A

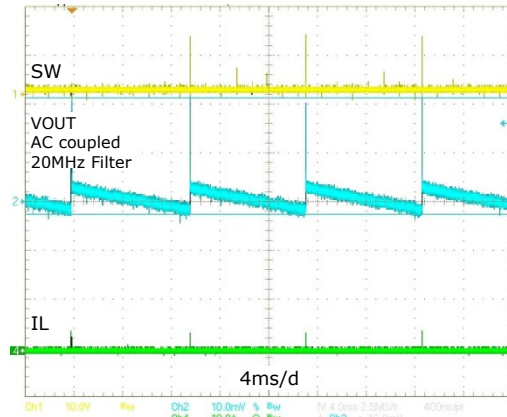


Figure 8:  $V_{OUT}$  Ripple is 23mV at 0A, DCM

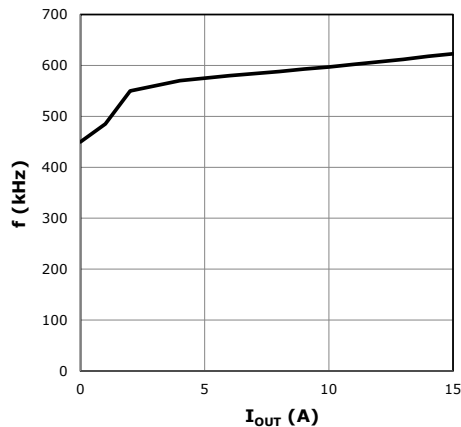


Figure 9: Frequency vs.  $I_{OUT}$ , Forced CCM

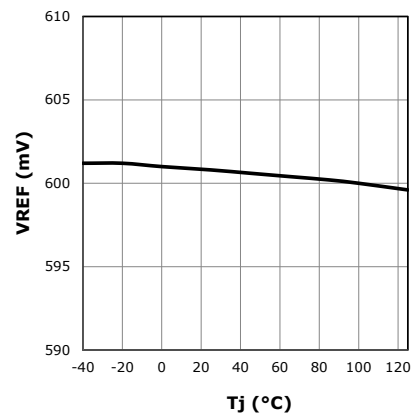


Figure 10:  $V_{REF}$  vs. Temperature

### Typical Performance Characteristics

All data taken at  $V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $f = 600kHz$ ,  $T_A = 25^\circ C$ , no air flow, Forced CCM, unless otherwise specified. The schematic and BOM are from the Applications Circuit section of this datasheet.

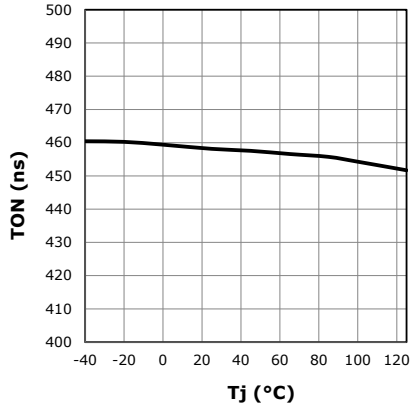


Figure 11: On-Time vs. Temperature

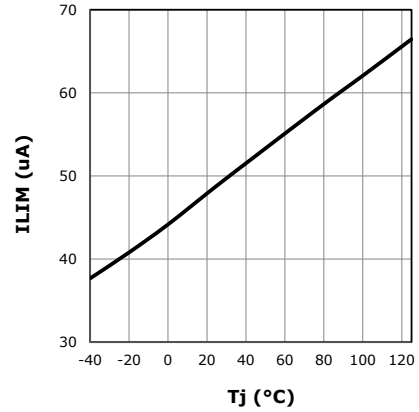


Figure 12:  $I_{LIM}$  vs. Temperature

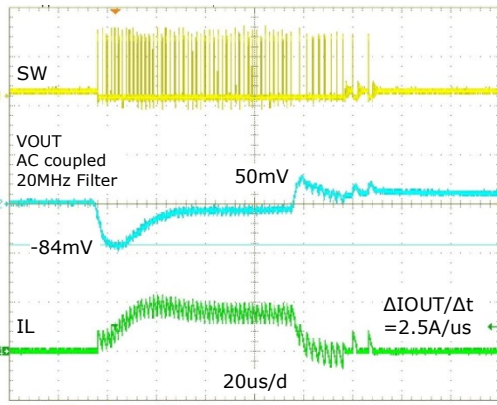


Figure 13: Load Step, DCM / CCM, 0A - 7.5A - 0A

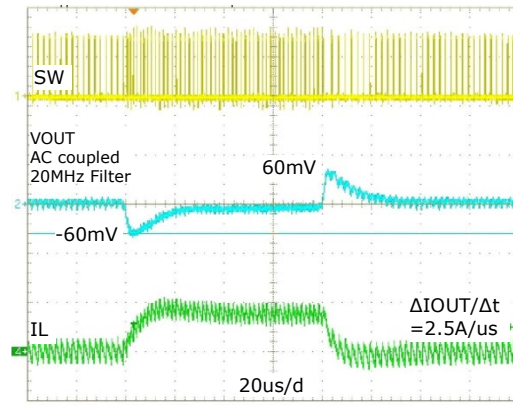


Figure 14: Load Step, Forced CCM, 0A - 7.5 - 0A

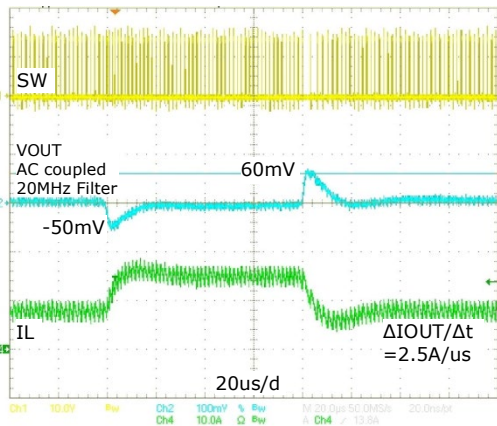


Figure 15: Load Step, Forced CCM, 7.5A - 15A - 7.5A

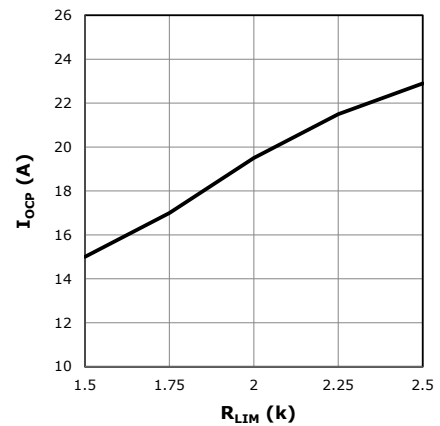


Figure 16: Typical  $I_{ocp}$  versus  $R_{LIM}$

Power-up

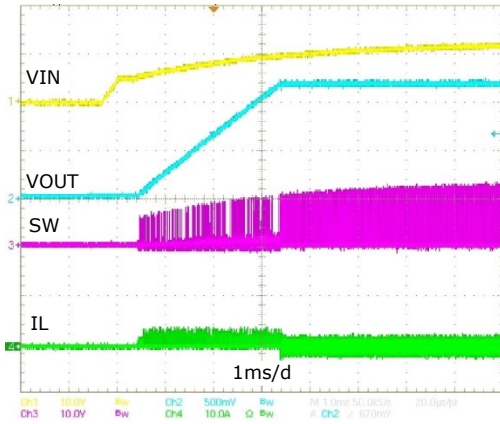


Figure 17: Power-up, Forced CCM,  $I_{OUT} = 0A$

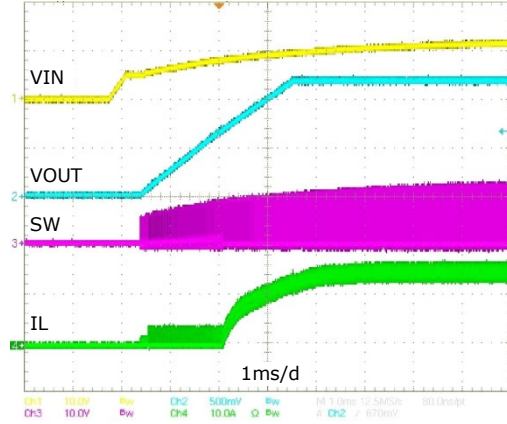


Figure 18: Power-up, Forced CCM,  $I_{OUT} = 15A$

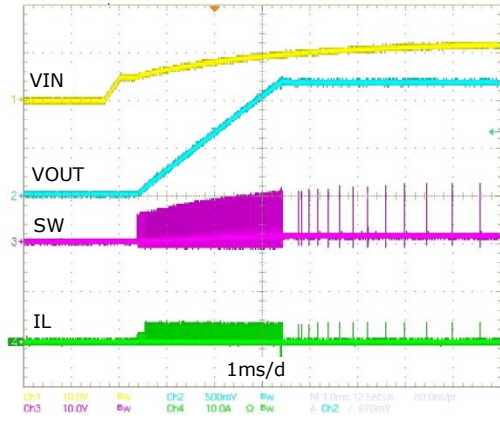


Figure 19: Power-up, DCM / CCM,  $I_{OUT} = 0A$

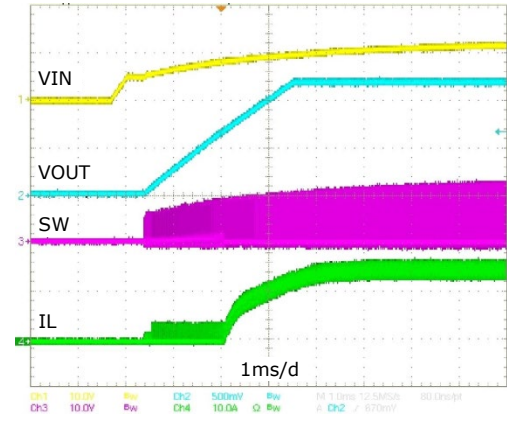


Figure 20: Power-up, DCM / CCM,  $I_{OUT} = 15A$

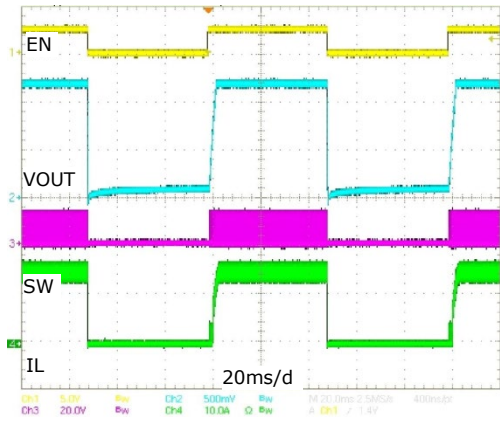


Figure 21: Enable Turn On / Turn Off,  $1.2V_{OUT}$ ,  $15A$

## Efficiency and Thermal Characteristics

T<sub>AMBIENT</sub> = 25°C, no air flow, inductor losses are included.

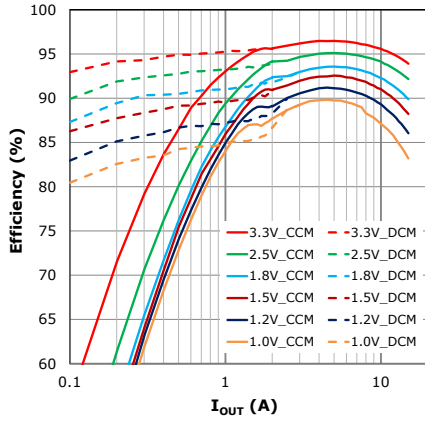


Figure 22: 5V<sub>IN</sub>, 600kHz, 0.47µH

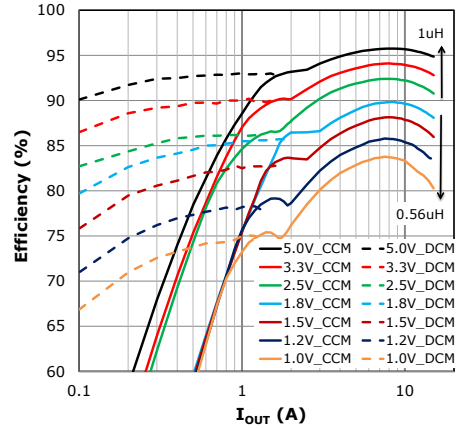


Figure 23: 12V<sub>IN</sub>, 600kHz

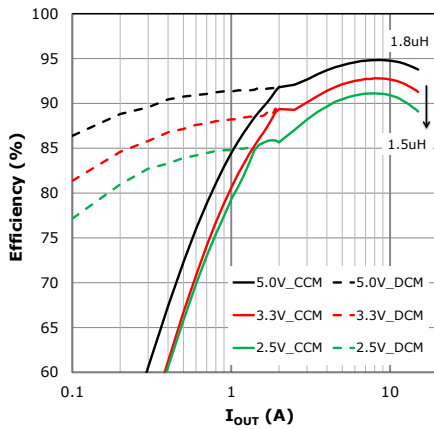


Figure 24: 22V<sub>IN</sub>, 400kHz

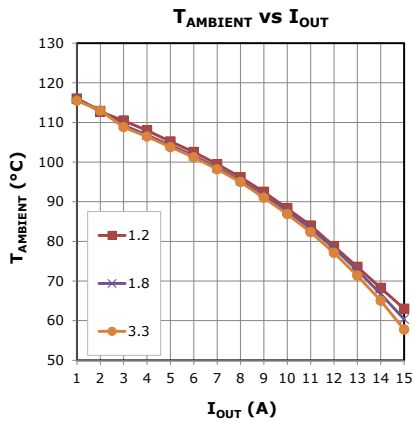


Figure 25: Package Thermal Derating, 12VIN

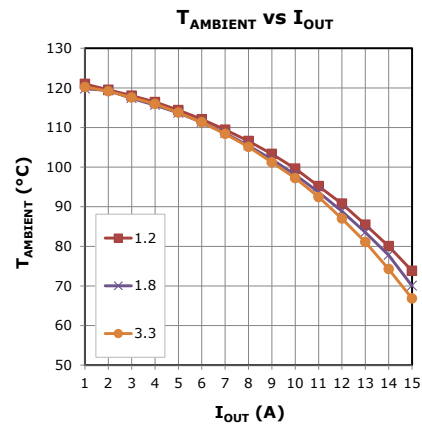


Figure 26: Package Thermal Derating, 5VIN

## Detailed Operation

The XR76115 uses a synchronous step-down, proprietary emulated current-mode Constant On-Time (COT) control scheme. The on-time, which is programmed via  $R_{ON}$ , is inversely proportional to  $V_{IN}$  and maintains a nearly constant frequency. The emulated current-mode control allows the use of ceramic output capacitors.

Each switching cycle begins with the high-side (switching) FET turning on for a pre-programmed time. At the end of the on-time, the high-side FET is turned off and the low-side (synchronous) FET is turned on for a preset minimum time (250ns nominal). This parameter is termed the Minimum Off-Time. After the Minimum Off-Time, the voltage at the feedback pin FB is compared to an internal voltage ramp at the feedback comparator. When  $V_{FB}$  drops below the ramp voltage, the high-side FET is turned on and the cycle repeats. This voltage ramp constitutes an emulated current ramp and allows for the use of ceramic capacitors, in addition to other capacitor types, for output filtering.

## Enable / Mode

The EN/MODE pin accepts a tri-level signal that is used to control channel turn-on and turn-off. It also selects between two modes of operation: 'Forced CCM' and 'DCM / CCM'. If EN is pulled below 1.9V, the regulator shuts down. A voltage between 1.9V and 3V selects the Forced CCM mode, which will run the converter in continuous conduction for all load currents. A voltage higher than 3V selects the DCM / CCM mode, which will run the converter in discontinuous conduction mode at light loads.

## Selecting the Forced CCM Mode

In order to set the controller to operate in Forced CCM, a voltage between 1.9V and 3.0V must be applied to the EN/MODE pin. This can be achieved with an external control signal that meets the above voltage requirement. Where an external control is not available, the EN/MODE signal can be derived from  $V_{IN}$ . If  $V_{IN}$  is well regulated, use a resistor divider and set the voltage to 2.5V. If  $V_{IN}$  varies over a wide range, the circuit shown in Figure 27 can be used to generate the required voltage. Note that at  $V_{IN}$  of 5.5V to 22V, the nominal Zener voltage is respectively 4.0V to 5.0V. Therefore, for  $V_{IN}$  in the range of 5.5V to 22V, the circuit shown in Figure 27 will generate voltage at the EN/MODE pin required for Forced CCM.

## Selecting the DCM / CCM Mode

In order to set the controller operation to DCM / CCM, a voltage between 3.1V and 5.5V must be applied to the EN/MODE pin. If an external control signal is available, it can be directly connected to the EN/MODE pin. In applications where an external control signal is not available, the EN/MODE input can be derived from  $V_{IN}$ . If  $V_{IN}$  is well regulated, use a resistor divider and set the voltage to 4.0V. If  $V_{IN}$  varies over a wide range, the circuit shown in Figure 28 can be used to generate the required voltage.

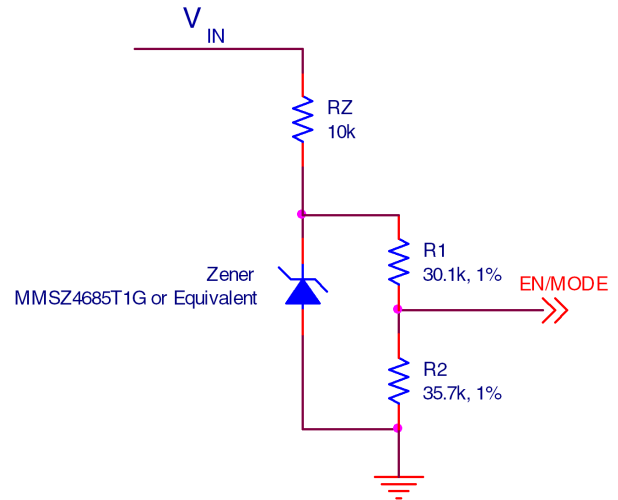


Figure 27: Selecting Forced CCM by deriving EN/MODE from  $V_{IN}$

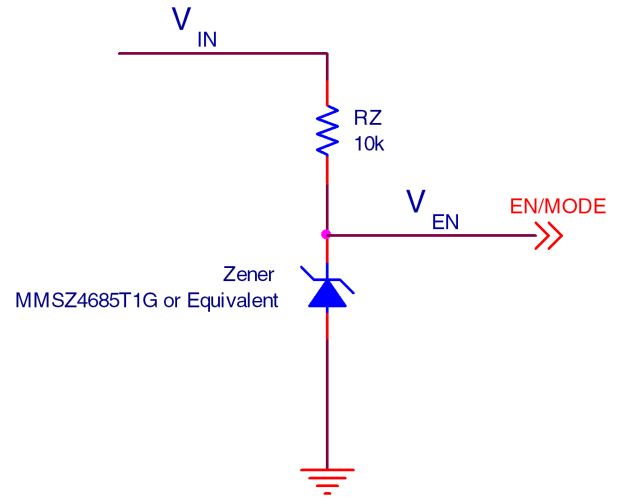


Figure 28: Selecting DCM/CCM by Deriving EN/MODE from  $V_{IN}$

## Programming the On-Time

The on-time  $T_{ON}$  is programmed via resistor  $R_{ON}$  according to following equation:

$$R_{ON} = \frac{V_{IN} \times [T_{ON} - (2.5 \times 10^{-8})]}{3 \times 10^{-10}}$$

$T_{ON}$  is calculated from:

$$T_{ON} = \frac{V_{OUT}}{V_{IN} \times f \times Eff.}$$

where:

f is the desired switching frequency at nominal  $I_{OUT}$

Eff. is the converter efficiency corresponding to nominal  $I_{OUT}$

Substituting for  $T_{ON}$  in the first equation we get:

$$R_{ON} = \frac{\left(\frac{V_{OUT}}{F \times E_{FF}}\right) - [(2.5 \times 10^{-8}) \times V_{IN}]}{(3 \times 10^{-10})}$$

## Over-Current Protection (OCP)

If the load current exceeds the programmed over-current  $I_{OCP}$  for four consecutive switching cycles, then the regulator enters the hiccup mode of operation. In hiccup mode, the MOSFET gates are turned off for 110ms (hiccup timeout). Following the hiccup timeout, a soft-start is attempted. If OCP persists, the hiccup timeout will repeat. The regulator will remain in hiccup mode until load current is reduced below the programmed  $I_{OCP}$ . In order to program over-current protection, use the following equation:

$$R_{LIM} = \frac{(I_{OCP} \times R_{DSON}) + 8mV}{I_{LIM}}$$

where:

$R_{LIM}$  is resistor value for programming  $I_{OCP}$

$I_{OCP}$  is the over-current value to be programmed

$R_{DSON} = 4.6m\Omega$  (maximum specification)

8mV is the OCP comparator offset

$I_{LIM}$  is the internal current that generates the necessary OCP comparator threshold (use 45 $\mu$ A)

Note that  $I_{LIM}$  has a positive temperature coefficient of 0.4%/°C. This is meant to approximately match and compensate for positive temperature coefficient of the synchronous FET.

The above equation is for worst-case analysis and safeguards against premature OCP. The actual value of  $I_{OCP}$ , for a given  $R_{LIM}$ , will be higher than that predicted by the above equation. Typical  $I_{OCP}$  versus  $R_{LIM}$  is shown in Figure 16.

## Short-Circuit Protection (SCP)

If the output voltage drops below 60% of its programmed value, the regulator will enter hiccup mode. Hiccup mode will persist until the short-circuit is removed. The SCP circuit becomes active after PGOOD asserts high.

## Over-Temperature Protection (OTP)

OTP triggers at a nominal controller temperature of 150°C. The gates of the switching FET and the synchronous FET are turned off. When die temperature cools down to 135°C, soft-start is initiated and operation resumes.

## Programming the Output Voltage

Use an external voltage divider as shown in Figure 1 to program the output voltage  $V_{OUT}$ .

$$R1 = R2 \times \left(\frac{V_{OUT}}{0.6} - 1\right)$$

The recommended value for R2 is 2k $\Omega$ .

## Programming the Soft-start

Place a capacitor  $C_{SS}$  between the SS and GND pins to program the soft-start. In order to program a soft-start time of  $T_{SS}$ , calculate the required capacitance  $C_{SS}$  from the following equation:

$$C_{SS} = T_{SS} \times \frac{10\mu A}{0.6V}$$

## Feed-Forward Capacitor $C_{FF}$

A feed-forward capacitor  $C_{FF}$  may be necessary, depending on the Equivalent Series Resistance (ESR) of  $C_{OUT}$ . If only ceramic output capacitors are used, then a  $C_{FF}$  is necessary. Calculate  $C_{FF}$  from:

$$C_{FF} = \frac{1}{2 \times \pi \times R1 \times 7 \times f_{LC}}$$

where:

R1 is the resistor that  $C_{FF}$  is placed in parallel with

$f_{LC}$  is the frequency of the output filter double pole

$f_{LC}$  must be less than 15kHz when using ceramic  $C_{OUT}$ . If necessary, increase  $C_{OUT}$  and / or L in order to meet this constraint.

When using capacitors with higher ESR, such as the Panasonic TPE series, a  $C_{FF}$  is not required provided following conditions are met:

1. The frequency of the output LC double pole  $f_{LC}$  should be less than 10kHz
2. The frequency of ESR zero  $f_{ZERO,ESR}$  should be at least five times larger than  $f_{LC}$



Note that if  $f_{ZERO,ESR}$  is less than 5 x  $f_{LC}$ , then it is recommended to set the  $f_{LC}$  at less than 2kHz.  $C_{FF}$  is still not required.

## Feed-Forward Resistor $R_{FF}$

Poor PCB layout and / or extremely fast switching FETs can cause switching noise at the output and may couple to the FB pin via  $C_{FF}$ . Excessive noise at FB will cause poor load regulation. To solve this problem, place a resistor  $R_{FF}$  in series with  $C_{FF}$ . An  $R_{FF}$  value up to 2% of R1 is acceptable.



Mechanical Dimensions

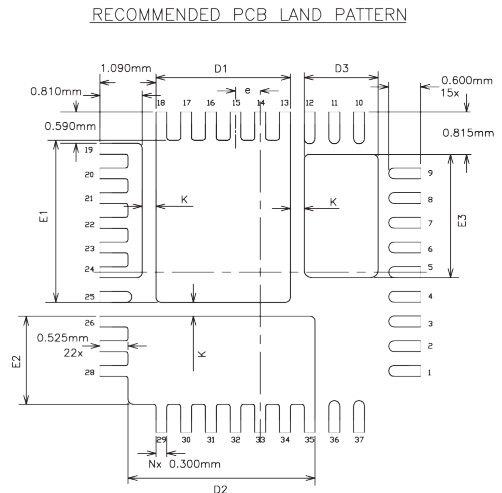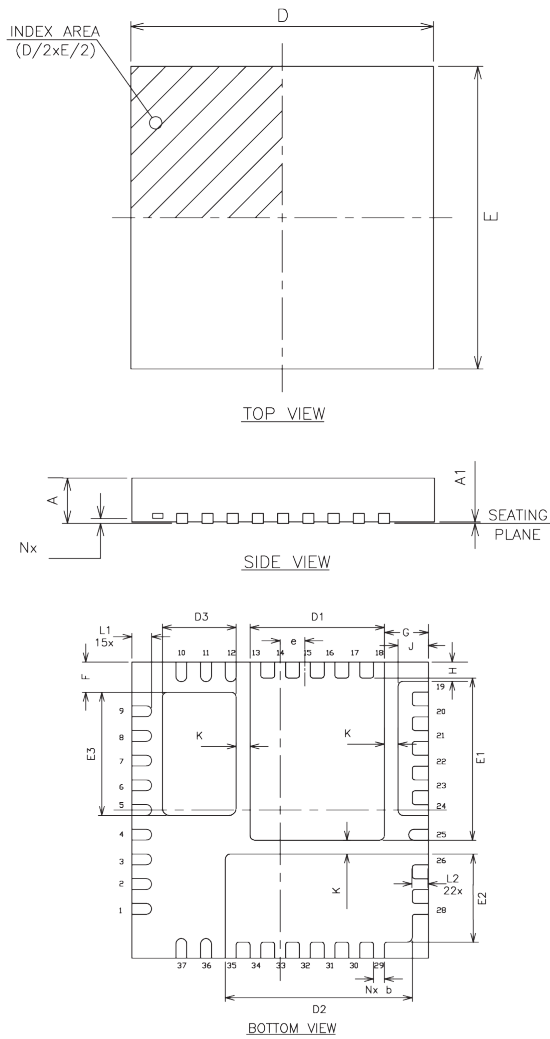

SYMBOLS	37LD 6x6mm QFN 0.50 PITCH					
	DIMENSIONS IN MM (Control Unit)			DIMENSIONS IN INCH (Reference Unit)		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.800	0.900	1.000	0.031	0.035	0.039
A1	0.000	0.020	0.050	0.000	0.001	0.002
b	0.180	0.250	0.300	0.007	0.010	0.012
D	6.000 BSC			0.240 BSC		
E	6.000 BSC			0.240 BSC		
e	0.500 BSC			0.020 BSC		
F	0.615 REF			0.024 REF		
G	0.890 REF			0.035 REF		
H	0.390 REF			0.015 REF		
J	0.610 REF			0.024 REF		
K	0.280 REF			0.011 REF		
D1	2.570	2.720	2.820	0.101	0.107	0.111
E1	3.135	3.285	3.385	0.123	0.129	0.133
D2	3.635	3.785	3.885	0.143	0.149	0.153
E2	1.635	1.785	1.885	0.064	0.070	0.074
D3	1.345	1.495	1.595	0.053	0.059	0.063
E3	2.345	2.495	2.595	0.092	0.098	0.102
L1	0.300	0.400	0.500	0.012	0.016	0.020
L2	0.225	0.325	0.425	0.009	0.013	0.017
N	37			37		

Drawing No: POD-00000019  
Revision: A

## Revision History

Revision	Date	Description
1A	March 2014	Initial release: ECN 1413-14 03-26-2014
1B	August 2015	Changed "On-Time 2" specification to: Min=170ns, Typ=200ns, Max= 230ns Changed "On-Time 3" specification to: Min=365ns, Typ=430ns, Max= 495ns Changed "f corresponding to On-Time 2" specification to: Min=362 kHz, Typ=417 kHz, Max= 490 kHz removed "f corresponding to On-Time 2" specifications for VOUT=3.3V, removed Diode Emulation Mode write up, modified Functional Block Diagram, modified Feed-Forward Capacitor write up, modified Programming the On-Time write up; added "Selecting the Forced CCM Mode", "Selecting the DCM/CCM Mode", "Feed-Forward Resistor", "Maximum Allowable Voltage Ripple at FB Pin" sections
1C	June 2018	Updated to MaxLinear logo. Updated format and Ordering Information table.
1D	10/18/19	Correct block diagram by changing the input gate into the Hiccup Mode from an AND gate to an OR gate. Update ordering information.

**Corporate Headquarters:**

5966 La Place Court  
 Suite 100  
 Carlsbad, CA 92008  
 Tel.: +1 (760) 692-0711  
 Fax: +1 (760) 444-8598  
[www.maxlinear.com](http://www.maxlinear.com)

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this guide. Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced into, stored in, or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of MaxLinear, Inc.

MaxLinear, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless MaxLinear, Inc. receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of MaxLinear, Inc. is adequately protected under the circumstances.

MaxLinear, Inc. may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from MaxLinear, Inc., the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

MaxLinear, the MaxLinear logo, and any MaxLinear trademarks, MxL, Full-Spectrum Capture, FSC, G.now, AirPHY and the MaxLinear logo are all on the products sold, are all trademarks of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. All rights reserved. Other company trademarks and product names appearing herein are the property of their respective owners.

© 2015 - 2019 MaxLinear, Inc. All rights reserved

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View XR76115EL-F on WIN SOURCE](#)

 [MaxLinear Inc Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management