




**THE DATASHEET OF  
WC-610M**



pin-locator  
1882-24008  
attached




### Operating instructions

- Please remove support while using pin-locator
- Pin locator must be tight screwed on wire-anvil
- Please mount support while using socket-locator
- Adjust fixing of socket-locator to assure its gliding functionality

### Ausführung: Workmanship:

- Leichte Handhabung  
Easy handling
- Linearer Hub  
Straight action principle
- Entriegelbare Zwangssperre  
Ratchet release
- Kontaktpositionierung mit Klapppositionierer  
Contact positioning with flap locator
- Präzise geschliffene Profile  
Precisely ground profiles
- Oberfläche brüniert  
Burnished surface
- Ergonomisch geformte Soft-Handgriffe  
Farbe: Türkisgrün (ähnl. RAL 6016)  
Ergonomically formed soft-grips  
Colour: green similar (similar RAL 6016)
- Voll recyclefähig;  
RoHS(Richtlinie.2002/95/EG) konform  
Fully recyclable;  
RoHS(Directive.2002/95/EG) compliant

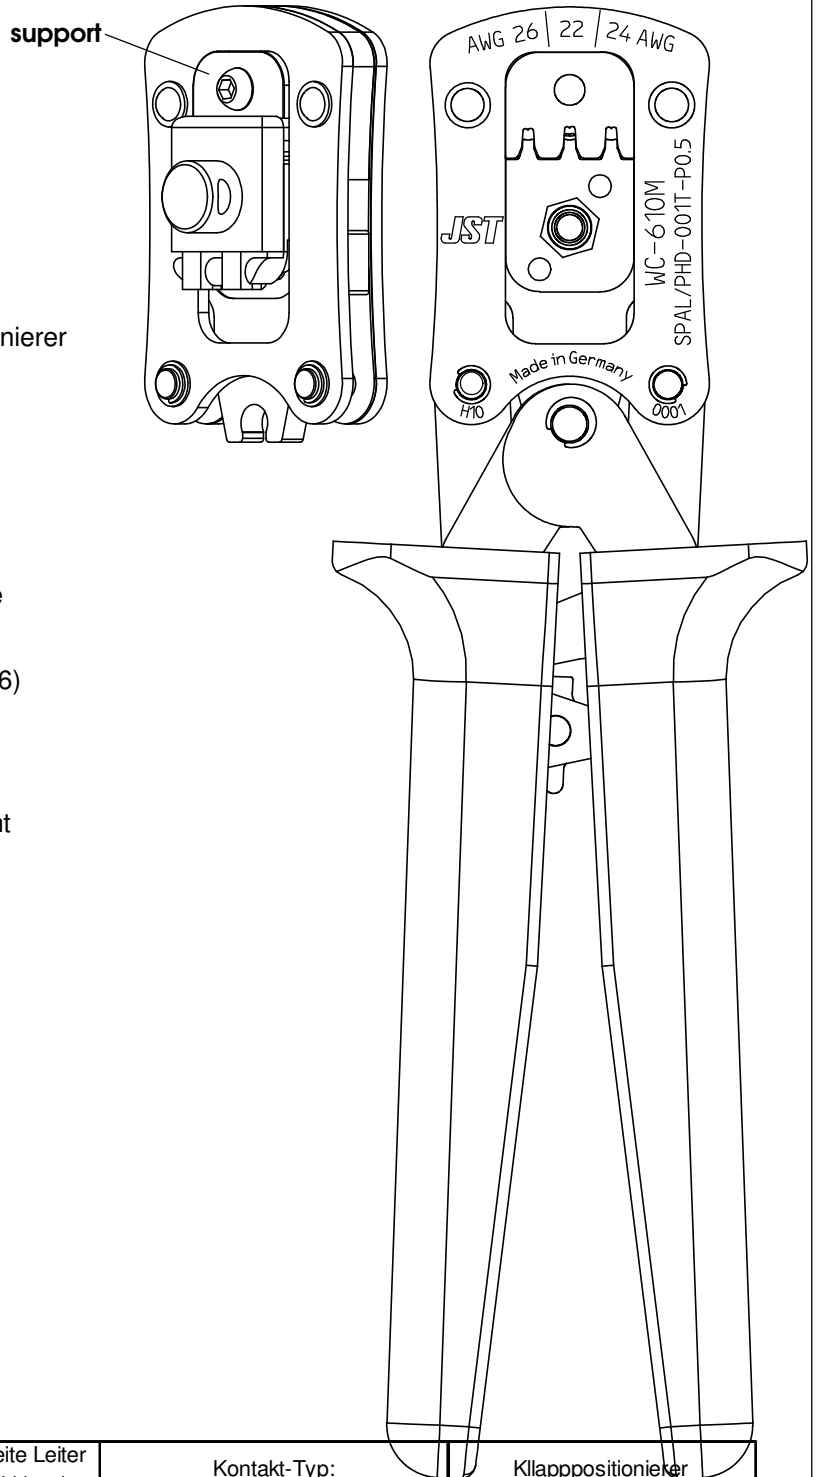

### Abmessungen: Dimensions:

- Länge: ca. 195 mm  
Length: approx. 195 mm
- Breite: ca. 63 mm  
Width: approx. 63 mm
- Gewicht: ca. 290 g  
Weight: approx. 290 g

Bedienhinweis auf Rückseite  
Operating instructions see overleaf

### Anwendungsbereich: Application range:

Leiterquerschnitt Cross section range	Crimphöhe Leiter Crimp height wire ±0,05	Crimpbreite Leiter Crimp width wire Ref	Kontakt-Typ: Contact Type:	Klapppositionierer flap locator
AWG 26	0,65	1,38	SPHD-001T-P0.5 Buchse/Socket SPAL-001T-P0.5 Stift/Pin	1182-24005 Buchse/Socket 1182-24008 Stift/Pin
AWG 22	0,75			
AWG 24	0,7			

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View WC-610M](#) on WIN SOURCE
- ⊖ [JST Sales America Inc.](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management