



# THE DATASHEET OF FTLX1370W3BTL

## Product Specification

### 9.8304 Gigabit RoHS Compliant Long-Wavelength SFP+ Transceiver

#### FTLX1370W3BTL

#### PRODUCT FEATURES

- Up to 9.8304 Gb/s bi-directional data links
- Hot-pluggable SFP+ footprint
- Built-in digital diagnostic functions
- Duplex LC connector
- RoHS compliant and Lead Free
- Up to 1.4 km at 9.8304 Gb/s on 9/125µm SMF
- Metal enclosure, for lower EMI
- Single 3.3V power supply
- Industrial operating temperature range: -40°C to 85°C
- 1 Watt Maximum Power Consumption



#### APPLICATIONS

- 2.457 Gb/s CPRI
- 3.072 Gb/s CPRI/LTE
- 4.915 Gb/s CPRI/LTE
- 6.144 Gb/s CPRI/OBSAI/LTE
- 9.8304 Gb/s CPRI/LTE

Finisar's FTLX1370W3BTL SFP+ transceivers are designed for use in Wireless basestation links up to 1.4 km at up to 9.8304 Gb/s data rates for CPRI, OBSAI, LTE, or other Wireless applications. They are compliant with SFF-8431<sup>1</sup>, SFF-8432<sup>2</sup>, SFF-8472 Rev 10.2<sup>3</sup>, CPRI Rev 5.0<sup>6</sup>, and OBSAI Rev V4.2<sup>7</sup>. The product is RoHS compliant and lead-free per Directive 2002/95/EC<sup>4</sup> and Finisar Application Note AN-2038.

#### PRODUCT SELECTION

|                      |
|----------------------|
| <b>FTLX1370W3BTL</b> |
|----------------------|

## I. Pin Descriptions

| Pin | Symbol             | Name/Description                                               | Ref. |
|-----|--------------------|----------------------------------------------------------------|------|
| 1   | V <sub>EET</sub>   | Transmitter Ground                                             | 1    |
| 2   | T <sub>FAULT</sub> | Transmitter Fault                                              | 2    |
| 3   | T <sub>DIS</sub>   | Transmitter Disable. Laser output disabled on high or open.    | 3    |
| 4   | SDA                | 2-wire Serial Interface Data Line                              | 2    |
| 5   | SCL                | 2-wire Serial Interface Clock Line                             | 2    |
| 6   | MOD_ABS            | Module Absent. Grounded within the module                      | 2    |
| 7   | RS0                | Rate Select 0. Not Used.                                       | 4    |
| 8   | RX_LOS             | Loss of Signal indication. Logic 0 indicates normal operation. | 5    |
| 9   | RS1                | Rate Select 1. Not Used.                                       | 4    |
| 10  | V <sub>EER</sub>   | Receiver Ground                                                | 1    |
| 11  | V <sub>EER</sub>   | Receiver Ground                                                | 1    |
| 12  | RD-                | Receiver Inverted DATA out. AC Coupled.                        |      |
| 13  | RD+                | Receiver Non-inverted DATA out. AC Coupled.                    |      |
| 14  | V <sub>EER</sub>   | Receiver Ground                                                | 1    |
| 15  | V <sub>CCR</sub>   | Receiver Power Supply                                          |      |
| 16  | V <sub>CCT</sub>   | Transmitter Power Supply                                       |      |
| 17  | V <sub>EET</sub>   | Transmitter Ground                                             | 1    |
| 18  | TD+                | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-                | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | V <sub>EET</sub>   | Transmitter Ground                                             | 1    |

### Notes:

1. Circuit ground is internally isolated from chassis ground.
2. T<sub>FAULT</sub> is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to V<sub>CC</sub> + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on T<sub>DIS</sub> >2.0V or open, enabled on T<sub>DIS</sub> <0.8V.
4. Internally pulled down per SFF-8431 Rev 4.1.
5. LOS is open collector output. Should be pulled up with 4.7k – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

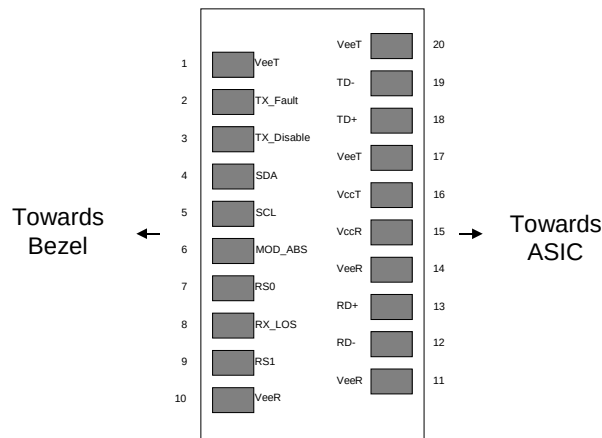


Figure 1. Diagram of Host Board Connector Block Pin Numbers and Names.

## II. Absolute Maximum Ratings

Exceeding the limits below may damage the transceiver module permanently.

| Parameter              | Symbol          | Min  | Typ | Max | Unit | Ref. |
|------------------------|-----------------|------|-----|-----|------|------|
| Maximum Supply Voltage | V <sub>CC</sub> | -0.5 |     | 4.0 | V    |      |
| Storage Temperature    | T <sub>S</sub>  | -40  |     | 85  | °C   |      |
| Relative Humidity      | RH              | 0    |     | 85  | %    | 1    |

1. Non-condensing.

## III. Electrical Characteristics (T<sub>OP</sub> = -40 to 85 °C, V<sub>CC</sub> = 3.14 to 3.46 Volts)

| Parameter                      | Symbol                              | Min                  | Typ  | Max                   | Unit | Ref. |
|--------------------------------|-------------------------------------|----------------------|------|-----------------------|------|------|
| Supply Voltage                 | V <sub>CC</sub>                     | 3.14                 | 3.30 | 3.46                  | V    |      |
| Supply Current                 | I <sub>CC</sub>                     |                      |      | 430                   | mA   |      |
| <b>Transmitter</b>             |                                     |                      |      |                       |      |      |
| Input differential impedance   | R <sub>in</sub>                     |                      | 100  |                       | Ω    | 1    |
| Differential data input swing  | V <sub>in,pp</sub>                  | 180                  |      | 2400                  | mV   |      |
| Transmit Disable Voltage       | V <sub>D</sub>                      | 2                    |      | V <sub>CC</sub>       | V    |      |
| Transmit Enable Voltage        | V <sub>EN</sub>                     | V <sub>EE</sub>      |      | V <sub>EE</sub> + 0.8 | V    |      |
| <b>Receiver</b>                |                                     |                      |      |                       |      |      |
| Differential data output swing | V <sub>out,pp</sub>                 | 300                  |      | 850                   | mV   | 2,6  |
| Output rise time and fall time | T <sub>r</sub> , T <sub>f</sub>     | 28                   |      |                       | ps   | 3    |
| LOS Fault                      | V <sub>LOS fault</sub>              | 2                    |      | V <sub>CCHOST</sub>   | V    | 4    |
| LOS Normal                     | V <sub>LOS norm</sub>               | V <sub>EE</sub>      |      | V <sub>EE</sub> +0.8  | V    | 4    |
| Power Supply Noise Tolerance   | V <sub>CC</sub> T/V <sub>CC</sub> R | Per SFF-8431 Rev 4.1 |      |                       | mVpp | 5    |

### Notes:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Into 100Ω differential termination.
3. 20 – 80%. Measured with Module Compliance Test Board and OMA test pattern. Use of four 1's and four 0's sequence in the PRBS 9 is an acceptable alternative. SFF-8431 Rev 4.1.
4. LOS is an open collector output. Should be pulled up with 4.7kΩ – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1.
5. See Section 2.8.3 of SFF-8431 Rev 4.1.
6. The FTLX1370D3BTL is a “limiting module”, i.e., it employs a limiting receiver. Host board designers using an EDC PHY IC should follow the IC manufacturer's recommended settings for interoperating the host-board EDC PHY with a limiting receiver SFP+ module.

**IV. Optical Characteristics (T<sub>OP</sub> = -40 to 85 °C, V<sub>CC3</sub> = 3.14 to 3.46 Volts)**

| Parameter                               | Symbol             | Min                      | Typ | Max   | Unit  | Ref. |
|-----------------------------------------|--------------------|--------------------------|-----|-------|-------|------|
| <b>Transmitter</b>                      |                    |                          |     |       |       |      |
| Optical Modulation Amplitude (OMA)      | P <sub>OMA</sub>   | -5.2                     |     |       | dBm   |      |
| Average Launch Power                    | P <sub>AVE</sub>   | -8.2                     |     | +0.5  | dBm   | 1    |
| Extinction Ratio                        | ER                 | 3.0                      |     |       | dB    |      |
| Optical Wavelength                      | λ                  | 1260                     |     | 1355  | nm    |      |
| Transmitter and Dispersion Penalty      | TDP                |                          |     | 3.4   | dB    |      |
| Average Launch power of OFF transmitter | P <sub>OFF</sub>   |                          |     | -30   | dBm   |      |
| Tx Jitter                               | T <sub>xj</sub>    | Per 802.3ae requirements |     |       |       |      |
| Relative Intensity Noise                | RIN                |                          |     | -128  | dB/Hz |      |
| <b>Receiver</b>                         |                    |                          |     |       |       |      |
| Receiver Sensitivity (OMA) @ 9.8304Gb/s | R <sub>SENS1</sub> |                          |     | -12.6 | dBm   | 2    |
| Average Receive Power                   | P <sub>AVE</sub>   |                          |     | +0.5  | dBm   |      |
| Optical Center Wavelength               | λ <sub>C</sub>     | 1260                     |     | 1600  | nm    |      |
| Receiver Reflectance                    | R <sub>rx</sub>    |                          |     | -12   | dB    |      |
| LOS De-Assert                           | LOS <sub>D</sub>   |                          |     | -17   | dBm   |      |
| LOS Assert                              | LOS <sub>A</sub>   | -30                      |     |       | dBm   |      |
| LOS Hysteresis                          |                    | 0.5                      |     |       | dB    |      |

**Notes:**

1. Average power figures are informative only, per IEEE 802.3ae.
2. Valid between 1260 and 1355 nm. Measured with worst ER; BER<10<sup>-12</sup>; 2<sup>31</sup> – 1 PRBS.

**V. General Specifications**

| Parameter                  | Symbol           | Min    | Typ | Max        | Units | Ref. |
|----------------------------|------------------|--------|-----|------------|-------|------|
| Bit Rate                   | BR               | 2.4576 |     | 9.8304     | Gb/s  |      |
| Bit Error Ratio            | BER              |        |     | $10^{-12}$ |       | 1    |
| Max. Supported Link Length | L <sub>MAX</sub> |        | 1.4 |            | km    |      |

Notes:

1. Tested with a  $2^{31} - 1$  PRBS.

**VI. Environmental Specifications**

Finisar FTLX1370W3BTL transceivers have an operating temperature range from -40°C to +85°C case temperature.

| Parameter                  | Symbol           | Min | Typ | Max | Units | Ref. |
|----------------------------|------------------|-----|-----|-----|-------|------|
| Case Operating Temperature | T <sub>op</sub>  | -40 |     | 85  | °C    |      |
| Storage Temperature        | T <sub>sto</sub> | -40 |     | 85  | °C    |      |

**VII. Regulatory Compliance**

Finisar transceivers are Class 1 Laser Products and comply with US FDA regulations. These products are certified by TÜV and CSA to meet the Class 1 eye safety requirements of EN (IEC) 60825 and the electrical safety requirements of EN (IEC) 60950. Copies of certificates are available at Finisar Corporation upon request.

## **VIII. Digital Diagnostic Functions**

Finisar FTLX1370W3BTL SFP+ transceivers support the 2-wire serial communication protocol as defined in the SFP MSA<sup>1</sup>. It is very closely related to the E<sup>2</sup>PROM defined in the GBIC standard, with the same electrical specifications.

The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, Finisar SFP+ transceivers provide an enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP MSA defines a 256-byte memory map in E<sup>2</sup>PROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged. The interface is identical to, and is thus fully backward compatible with both the GBIC Specification and the SFP Multi Source Agreement. The complete interface is described in Finisar Application Note AN-2030: "Digital Diagnostics Monitoring Interface for SFP Optical Transceivers".

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E<sup>2</sup>PROM that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

For more information, please see the SFP MSA documentation<sup>1,5</sup> and Finisar Application Note AN-2030.

Please note that evaluation board FDB-1027 is available with Finisar ModDEMO software that allows simple to use communication over the 2-wire serial interface.

## IX. Digital Diagnostic Specifications

FTLX1370W3BTL transceivers can be used in host systems that require either internally or externally calibrated digital diagnostics.

| Parameter                                      | Symbol                           | Min   | Typ | Max  | Units | Ref. |
|------------------------------------------------|----------------------------------|-------|-----|------|-------|------|
| <b>Accuracy</b>                                |                                  |       |     |      |       |      |
| Internally measured transceiver temperature    | $\Delta DD_{\text{Temperature}}$ |       |     | 3    | °C    |      |
| Internally measured transceiver supply voltage | $\Delta DD_{\text{Voltage}}$     |       |     | 3    | %     |      |
| Measured TX bias current                       | $\Delta DD_{\text{Bias}}$        |       |     | 10   | %     | 1    |
| Measured TX output power                       | $\Delta DD_{\text{Tx-Power}}$    |       |     | 2    | dB    |      |
| Measured RX received average optical power     | $\Delta DD_{\text{Rx-Power}}$    |       |     | 2    | dB    |      |
| <b>Dynamic Range for Rated Accuracy</b>        |                                  |       |     |      |       |      |
| Internally measured transceiver temperature    | $DD_{\text{Temperature}}$        | -40   |     | 85   | °C    |      |
| Internally measured transceiver supply voltage | $DD_{\text{Voltage}}$            | 3.1   |     | 3.5  | V     |      |
| Measured TX bias current                       | $DD_{\text{Bias}}$               | 10    |     | 70   | mA    |      |
| Measured TX output power                       | $DD_{\text{Tx-Power}}$           | -8.2  |     | +0.5 | dBm   |      |
| Measured RX received average optical power     | $DD_{\text{Rx-Power}}$           | -14.2 |     | +0.5 | dBm   |      |
| <b>Max Reporting Range</b>                     |                                  |       |     |      |       |      |
| Internally measured transceiver temperature    | $DD_{\text{Temperature}}$        | -40   |     | 125  | °C    |      |
| Internally measured transceiver supply voltage | $DD_{\text{Voltage}}$            | 2.8   |     | 4.0  | V     |      |
| Measured TX bias current                       | $DD_{\text{Bias}}$               | 0     |     | 100  | mA    |      |
| Measured TX output power                       | $DD_{\text{Tx-Power}}$           | -10   |     | +2   | dBm   |      |
| Measured RX received average optical power     | $DD_{\text{Rx-Power}}$           | -22   |     | +2   | dBm   |      |


### Notes:

1. Accuracy of measured Tx bias current is 10% of the actual bias current from the laser driver to the laser.




## X. Mechanical Specifications

Finisar FTLX1370W3BTL SFP+ transceivers are compatible with the SFF-8432 specification for improved pluggable form factor, and shown here for reference purposes only. Bail color is blue.

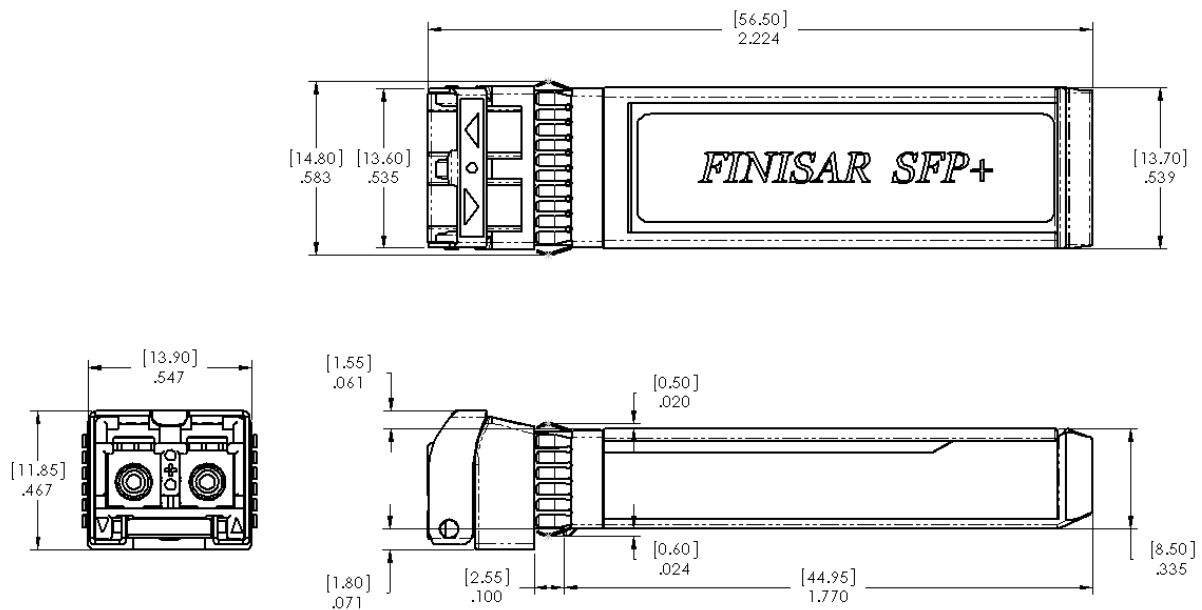

**Figure 2. FTLX1370W3BTL Mechanical Dimensions.**



## XI. PCB Layout and Bezel Recommendations

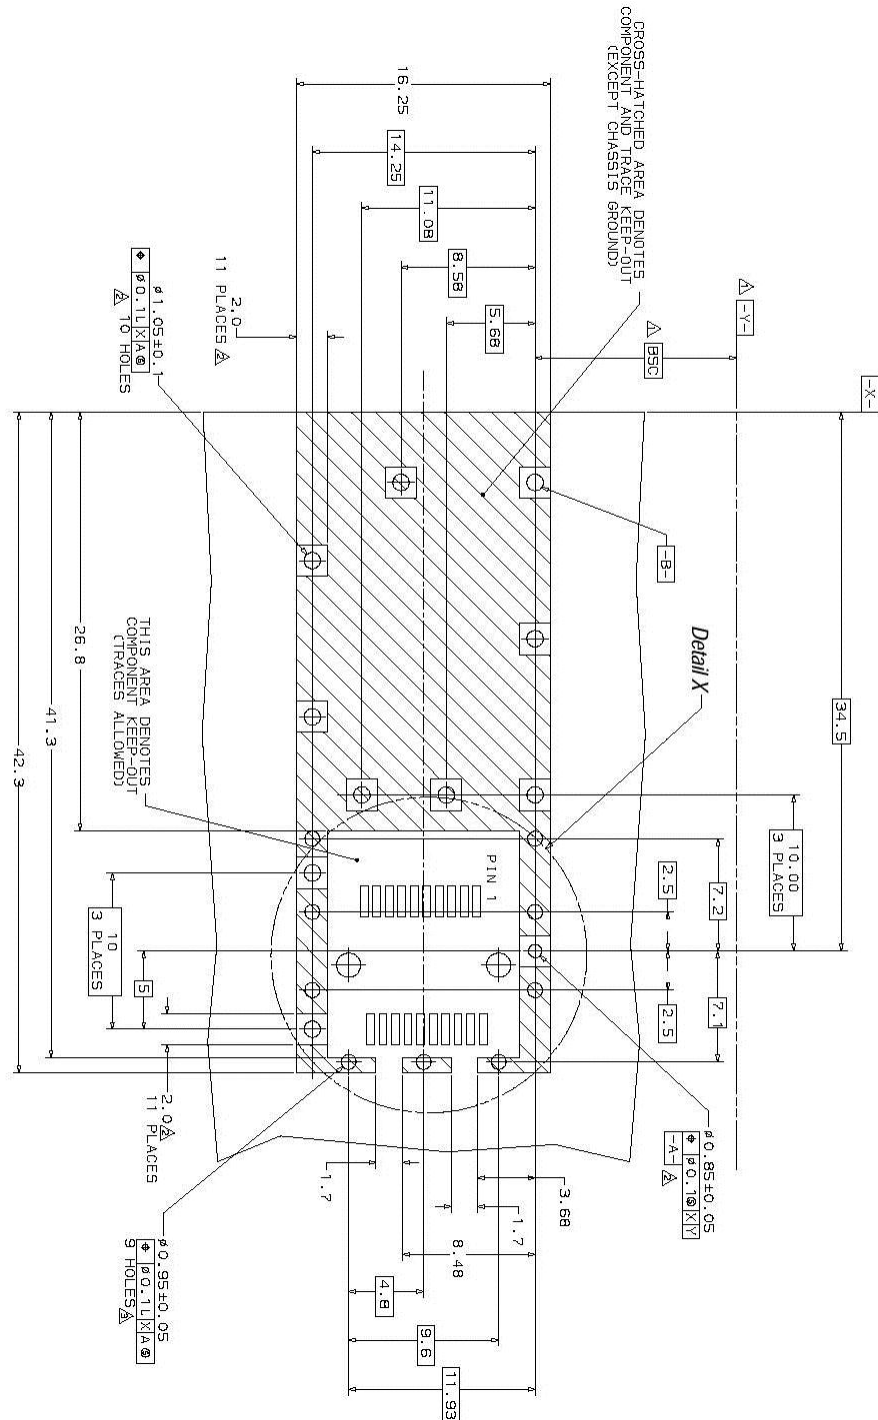

### Datum and Basic Dimension Established by Customer

△2Pads and Vias are Chassis Ground, 11 Places

### 3 Through Holes are Unplated

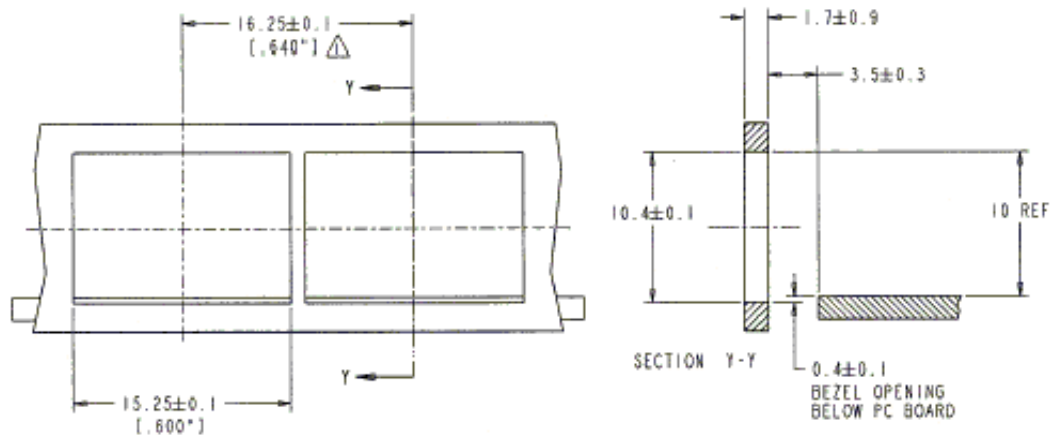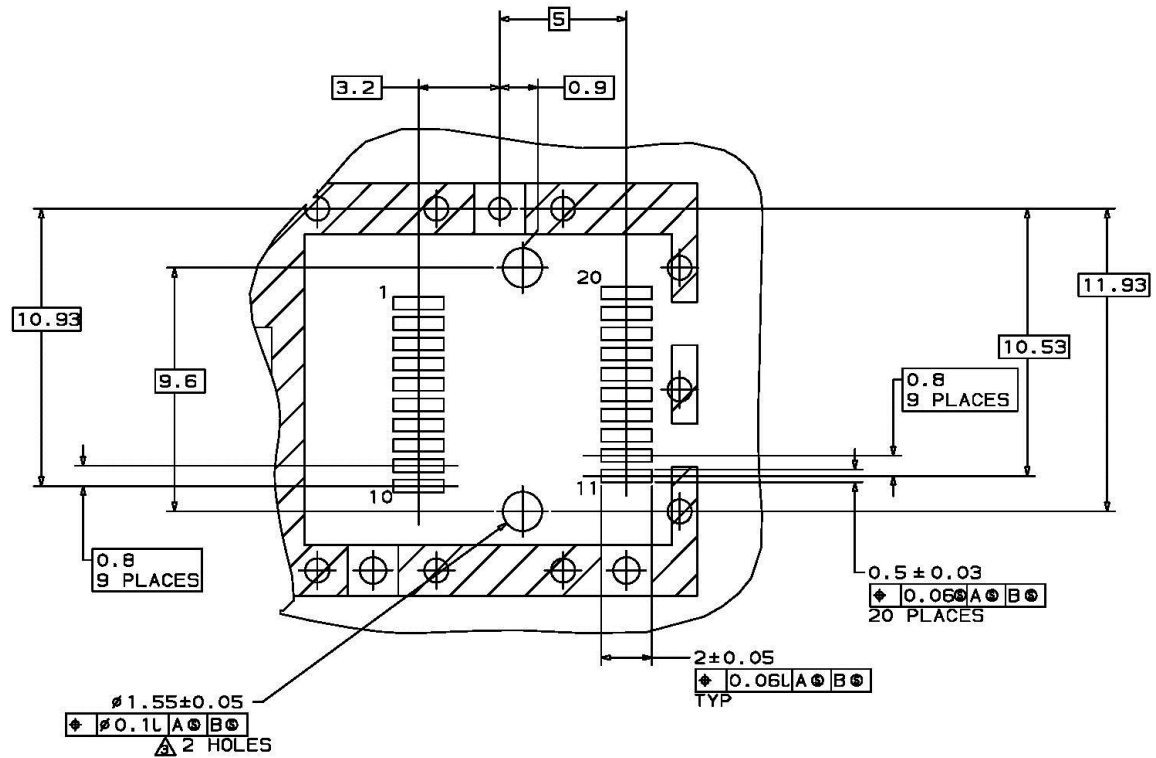

NOTES:

△ MINIMUM PITCH ILLUSTRATED, ENGLISH DIMENSIONS  
ARE FOR REFERENCE ONLY

2. NOT RECOMMENDED FOR PCI EXPANSION CARD APPLICATIONS

## XII. Host - Transceiver Interface Block Diagram

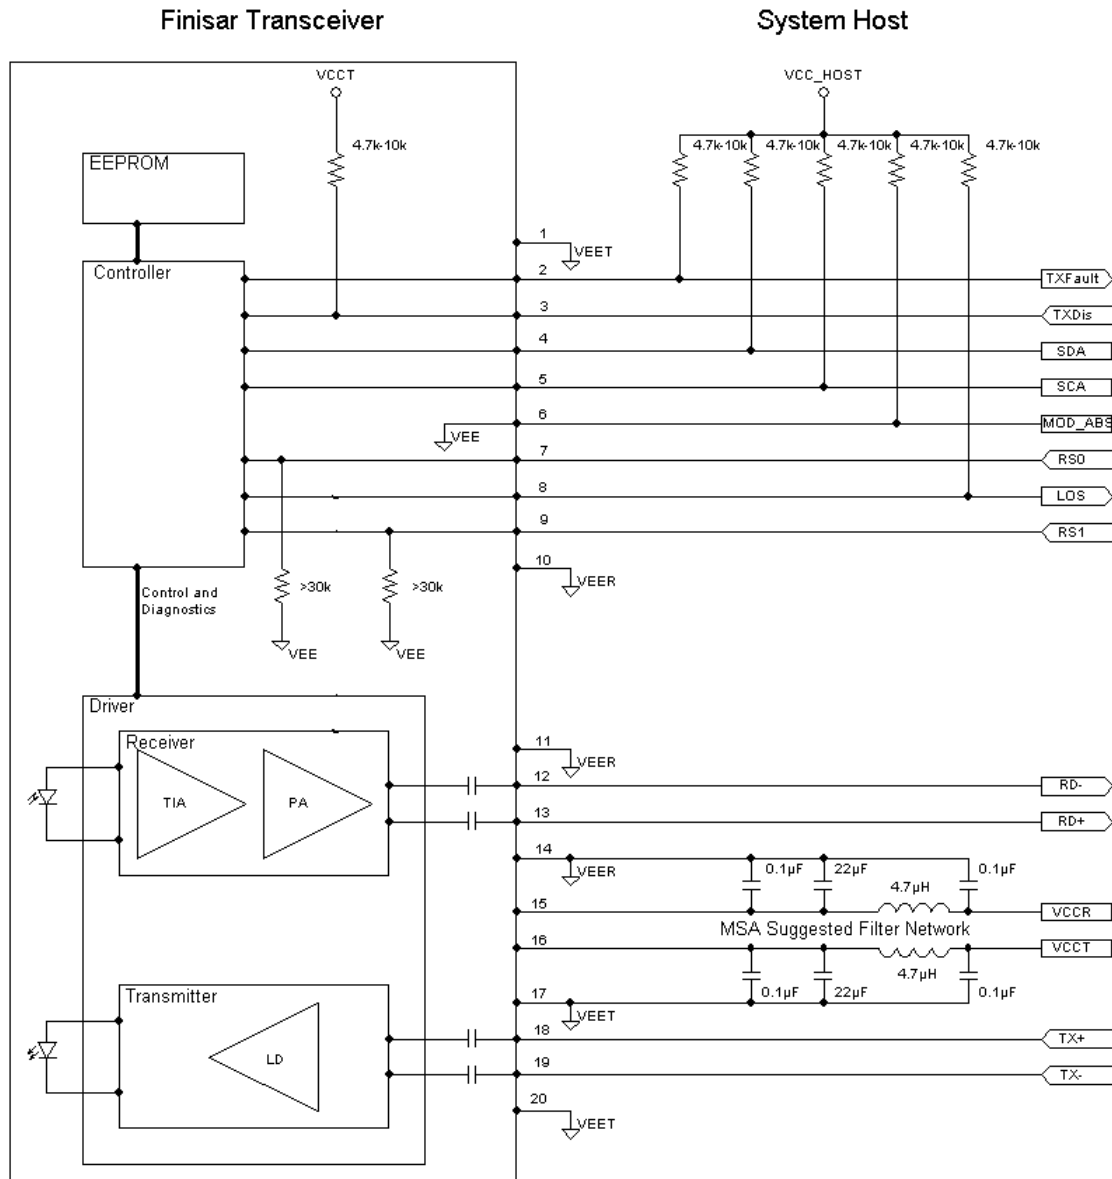


Figure 6-Host-Module Interface

### **XIII. References**

1. “Specifications for Enhanced 8.5 and 10 Gigabit Small Form Factor Pluggable Module ‘SFP+’”, SFF Document Number SFF-8431, Revision 3.0, May 8, 2008.
2. “Improved Pluggable Formfactor”, SFF Document Number SFF-8432, Revision 5.0, July 16, 2007.
3. “Digital Monitoring Interface for Optical Transceivers”, SFF Document Number SFF-8472, Revision 10.2, June 1, 2007.
4. Directive 2002/95/EC of the European Council Parliament and of the Council, “on the restriction of the use of certain hazardous substances in electrical and electronic equipment.” January 27, 2003.
5. Small Form Factor Pluggable (SFP) Transceiver Multi-source Agreement (MSA), September 14, 2000.
6. “CPRI Specification V5.0”. Common Public Radio Interface. September 21, 2011.
7. “Reference Point 3 Specification”. Open Base Station Architecture Initiative. March 2010.

### **XIV. For More Information**

Finisar Corporation  
1389 Moffett Park Drive  
Sunnyvale, CA 94089-1134  
Tel. 1-408-548-1000  
Fax 1-408-541-6138  
[sales@finisar.com](mailto:sales@finisar.com)  
[www.finisar.com](http://www.finisar.com)

Data subject to change without notice.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 View [FTLX1370W3BTL](#) on WIN SOURCE

 [Finisar Corporation](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management