



**THE DATASHEET OF  
CLQ4D10NP-6R8NC**

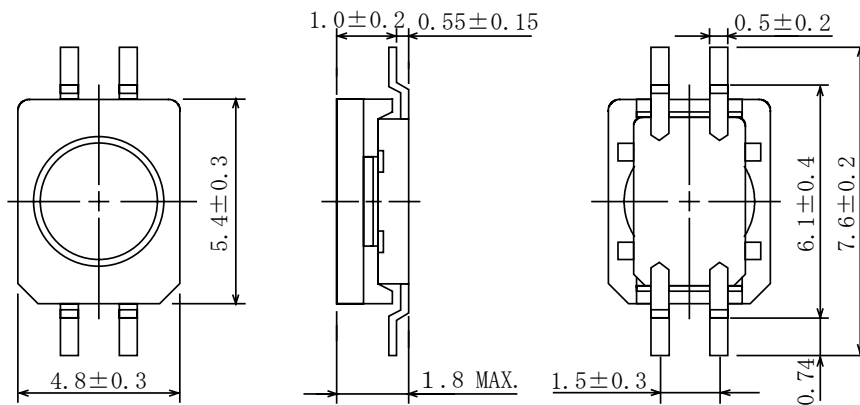



**Type: CLQ4D10**
**◆ Product Description**

- 5.7×5.1mm Max.(L×W), 1.8mm Max.(Height)
- Inductance range: 4.7 μ H~330 μ H; Rated current range: 0.10A~0.94A
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements


**◆ Feature**

- Magnetically shielded construction.
- Max. Operating frequency 1MHz, Max Operating Power 350mW (1MHz).
- Ideally used in Digital still camera, Digital video camera, LCD TV, Portable equipment.
- RoHS Compliance

**◆ Dimensions (mm)**

**◆ Schematics (Bottom)**


“ S ” indicates winding start.

**◆ Specification**

Sample No.	Inductance(4-1) (100kHz/1.0V)	D.C.R. (4-1)	Inductance(2-3) (100kHz/1.0V)
5382-T058	5.5 μ H ± 30% within	230m Ω Max.	1.2 μ H ± 30% within

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View CLQ4D10NP-6R8NC on WIN SOURCE](#)
- ⊖ [Sumida America Components Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management