





THE DATASHEET OF ICS-324-T



Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/05	

APPROVED: _____

DATE: _____ TITLE: _____

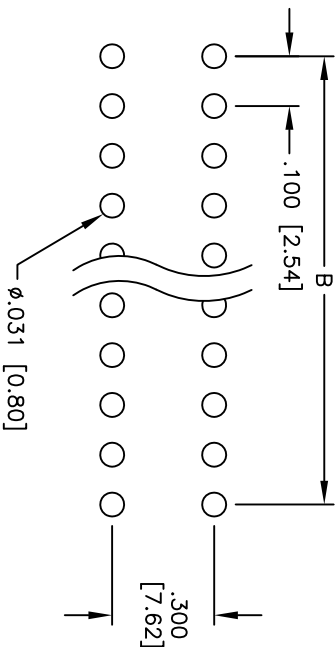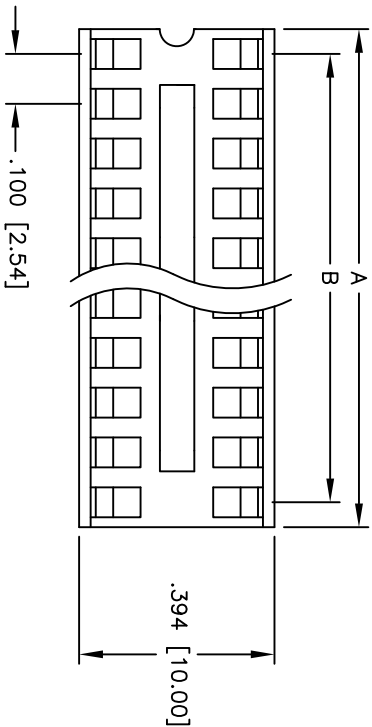

PCB LAYOUT

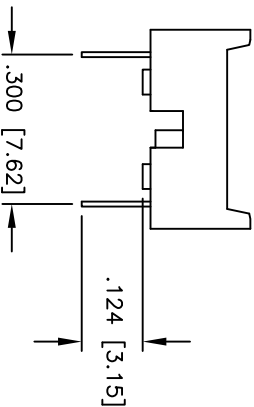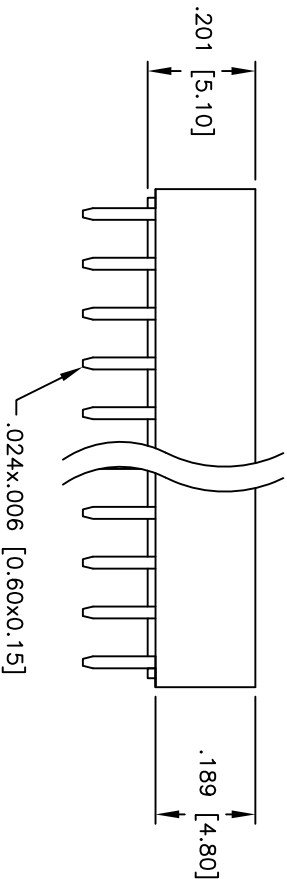

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max initial

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 6, 8, 14, 16, 18, 20, 22, 24, 28, & 32
A = .100 [2.54] x No. of Positions Per Row
B = .100 [2.54] x No. of Spaces Per Row

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		Holes		TITLE	
.X	± .10	ØX	± .10	IC SOCKET, .300" ROW SPACING	
.XX	± .020	ØXX	± .015	TIN PLATED	
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN		SS		1/28/05	
CHECKED					
APPROVED					
SIZE		PART NO.		REV.	
X		ICS-3XX-T		-	
REF:		SCALE: NTS		SHEET 1 OF 1	

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ICS-324-T on WIN SOURCE](#)
-  [Adam Technologies, Inc.](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management