



# THE DATASHEET OF MAX8512EXK



# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

## General Description

The MAX8510/MAX8511/MAX8512 ultra-low-noise, low-dropout (LDO) linear regulators are designed to deliver up to 120mA continuous output current. These regulators achieve a low 120mV dropout for 120mA load current. The MAX8510 uses an advanced architecture to achieve ultra-low output voltage noise of 11 $\mu$ V<sub>RMS</sub> and PSRR of 54dB at 100kHz.

The MAX8511 does not require a bypass capacitor, hence achieving the smallest PC board area. The MAX8512's output voltage can be adjusted with an external divider.

The MAX8510/MAX8511 are preset to a variety of voltages in the 1.5V to 4.5V range. Designed with a P-channel MOSFET series pass transistor, the MAX8510/MAX8511/MAX8512 maintain very low ground current (40 $\mu$ A).

The regulators are designed and optimized to work with low-value, low-cost ceramic capacitors. The MAX8510 requires only 1 $\mu$ F (typ) of output capacitance for stability with any load. When disabled, current consumption drops to below 1 $\mu$ A.

Package options include a 5-pin SC70 and a tiny 2mm x 2mm TDFN package.

## Applications

Cellular and Cordless Phones  
PDA and Palmtop Computers  
Base Stations  
Bluetooth Portable Radios and Accessories  
Wireless LANs  
Digital Cameras  
Personal Stereos  
Portable and Battery-Powered Equipment

**Output Voltage Selector Guide appears at end of data sheet.**

## Features

- ◆ Space-Saving SC70 and TDFN (2mm x 2mm) Packages
- ◆ 11 $\mu$ V<sub>RMS</sub> Output Noise at 100Hz to 100kHz Bandwidth (MAX8510)
- ◆ 78dB PSRR at 1kHz (MAX8510)
- ◆ 120mV Dropout at 120mA Load
- ◆ Stable with 1 $\mu$ F Ceramic Capacitor for Any Load
- ◆ Guaranteed 120mA Output
- ◆ Only Need Input and Output Capacitors (MAX8511)
- ◆ Output Voltages: 1.5V, 1.8V, 2.5V, 2.6V, 2.7V, 2.8V, 2.85V, 3V, 3.3V, 4.5V (MAX8510/MAX8511) and Adjustable (MAX8512)
- ◆ Low 40 $\mu$ A Ground Current
- ◆ Excellent Load/Line Transient
- ◆ Overcurrent and Thermal Protection

## Ordering Information

| PART*          | TEMP RANGE     | PIN-PACKAGE |
|----------------|----------------|-------------|
| MAX8510EXKxy+T | -40°C to +85°C | 5 SC70-5    |


\*xy is the output voltage code (see Output Voltage Selector Guide). Other versions between 1.5V and 4.5V are available in 100mV increments. Contact factory for other versions.

+ Denotes a lead(Pb)-free/RoHS-compliant package.


T = Tape and reel.

**Ordering Information continued at end of data sheet.**

## Typical Operating Circuits

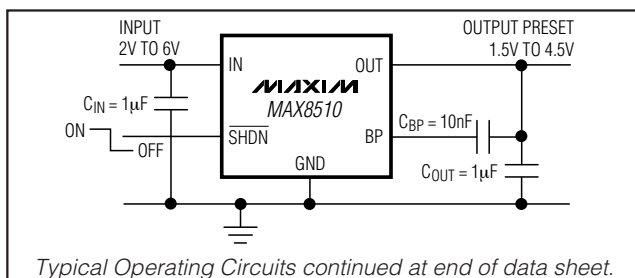

## Pin Configuration

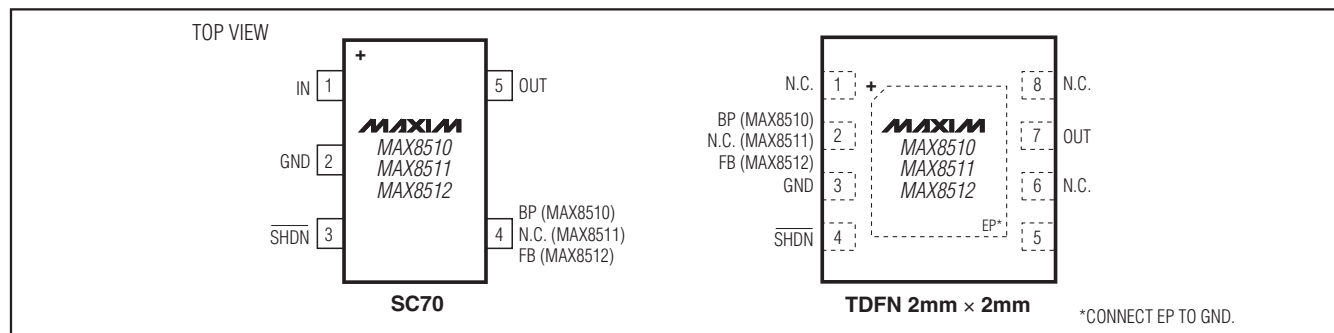

# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

## ABSOLUTE MAXIMUM RATINGS

IN to GND .....-0.3V to +7V  
 Output Short-Circuit Duration ..... Infinite  
 OUT,  $\overline{\text{SHDN}}$  to GND .....-0.3V to (IN + 0.3V)  
 FB, BP, N.C. to GND .....-0.3V to (OUT + 0.3V)  
 Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )  
   5-Pin SC70 (derate 3.1mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) .....0.247W  
   8-Pin TDFN (derate 11.9mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) .....0.953W

Operating Temperature Range ..... $-40^\circ\text{C}$  to  $+85^\circ\text{C}$   
 Junction Temperature ..... $+150^\circ\text{C}$   
 Storage Temperature Range ..... $-65^\circ\text{C}$  to  $+150^\circ\text{C}$   
 Lead Temperature (soldering, 10s) ..... $+300^\circ\text{C}$   
 Soldering Temperature (reflow) ..... $+260^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## PACKAGE THERMAL CHARACTERISTICS (Note 1)

|      |                                                                                      |      |                                                                                       |
|------|--------------------------------------------------------------------------------------|------|---------------------------------------------------------------------------------------|
| SC70 | Junction-to-Ambient Thermal Resistance ( $\theta_{JA}$ ) ..... $324^\circ\text{C/W}$ | TDFN | Junction-to-Ambient Thermal Resistance ( $\theta_{JA}$ ) ..... $83.9^\circ\text{C/W}$ |
|      | Junction-to-Case Thermal Resistance ( $\theta_{JC}$ ) ..... $115^\circ\text{C/W}$    |      | Junction-to-Case Thermal Resistance ( $\theta_{JC}$ ) ..... $37^\circ\text{C/W}$      |

**Note 1:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maxim-ic.com/thermal-tutorial](http://www.maxim-ic.com/thermal-tutorial).

## ELECTRICAL CHARACTERISTICS

( $V_{IN} = V_{OUT} + 0.5\text{V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ , unless otherwise noted.  $C_{IN} = 1\mu\text{F}$ ,  $C_{OUT} = 1\mu\text{F}$ ,  $C_{BP} = 10\text{nF}$ . Typical values are at  $+25^\circ\text{C}$ ; the MAX8512 is tested with 2.45V output, unless otherwise noted.) (Note 2)

| PARAMETER                | SYMBOL                       | CONDITIONS                                                                   | MIN              | TYP   | MAX | UNITS         |
|--------------------------|------------------------------|------------------------------------------------------------------------------|------------------|-------|-----|---------------|
| Input Voltage Range      | $V_{IN}$                     |                                                                              | 2                |       | 6   | V             |
| Output Voltage Accuracy  |                              | $I_{OUT} = 1\text{mA}$ , $T_A = +25^\circ\text{C}$                           | -1               |       | +1  | %             |
|                          |                              | $I_{OUT} = 100\mu\text{A}$ to $80\text{mA}$ , $T_A = +25^\circ\text{C}$      | -2               |       | +2  |               |
|                          |                              | $I_{OUT} = 100\mu\text{A}$ to $80\text{mA}$                                  | -3               |       | +3  |               |
| Maximum Output Current   | $I_{OUT}$                    |                                                                              | 120              |       |     | mA            |
| Current Limit            | $I_{LIM}$                    | $V_{OUT} = 90\%$ of nominal value                                            | 130              | 200   | 300 | mA            |
| Dropout Voltage (Note 3) |                              | $V_{OUT} \geq 3\text{V}$ , $I_{OUT} = 80\text{mA}$                           |                  | 80    | 170 | mV            |
|                          |                              | $V_{OUT} \geq 3\text{V}$ , $I_{OUT} = 120\text{mA}$                          |                  | 120   |     |               |
|                          |                              | $2.5\text{V} \leq V_{OUT} < 3\text{V}$ , $I_{OUT} = 80\text{mA}$             |                  | 90    | 200 |               |
|                          |                              | $2.5\text{V} \leq V_{OUT} < 3\text{V}$ , $I_{OUT} = 120\text{mA}$            |                  | 135   |     |               |
|                          |                              | $2\text{V} \leq V_{OUT} < 2.5\text{V}$ , $I_{OUT} = 80\text{mA}$             |                  | 120   | 250 |               |
|                          |                              | $2\text{V} \leq V_{OUT} < 2.5\text{V}$ , $I_{OUT} = 120\text{mA}$            |                  | 180   |     |               |
| Ground Current           | $I_Q$                        | $I_{OUT} = 0.05\text{mA}$                                                    |                  | 40    | 90  | $\mu\text{A}$ |
|                          |                              | $V_{IN} = V_{OUT}(\text{nom}) - 0.1\text{V}$ , $I_{OUT} = 0\text{mA}$        |                  | 220   | 500 |               |
| Line Regulation          | $V_{LNR}$                    | $V_{IN} = (V_{OUT} + 0.5\text{V})$ to $6\text{V}$ , $I_{OUT} = 0.1\text{mA}$ |                  | 0.001 |     | %/V           |
| Load Regulation          | $V_{LDR}$                    | $I_{OUT} = 1\text{mA}$ to $80\text{mA}$                                      |                  | 0.003 |     | %/mA          |
| Shutdown Supply Current  | $I_{\overline{\text{SHDN}}}$ | $V_{\overline{\text{SHDN}}} = 0\text{V}$                                     |                  | 0.003 | 1   | $\mu\text{A}$ |
|                          |                              |                                                                              |                  | 0.05  |     |               |
| Ripple Rejection         | PSRR                         | $f = 1\text{kHz}$ , $I_{OUT} = 10\text{mA}$                                  |                  |       |     | dB            |
|                          |                              |                                                                              | MAX8510          | 78    |     |               |
|                          |                              |                                                                              | MAX8511/MAX8512  | 72    |     |               |
|                          |                              | $f = 10\text{kHz}$ , $I_{OUT} = 10\text{mA}$                                 | MAX8510          | 75    |     |               |
|                          |                              |                                                                              | MAX8511/MAX8512  | 65    |     |               |
|                          |                              | $f = 100\text{kHz}$ , $I_{OUT} = 10\text{mA}$                                | MAX8510          | 54    |     |               |
|                          |                              |                                                                              | MAX8511/ MAX8512 | 46    |     |               |

# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

MAX8510/MAX8511/MAX8512

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = V_{OUT} + 0.5V$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise noted.  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BP} = 10nF$ . Typical values are at  $+25^{\circ}C$ ; the MAX8512 is tested with 2.45V output, unless otherwise noted.) (Note 2)

| PARAMETER                            | SYMBOL | CONDITIONS                                         | MIN                  | TYP | MAX   | UNITS       |
|--------------------------------------|--------|----------------------------------------------------|----------------------|-----|-------|-------------|
| Output Noise Voltage (RMS)           |        | f = 100Hz to 100kHz,<br>$I_{LOAD} = 10mA$          | MAX8510              |     | 11    | $\mu V$     |
|                                      |        |                                                    | MAX8511/MAX8512      |     | 230   |             |
|                                      |        | f = 100Hz to 100kHz,<br>$I_{LOAD} = 80mA$          | MAX8510              |     | 13    |             |
|                                      |        |                                                    | MAX8511/MAX8512      |     | 230   |             |
| Shutdown Exit Delay                  |        | $R_{LOAD} = 50\Omega$ (Note 4)                     |                      |     | 300   | $\mu s$     |
| $\overline{SHDN}$ Logic Low Level    |        | $V_{IN} = 2V$ to $6V$                              |                      |     | 0.4   | V           |
| $\overline{SHDN}$ Logic High Level   |        | $V_{IN} = 2V$ to $6V$                              | 1.5                  |     |       | V           |
| $\overline{SHDN}$ Input Bias Current |        | $V_{IN} = 6V$ , $V_{\overline{SHDN}} = 0V$ or $6V$ | $T_A = +25^{\circ}C$ |     |       | $\mu A$     |
|                                      |        |                                                    | $T_A = +85^{\circ}C$ |     | 0.01  |             |
| FB Input Bias Current (MAX8512)      |        | $V_{IN} = 6V$ , $V_{FB} = 1.3V$                    | $T_A = +25^{\circ}C$ |     | 0.006 | $\mu A$     |
|                                      |        |                                                    | $T_A = +85^{\circ}C$ |     | 0.01  |             |
| Thermal Shutdown                     |        |                                                    |                      | 160 |       | $^{\circ}C$ |
| Thermal-Shutdown Hysteresis          |        |                                                    |                      | 10  |       | $^{\circ}C$ |

**Note 2:** Limits are 100% tested at  $+25^{\circ}C$ . Limits over operating temperature range are guaranteed by design.


**Note 3:** Dropout is defined as  $V_{IN} - V_{OUT}$  when  $V_{OUT}$  is 100mV below the value of  $V_{OUT}$  for  $V_{IN} = V_{OUT} + 0.5V$ .

**Note 4:** Time needed for  $V_{OUT}$  to reach 90% of final value.


## Typical Operating Characteristics

( $V_{IN} = V_{OUT} + 0.5V$ ,  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BP} = 10nF$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.)


**MAX8510  
OUTPUT VOLTAGE vs. INPUT VOLTAGE**

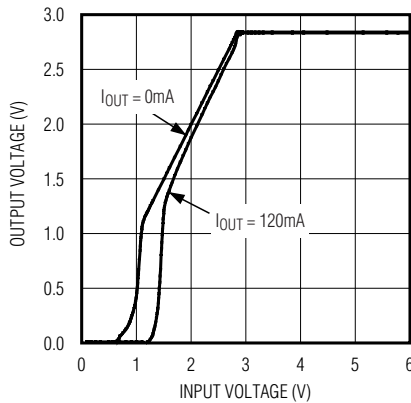

**MAX8510  
OUTPUT VOLTAGE ACCURACY  
vs. LOAD CURRENT**

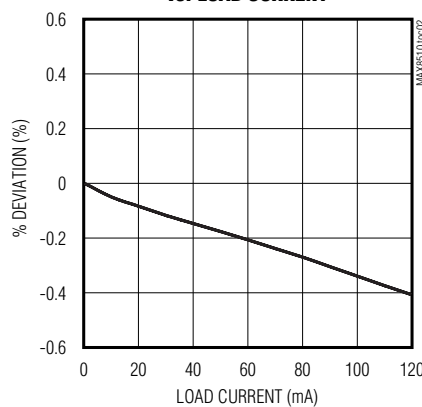










**MAX8510  
OUTPUT VOLTAGE ACCURACY  
vs. TEMPERATURE**

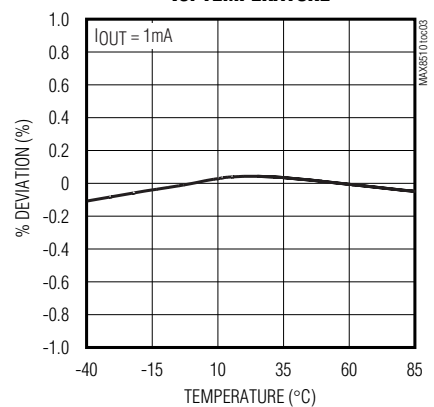

# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

## Typical Operating Characteristics (continued)

( $V_{IN} = V_{OUT} + 0.5V$ ,  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BP} = 10nF$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

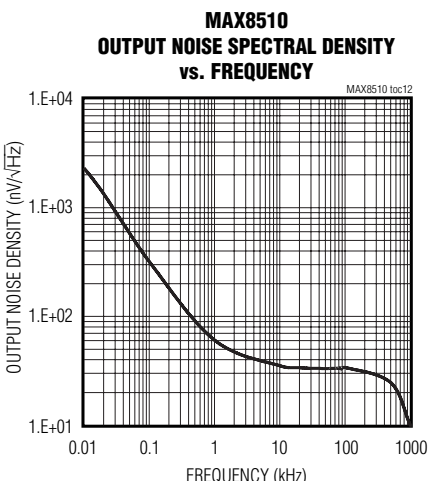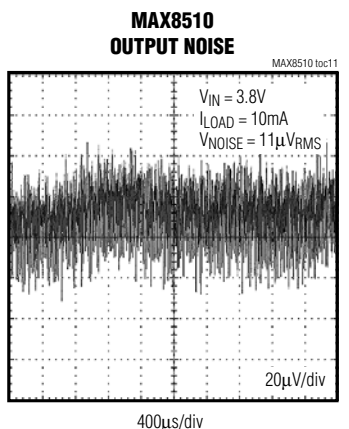
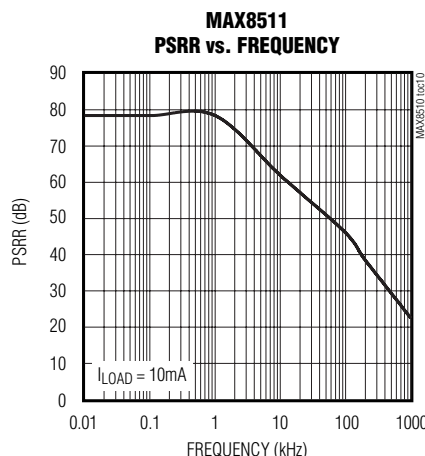
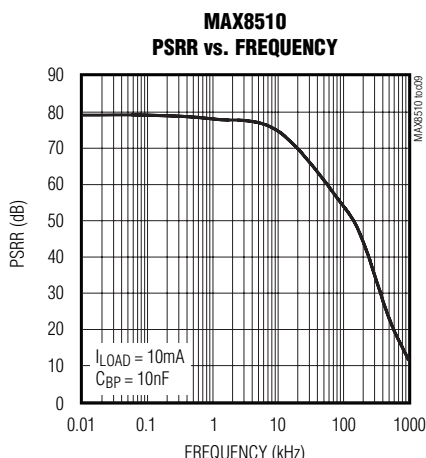
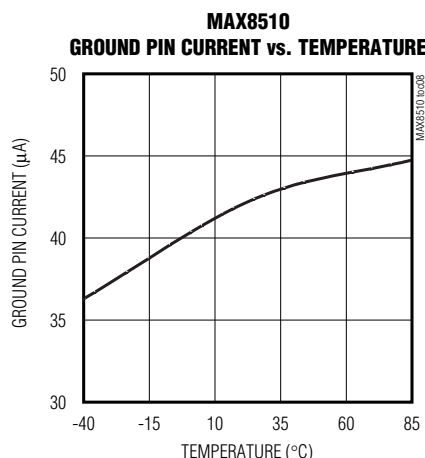
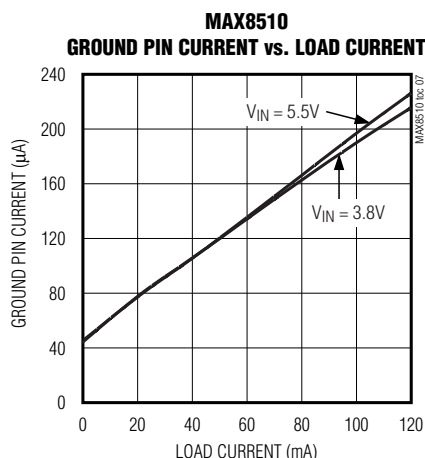
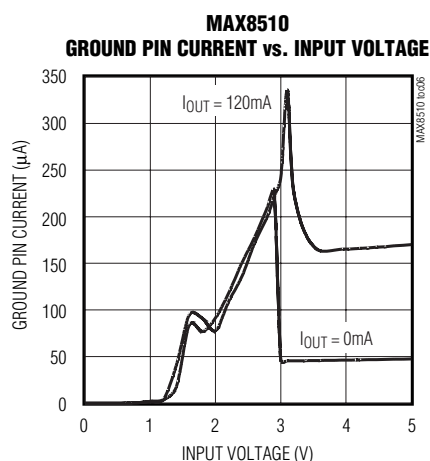
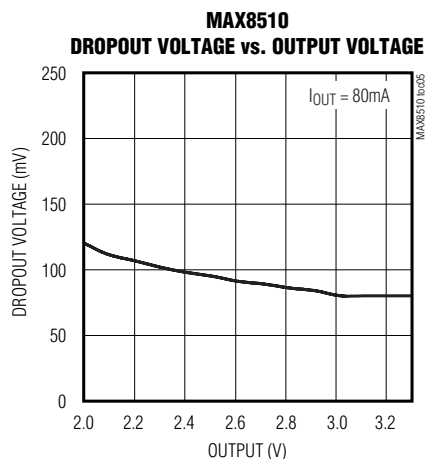
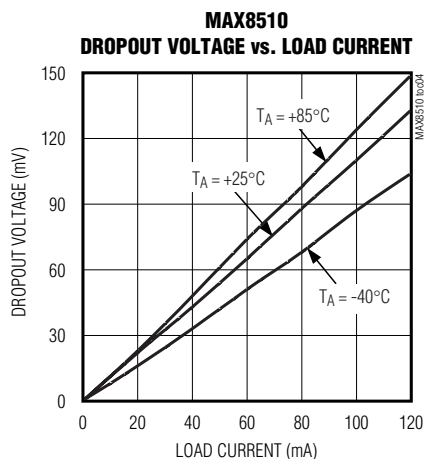


# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

## Typical Operating Characteristics (continued)

( $V_{IN} = V_{OUT} + 0.5V$ ,  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BP} = 10nF$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

MAX8510/MAX8511/MAX8512

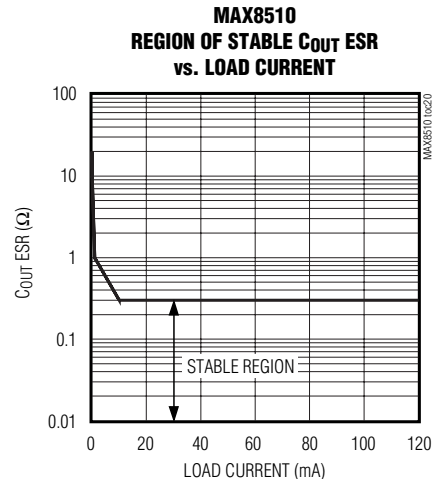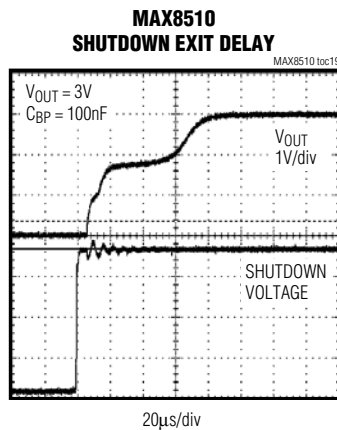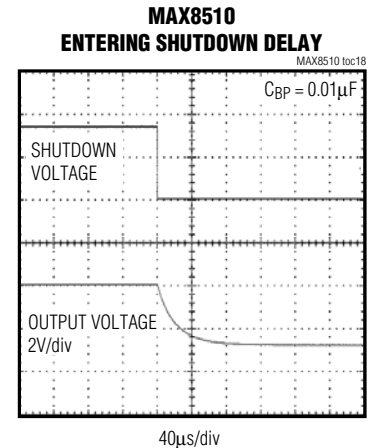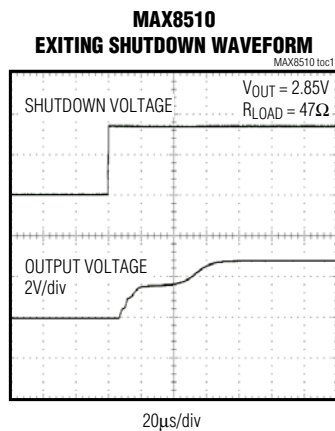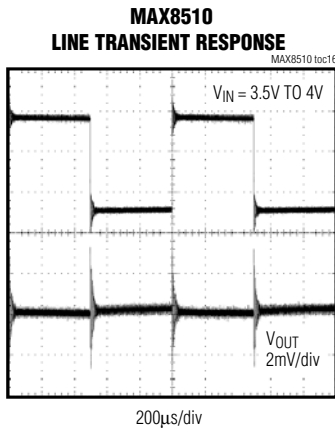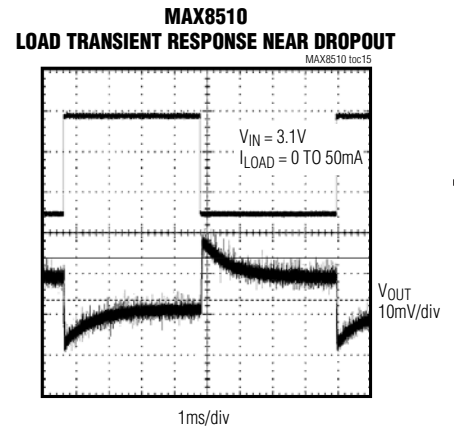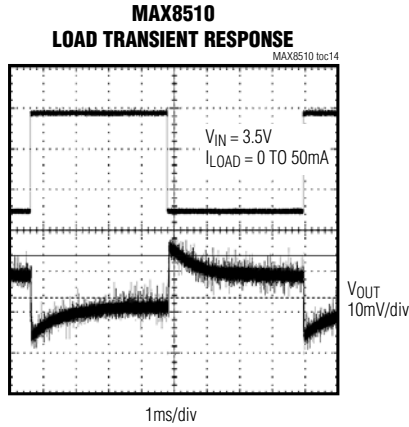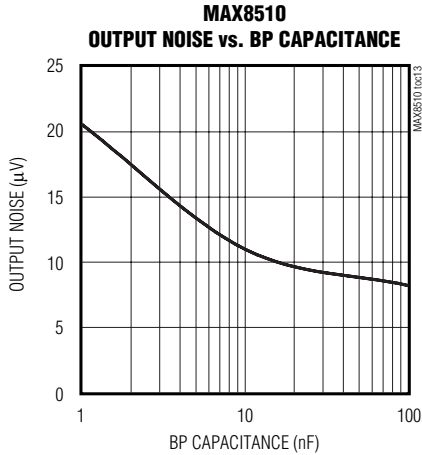

# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

## Pin Description

| PIN     |             |         |             |         |             | NAME | FUNCTION                                                                                                                                                               |
|---------|-------------|---------|-------------|---------|-------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX8510 |             | MAX8511 |             | MAX8512 |             |      |                                                                                                                                                                        |
| SC70    | TDFN<br>-EP | SC70    | TDFN<br>-EP | SC70    | TDFN<br>-EP |      |                                                                                                                                                                        |
| 1       | 5           | 1       | 5           | 1       | 5           | IN   | Unregulated Input Supply                                                                                                                                               |
| 2       | 3           | 2       | 3           | 2       | 3           | GND  | Ground                                                                                                                                                                 |
| 3       | 4           | 3       | 4           | 3       | 4           | SHDN | Shutdown. Pull low to disable the regulator.                                                                                                                           |
| 4       | 2           | —       | —           | —       | —           | BP   | Noise Bypass for Low-Noise Operation. Connect a 10nF capacitor from BP to OUT. BP is shorted to OUT in shutdown mode.                                                  |
| —       | —           | —       | —           | 4       | 2           | FB   | Adjustable Output Feedback Point                                                                                                                                       |
| 5       | 7           | 5       | 7           | 5       | 7           | OUT  | Regulated Output Voltage. Bypass with a capacitor to GND. See the <i>Capacitor Selection and Regulator Stability</i> section for more details.                         |
| —       | 1, 6, 8     | 4       | 1, 2, 6,    | —       | 1, 6, 8     | N.C. | No connection. Not internally connected.                                                                                                                               |
| —       | —           | —       | —           | —       | —           | EP   | Exposed Pad (TDFN Only). Internally connected to GND. Connect to a large ground plane to maximize thermal performance. Not intended as an electrical connection point. |

## Detailed Description

The MAX8510/MAX8511/MAX8512 are ultra-low-noise, low-dropout, low-quiescent current linear regulators designed for space-restricted applications. The parts are available with preset output voltages ranging from 1.5V to 4.5V in 100mV increments. These devices can supply loads up to 120mA. As shown in the *Functional Diagram*, the MAX8510/MAX8511 consist of an innovative bandgap core and noise bypass circuit, error amplifier, P-channel pass transistor, and internal feedback voltage-divider. The MAX8512 allows for adjustable output with an external feedback network.

The 1.225V bandgap reference is connected to the error amplifier's inverting input. The error amplifier compares this reference with the feedback voltage and amplifies the difference. If the feedback voltage is lower than the reference voltage, the pass-transistor gate is pulled low. This allows more current to pass to the output and increases the output voltage. If the feedback voltage is too high, the pass transistor gate is pulled high, allowing less current to pass to the output. The output voltage is fed back through an internal resistor voltage-divider connected to the OUT pin.

An external bypass capacitor connected to BP (MAX8510) reduces noise at the output. Additional blocks include a current limiter, thermal sensor, and shutdown logic.

## Internal P-Channel Pass Transistor

The MAX8510/MAX8511/MAX8512 feature a 1Ω (typ) P-channel MOSFET pass transistor. This provides several advantages over similar designs using a PNP pass transistor, including longer battery life. The P-channel MOSFET requires no base drive, which considerably reduces quiescent current. PNP-based regulators waste considerable current in dropout when the pass transistor saturates. They also use high base-drive current under heavy loads. The MAX8510/MAX8511/MAX8512 do not suffer from these problems and consume only 40μA of quiescent current in light load and 220μA in dropout (see the *Typical Operating Characteristics*).

## Output Voltage Selection

The MAX8510/MAX8511 are supplied with factory-set output voltages from 1.5V to 4.5V, in 100mV increments (see *Ordering Information*). The MAX8512 features a user-adjustable output through an external feedback network (see the *Typical Operating Circuits*).

To set the output of the MAX8512, use the following equation:

$$R1 = R2 \times \left( \frac{V_{OUT}}{V_{REF}} - 1 \right)$$

where R2 is chosen to be less than 240kΩ and VREF = 1.225V. Use 1% or better resistors.



# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

## Shutdown

The MAX8510/MAX8511/MAX8512 feature a low-power shutdown mode that reduces quiescent current less than 1μA. Driving  $\overline{\text{SHDN}}$  low disables the voltage reference, error amplifier, gate-drive circuitry, and pass transistor (see the *Functional Diagram*), and the device output enters a high-impedance state. Connect  $\overline{\text{SHDN}}$  to IN for normal operation.

## Current Limit

The MAX8510/MAX8511/MAX8512 include a current limiter, which monitors and controls the pass transistor's gate voltage, limiting the output current to 200mA. For design purposes, consider the current limit to be 130mA (min) to 300mA (max). The output can be shorted to ground for an indefinite amount of time without damaging the part.

## Thermal-Overload Protection

Thermal-overload protection limits total power dissipation in the MAX8510/MAX8511/MAX8512. When the junction temperature exceeds  $T_J = +160^\circ\text{C}$ , the thermal sensor signals the shutdown logic, turning off the pass transistor and allowing the IC to cool down. The thermal sensor turns the pass transistor on again after the IC's junction temperature drops by  $10^\circ\text{C}$ , resulting in a pulsed output during continuous thermal-overload conditions.

Thermal-overload protection is designed to protect the MAX8510/MAX8511/MAX8512 in the event of a fault condition. For continual operation, do not exceed the absolute maximum junction temperature rating of  $T_J = +150^\circ\text{C}$ .

## Operating Region and Power Dissipation

The MAX8510/MAX8511/MAX8512 maximum power dissipation depends on the thermal resistance of the case and circuit board, the temperature difference between the die junction and ambient, and the rate of airflow. The power dissipation across the device is:

$$P = I_{\text{OUT}} (V_{\text{IN}} - V_{\text{OUT}})$$

The maximum power dissipation is:

$$P_{\text{MAX}} = (T_J - T_A) / (\theta_{\text{JC}} + \theta_{\text{CA}})$$

where  $T_J - T_A$  is the temperature difference between the MAX8510/MAX8511/MAX8512 die junction and the surrounding air,  $\theta_{\text{JC}}$  is the thermal resistance of the package, and  $\theta_{\text{CA}}$  is the thermal resistance through the PC board, copper traces, and other materials to the surrounding air.

The GND pin of the MAX8510/MAX8511/MAX8512 performs the dual function of providing an electrical connection to ground and channeling heat away. Connect the GND pin to ground using a large pad or ground plane.

## Noise Reduction

For the MAX8510, an external 0.01μF bypass capacitor between BP and OUT with innovative noise bypass scheme reduces output noises dramatically, exhibiting 11μVRMS of output voltage noise with  $C_{\text{BP}} = 0.01\mu\text{F}$  and  $C_{\text{OUT}} = 1\mu\text{F}$ . Startup time is minimized by a power-on circuit that precharges the bypass capacitor.

## Applications Information

### Capacitor Selection and Regulator Stability

Use a 1μF capacitor on the MAX8510/MAX8511/MAX8512 input and a 1μF capacitor on the output. Larger input capacitor values and lower ESRs provide better noise rejection and line-transient response. Reduce output noise and improve load-transient response, stability, and power-supply rejection by using large output capacitors. Note that some ceramic dielectrics exhibit large capacitance and ESR variation with temperature. With dielectrics such as Z5U and Y5V, it may be necessary to use a 2.2μF or larger output capacitor to ensure stability at temperatures below  $-10^\circ\text{C}$ . With X7R or X5R dielectrics, 1μF is sufficient at all operating temperatures. A graph of the region of stable  $C_{\text{OUT}}$  ESR vs. load current is shown in the *Typical Operating Characteristics*.

Use a 0.01μF bypass capacitor at BP (MAX8510) for low-output voltage noise. The leakage current going into the BP pin should be less than 10nA. Increasing the capacitance slightly decreases the output noise. Values above 0.1μF and below 0.001μF are not recommended.

### Noise, PSRR, and Transient Response

The MAX8510/MAX8511/MAX8512 are designed to deliver ultra-low noise and high PSRR, as well as low dropout and low quiescent currents in battery-powered systems. The MAX8510 power-supply rejection is 78dB at 1kHz and 54dB at 100kHz. The MAX8511/MAX8512 PSRR is 72dB at 1kHz and 46dB at 100kHz (see the Power-Supply Rejection Ratio vs. Frequency graph in the *Typical Operating Characteristics*).

When operating from sources other than batteries, improved supply-noise rejection and transient response can be achieved by increasing the values of the input and output bypass capacitors, and through passive filtering techniques. The *Typical Operating Characteristics* show the MAX8510/MAX8511/MAX8512 line- and load-transient responses.




# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

## Dropout Voltage

A regulator's minimum dropout voltage determines the lowest usable supply voltage. In battery-powered systems, this determines the useful end-of-life battery voltage. Because the MAX8510/MAX8511/MAX8512 use a

P-channel MOSFET pass transistor, their dropout voltage is a function of drain-to-source on-resistance ( $R_{DS(ON)}$ ) multiplied by the load current (see the *Typical Operating Characteristics*).

## Functional Diagram

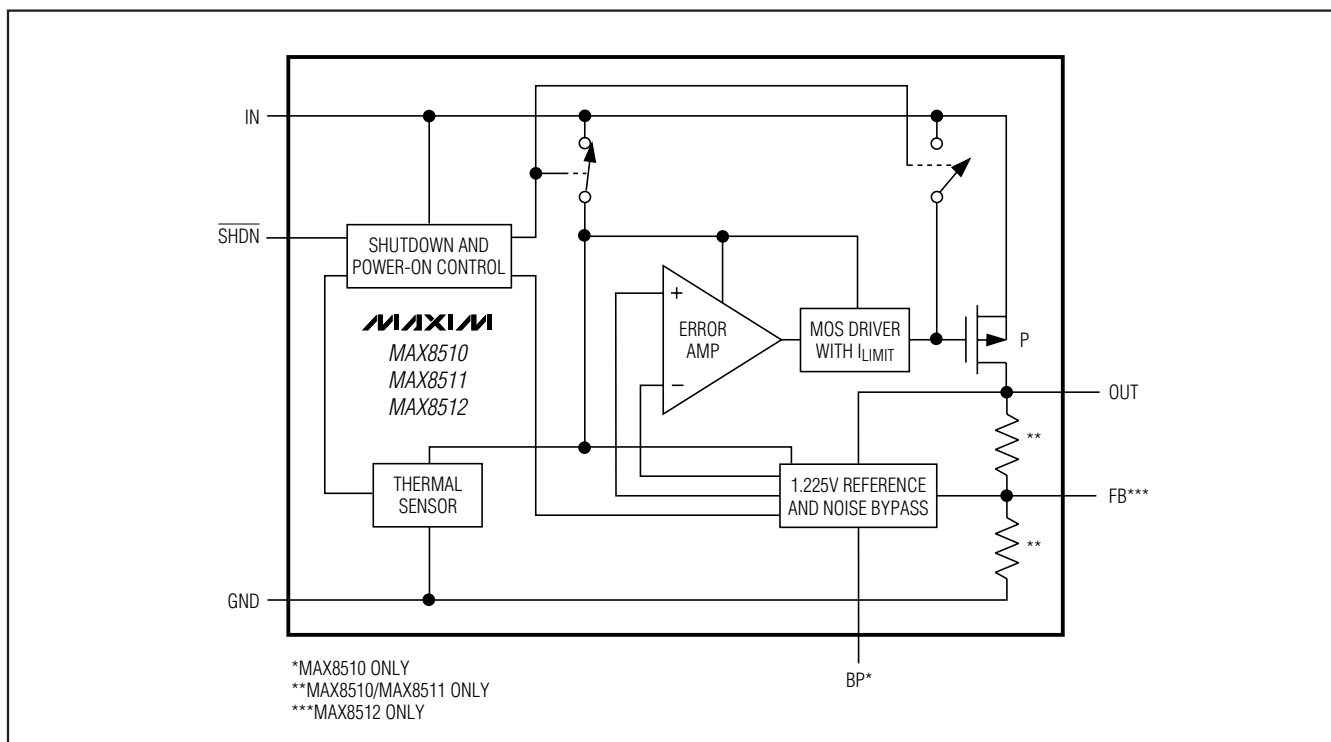

# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

MAX8510/MAX8511/MAX8512

## Ordering Information (continued)

| PART*          | TEMP RANGE     | PIN-PACKAGE              |
|----------------|----------------|--------------------------|
| MAX8510EXKxy+T | -40°C to +85°C | 5 SC70                   |
| MAX8510ETAxy+T | -40°C to +85°C | 8 TDFN-EP**<br>2mm x 2mm |
| MAX8511EXKxy+T | -40°C to +85°C | 5 SC70                   |
| MAX8511ETAxy+T | -40°C to +85°C | 8 TDFN-EP**<br>2mm x 2mm |
| MAX8512EXK+T   | -40°C to +85°C | 5 SC70                   |
| MAX8512ETA+T   | -40°C to +85°C | 8 TDFN-EP**<br>2mm x 2mm |


\*xy is the output voltage code (see Output Voltage Selector Guide). Other versions between 1.5V and 4.5V are available in 100mV increments. Contact factory for other versions.

\*\*EP = Exposed pad.

+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

## Typical Operating Circuits (continued)

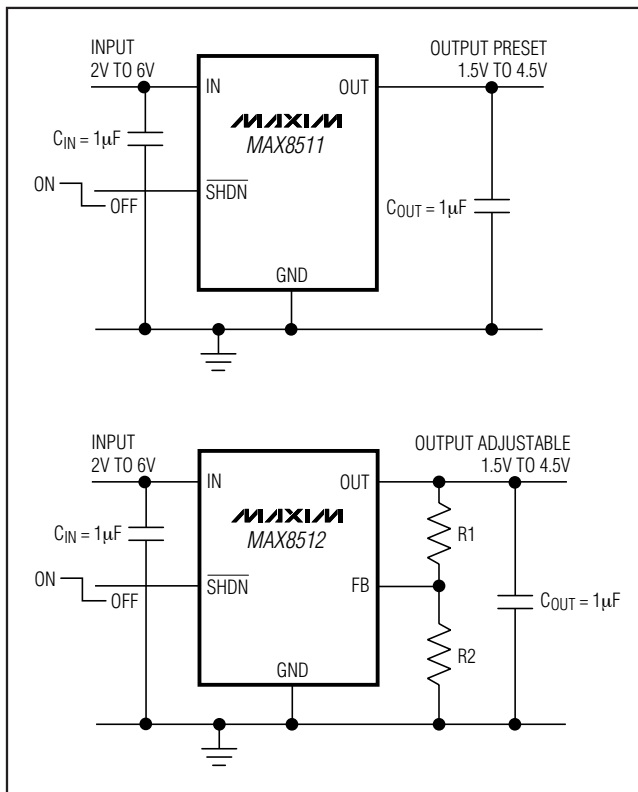

## Output Voltage Selector Guide

| PART           | V <sub>OUT</sub> (V) | TOP MARK |
|----------------|----------------------|----------|
| MAX8510EXK16+T | 1.6                  | AEX      |
| MAX8510EXK18+T | 1.8                  | ATH      |
| MAX8510ETA25+T | 2.5                  | AAO      |
| MAX8510EXK27+T | 2.7                  | ATD      |
| MAX8510ETA28+T | 2.8                  | AAR      |
| MAX8510EXK29+T | 2.85                 | ADS      |
| MAX8510ETA30+T | 3                    | AAS      |
| MAX8510ETA33+T | 3.3                  | AAT      |
| MAX8510ETA45+T | 4.5                  | AAU      |
| MAX8511EXK15+T | 1.5                  | ADU      |
| MAX8511ETA18+T | 1.8                  | AAV      |
| MAX8511ETA25+T | 2.5                  | AAP      |
| MAX8511ETA26+T | 2.6                  | AAW      |
| MAX8511EXK28+T | 2.8                  | AFA      |
| MAX8511ETA29+T | 2.85                 | AAX      |
| MAX8511EXK89+T | 2.9                  | AEH      |
| MAX8511EXK31+T | 3.1                  | ARS      |
| MAX8511ETA33+T | 3.3                  | AAY      |
| MAX8511EXK45+T | 4.5                  | AEJ      |
| MAX8512ETA+T   | Adjustable           | AAQ      |

(Note: Standard output voltage options, shown in **bold**, are available. Contact the factory for other output voltages between 1.5V and 4.5V. Minimum order quantity is 15,000 units.)

## Chip Information

PROCESS: BiCMOS

## Package Information

For the latest package outline information and land patterns (footprints), go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 8 TDFN       | T822+1       | <a href="#">21-0168</a> | <a href="#">90-0064</a> |
| 5 SC70       | X5+1         | <a href="#">21-0076</a> | <a href="#">90-0188</a> |

# Ultra-Low-Noise, High PSRR, Low-Dropout, 120mA Linear Regulators

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                   | PAGES<br>CHANGED |
|--------------------|------------------|-----------------------------------------------|------------------|
| 4                  | 8/11             | Corrected errors and added lead-free packages | 1, 2, 3, 6, 9    |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

10 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MAX8512EXK](#) on WIN SOURCE

 [Maxim Integrated](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management