



**THE DATASHEET OF
CM1812R600R-10**




CM1812R600R-10

UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:

- A 4.57 [.180] \pm 0.25 [.010]
- B 3.05 [.120] \pm 0.25 [.010]
- C 2.36 [.093] \pm 0.25 [.010]
- D 1.14 [.045] \pm 0.13 [.005]
- E 0.58 [.023] \pm 0.18 [.007]

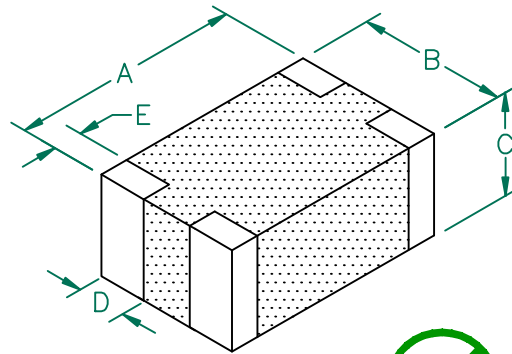


COMMON MODE ELECTRICAL CHARACTERISTICS:

	COMMON MODE Z @ 100 MHz (Ω)	COMMON MODE Z @ 500 MHz (Ω)	DCR (Ω)	CONTINUOUS Rated Current
Nominal (Ref)	60	Nominal (Ref) 85		
Minimum	45	-		
Maximum	75	-	0.005	5,000 mA


NOTES: UNLESS OTHERWISE SPECIFIED

- TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 2500 PCS/REEL.
- COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
- U.S. PATENT 6,288,626 SHOULD APPEAR ON THE LABEL OF EACH REEL OF PACKAGED PARTS.
- MINIMUM LINE TO LINE RESISTANCE 1 M Ω
- TERMINATION FINISH IS 100% TIN.

Z vs. FREQUENCY (C,N,O)

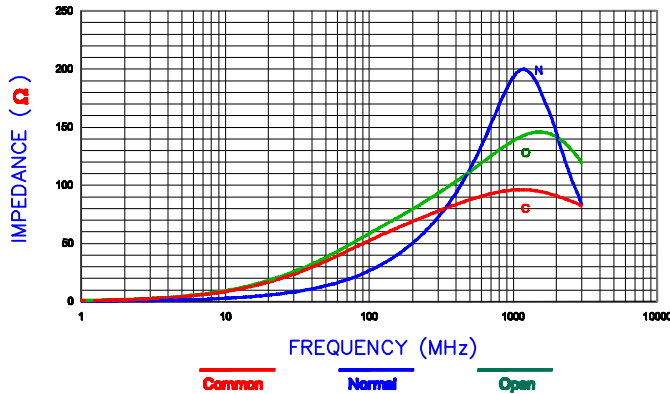


LAND PATTERNS FOR REFLOW SOLDERING

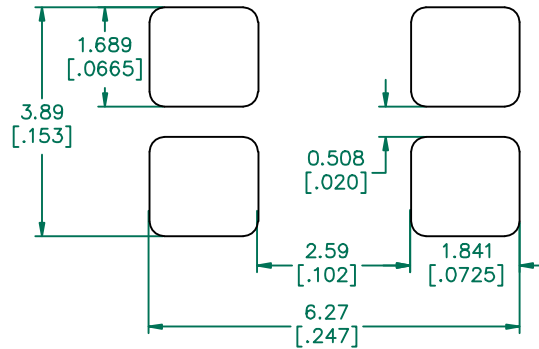


DURING AND AFTER SOLDERING OPERATION SOLDER MUST NOT BE ALLOWED TO BRIDGE CONTACTS. CONTACT SEPARATION MUST BE MAINTAINED.

RECOMMENDED SOLDERING CONDITIONS

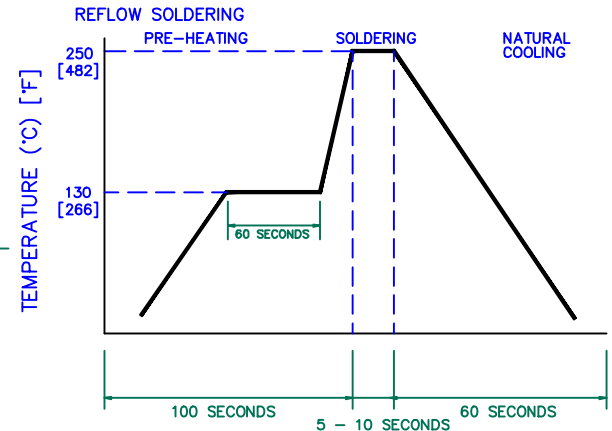

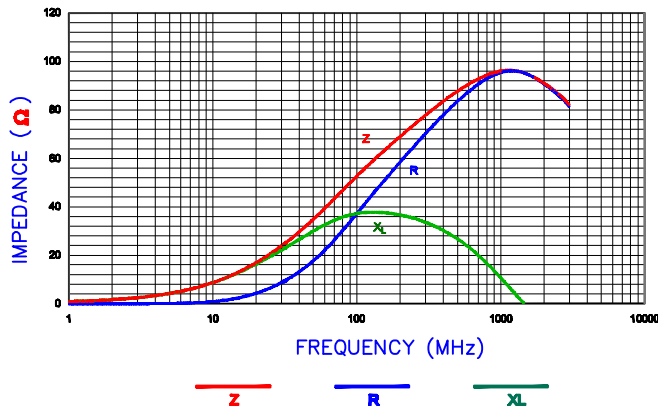

Z, R, XL vs. FREQUENCY



DIMENSIONS ARE IN mm [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
				Steward <small>part of Laird</small>			
PROJECT/PART NUMBER:				REV	PART TYPE:	DRAWN BY:	
C	UPDATE COMPANY LOGO	05/15/07	JRK	CM1812R600R-10	C	CO-FIRE	JRK
B	CHANGE MIN LINE RESISTANCE	09/28/05	JRK	DATE: 03/02/05	SCALE: NTS	SHEET: 2 of 2	
A	ORIGINAL DRAFT	03/02/05	JRK	CAD #	TOOL #		
REV	DESCRIPTION	DATE	INT	CM1812R600R-10-C	CM1812		

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CM1812R600R-10 on WIN SOURCE](#)
-  [Laird-Signal Integrity Products Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management