





THE DATASHEET OF BCR135WH6327XTSA1

NPN Silicon Digital Transistor


- Switching circuit, inverter, interface circuit driver circuit
- Built in bias resistor ($R_1=10\text{ k}\Omega$, $R_2=47\text{ k}\Omega$)
- BCR135S: Two internally isolated transistors with good matching in one multichip package
- BCR135S: For orientation in reel see package information below
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101

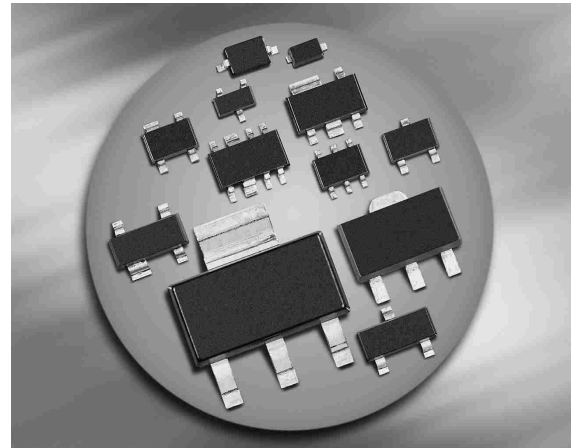

BCR135 BCR135W



BCR135S



Type	Marking	Pin Configuration						Package
BCR135	WJs	1=B	2=E	3=C	-	-	-	SOT23
BCR135S	WJs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363
BCR135W	WJs	1=B	2=E	3=C	-	-	-	SOT323

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Input forward voltage	$V_{i(fwd)}$	40	
Input reverse voltage	$V_{i(rev)}$	6	
Collector current	I_C	100	mA
Total power dissipation	P_{tot}		mW
BCR135, $T_S \leq 102^\circ\text{C}$		200	
BCR135S, $T_S \leq 115^\circ\text{C}$		250	
BCR135W, $T_S \leq 124^\circ\text{C}$		250	
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}		K/W
BCR135		≤ 240	
BCR135S		≤ 140	
BCR135W		≤ 105	

¹⁾For calculation of R_{thJA} please refer to Application Note AN077 (Thermal Resistance Calculation)


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 100\ \mu\text{A}$, $I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10\ \mu\text{A}$, $I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Collector-base cutoff current $V_{\text{CB}} = 40\ \text{V}$, $I_E = 0$	I_{CBO}	-	-	100	nA
Emitter-base cutoff current $V_{\text{EB}} = 6\ \text{V}$, $I_C = 0$	I_{EBO}	-	-	167	μA
DC current gain ¹⁾ $I_C = 5\ \text{mA}$, $V_{\text{CE}} = 5\ \text{V}$	h_{FE}	70	-	-	-
Collector-emitter saturation voltage ¹⁾ $I_C = 10\ \text{mA}$, $I_B = 0.5\ \text{mA}$	V_{CEsat}	-	-	0.3	V
Input off voltage $I_C = 100\ \mu\text{A}$, $V_{\text{CE}} = 5\ \text{V}$	$V_{\text{i(off)}}$	0.5	-	1	
Input on voltage $I_C = 2\ \text{mA}$, $V_{\text{CE}} = 0.3\ \text{V}$	$V_{\text{i(on)}}$	0.5	-	1.4	
Input resistor	R_1	7	10	13	k Ω
Resistor ratio	R_1/R_2	0.19	0.21	0.24	-
AC Characteristics					
Transition frequency $I_C = 10\ \text{mA}$, $V_{\text{CE}} = 5\ \text{V}$, $f = 100\ \text{MHz}$	f_{T}	-	150	-	MHz
Collector-base capacitance $V_{\text{CB}} = 10\ \text{V}$, $f = 1\ \text{MHz}$	C_{cb}	-	3	-	pF

¹⁾Pulse test: $t < 300\ \mu\text{s}$; $D < 2\%$


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5V$ (common emitter configuration)

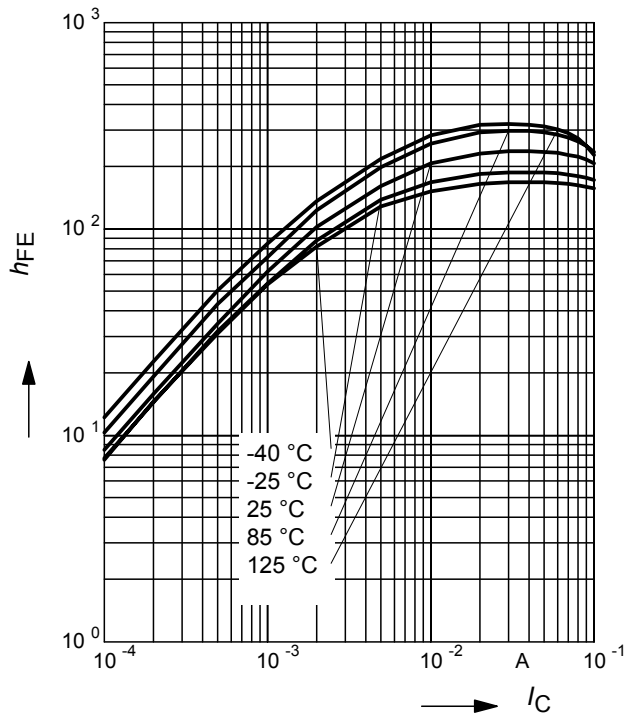


Collector-emitter saturation voltage

$V_{CEsat} = f(I_C)$, $I_C/I_B = 20$

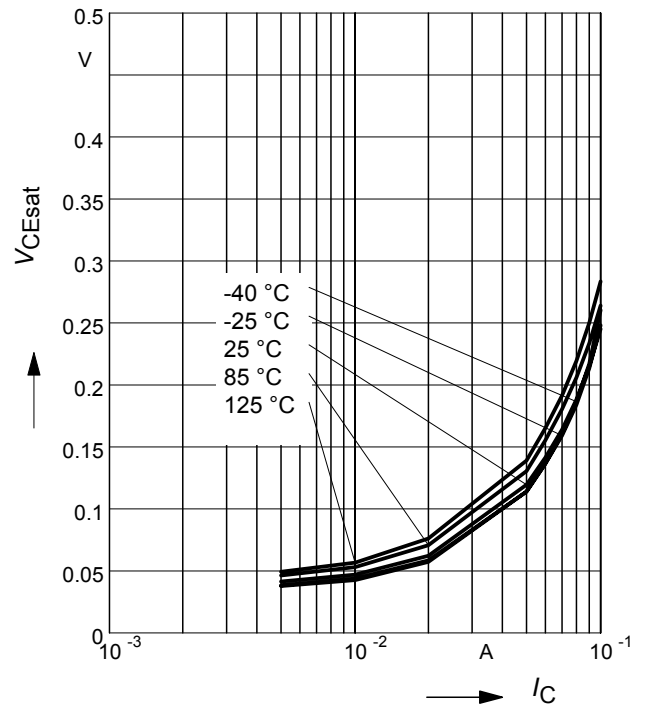


Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3V$ (common emitter configuration)

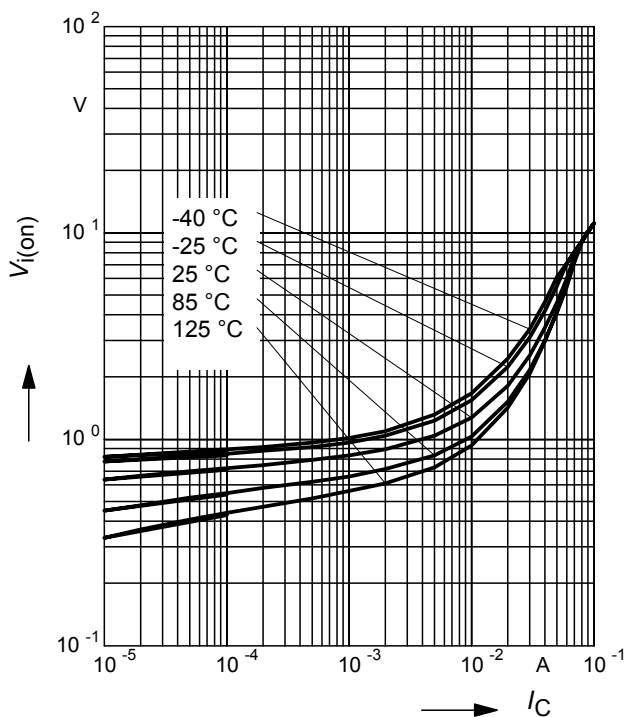


Input off voltage $V_{i(off)} = f(I_C)$

$V_{CE} = 5V$ (common emitter configuration)

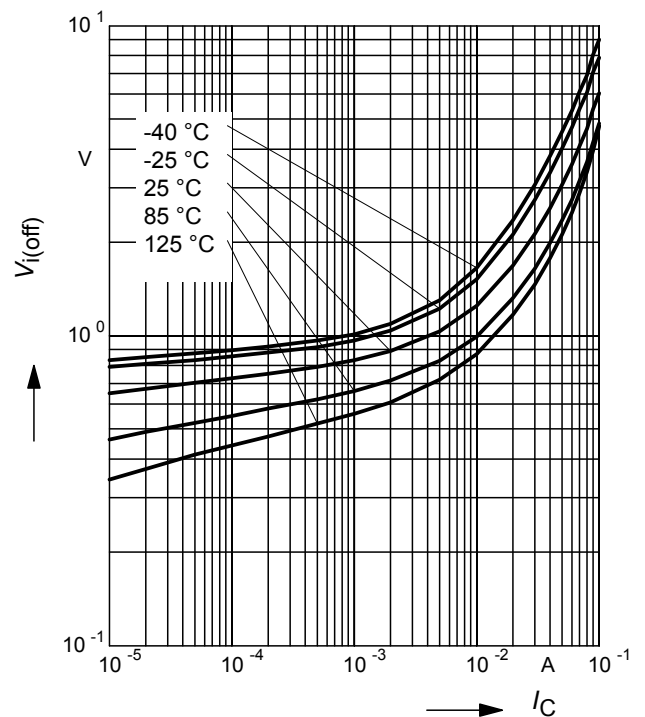


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR135

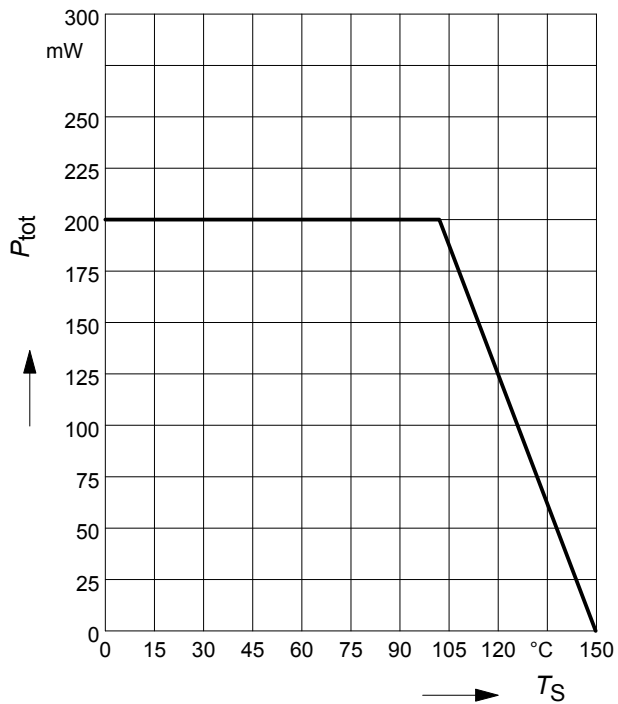


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR135S

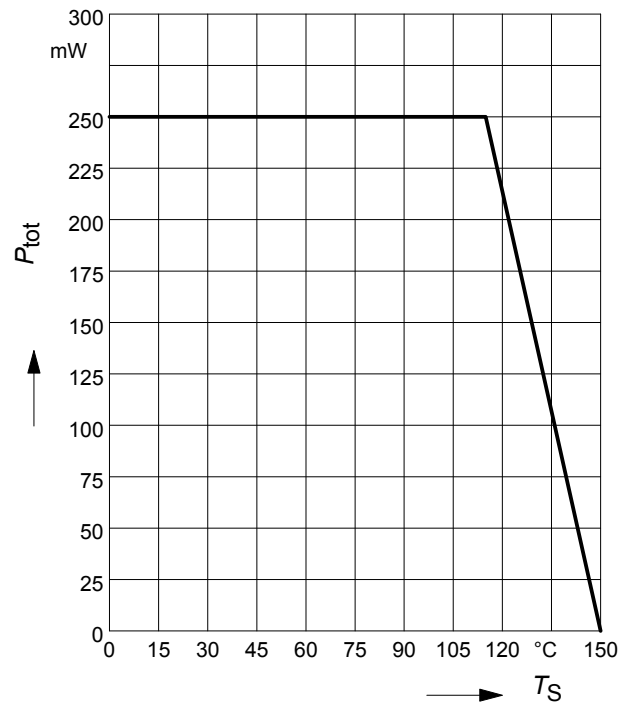


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR135W

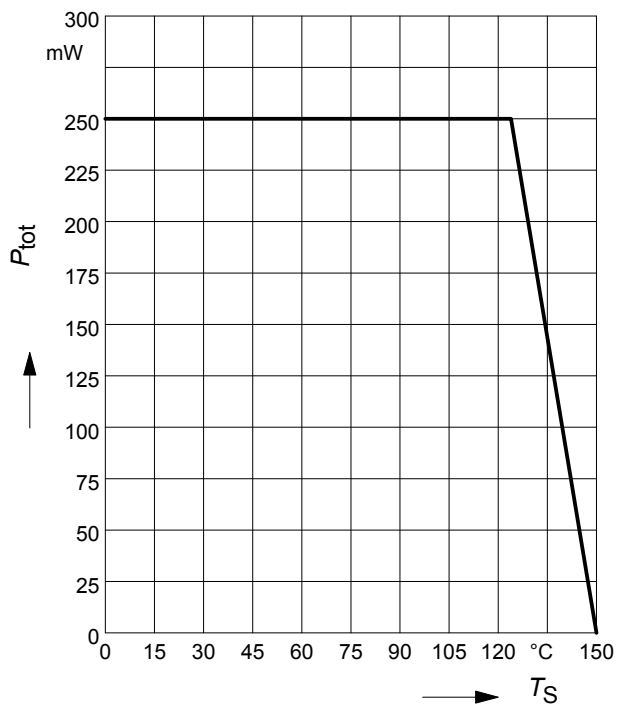

Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$


BCR135

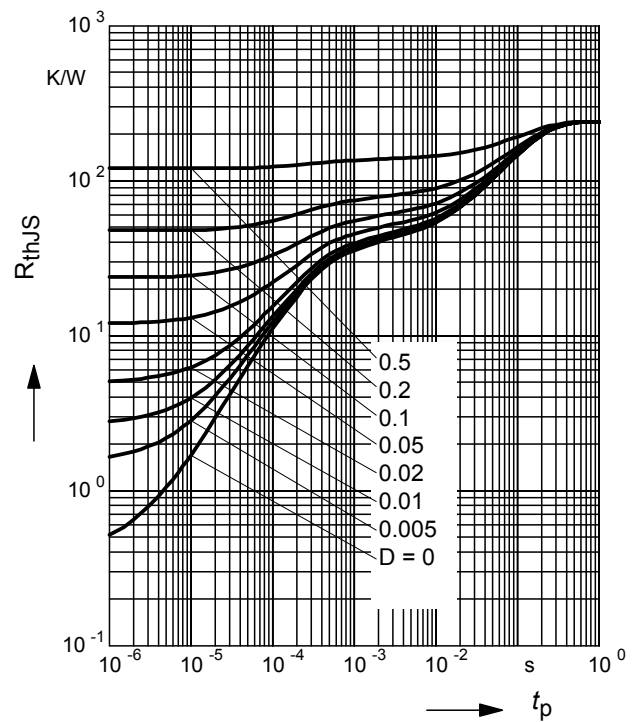

Permissible Pulse Load


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR135

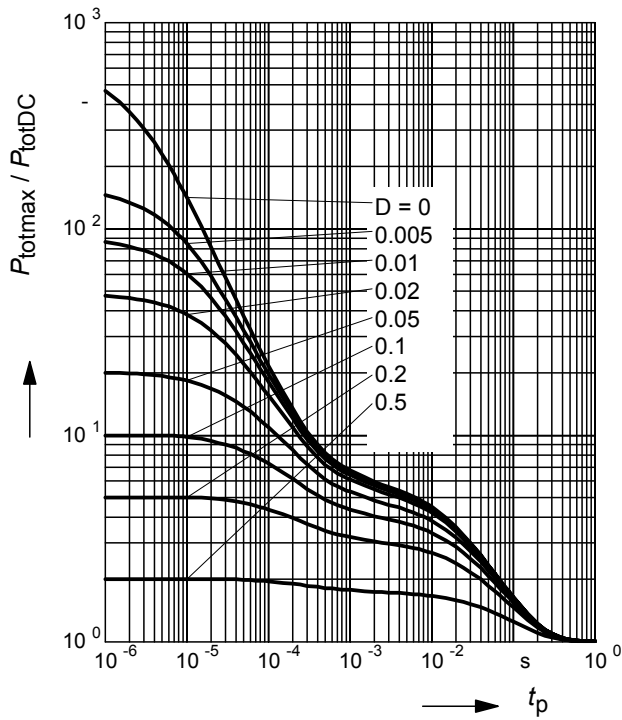

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$


BCR135S

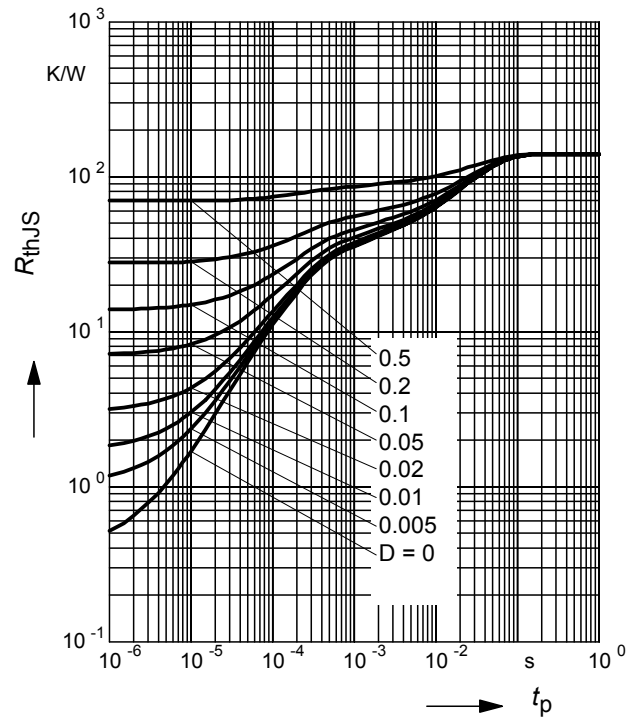

Permissible Pulse Load


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR135S

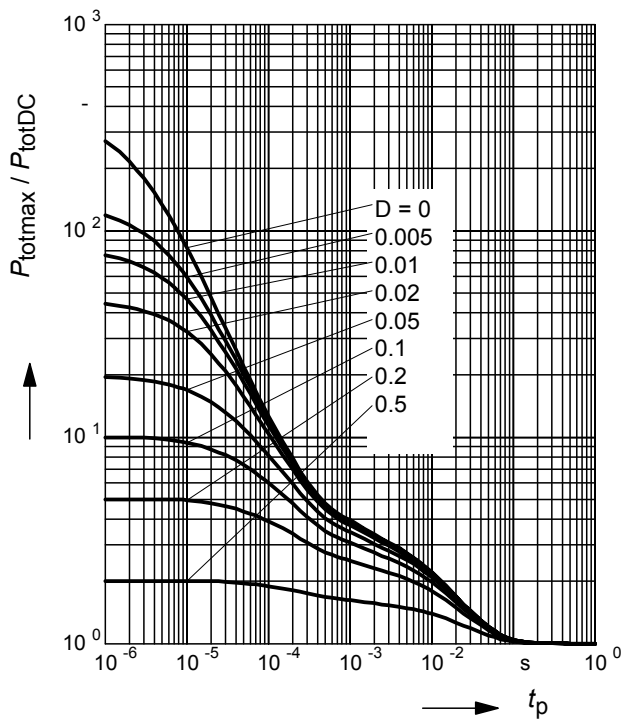

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$


BCR135W

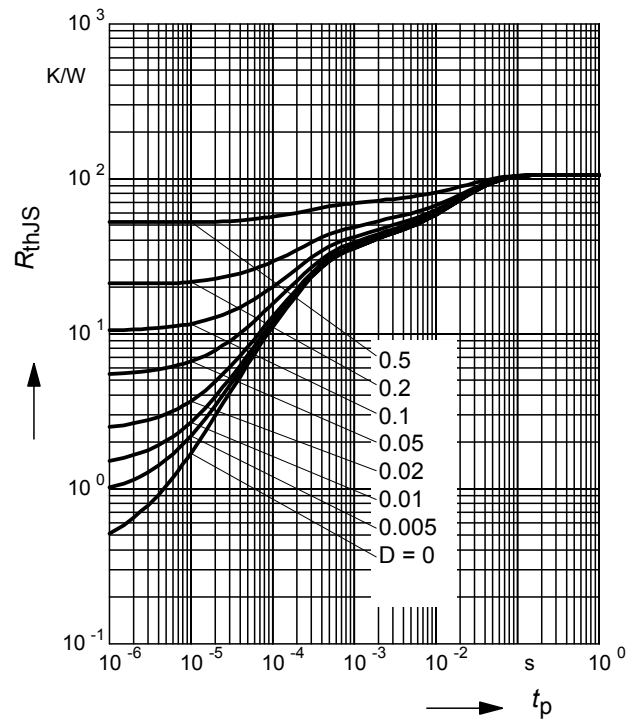

Permissible Pulse Load

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR135W

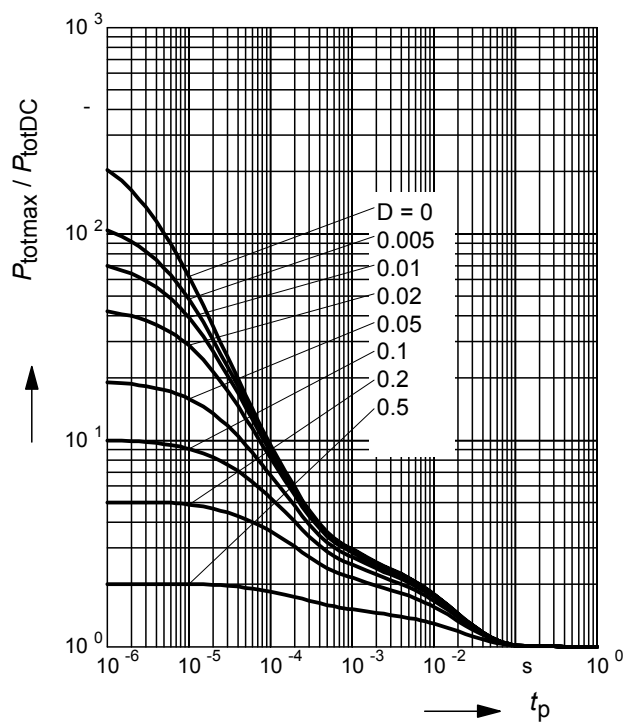




Technical drawing of a stepped shaft. The drawing shows a shaft with two steps. The top view shows a diameter of 0.8 for the left section and 0.9 for the right section. The side view shows a total length of 1.3, with a 0.8 section on the left and a 0.9 section on the right. The shaft has a central hole with a diameter of 0.8 and a length of 1.2.

The diagram shows a rectangular LED package with four pins. The top pin is labeled 'Manufacturer' and points to the 'infineon' logo. The bottom-left pin is labeled 'Pin 1'. The bottom-right pin is labeled 'BCW66' and 'Type code'. The package body contains the text 'EHS' and a date code '05 05', which is labeled '2005, June' and 'Date code (YM)'.

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

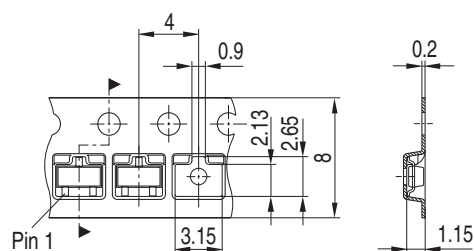

Package Outline



Foot Print




Marking Layout (Example)




Standard Packing


Reel $\varnothing 180$ mm = 3.000 Pieces/Reel
 Reel $\varnothing 330$ mm = 10.000 Pieces/Reel

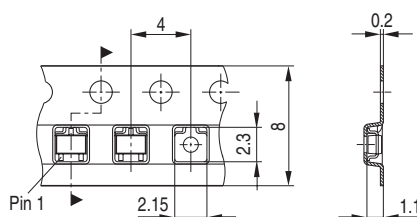

Package Outline

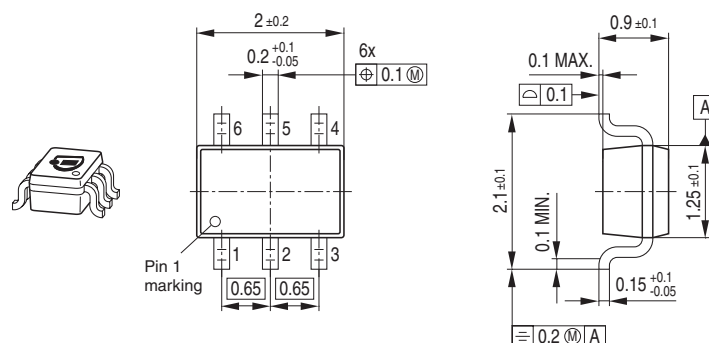


Foot Print



Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.

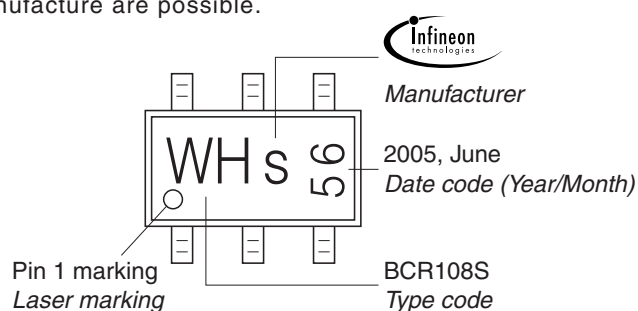

Standard Packing

Reel $\varnothing 180$ mm = 3.000 Pieces/Reel
Reel $\varnothing 330$ mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

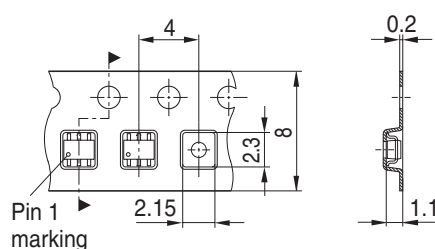

Edition 2009-11-16

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2009 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [BCR135WH6327XTSA1](#) on WIN SOURCE
- ⊖ [Infineon Technologies](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management