





**THE DATASHEET OF  
CDRH50D43RNP-2R2NC**




# SMD Power Inductor CDRH50D43R

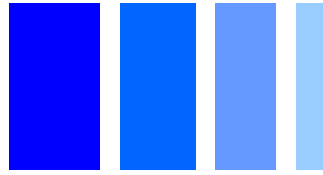

## Dimension - [mm]

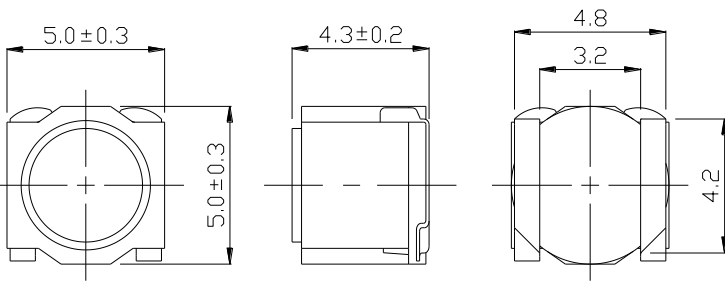

## Land pattern and Schematics - [mm]

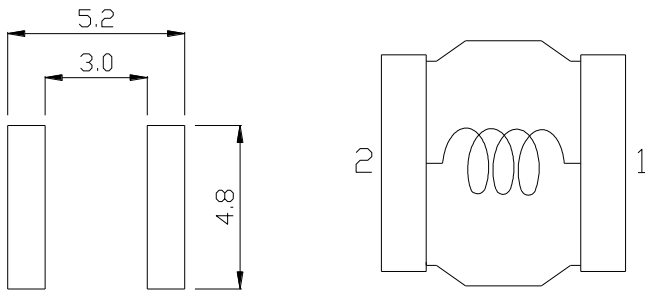

## Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 5.3 × 5.3 × 4.5mm Max.
- Product weight: 0.38g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data


- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.

## Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 1500pcs per reel

## Applications

- Ideally used in Slim-type TV , car navigation etc.



### Electrical Characteristics


Part No.	Stamp	Inductance ( $\mu\text{H}$ ) [Within] ※1	D.C.R.( $\text{m}\Omega$ ) [Within] (at 20°C)	Saturation current (A) ※2		Temperature rise current (A) ※3
				(at 20°C)	(at 105°C)	
CDRH50D43RNP-2R2NC	C	2.2±30%	22±25%	3.60	3.00	3.80
CDRH50D43RNP-3R3NC	D	3.3±30%	25±25%	2.90	2.50	3.50
CDRH50D43RNP-4R7MC	E	4.7±20%	30±25%	2.44	2.08	3.20
CDRH50D43RNP-6R8MC	F	6.8±20%	37±25%	2.12	1.70	2.80
CDRH50D43RNP-100MC	G	10±20%	47±25%	1.75	1.48	2.40
CDRH50D43RNP-150MC	H	15±20%	72±25%	1.44	1.28	1.90
CDRH50D43RNP-220MC	J	22±20%	112±20%	1.16	0.97	1.44
CDRH50D43RNP-330MC	K	33±20%	160±20%	0.96	0.80	1.25
CDRH50D43RNP-470MC	M	47±20%	270±20%	0.78	0.67	0.91
CDRH50D43RNP-680MC	N	68±20%	430±20%	0.65	0.53	0.72
CDRH50D43RNP-101MC	P	100±20%	545±20%	0.54	0.45	0.65
CDRH50D43RNP-151MC	Q	150±20%	775±20%	0.44	0.37	0.51
CDRH50D43RNP-221MC	R	220±20%	975±20%	0.36	0.30	0.49

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.













※3. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t=40^\circ\text{C}$ ( $T_a=20^\circ\text{C}$ ).

# SMD Power Inductor CDRH50D43R




## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$

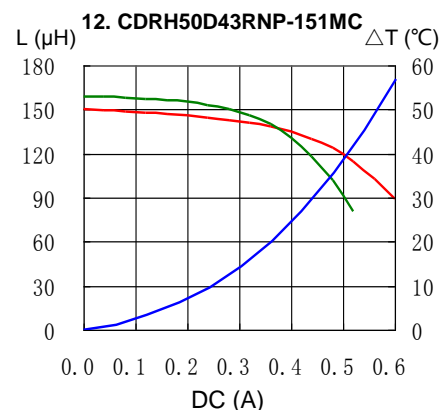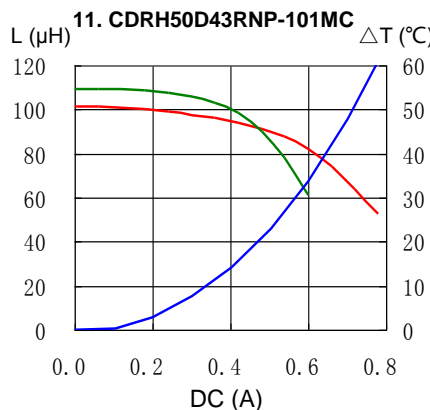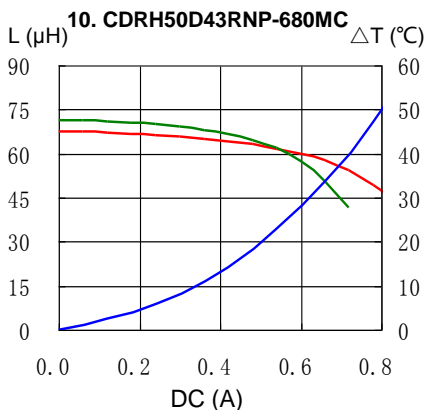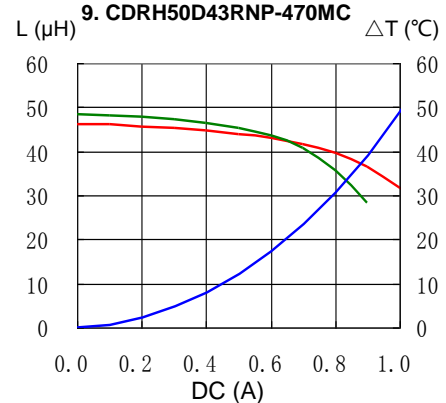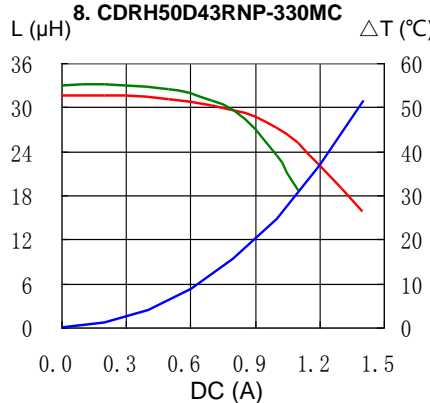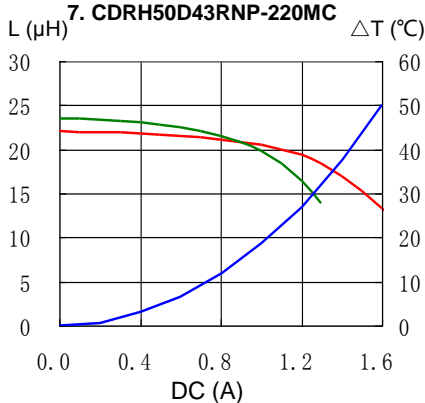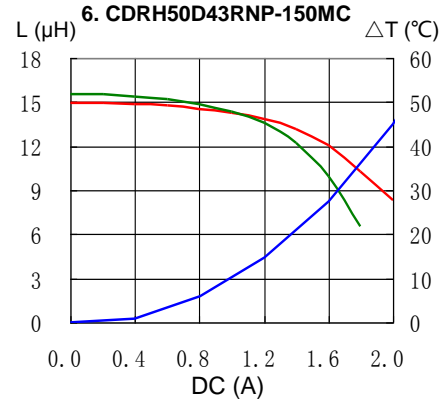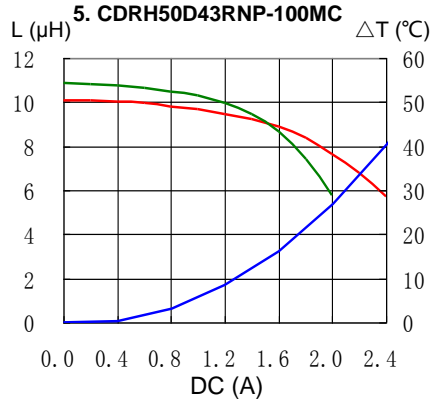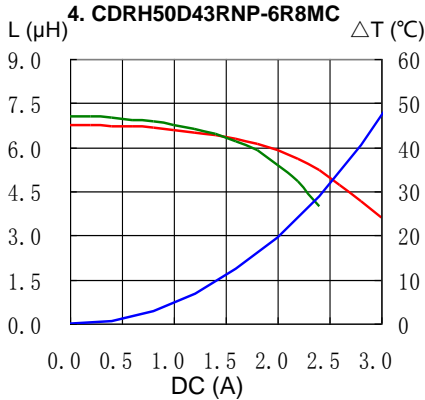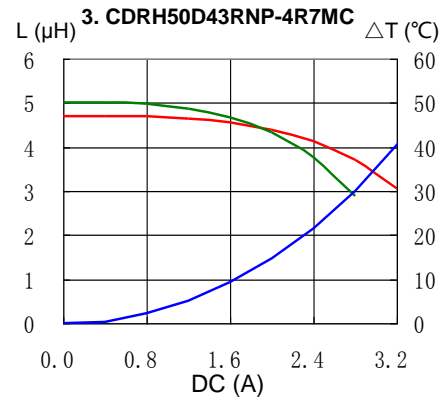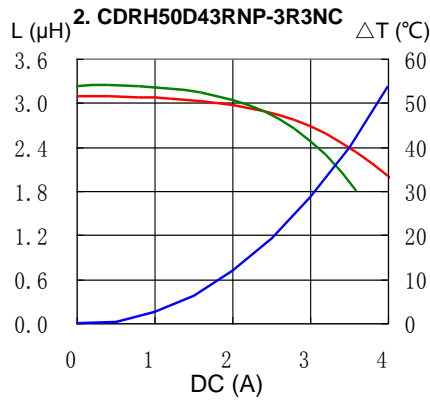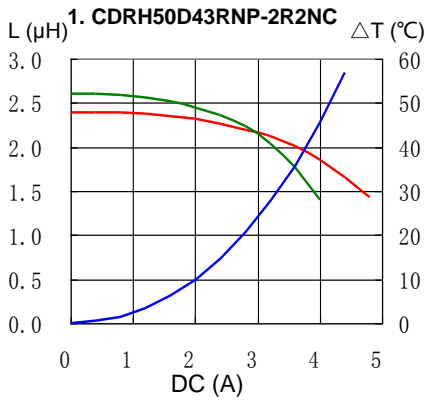


# SMD Power Inductor CDRH50D43R




## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$

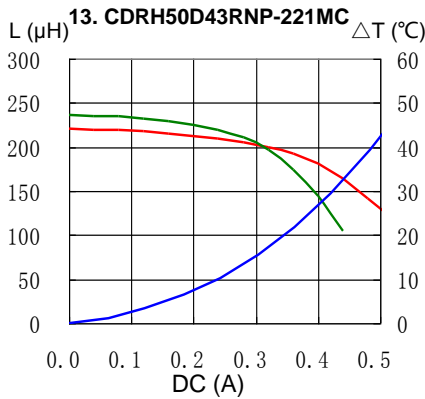


## Solder Reflow Condition

Heat Endurance

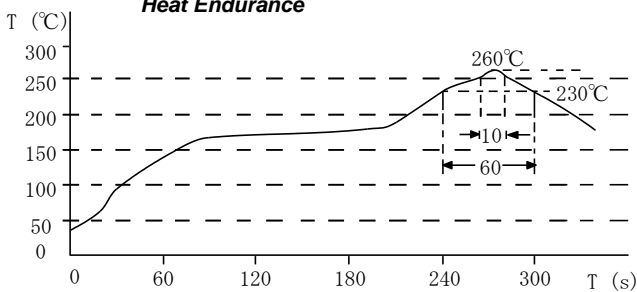

Temperature Chart

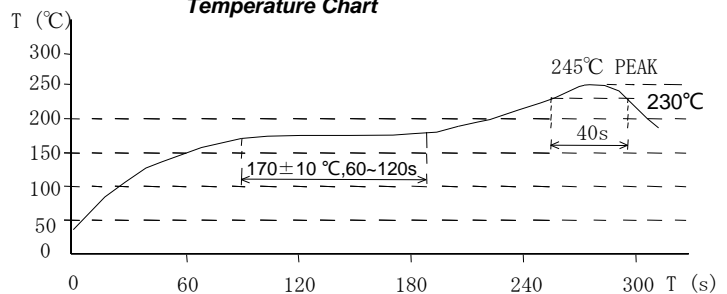

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View CDRH50D43RNP-2R2NC on WIN SOURCE](#)
- ⊖ [Sumida America Components Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management