




# THE DATASHEET OF TPS72618KTTR



# LOW INPUT VOLTAGE, 1-A LOW-DROPOUT LINEAR REGULATORS WITH SUPERVISOR

Check for Samples: [TPS726126](#), [TPS72615](#), [TPS72616](#), [TPS72618](#), [TPS72625](#)

## FEATURES

- 1-A Low-Dropout Regulator Supports Input Voltages Down to 1.8-V
- Available in 1.26-V, 1.5-V, 1.6-V, 1.8-V, 2.5-V
- Stable With Any Type/Value Output Capacitor
- $\pm 2\%$  Output Voltage Tolerance Over Line, Load, and Temperature ( $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ )
- Integrated Supervisor (SVS) With 200-ms RESET Delay Time
- Low 170-mV Dropout Voltage at 1 A (TPS72625)
- Low 210- $\mu\text{A}$  Ground Current at Full Load
- Less than 1- $\mu\text{A}$  Standby Current
- Integrated UVLO with Thermal and Overcurrent Protection
- 5-Lead SOT223 or DPAK Surface-Mount Package

## APPLICATIONS

- PCI Cards
- Modem Banks and Telecom Boards
- DSP, FPGA, and Microprocessor Power Supplies
- Portable, Battery-Powered Applications
- 1.26-V Core Voltage for the Following DSPs:
  - TMS320vC5501
  - TMS320vC5502


## DESCRIPTION

The TPS726xx family of 1-A low-dropout (LDO) linear regulators has fixed voltage options available that are commonly used to power the latest DSPs, FPGAs, and microcontrollers. The integrated supervisory circuitry provides an active low RESET signal when the output falls out of regulation. The no capacitor/any capacitor feature allows the customer to tailor output transient performance as needed. Therefore, compared to other regulators capable of providing the same output current, this family of regulators can provide a stand alone power supply solution or a post regulator for a switch mode power supply.

These regulators operate over a wide range of input voltages (1.8 V to 6 V) and have very low dropout (170 mV at 1-A). Ground current is typically 210  $\mu\text{A}$  at full load and drops to less than 80  $\mu\text{A}$  at no load. Standby current is less than 1  $\mu\text{A}$ .

Unlike some regulators that have a minimum current requirement, the TPS726xx family is stable with no output load current. The low noise capability of this family, coupled with its high current operation and ease of power dissipation, make it ideal for telecom boards, modem banks, and other noise sensitive applications.

The TPS726xx is available in either a SOT223 or DPAK package. The TPS726126 is available in a SOT223 package only.

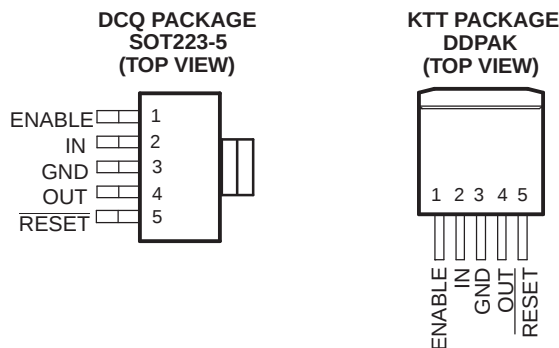

Note: Tab is GND for both packages



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## ORDERING INFORMATION<sup>(1)</sup>

| PRODUCT         | V <sub>OUT</sub>                                                                                                             |
|-----------------|------------------------------------------------------------------------------------------------------------------------------|
| TPS726xx xyyy z | XXX is nominal output voltage (for example, 126 = 1.26V, 15 = 1.5V).<br>YYY is package designator.<br>Z is package quantity. |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at [www.ti.com](http://www.ti.com).

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range unless otherwise noted<sup>(1)</sup>

|                                                      |                              | UNIT |
|------------------------------------------------------|------------------------------|------|
| Input voltage, V <sub>I</sub> <sup>(2)</sup>         | –0.3 to 7                    | V    |
| Voltage range at EN                                  | –0.3 to V <sub>I</sub> + 0.3 | V    |
| Voltage on $\overline{\text{RESET}}$                 | V <sub>IN</sub> + 0.3        | V    |
| Voltage on OUT                                       | 6                            | V    |
| ESD rating, HBM                                      | 2                            | kV   |
| Continuous total power dissipation                   | See Dissipation Rating Table |      |
| Operating junction temperature range, T <sub>J</sub> | –50 to 150                   | °C   |
| Maximum junction temperature range, T <sub>J</sub>   | 150                          | °C   |
| Storage temperature, T <sub>stg</sub>                | –65 to 150                   | °C   |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal.

## PACKAGE DISSIPATION RATINGS

| PACKAGE | BOARD                 | R <sub>θJC</sub> | R <sub>θJA</sub> |
|---------|-----------------------|------------------|------------------|
| DDPAK   | High K <sup>(1)</sup> | 2 °C/W           | 23 °C/W          |
| SOT223  | Low K <sup>(2)</sup>  | 15 °C/W          | 53 °C/W          |

- (1) The JEDEC high K (2s2p) board design used to derive this data was a 3-inch x 3-inch (7,5-cm x 7,5-cm), multilayer board with 1 ounce internal power and ground planes and 2 ounce copper traces on top and bottom of the board.
- (2) The JEDEC low K (1s) board design used to derive this data was a 3-inch x 3-inch (7,5-cm x 7,5-cm), two-layer board with 2 ounce copper traces on top of the board.

## ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range  $V_I = V_{O(typ)} + 1\text{ V}$ ,  $I_O = 1\text{ mA}$ ,  $EN = IN$ ,  $C_O = 1\text{ }\mu\text{F}$ ,  $C_I = 1\text{ }\mu\text{F}$  (unless otherwise noted). Typical values are at  $+25^\circ\text{C}$ .

| PARAMETER                     |                                                                                     |           | TEST CONDITIONS                                  |                                | MIN   | TYP   | MAX   | UNIT            |
|-------------------------------|-------------------------------------------------------------------------------------|-----------|--------------------------------------------------|--------------------------------|-------|-------|-------|-----------------|
| V <sub>I</sub> <sup>(1)</sup> | Input voltage                                                                       |           |                                                  |                                | 1.8   |       | 6     | V               |
| I <sub>O</sub>                | Continuous output current                                                           |           |                                                  |                                | 0     |       | 1     | A               |
| Bandgap voltage reference     |                                                                                     |           |                                                  |                                | 1.177 | 1.220 | 1.263 | V               |
| V <sub>O</sub>                | Output voltage                                                                      | TPS726126 | 0 μA < I <sub>O</sub> < 1 A                      | 1.8 V ≤ V <sub>I</sub> ≤ 5.5 V | 1.222 | 1.26  | 1.298 | V               |
|                               |                                                                                     | TPS72615  | 0 μA < I <sub>O</sub> < 1 A                      | 1.8 V ≤ V <sub>I</sub> ≤ 5.5 V | 1.47  | 1.5   | 1.53  |                 |
|                               |                                                                                     | TPS72616  | 0 μA < I <sub>O</sub> < 1 A                      | 2.6 V ≤ V <sub>I</sub> ≤ 5.5 V | 1.568 | 1.6   | 1.632 |                 |
|                               |                                                                                     | TPS72618  | 0 μA < I <sub>O</sub> < 1 A                      | 2.8 V ≤ V <sub>I</sub> ≤ 5.5 V | 1.764 | 1.8   | 1.836 |                 |
|                               |                                                                                     | TPS72625  | 0 μA < I <sub>O</sub> < 1 A                      | 3.5 V ≤ V <sub>I</sub> ≤ 5.5 V | 2.45  | 2.5   | 2.55  |                 |
| I                             | Ground current                                                                      |           | I <sub>O</sub> = 0 μA                            |                                |       | 75    | 120   | μA              |
|                               |                                                                                     |           | I <sub>O</sub> = 1 A                             |                                |       | 210   | 300   |                 |
|                               | Standby current                                                                     |           | EN < 0.4 V                                       |                                |       | 0.2   | 1     | μA              |
| V <sub>n</sub>                | Output noise voltage                                                                |           | BW = 200 Hz to 100 kHz<br>C <sub>O</sub> = 10 μF |                                |       | 150   |       | μV              |
| PSRR                          | Ripple rejection                                                                    |           | f = 1 kHz, C <sub>O</sub> = 10 μF                |                                |       | 60    |       | dB              |
|                               | Current limit <sup>(2)</sup>                                                        |           |                                                  |                                | 1.1   | 1.6   | 2.3   | A               |
|                               | Output voltage line regulation<br>(ΔV <sub>O</sub> /V <sub>O</sub> ) <sup>(3)</sup> |           | V <sub>O</sub> + 1 V < V <sub>I</sub> ≤ 5.5 V    |                                | −0.15 | 0.02  | 0.15  | %/V             |
|                               | Output voltage load regulation                                                      |           | 0 μA < I <sub>O</sub> < 1 A                      |                                | −0.25 | 0.05  | 0.25  | %/A             |
| V <sub>IH</sub>               | EN high level input                                                                 |           |                                                  |                                | 1.3   |       |       | V               |
| V <sub>IL</sub>               | EN low level input                                                                  |           |                                                  |                                | −0.2  |       | 0.4   |                 |
| I <sub>I</sub>                | EN input current                                                                    |           | EN = 0 V or V <sub>I</sub>                       |                                |       | 0.01  | 100   | nA              |
|                               | UVLO threshold                                                                      |           | V <sub>CC</sub> rising                           |                                | 1.45  | 1.57  | 1.70  | V               |
|                               | UVLO hysteresis                                                                     |           | V <sub>CC</sub> rising                           |                                |       | 50    |       | mV              |
|                               | UVLO deglitch                                                                       |           | V <sub>CC</sub> rising                           |                                |       | 10    |       | μs              |
|                               | UVLO delay                                                                          |           | V <sub>CC</sub> rising                           |                                |       | 100   |       | μs              |
| V <sub>DO</sub>               | Dropout voltage <sup>(4)</sup>                                                      | TPS72625  | I <sub>O</sub> = 1 A                             |                                |       | 170   | 280   | mV              |
|                               |                                                                                     | TPS72618  | I <sub>O</sub> = 1 A                             |                                |       | 210   | 320   |                 |
| RESET                         | Minimum input voltage for valid RESET (V <sub>RES</sub> )                           |           |                                                  |                                | 1.3   |       |       | V               |
|                               | Trip threshold voltage                                                              |           |                                                  |                                | 90    | 93    | 96    | %V <sub>O</sub> |
|                               | Hysteresis voltage                                                                  |           |                                                  |                                |       | 10    |       | mV              |
|                               | t <sub>(RESET)</sub> delay time                                                     |           |                                                  |                                | 100   | 200   | 300   | ms              |
|                               | Rising edge deglitch                                                                |           |                                                  |                                |       | 10    |       | μs              |
|                               | Output low voltage (at 700 μA)                                                      |           |                                                  |                                | −0.3  |       | 0.4   | V               |
|                               | Leakage current                                                                     |           |                                                  |                                |       |       | 100   | nA              |
| T <sub>J</sub>                | Operating junction temperature                                                      |           |                                                  |                                | −40   |       | +125  | °C              |

(1) Minimum  $V_{IN}$  is 1.800 V or  $V_O + V_{DO}$ , whichever is greater.


(2) Test condition includes, output voltage  $V_O = V_O - 15\%$  and pulse duration = 10 ms.

(3)  $V_{Imin} = (V_O + 1)$  or 1.8 V whichever is greater.

$$\text{Line regulation (mV)} = (\% / \text{V}) \times \frac{V_O(5.5\text{ V} - V_{Imin})}{100} \times 1000$$

(4) Dropout voltage is defined as the differential voltage between  $V_O$  and  $V_I$  when  $V_O$  drops 100 mV below the value measured with  $V_I = V_O + 1\text{ V}$ .


## FUNCTIONAL BLOCK DIAGRAM

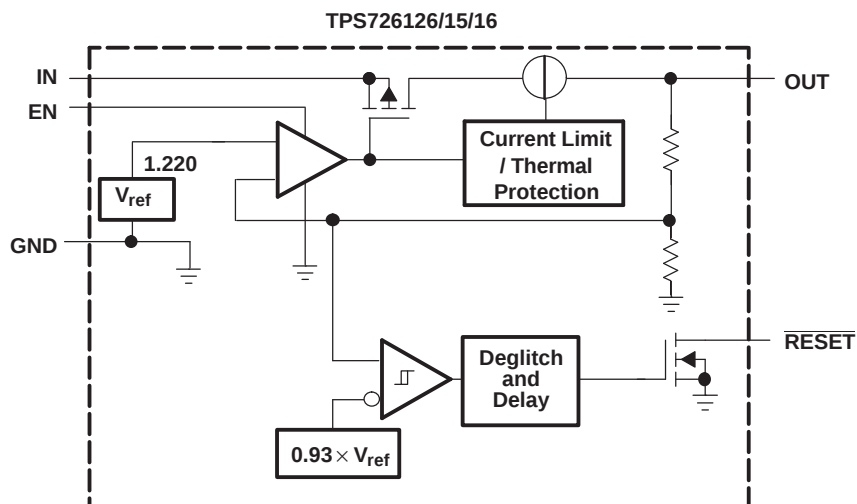

## Terminal Functions

| TERMINAL<br>NAME | NO. | DESCRIPTION                                                                                                                                                                                                                                                        |
|------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GND              | 3   | Ground                                                                                                                                                                                                                                                             |
| ENABLE           | 1   | Enable input                                                                                                                                                                                                                                                       |
| IN               | 2   | Input supply voltage                                                                                                                                                                                                                                               |
| RESET            | 5   | This terminal is the RESET output. When used with a pull-up resistor, this open-drain output provides the active low RESET signal when the regulator output voltage drops more than 5% below its nominal output voltage. The RESET delay time is typically 200 ms. |
| OUT              | 4   | Regulated output voltage                                                                                                                                                                                                                                           |

## RESET TIMING DIAGRAM

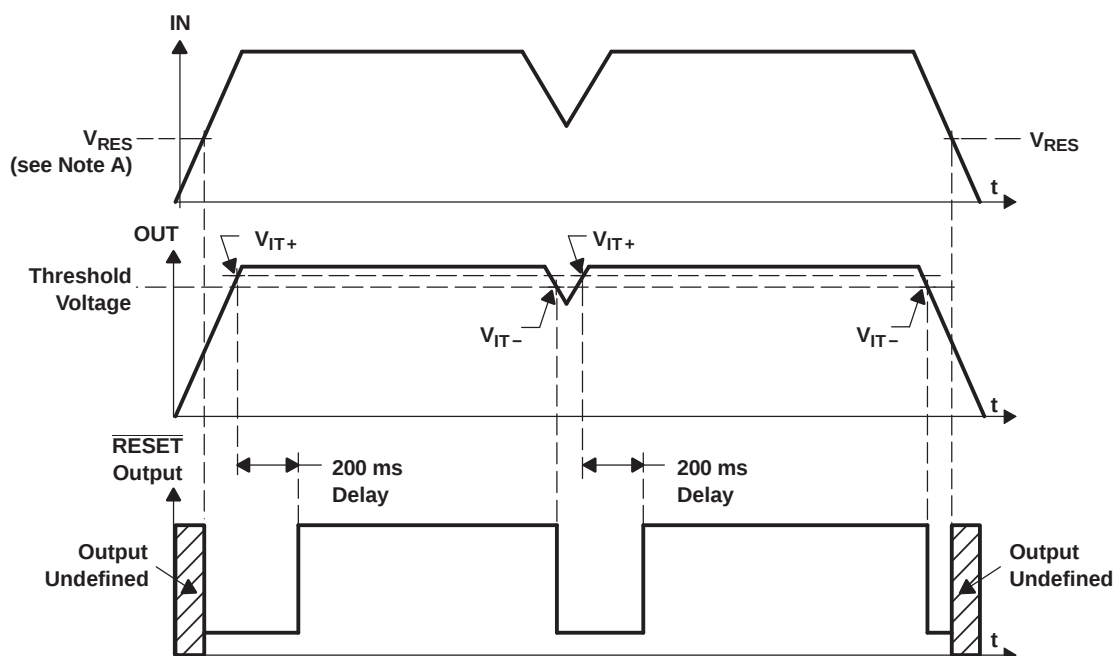

NOTES:A.  $V_{RES}$  is the minimum input voltage for a valid RESET.

## TYPICAL CHARACTERISTICS

**TPS72618 OUTPUT VOLTAGE  
vs  
OUTPUT CURRENT**

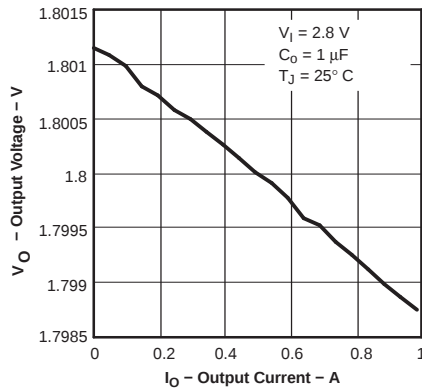


Figure 1.

**TPS72618  
OUTPUT VOLTAGE  
vs  
JUNCTION TEMPERATURE**

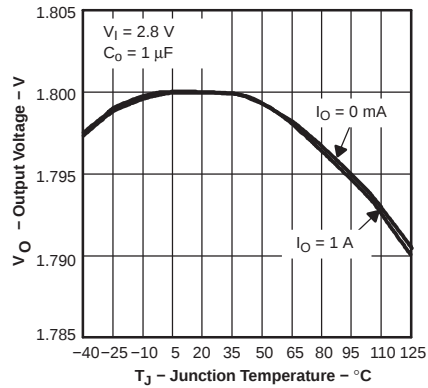


Figure 2.

**TPS72618  
GROUND CURRENT  
vs  
JUNCTION TEMPERATURE**

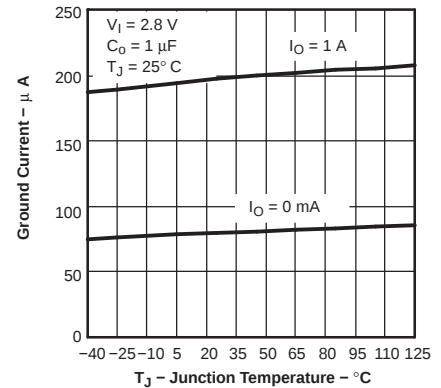


Figure 3.

**TPS72618  
GROUND CURRENT  
vs  
OUTPUT CURRENT**

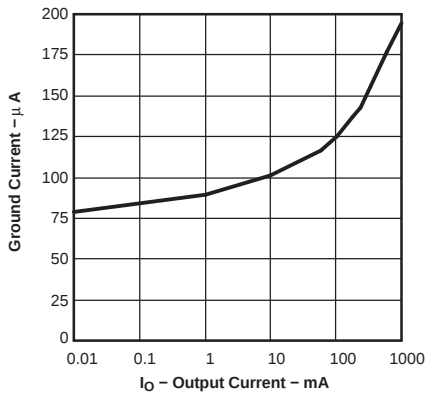


Figure 4.

**TPS72625  
DC DROPOUT VOLTAGE  
vs  
OUTPUT CURRENT**

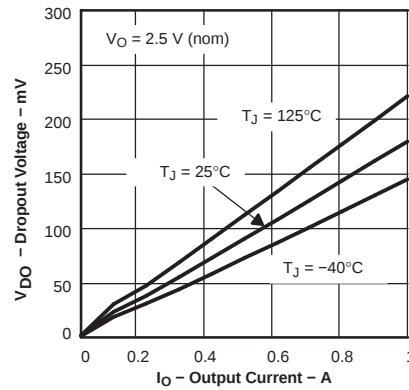


Figure 5.

**TPS72618  
DROPOUT VOLTAGE  
vs  
JUNCTION TEMPERATURE**

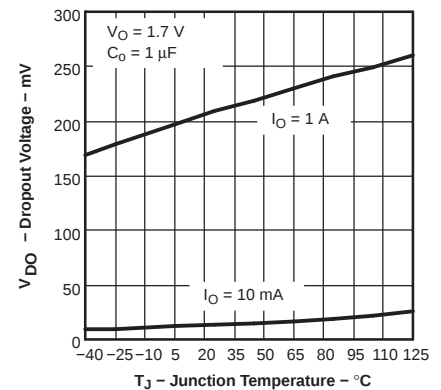


Figure 6.

## TYPICAL CHARACTERISTICS (continued)

**MINIMUM REQUIRED  
INPUT VOLTAGE  
VS  
OUTPUT VOLTAGE**

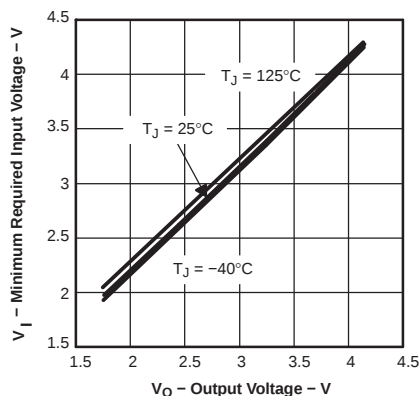


Figure 7.

**TPS72618  
LINE TRANSIENT  
RESPONSE**

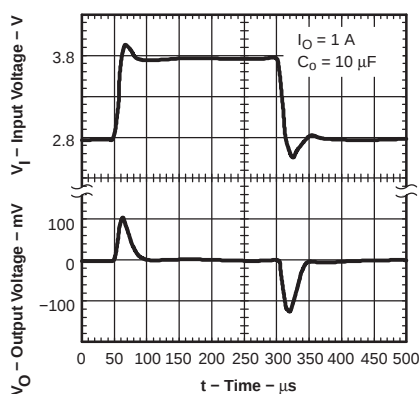


Figure 8.

**TPS72618  
LOAD TRANSIENT  
RESPONSE**

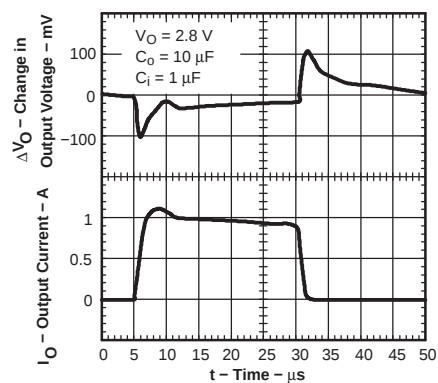


Figure 9.

**TPS72618  
LOAD TRANSIENT  
RESPONSE**

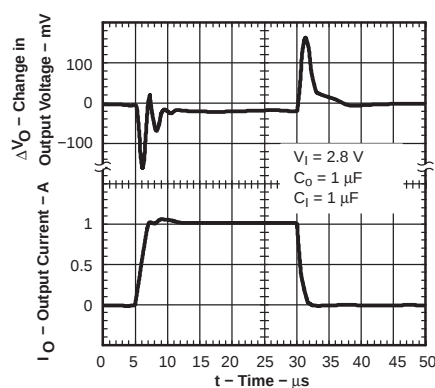


Figure 10.

**TPS72618  
OUTPUT VOLTAGE,  
ENABLE VOLTAGE  
VS  
TIME (START-UP)**

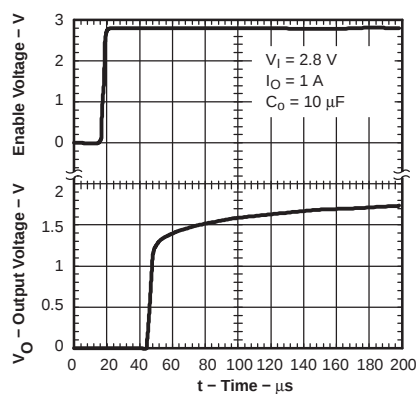


Figure 11.

**TPS72618  
POWER UP/POWER DOWN**

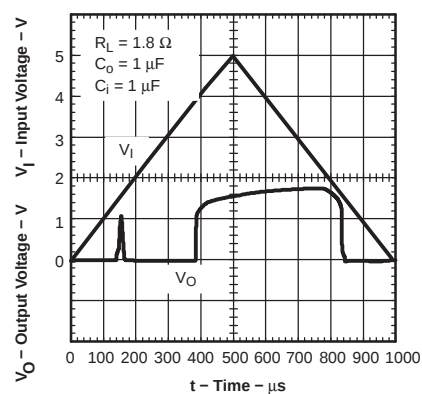


Figure 12.

## TYPICAL CHARACTERISTICS (continued)

**TPS72618  
OUTPUT SPECTRAL NOISE  
DENSITY  
VS  
FREQUENCY**

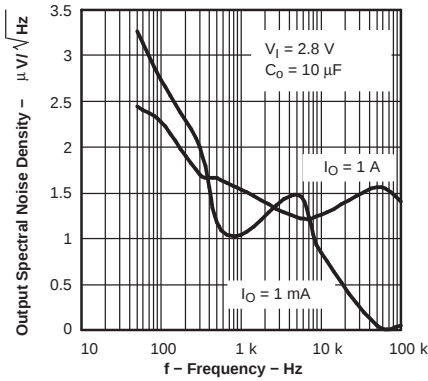


Figure 13.

**TPS72618  
RIPPLE REJECTION  
VS  
FREQUENCY**

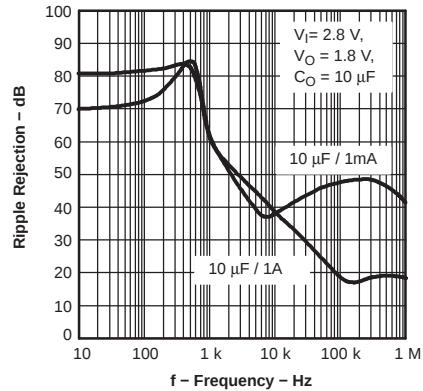


Figure 14.

**CURRENT LIMIT  
VS  
INPUT VOLTAGE**

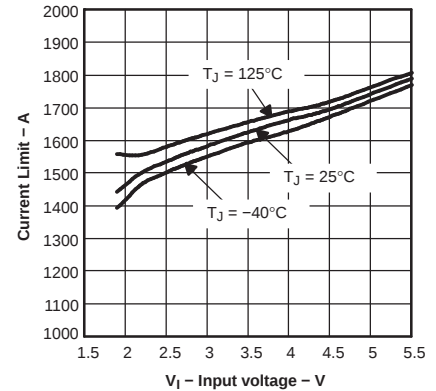


Figure 15.

**TPS72615  
GROUND CURRENT  
VS  
INPUT VOLTAGE**

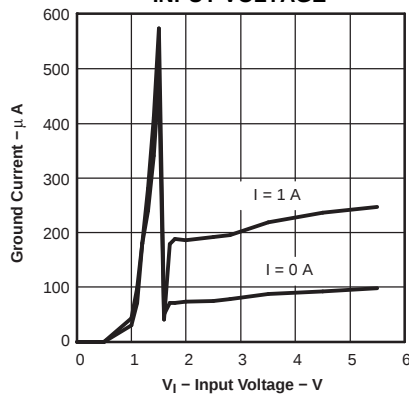


Figure 16.

**DROPOUT VOLTAGE  
VS  
INPUT VOLTAGE**

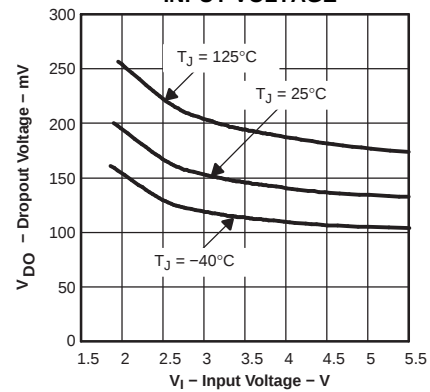


Figure 17.

## APPLICATION INFORMATION

The TPS726xx family of low-dropout (LDO) regulators have numerous features that make it apply to a wide range of applications. The family operates with very low input voltage ( $\geq 1.8$  V) and low dropout voltage (typically 200 mV at full load), making it an efficient stand-alone power supply or post regulator for battery or switch mode power supplies. Both the active low RESET and 1-A output current, make the TPS726xx family ideal for powering processor and FPGA supplies. The TPS726xx family also has low output noise (typically 150  $\mu\text{V}_{\text{RMS}}$  with 10- $\mu\text{F}$  output capacitor), making it ideal for use in telecom equipment.

### External Capacitor Requirements

A 1- $\mu\text{F}$  or larger ceramic input bypass capacitor, connected between IN and GND and located close to the TPS726xx, is required for stability. To improve transient response, noise rejection, and ripple rejection, an additional 10- $\mu\text{F}$  or larger, low ESR capacitor is recommended. A higher-value, low ESR input capacitor may be necessary if large, fast-rise-time load transients are anticipated and the device is located several inches from the power source, especially if the minimum input voltage of 1.8 V is used.

Although an output capacitor is not required for stability, transient response and output noise are improved with a 10- $\mu\text{F}$  output capacitor.

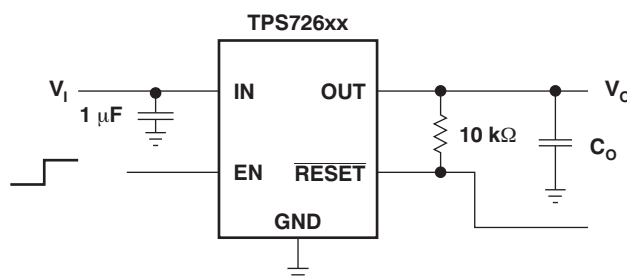


Figure 18. TPS726xx Fixed Output Typical Application Diagram

### Regulator Protection

The TPS726xx pass element has a built-in back diode that safely conducts reverse current when the input voltage drops below the output voltage (e.g., during power down). Current is conducted from the output to the input and is not internally limited. If extended reverse voltage is anticipated, external limiting might be appropriate.

The TPS726xx also features internal current limiting and thermal protection. During normal operation, the TPS726xx limits output current to approximately 1.6 A. When current limiting engages, the output voltage scales back linearly until the overcurrent condition ends. While current limiting is designed to prevent gross device failure, care should be taken not to exceed the power dissipation ratings of the package. If the temperature of the device exceeds 165°C, thermal-protection circuitry shuts it down. Once the device has cooled down to below 145°C, regulator operation resumes.

## THERMAL INFORMATION

The amount of heat that an LDO linear regulator generates is directly proportional to the amount of power it dissipates during operation. All integrated circuits have a maximum allowable junction temperature ( $T_{j\text{max}}$ ) above which normal operation is not assured. A system designer must design the operating environment so that the operating junction temperature ( $T_j$ ) does not exceed the maximum junction temperature ( $T_{j\text{max}}$ ). The two main environmental variables that a designer can use to improve thermal performance are air flow and external heatsinks. The purpose of this information is to aid the designer in determining the proper operating environment for a linear regulator that is operating at a specific power level.

In general, the maximum expected power ( $P_{D(max)}$ ) consumed by a linear regulator is computed as:

$$P_{Dmax} = (V_{I(avg)} - V_{O(avg)}) \times I_{O(avg)} + V_{I(avg)} \times I_{(Q)} \quad (1)$$

Where:

- $V_{I(avg)}$  is the average input voltage.
- $V_{O(avg)}$  is the average output voltage.
- $I_{O(avg)}$  is the average output current.
- $I_{(Q)}$  is the quiescent current.

For most TI LDO regulators, the quiescent current is insignificant compared to the average output current; therefore, the term  $V_{I(avg)} \times I_{(Q)}$  can be neglected. The operating junction temperature is computed by adding the ambient temperature ( $T_A$ ) and the increase in temperature due to the regulator's power dissipation. The temperature rise is computed by multiplying the maximum expected power dissipation by the sum of the thermal resistances between the junction and the case ( $R_{\theta JC}$ ), the case to heatsink ( $R_{\theta CS}$ ), and the heatsink to ambient ( $R_{\theta SA}$ ). Thermal resistances are measures of how effectively an object dissipates heat. Typically, the larger the device, the more surface area available for power dissipation and the lower the object's thermal resistance.

Figure 19 illustrates these thermal resistances for (a) a SOT223 package mounted in a JEDEC low-K board, and (b) a DDPAK package mounted on a JEDEC high-K board.

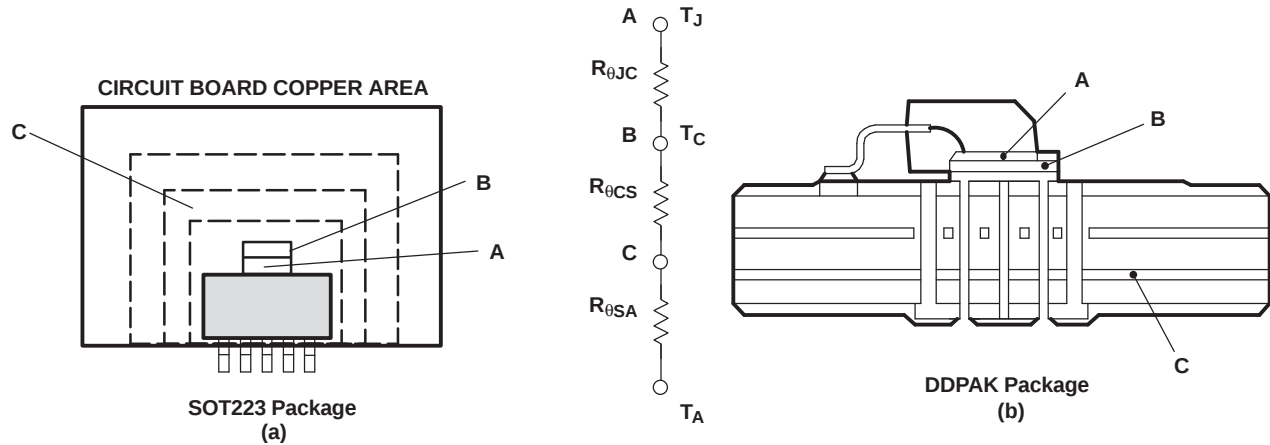


Figure 19. Thermal Resistances

Equation 2 summarizes the computation:

$$T_J = T_A + P_{Dmax} \times (R_{\theta JC} + R_{\theta CS} + R_{\theta SA}) \quad (2)$$

The  $R_{\theta JC}$  is specific to each regulator as determined by its package, lead frame, and die size provided in the regulator's data sheet. The  $R_{\theta SA}$  is a function of the type and size of heatsink. For example, *black body radiator* type heatsinks can have  $R_{\theta CS}$  values ranging from 5°C/W for very large heatsinks to 50°C/W for very small heatsinks. The  $R_{\theta CS}$  is a function of how the package is attached to the heatsink. For example, if a thermal compound is used to attach a heatsink to a SOT223 package,  $R_{\theta CS}$  of 1°C/W is reasonable.

Even if no external *black body radiator* type heatsink is attached to the package, the board on which the regulator is mounted provides some heatsinking through the pin solder connections. Some packages, like the DDPAK and SOT223 packages, use a copper plane underneath the package or the circuit board's ground plane for additional heatsinking to improve their thermal performance. Computer-aided thermal modeling can be used to compute very accurate approximations of an integrated circuit's thermal performance in different operating environments (e.g., different types of circuit boards, different types and sizes of heatsinks, and different air flows, etc.). Using these models, the three thermal resistances can be combined into one thermal resistance between junction and ambient ( $R_{\theta JA}$ ). This  $R_{\theta JA}$  is valid only for the specific operating environment used in the computer model.

Equation 2 simplifies into Equation 3:

$$T_J = T_A + P_{Dmax} \times R_{\theta JA} \quad (3)$$

Rearranging Equation 3 gives Equation 4:

$$R_{\theta JA} = \frac{T_J - T_A}{P_{Dmax}} \quad (4)$$

Using Equation 3 and the computer model generated curves shown in Figure 20 and Figure 23, a designer can quickly compute the required heatsink thermal resistance/board area for a given ambient temperature, power dissipation, and operating environment.

## DDPAK Power Dissipation

The DDPACK package provides an effective means of managing power dissipation in surface mount applications. The DDPACK package dimensions are provided in the *Mechanical Data* section at the end of the data sheet. The addition of a copper plane directly underneath the DDPACK package enhances the thermal performance of the package.

To illustrate, the TPS72625 in a DDPACK package was chosen. For this example, the average input voltage is 5 V, the output voltage is 2.5 V, the average output current is 1 A, the ambient temperature 55°C, the air flow is 150 LFM, and the operating environment is the same as documented below. Neglecting the quiescent current, the maximum average power is:

$$P_{Dmax} = (5 - 2.5) V \times 1 A = 2.5 W \quad (5)$$

Substituting  $T_{Jmax}$  for  $T_J$  into Equation 4 gives Equation 6:

$$R_{\theta JAmax} = (125 - 55)^\circ C / 2.5 W = 28^\circ C/W \quad (6)$$

From Figure 20, *DDPAK Thermal Resistance vs Copper Heatsink Area*, the ground plane needs to be 1 cm<sup>2</sup> for the part to dissipate 2.5 W. The operating environment used in the computer model to construct Figure 20 consisted of a standard JEDEC High-K board (2S2P) with a 1 oz. internal copper plane and ground plane. The package is soldered to a 2 oz. copper pad. The pad is tied through thermal vias to the 1 oz. ground plane. Figure 21 shows the side view of the operating environment used in the computer model.

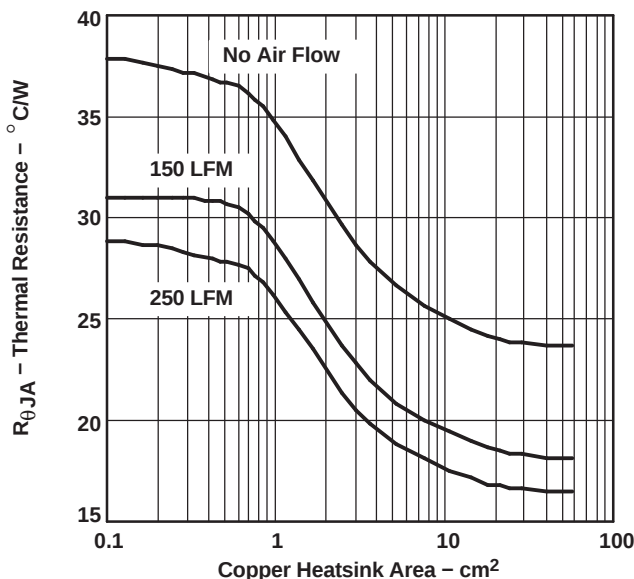
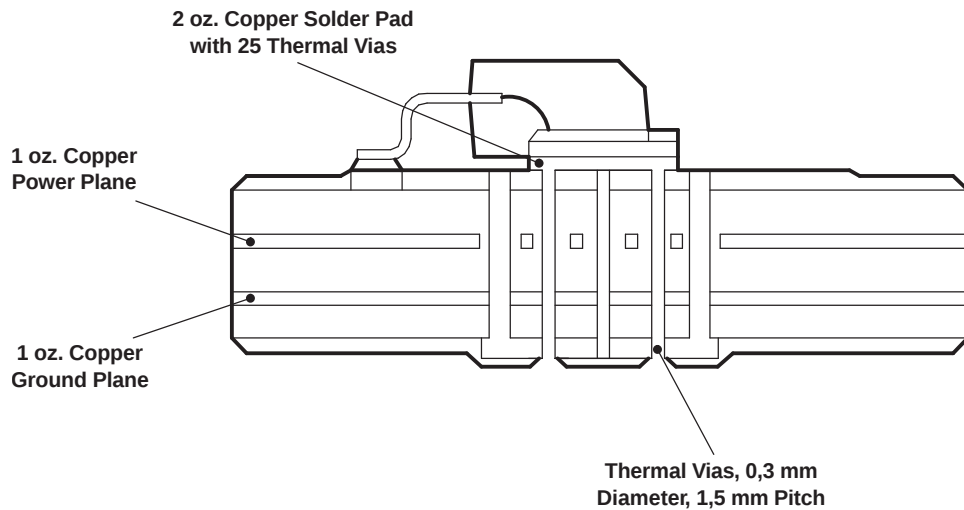
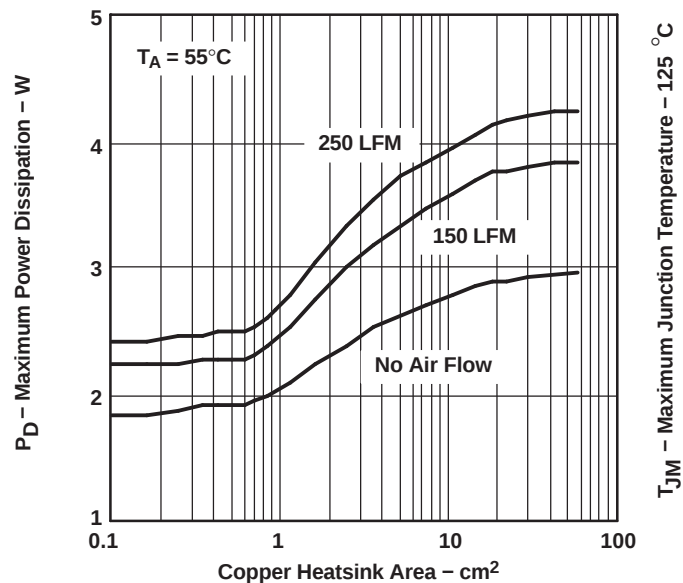


Figure 20. DDPACK Thermal Resistance vs Copper Heatsink Area



**Figure 21. DDPAK Thermal Resistance**

From the data in [Figure 22](#) and rearranging [Equation 4](#), the maximum power dissipation for a different ground plane area and a specific ambient temperature can be computed.



**Figure 22. Maximum Power Dissipation vs Copper Heatsink Area**

### SOT223 Power Dissipation

The SOT223 package provides an effective means of managing power dissipation in surface mount applications. The SOT223 package dimensions are provided in the *Mechanical Data* section at the end of the data sheet. The addition of a copper plane directly underneath the SOT223 package enhances the thermal performance of the package.

To illustrate, the TPS72625 in a SOT223 package was chosen. For this example, the average input voltage is 3.3 V, the output voltage is 2.5 V, the average output current is 1 A, the ambient temperature 55°C, no air flow is present, and the operating environment is the same as documented below. Neglecting the quiescent current, the maximum average power is:

$$P_{D\max} = (3.3 - 2.5) \text{ V} \times 1 \text{ A} = 800 \text{ mW} \quad (7)$$

Substituting  $T_{j\max}$  for  $T_j$  into [Equation 4](#) gives [Equation 8](#):

$$R_{\theta JA}^{\max} = (125 - 55)^{\circ}\text{C}/800 \text{ mW} = 87.5^{\circ}\text{C}/\text{W} \quad (8)$$

From [Figure 23](#),  $R_{\theta JA}$  vs PCB Copper Area, the ground plane needs to be 0.55 in<sup>2</sup> for the part to dissipate 800 mW. The operating environment used to construct [Figure 23](#) consisted of a board with 1 oz. copper planes. The package is soldered to a 1 oz. copper pad on the top of the board. The pad is tied through thermal vias to the 1 oz. ground plane.

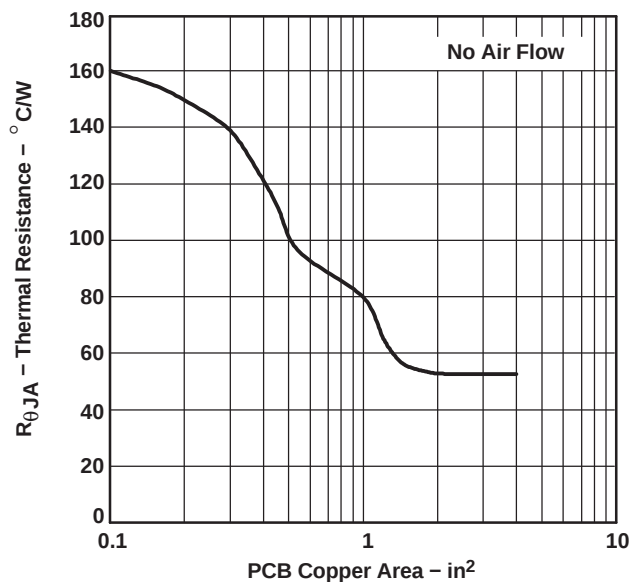


Figure 23. SOT223 Thermal Resistance vs PCB AREA

From the data in [Figure 23](#) and rearranging [Equation 4](#), the maximum power dissipation for a different ground plane area and a specific ambient temperature can be computed (as shown in [Figure 24](#)).

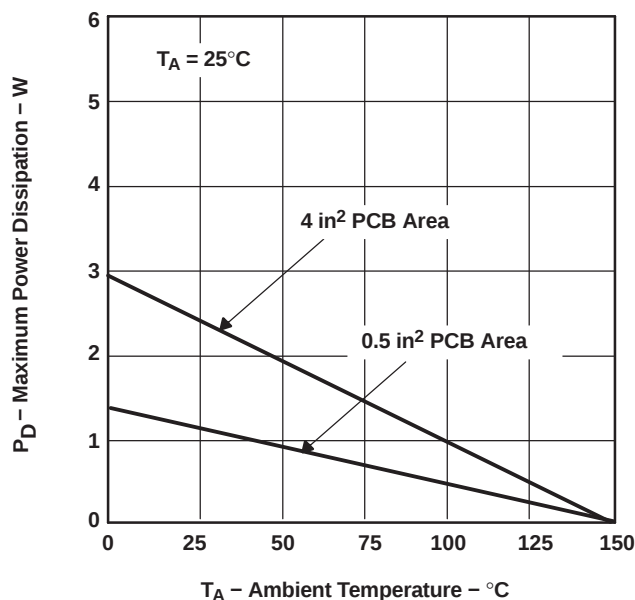


Figure 24. SOT223 Power Dissipation

## REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision G (May 2006) to Revision H                | Page |
|-----------------------------------------------------------------|------|
| • Deleted Figure 14, <i>Output Impedance vs Frequency</i> ..... | 7    |
| • Added <a href="#">Figure 18</a> .....                         | 8    |

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type     | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|------------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| TPS726126DCQ     | ACTIVE        | SOT-223          | DCQ                | 6    | 78             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 125   | 726126                  | <a href="#">Samples</a> |
| TPS726126DCQR    | ACTIVE        | SOT-223          | DCQ                | 6    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 125   | 726126                  | <a href="#">Samples</a> |
| TPS726126DCQRG4  | ACTIVE        | SOT-223          | DCQ                | 6    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 125   | 726126                  | <a href="#">Samples</a> |
| TPS72615DCQ      | ACTIVE        | SOT-223          | DCQ                | 6    | 78             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 125   | PS72615                 | <a href="#">Samples</a> |
| TPS72615DCQR     | ACTIVE        | SOT-223          | DCQ                | 6    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 125   | PS72615                 | <a href="#">Samples</a> |
| TPS72615KTTR     | ACTIVE        | DDPAK/<br>TO-263 | KTT                | 5    | 500            | Green (RoHS<br>& no Sb/Br) | CU SN   Call TI         | Level-2-260C-1 YEAR  | -40 to 125   | TPS<br>72615            | <a href="#">Samples</a> |
| TPS72616DCQ      | ACTIVE        | SOT-223          | DCQ                | 6    | 78             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 125   | PS72616                 | <a href="#">Samples</a> |
| TPS72616DCQR     | ACTIVE        | SOT-223          | DCQ                | 6    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  | -40 to 125   | PS72616                 | <a href="#">Samples</a> |
| TPS72616KTTR     | ACTIVE        | DDPAK/<br>TO-263 | KTT                | 5    | 500            | Green (RoHS<br>& no Sb/Br) | CU SN   Call TI         | Level-2-260C-1 YEAR  |              | TPS<br>72616            | <a href="#">Samples</a> |
| TPS72616KTTRG3   | ACTIVE        | DDPAK/<br>TO-263 | KTT                | 5    | 500            | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-2-260C-1 YEAR  |              | TPS<br>72616            | <a href="#">Samples</a> |
| TPS72618DCQ      | ACTIVE        | SOT-223          | DCQ                | 6    | 78             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  |              | PS72618                 | <a href="#">Samples</a> |
| TPS72618DCQR     | ACTIVE        | SOT-223          | DCQ                | 6    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  |              | PS72618                 | <a href="#">Samples</a> |
| TPS72618KTTR     | ACTIVE        | DDPAK/<br>TO-263 | KTT                | 5    | 500            | Green (RoHS<br>& no Sb/Br) | CU SN   Call TI         | Level-2-260C-1 YEAR  |              | TPS<br>72618            | <a href="#">Samples</a> |
| TPS72625DCQ      | ACTIVE        | SOT-223          | DCQ                | 6    | 78             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  |              | PS72625                 | <a href="#">Samples</a> |
| TPS72625DCQR     | ACTIVE        | SOT-223          | DCQ                | 6    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-2-260C-1 YEAR  |              | PS72625                 | <a href="#">Samples</a> |
| TPS72625KTTT     | ACTIVE        | DDPAK/<br>TO-263 | KTT                | 5    | 50             | Green (RoHS<br>& no Sb/Br) | CU SN   Call TI         | Level-2-260C-1 YEAR  | -40 to 125   | TPS<br>72625            | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:  
**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of  $\leq 1000$ ppm threshold. Antimony trioxide based flame retardants must also meet the  $\leq 1000$ ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS726126DCQR | SOT-223      | DCQ             | 6    | 2500 | 330.0              | 12.4               | 7.1     | 7.45    | 1.88    | 8.0     | 12.0   | Q3            |
| TPS72615DCQR  | SOT-223      | DCQ             | 6    | 2500 | 330.0              | 12.4               | 7.1     | 7.45    | 1.88    | 8.0     | 12.0   | Q3            |
| TPS72615KTTR  | DDPAK/TO-263 | KTT             | 5    | 500  | 330.0              | 24.4               | 10.6    | 15.6    | 4.9     | 16.0    | 24.0   | Q2            |
| TPS72616DCQR  | SOT-223      | DCQ             | 6    | 2500 | 330.0              | 12.4               | 7.1     | 7.45    | 1.88    | 8.0     | 12.0   | Q3            |
| TPS72616KTTR  | DDPAK/TO-263 | KTT             | 5    | 500  | 330.0              | 24.4               | 10.6    | 15.6    | 4.9     | 16.0    | 24.0   | Q2            |
| TPS72618DCQR  | SOT-223      | DCQ             | 6    | 2500 | 330.0              | 12.4               | 7.1     | 7.45    | 1.88    | 8.0     | 12.0   | Q3            |
| TPS72618KTTR  | DDPAK/TO-263 | KTT             | 5    | 500  | 330.0              | 24.4               | 10.6    | 15.6    | 4.9     | 16.0    | 24.0   | Q2            |
| TPS72625DCQR  | SOT-223      | DCQ             | 6    | 2500 | 330.0              | 12.4               | 7.1     | 7.45    | 1.88    | 8.0     | 12.0   | Q3            |
| TPS72625KTTT  | DDPAK/TO-263 | KTT             | 5    | 50   | 330.0              | 24.4               | 10.6    | 15.6    | 4.9     | 16.0    | 24.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS

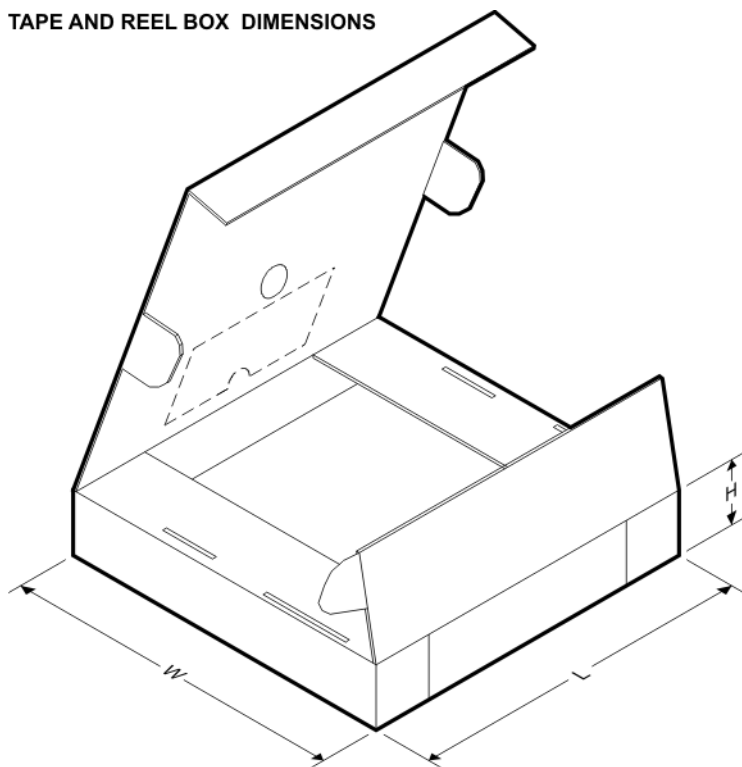


\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS726126DCQR | SOT-223      | DCQ             | 6    | 2500 | 346.0       | 346.0      | 41.0        |
| TPS72615DCQR  | SOT-223      | DCQ             | 6    | 2500 | 346.0       | 346.0      | 29.0        |
| TPS72615KTTR  | DDPAK/TO-263 | KTT             | 5    | 500  | 367.0       | 367.0      | 45.0        |
| TPS72616DCQR  | SOT-223      | DCQ             | 6    | 2500 | 346.0       | 346.0      | 41.0        |
| TPS72616KTTR  | DDPAK/TO-263 | KTT             | 5    | 500  | 367.0       | 367.0      | 45.0        |
| TPS72618DCQR  | SOT-223      | DCQ             | 6    | 2500 | 346.0       | 346.0      | 41.0        |
| TPS72618KTTR  | DDPAK/TO-263 | KTT             | 5    | 500  | 367.0       | 367.0      | 45.0        |
| TPS72625DCQR  | SOT-223      | DCQ             | 6    | 2500 | 346.0       | 346.0      | 41.0        |
| TPS72625KTTT  | DDPAK/TO-263 | KTT             | 5    | 50   | 367.0       | 367.0      | 45.0        |

DCQ (R-PDSO-G6)


## PLASTIC SMALL-OUTLINE

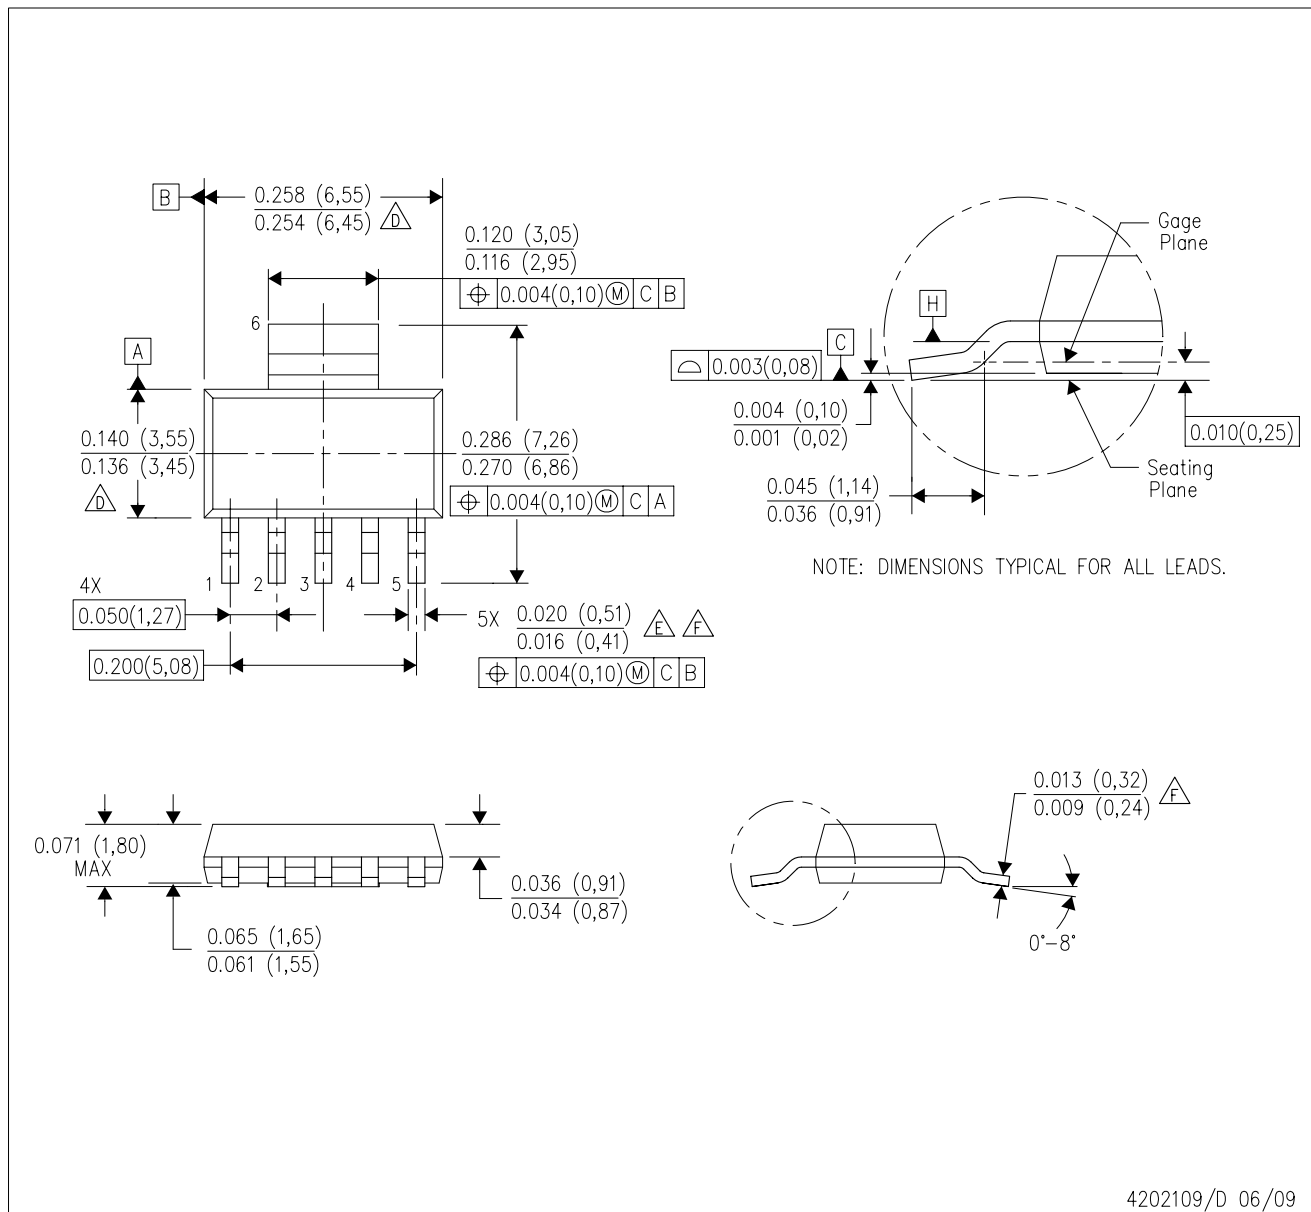

- NOTES:
- |                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| A. All linear dimensions are in inches (millimeters).                                                                                                                                                                                                                                                                                     |  Lead width and thickness dimensions apply to solder plated leads. |
| B. This drawing is subject to change without notice.                                                                                                                                                                                                                                                                                      |                                                                                                                                                       |
| C. Controlling dimension in inches.                                                                                                                                                                                                                                                                                                       | G. Interlead flash allow 0.008 inch max.                                                                                                              |
|  Body length and width dimensions are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs, and interlead flash, but including any mismatch between the top and the bottom of the plastic body. | H. Gate burr/protrusion max. 0.006 inch.                                                                                                              |
|  Lead width dimension does not include dambar protrusion.                                                                                                                                                                                              | I. Datums A and B are to be determined at Datum H.                                                                                                    |

DCQ (R-PDSO-G6)

PLASTIC SMALL OUTLINE

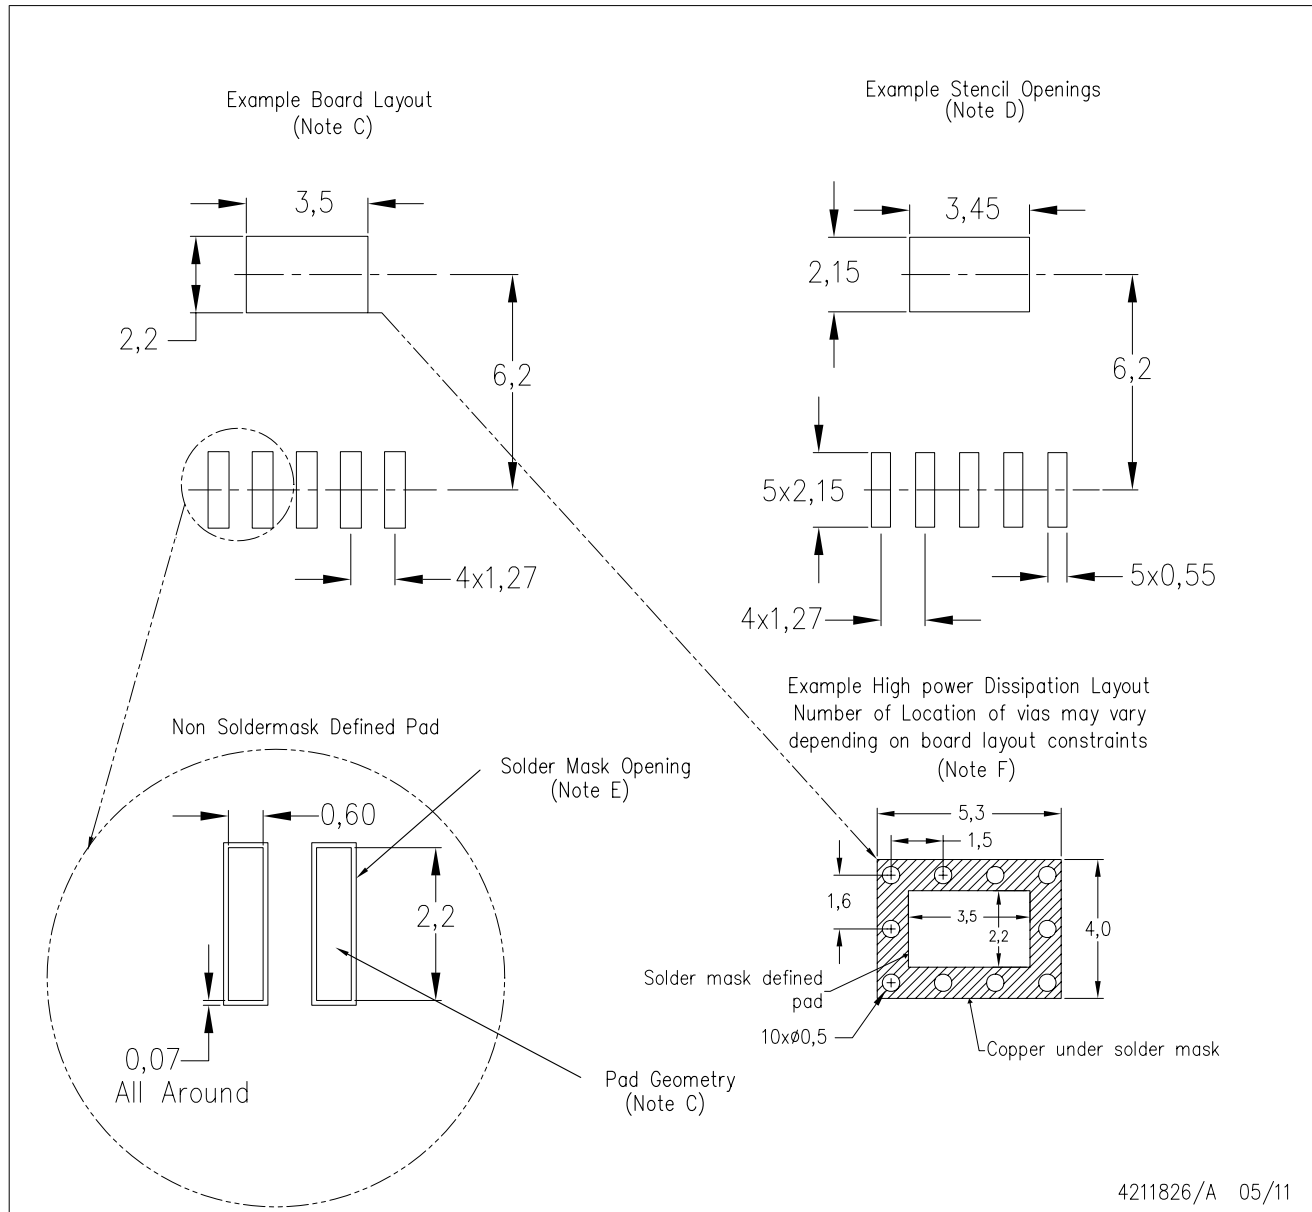


4211826/A 05/11

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-SM-782 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations.
  - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.
  - Please refer to the product data sheet for specific via and thermal dissipation requirements.

KTT (R-PSFM-G5)


PLASTIC FLANGE-MOUNT PACKAGE

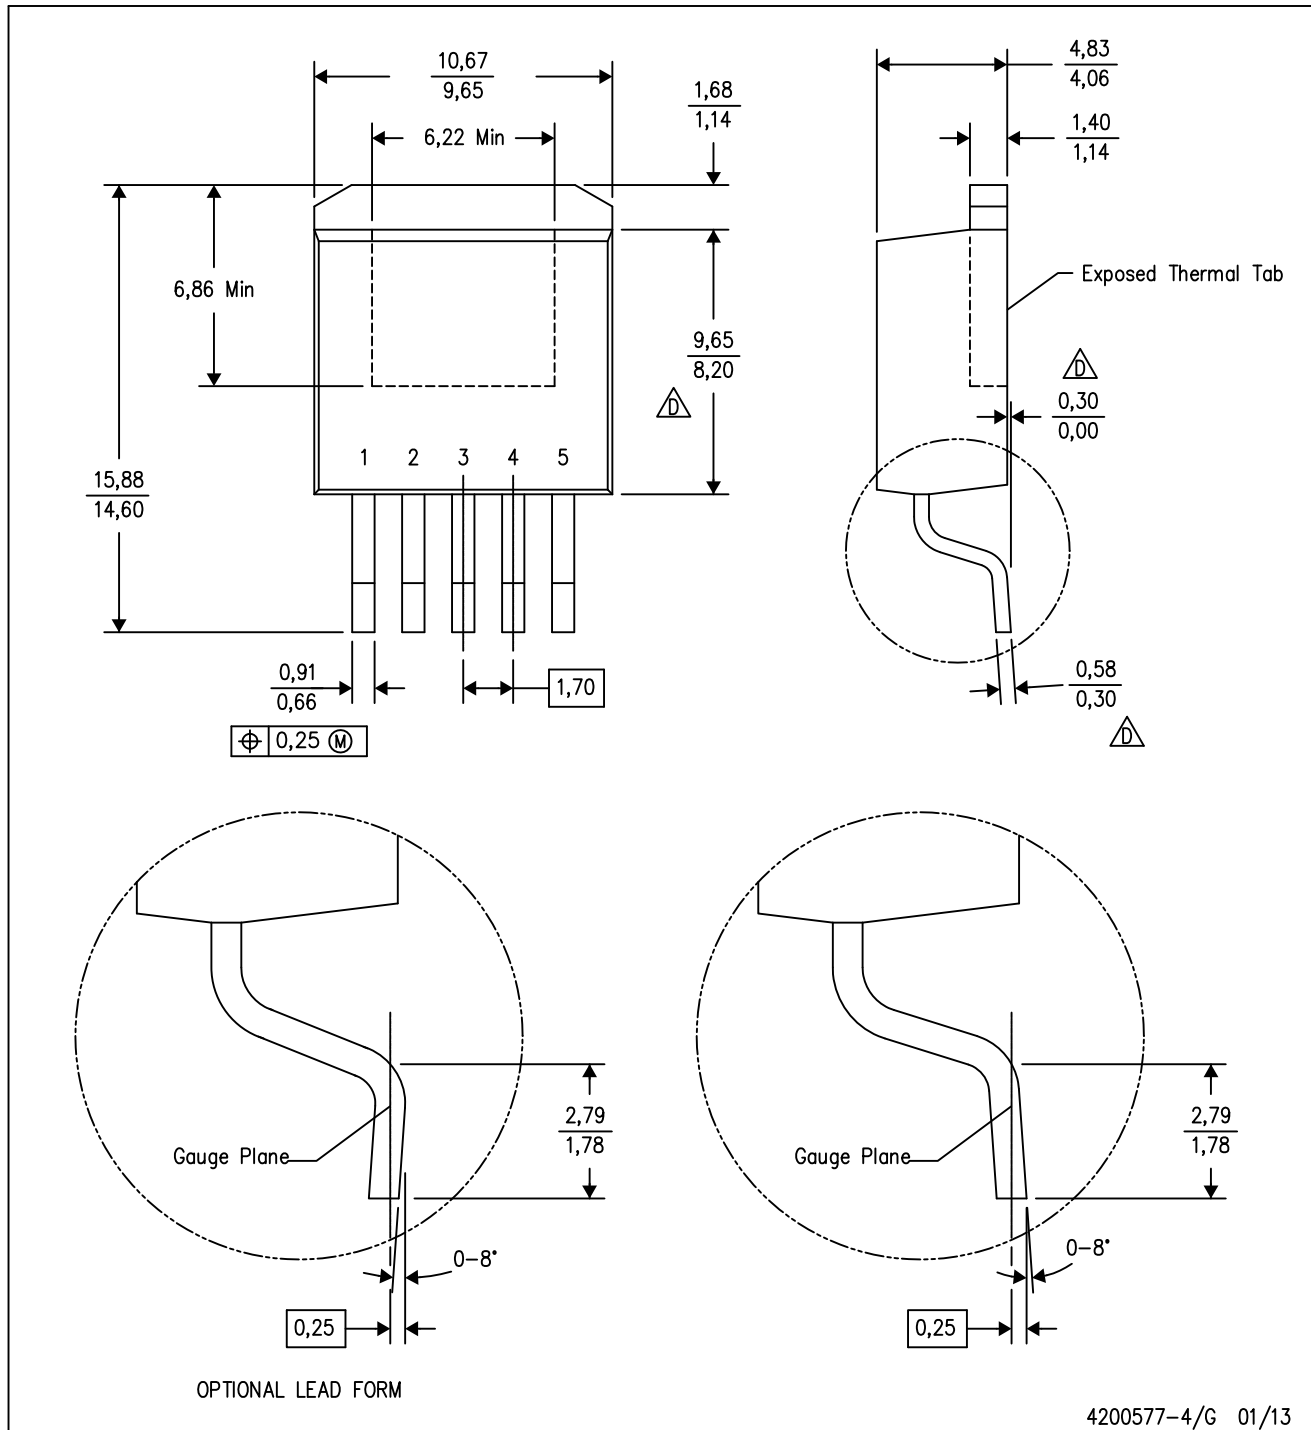

4200577-4/G 01/13

KTT (R-PSFM-G5)

PLASTIC FLANGE-MOUNT PACKAGE

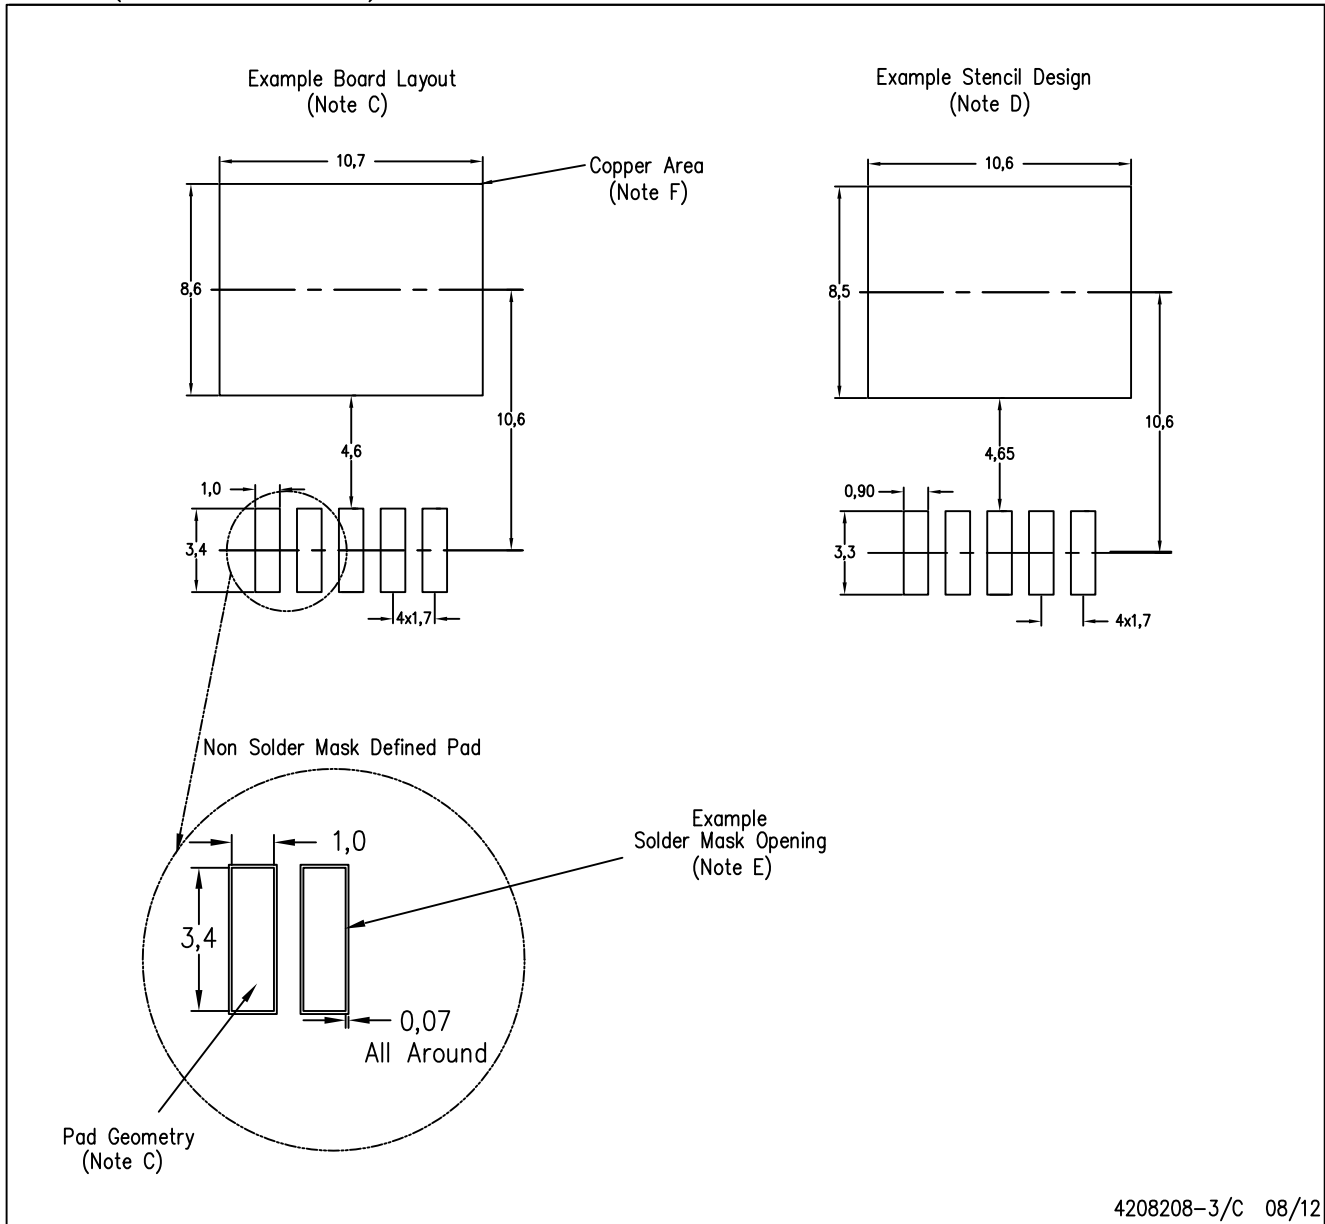

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-SM-782 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.
  - F. This package is designed to be soldered to a thermal pad on the board. Refer to the Product Datasheet for specific thermal information, via requirements, and recommended thermal pad size. For thermal pad sizes larger than shown a solder mask defined pad is recommended in order to maintain the solderable pad geometry while increasing copper area.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2019, Texas Instruments Incorporated

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 View [TPS72618KTTR](#) on WIN SOURCE

 [Texas Instruments](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management