



**THE DATASHEET OF  
ADNS-7700-HCMY**



# ADNS-7700

## One chip USB LaserStream™ Mouse Sensors



### Data Sheet



#### Description

The ADNS-7700 series are compact, low cost, one chip USB LaserStream™ mouse sensors designed for implementation of a non-mechanical tracking engine in computer mice.

This ADNS-7700 sensor is a 22-pin integrated molded lead-frame DIP package. It comprises a USB controller and LaserStream navigation sensor with VCSEL integrated within a single package. It is designed to be used with the ADNS-6180-001 trim lens or ADNS-6180-002 wide trim lens to achieve the LaserStream performance featured in this document. These parts provide a complete and compact navigation system with no moving parts and precision optical alignment to facilitate high volume assembly. Avago has pre-calibrated the laser power prior shipment, thus NO laser power calibration is required at manufacturer site, therefore reducing assembly time and associated cost.

The motion output is a selectable 8/12/16-bit USB data reporting format. This device is compliant to USB Revision 2.0 low speed specification. The ADNS-7700 series are designed with on-chip One-Time-Programmable (OTP) memory. This enables device configuration flexibility for the manufacturer to cater for various market segments.

#### Theory of Operation

The ADNS-7700 is based on Laser-Stream navigation technology that measures changes in position by optically acquiring sequential surface images (per frames) and mathematically determining the direction and magnitude of motion movement.

It contains an Image Acquisition System (IAS), a Digital Signal Processor (DSP) and USB stream output. The IAS acquires microscopic surface images via the lens. These images are processed by the DSP to determine the direction and distance of motion. The DSP generates the  $\Delta x$  and  $\Delta y$  relative displacement values which are converted to USB motion data.

#### Features

- One chip USB laser mouse sensor with VCSEL integrated in single package
- LaserStream™ navigation technology
- USB 2.0 Low Speed Compliance
- Meets HID Revision 1.11
- Single 5.0 volts power supply
- Compliance to IEC/EN 60825-1 Class 1 Eye Safety
  - Pre-calibrated laser power prior shipment
  - Class 1 eye safety AEL
  - On-chip Laser fault detect circuitry
- High speed motion detection at 45 inches per second (ips) and acceleration up to 20g
- Input buttons: 3 or 5-buttons
- Mechanical Z-Wheel interface for vertical scroll
- On-chip OTP memory for device configuration flexibility without any external software driver:
  - Enable/Disable Tilt-Wheel\* function that supports horizontal scroll in Microsoft Vista OS.
  - 8/12/16-bit USB motion data reporting
  - Resolution
    - Programmable from 400-2400 counts per inch (cpi) with ~100cpi incremental step
    - 3 selections of On-the-Fly (OTF) resolution mode setting
- KeyMap (KM) for keyboard shortcut key
- Customizable VID, PID, Manufacturer string and Product string
- 4-axis sensor rotations: 0°, 90°, 180° or 270°

#### Applications

- Corded laser mice
- Integrated input devices

\* Disclaimer: All designers and manufacturers of this design must assure that they have all necessary intellectual property rights

## Ordering Part Numbers:

| Description for USB LaserStream Mouse Sensor |              |              |                |              |
|--|--------------|--------------|----------------|--------------|
| Part Number                                  | Input Button | Tilt-Wheel   | OTF Resolution | KeyMap       |
| ADNS-7700-H4MY                               | 3-buttons    | Programmable | –              | –            |
| ADNS-7700-HAMY                               | 3-buttons    | Programmable | Programmable   | –            |
| ADNS-7700-HCMY                               | 5-buttons    | Programmable | Programmable   | –            |
| ADNS-7700-HMMY                               | 5-buttons    | Programmable | Programmable   | Programmable |

## Package Pinout

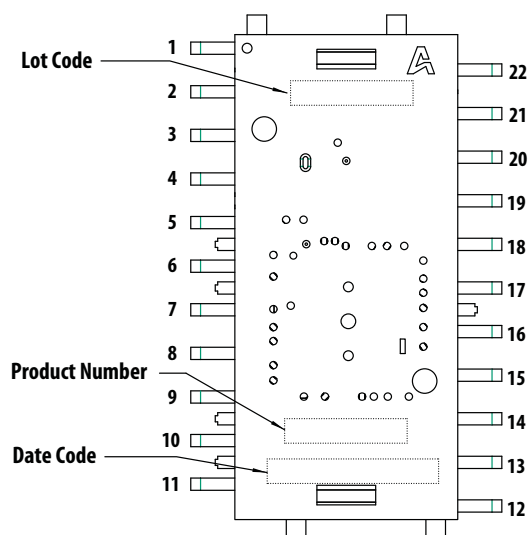


Figure 1. Device Pinout

| Item           | Marking | Remarks  |
|----------------|---------|--|
| Product Number | A7700   |  |
| Date Code      | XYWWZV  | X = Subcon Code<br>YYWW = Date Code<br>Z = Sensor Die Source<br>V = VCSEL Die Source |
| Lot Code       | VVV     | Numeric  |

Table 1. Pin Name Description

| Pin Name  | Description                            | Pin Name | Description                     |
|-----------|--|----------|---------------------------------|
| -VCSEL    | Negative terminal of VCSEL             | B1       | Left button input (LB)          |
| +VCSEL    | Positive terminal of VCSEL             | B2       | Right button input (RB)         |
| D+        | USB D+ line                            | B3       | Middle button input (MB)        |
| D-        | USB D- line                            | B4       | Back button input (BB)          |
| OSC_IN    | Ceramic resonator input                | B5       | Forward button input (FB)       |
| OSC_OUT   | Ceramic resonator output               | TW1*     | Left tilt input                 |
| VDD5      | 5-Volt Power (USB VBUS)                | TW2*     | Right tilt input                |
| DGND      | System ground                          | LED0     | Resolution LED indicator output |
| AGND      | Analog ground                          | LED1     | Resolution LED indicator output |
| LASER_GND | LASER ground                           | LED2     | Resolution LED indicator output |
| REFA      | Reference voltage capacitor            | ZA       | Z-Wheel quadrature input        |
| REFB      | Reference voltage capacitor            | ZB       | Z-Wheel quadrature input        |
| REFC      | Reference coupling                     | KM1      | KeyMap 1 button input           |
| OTF       | OTF Resolution button input            | KM2      | KeyMap 2 button input           |
| OTF_L     | OTF Resolution Long Press button input | NC       | No Connection                   |


**Table 2a. Device Pinout Configurations**

| Pin No | ADNS-7700-H4MY |           | ADNS-7700-HAMY |           |                 |               | ADNS-7700-HCMY |           |           |               |
|--------|----------------|-----------|----------------|-----------|-----------------|---------------|----------------|-----------|-----------|---------------|
|        | 3B             | 3B + TW   | 3B             | 3B + TW   | 3B + OTF + 3LED | 3B + TW + OTF | 5B             | 5B + TW   | 5B + OTF  | 4B + TW + OTF |
| 1      | +VCSEL         | +VCSEL    | +VCSEL         | +VCSEL    | +VCSEL          | +VCSEL        | +VCSEL         | +VCSEL    | +VCSEL    | +VCSEL        |
| 2      | NC             | TW2*      | NC             | TW2*      | LED0            | TW2*          | NC             | TW2*      | OTF       | TW2*          |
| 3      | NC             | TW1*      | NC             | TW1*      | LED1            | TW1*          | NC             | TW1*      | NC        | TW1*          |
| 4      | LASER_GND      | LASER_GND | LASER_GND      | LASER_GND | LASER_GND       | LASER_GND     | LASER_GND      | LASER_GND | LASER_GND | LASER_GND     |
| 5      | REFB           | REFB      | REFB           | REFB      | REFB            | REFB          | REFB           | REFB      | REFB      | REFB          |
| 6      | VDD5           | VDD5      | VDD5           | VDD5      | VDD5            | VDD5          | VDD5           | VDD5      | VDD5      | VDD5          |
| 7      | REFC           | REFC      | REFC           | REFC      | REFC            | REFC          | REFC           | REFC      | REFC      | REFC          |
| 8      | ZA             | ZA        | ZA             | ZA        | ZA              | ZA            | ZA             | ZA        | ZA        | ZA            |
| 9      | ZB             | ZB        | ZB             | ZB        | ZB              | ZB            | ZB             | ZB        | ZB        | ZB            |
| 10     | AGND           | AGND      | AGND           | AGND      | AGND            | AGND          | AGND           | AGND      | AGND      | AGND          |
| 11     | REFA           | REFA      | REFA           | REFA      | REFA            | REFA          | REFA           | REFA      | REFA      | REFA          |
| 12     | DGND           | DGND      | DGND           | DGND      | DGND            | DGND          | DGND           | DGND      | DGND      | DGND          |
| 13     | OSC_OUT        | OSC_OUT   | OSC_OUT        | OSC_OUT   | OSC_OUT         | OSC_OUT       | OSC_OUT        | OSC_OUT   | OSC_OUT   | OSC_OUT       |
| 14     | OSC_IN         | OSC_IN    | OSC_IN         | OSC_IN    | OSC_IN          | OSC_IN        | OSC_IN         | OSC_IN    | OSC_IN    | OSC_IN        |
| 15     | NC             | NC        | NC             | NC        | OTF             | OTF           | B5             | B5        | B5        | OTF           |
| 16     | NC             | NC        | NC             | NC        | LED2            | NC            | B4             | B4        | B4        | B4            |
| 17     | B3             | B3        | B3             | B3        | B3              | B3            | B3             | B3        | B3        | B3            |
| 18     | B2             | B2        | B2             | B2        | B2              | B2            | B2             | B2        | B2        | B2            |
| 19     | B1             | B1        | B1             | B1        | B1              | B1            | B1             | B1        | B1        | B1            |
| 20     | D-             | D-        | D-             | D-        | D-              | D-            | D-             | D-        | D-        | D-            |
| 21     | D+             | D+        | D+             | D+        | D+              | D+            | D+             | D+        | D+        | D+            |
| 22     | -VCSEL         | -VCSEL    | -VCSEL         | -VCSEL    | -VCSEL          | -VCSEL        | -VCSEL         | -VCSEL    | -VCSEL    | -VCSEL        |

**Table 2b. Device Pinout Configurations**

| Pin No | ADNS-7700-HMMY |           |                |                      |                     |                     |                           |
|--------|----------------|-----------|----------------|----------------------|---------------------|---------------------|---------------------------|
|        | 5B             | 5B + TW   | 5B + KM1/OTF_L | 5B + KM1/OTF_L + KM2 | 4B + TW + KM1/OTF_L | 3B + TW + KM1/OTF_L | 3B + TW + KM1/OTF_L + KM2 |
| 1      | +VCSEL         | +VCSEL    | +VCSEL         | +VCSEL               | +VCSEL              | +VCSEL              | +VCSEL                    |
| 2      | NC             | TW2*      | KM1/OTF_L      | KM1/OTF_L            | TW2*                | TW2*                | TW2*                      |
| 3      | NC             | TW1*      | NC             | KM2                  | TW1*                | TW1*                | TW1*                      |
| 4      | LASER_GND      | LASER_GND | LASER_GND      | LASER_GND            | LASER_GND           | LASER_GND           | LASER_GND                 |
| 5      | REFB           | REFB      | REFB           | REFB                 | REFB                | REFB                | REFB                      |
| 6      | VDD5           | VDD5      | VDD5           | VDD5                 | VDD5                | VDD5                | VDD5                      |
| 7      | REFC           | REFC      | REFC           | REFC                 | REFC                | REFC                | REFC                      |
| 8      | ZA             | ZA        | ZA             | ZA                   | ZA                  | ZA                  | ZA                        |
| 9      | ZB             | ZB        | ZB             | ZB                   | ZB                  | ZB                  | ZB                        |
| 10     | AGND           | AGND      | AGND           | AGND                 | AGND                | AGND                | AGND                      |
| 11     | REFA           | REFA      | REFA           | REFA                 | REFA                | REFA                | REFA                      |
| 12     | DGND           | DGND      | DGND           | DGND                 | DGND                | DGND                | DGND                      |
| 13     | OSC_OUT        | OSC_OUT   | OSC_OUT        | OSC_OUT              | OSC_OUT             | OSC_OUT             | OSC_OUT                   |
| 14     | OSC_IN         | OSC_IN    | OSC_IN         | OSC_IN               | OSC_IN              | OSC_IN              | OSC_IN                    |
| 15     | B5             | B5        | B5             | B5                   | KM1/OTF_L           | KM1/OTF_L           | KM1/OTF_L                 |
| 16     | B4             | B4        | B4             | B4                   | B4                  | NC                  | KM2                       |
| 17     | B3             | B3        | B3             | B3                   | B3                  | B3                  | B3                        |
| 18     | B2             | B2        | B2             | B2                   | B2                  | B2                  | B2                        |
| 19     | B1             | B1        | B1             | B1                   | B1                  | B1                  | B1                        |
| 20     | D-             | D-        | D-             | D-                   | D-                  | D-                  | D-                        |
| 21     | D+             | D+        | D+             | D+                   | D+                  | D+                  | D+                        |
| 22     | -VCSEL         | -VCSEL    | -VCSEL         | -VCSEL               | -VCSEL              | -VCSEL              | -VCSEL                    |

\* Disclaimer: All designers and manufacturers of this design must assure that they have all necessary intellectual property rights.

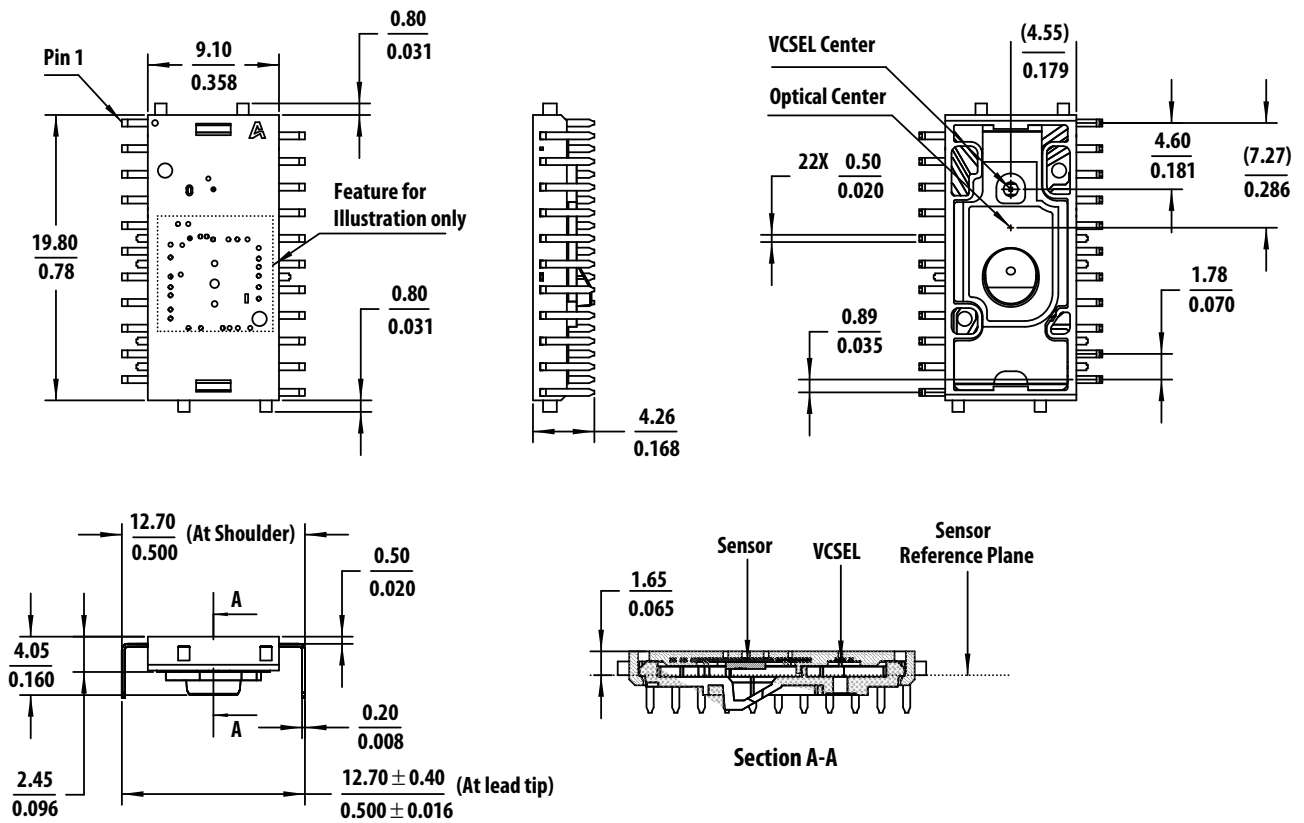

**NOTES: (Unless otherwise specified)**

1. Dimensions in millimeter / inches.
2. Dimensional tolerance:  $\pm 0.1\text{mm}$ .
3. Coplanarity of leads:  $0.1\text{mm}$ .
4. Lead pitch tolerance:  $\pm 0.15\text{mm}$ .
5. Non-cumulative pitch tolerance:  $\pm 0.15\text{mm}$ .
6. Angular tolerance:  $\pm 3^\circ$
7. Maximum flash:  $0.2\text{mm}$ .
8. Chamfer ( $25^\circ \times 2$ ) on the taper side of the lead.
9. Brackets ( ) indicate reference dimension.
10. Document Number: LSR\_SOC\_INT\_22A\_Pkg\_001

Figure 2. Package outline drawing

**CAUTION:** It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation which may be induced by ESD.

# Assembly Drawings


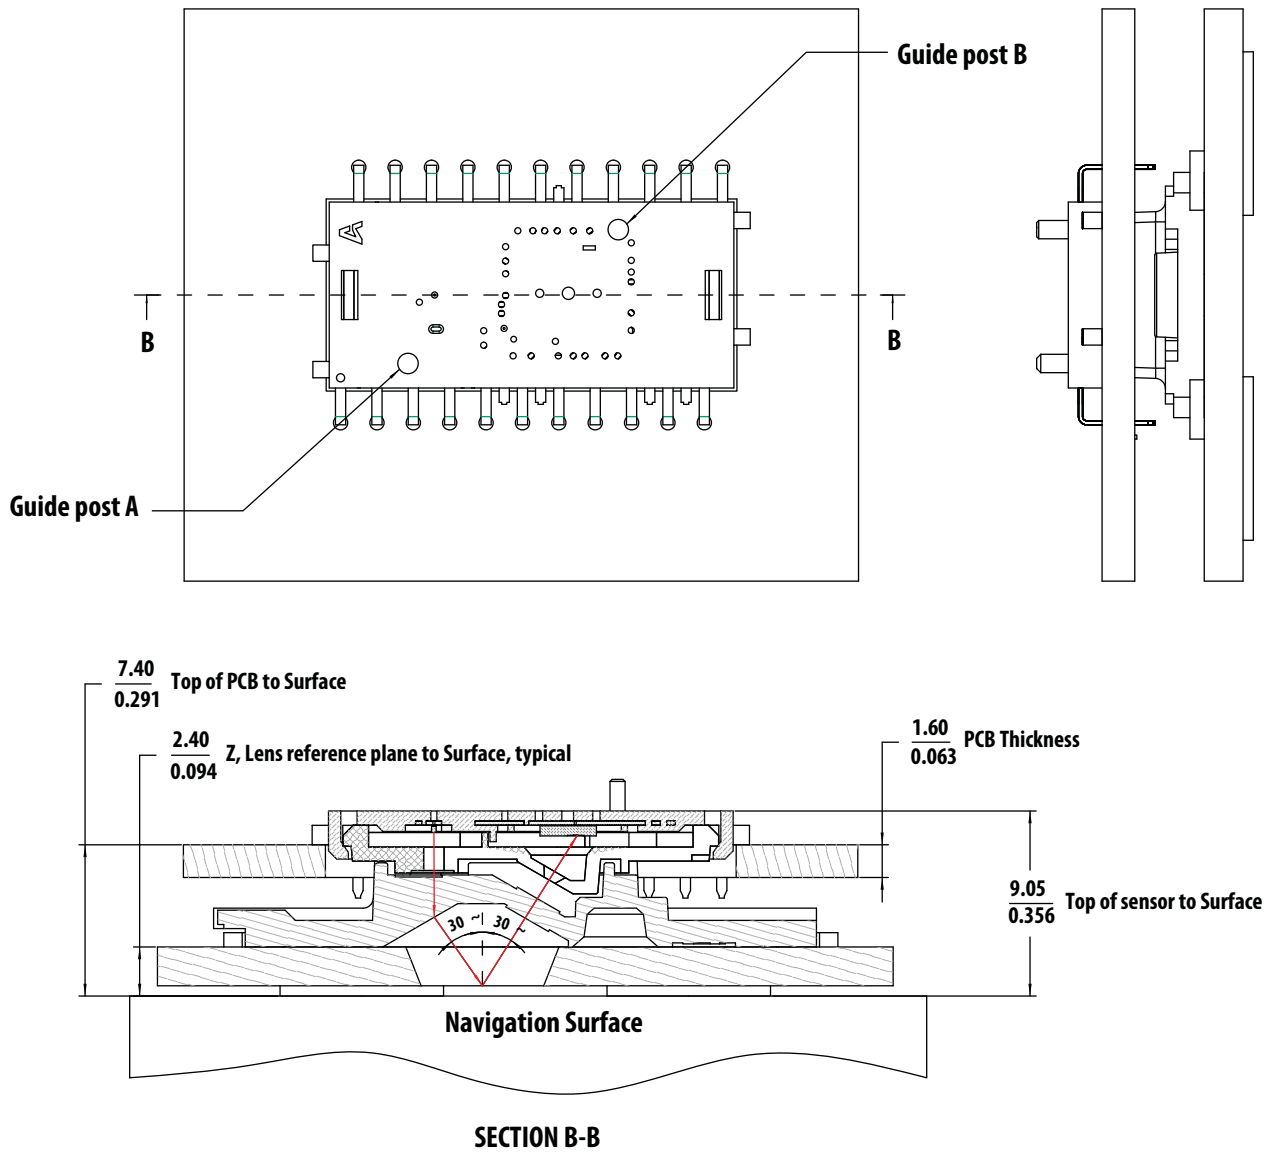


Figure 3. 2D assembly drawing of ADNS-7700 sensor coupled with ADNS-6180-002 lens, PCB & base plate

As shown in Figure 5, the components self-align as they are mounted onto defined features on the base plate. The ADNS-7700 sensor is designed for mounting on a through-hole PCB, looking down. The guide holes in the sensor package mates and self-aligns with the guide posts in the ADNS-6180-001 or ADNS-6180-002 lens.

The integrated VCSEL is used for the illumination, provides a laser diode with a single longitudinal and a single transverse mode. Together with the VCSEL contained in the sensor package, the ADNS-6180-001 or ADNS-6180-002 lens provides directed illumination and optical imaging necessary for the operation of the sensor. The lens is a precision molded optical component and should be handled with care to avoid scratching and contamination on the optical surfaces.

3D drawing files in STEP or IGES format for the sensor, lens and base plate describing the components and base plate molding features for the lens and PCB alignment is available.

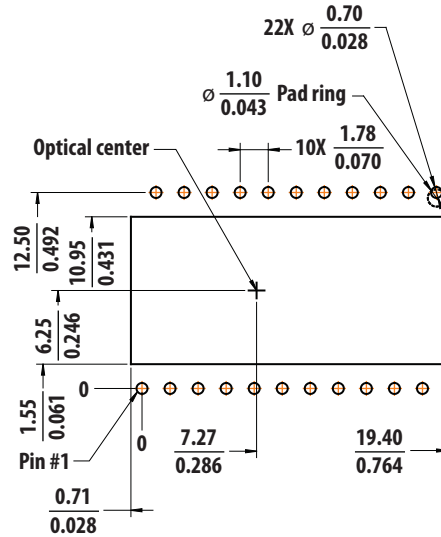

Dimensions in mm/inches

Figure 4. Recommended PCB mechanical cutouts and spacing

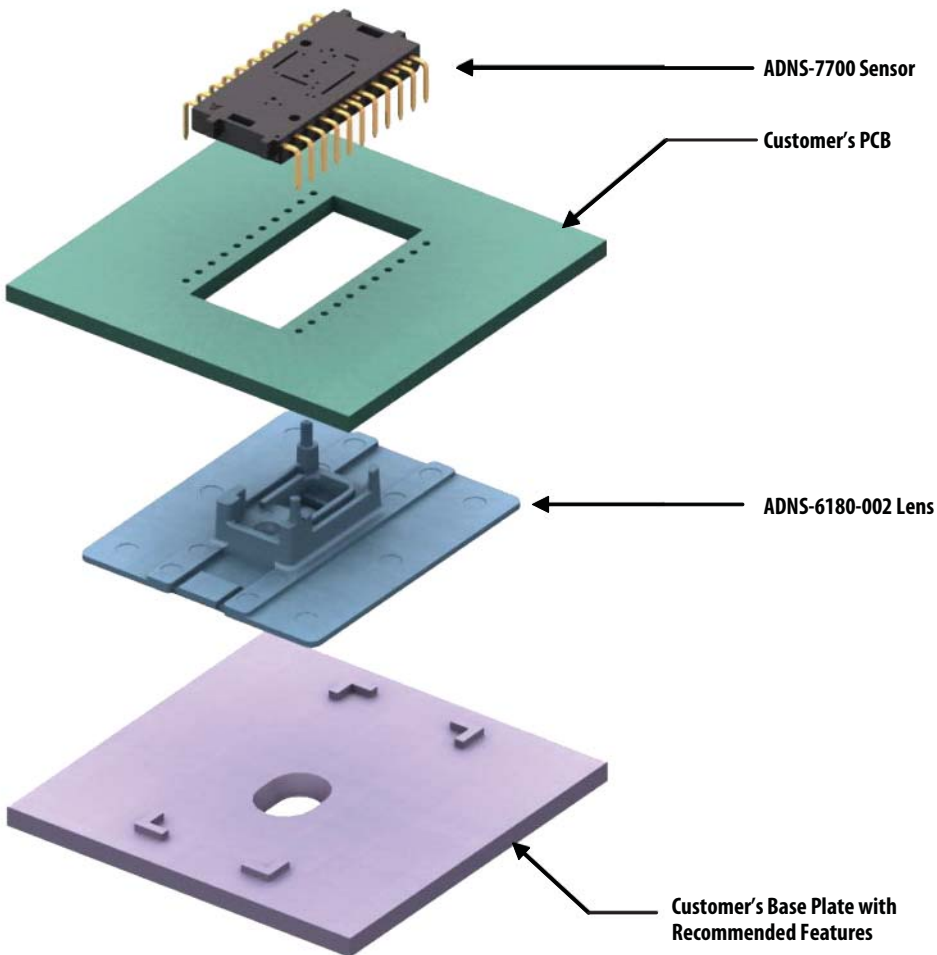


Figure 5. Exploded view drawing of ADNS-7700 sensor coupled with ADNS-6180-002 lens, PCB & base plate

# Application Schematics

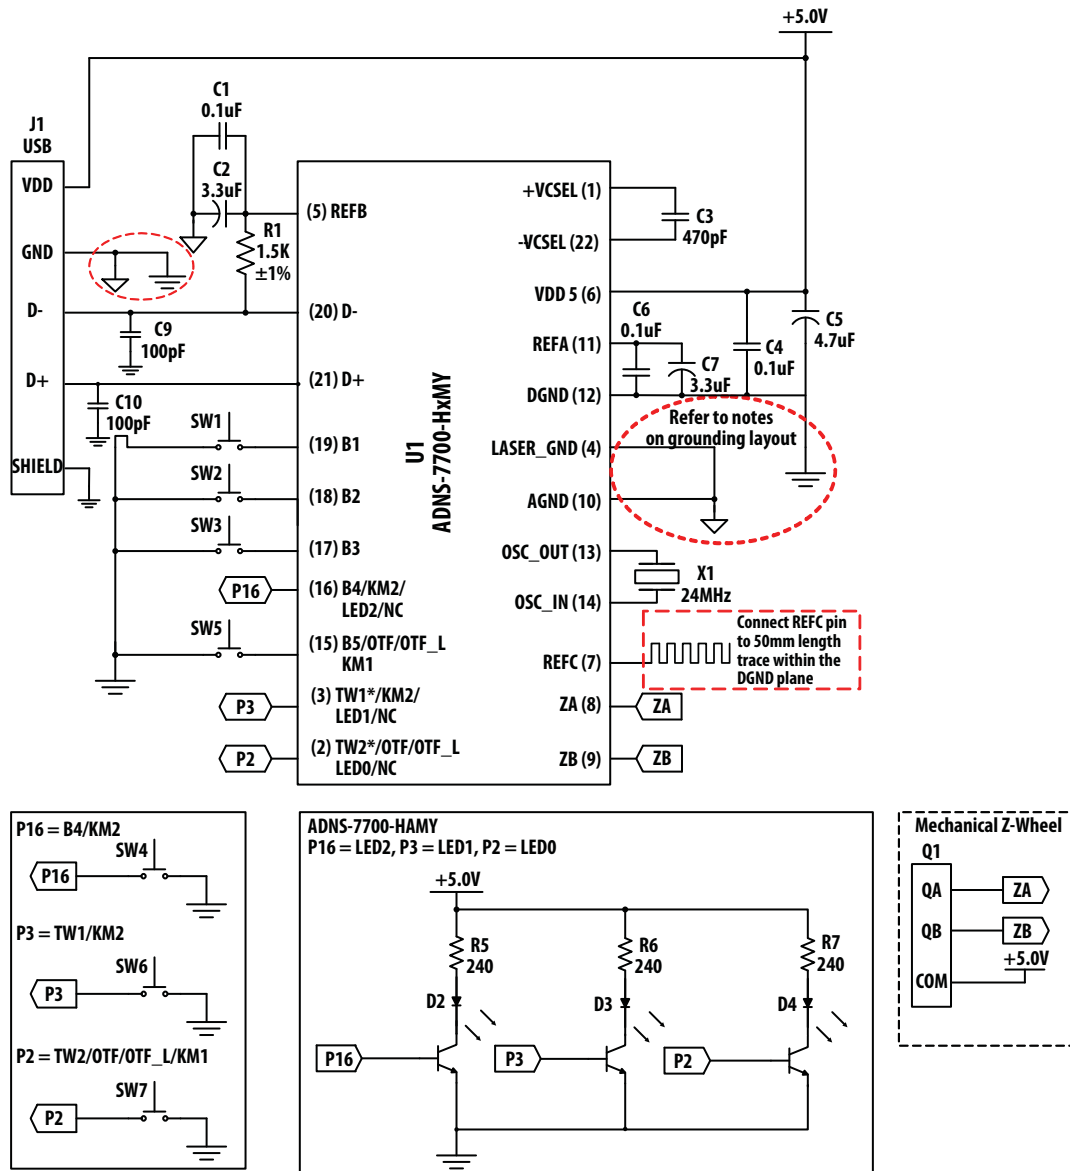


Figure 6. ADNS-7700 Sensor's Application Schematics

\* DISCLAIMER: ALL DESIGNERS AND MANUFACTURERS OF THIS DESIGN MUST ASSURE THAT THEY HAVE ALL NECESSARY INTELLECTUAL PROPERTY RIGHTS.

## PCB Layout Considerations:

1. The DGND and AGND paths *MUST* be layout as far as possible and connected together at the USB ground point with star topology. Ensure large grounding plane on the PCB layout for better performance on ESD and EFTB.
2. All caps *MUST* be as close to VDD5, REFA, REFB & +VCSEL sensor pins as possible and ground at the DGND and AGND plane that connected to USB GND, with trace length less than 5mm.
3. 1.5k $\Omega$  pullup resistor (R1) should be  $\pm$  1% tolerance and connected to REFB pin with shortest possible trace length.
4. Ceramic non-polarity caps and tantalum polarity caps are recommended.
5. Caps should have less than 5nH of self inductance.
6. Caps connected to VDD5 *MUST* have less than 0.2 $\Omega$  ESR.
7. REFC pin requires an open ended trace of min 50 mm lengths within DGND plane for EFTB performance improvement. Refer to System Design Recommendations Application Note.
8. Do not use jumper on ground plane, D+ and D- paths.
9. Data lines (D+ and D-) should be as far as possible from resonator.

## PCB Assembly Considerations

1. Insert the sensor package and all other electrical components into the application PCB. To maintain the Z alignment of sensor package, the sensor reference plane can be sit directly on the PCB.
2. This sensor package is only qualified for wave-solder process.
3. Wave solder the entire assembly in a non-wash solder process utilizing solder fixture. The solder fixture is needed to protect the sensor during the solder process shielding the optical aperture from direct solder contact.
4. Place the lens onto the base plate. Care must be taken to avoid contamination and scratches on the optical surfaces.
5. Hold the PCB vertically and remove the Kapton tape attached to the respective aperture of sensor and VCSEL. During the removal process of Kapton tape, care must be taken to prevent contaminants from entering through the apertures. Do NOT place the PCB facing upwards during the entire mouse assembly process.

6. Place the PCB over the lens onto base plate. The sensor package should be self-aligned and locked to the lens by the lens' alignment guide posts. The optical center reference for the PCB is set by base plate and lens. Note that the PCB movement due to button presses must be minimized to maintain good optical alignment.
7. Optional: The lens can be permanently locked to the sensor package by melting the lens' guide posts over the sensor with heat staking process.
8. Then, install the mouse top case. There *MUST* be feature in the top case (or other area) to press down onto the sensor or PCB assembly to ensure the sensor and lens are interlocked to correct vertical height.

## Design Considerations for Improving ESD Performance

For improved electrostatic discharge performance, typical creepage and clearance distance are shown in the table below. Assumption: base plate construction as per the Avago supplied 3D model file when use with ADNS-6180-001 trim lens or ADNS-6180-002 wide trim lens. The lens flange can be sealed (i.e. glued) to the base plate. Note that the lens material is polycarbonate and therefore, cyanoacrylate based adhesives or other adhesives that may damage the lens should NOT be used.

| Typical Distance (mm) | ADNS-6180-001 trim lens | ADNS-6180-002 wide trim lens |
|-----------------------|-------------------------|------------------------------|
| Creepage              | 5.5                     | 17.5                         |
| Clearance             | 1.8                     | 1.8                          |

## Regulatory Requirements

- Passes FCC B and worldwide analogous emission limits when assembled into a mouse with unshielded cable and following Avago Technologies recommendations.
- Passes EN 61000-4-4/IEC 801-4 EFT tests when assembled into a mouse with shielded cable and following Avago Technologies recommendations.
- Passes IEC-61000-4-2 Electrostatic Discharge Immunity Test (ESD) and provides sufficient ESD creepage/clearance distance to withstand up to 12 kV discharge when assembled into a mouse with ADNS-6180-001 trim lens and up to 15 kV discharge when assembled into a mouse with ADNS-6180-002 wide trim lens.
- Passes IEC/EN 60825-1 Class-1 Eye Safety when ADNS-7700 is driving the laser using ADNS-6180-001 or ADNS-6180-002 lens with recommended operating conditions.

## Block Diagram

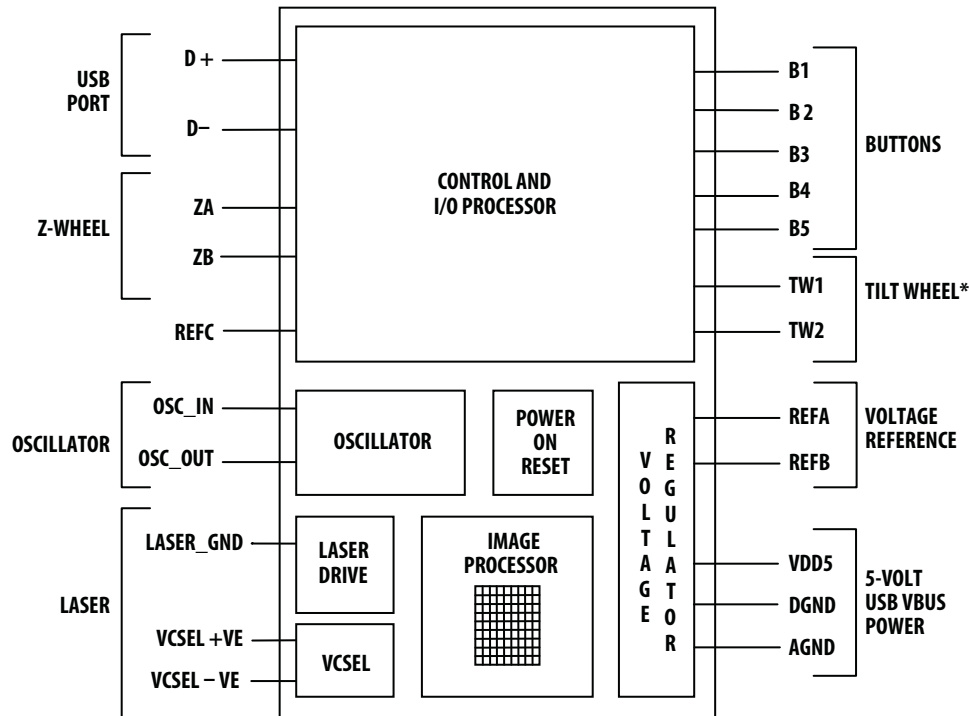


Figure 7. ADNS-7700 Block Diagram

## Eye Safety

ADNS-7700 sensor and the associated components in the schematic of Figure 6 are intended to comply with Class 1 Eye Safety requirements of IEC/EN 60825-1. Avago Technologies calibrate sensor laser output power (LOP) to Class 1 eye safety level prior shipping out, thus no laser output power calibration is required at mouse manufacturer site.

ADNS-7700 sensor is designed to maintain the laser output power using ADNS-6180-002 lens within Class 1 requirements over components manufacturing tolerances under the recommended operating conditions and application circuit of Figure 6 as specified in this document. Under normal operating conditions, the sensor generates the drive current for the VCSEL. Increasing the LOP by other means on hardware and software can result in a violation of the Class 1 eye safety limit of  $716 \mu\text{W}$ . For more information, please refer to Eye Safety Application Note.

## Laser Output Power

The laser output power, LOP can be measured at the navigation surface plane. The sensor can drive the laser in continuous (CW) mode by writing to LSR\_CTRL0 and LSR\_CTRL1 registers via USB Set Vendor test command.

The pre-calibrated LOP value at typical operating supply voltage and temperature of  $25 \pm 5^\circ\text{C}$  should not exceed-

ing  $506 \mu\text{W}$ , otherwise the  $\text{LOP}_{\text{max}}$  limit in the Absolute Maximum Rating is applicable.

The following conditions apply:

1. The system is operated based on the recommended application circuit in Figure 6 and within the recommended operating conditions.
2. Measurement is taken at the optical center and illumination angle on navigation surface plane, Z.
3. No allowance for optical power meter accuracy is assumed.

## Single Fault Detection

ADNS-7700 sensor is able to detect a short circuit or fault condition at the -VCSEL pin, which could lead to excessive laser power output. A path to ground on this pin will trigger the fault detection circuit, which will turn off the laser drive current source and set the LASER\_NEN output high. The system will prevent excess laser power for a resistive path to ground at -VCSEL by shutting off the laser. In addition to the ground path fault detection described above, the fault detection circuit is continuously checking for proper operation by internally generating a path to ground with the laser turned off via LASER\_NEN. If the -VCSEL pin is shorted internally to VDD3 or externally to REFB, this test will fail and will be reported as a fault.

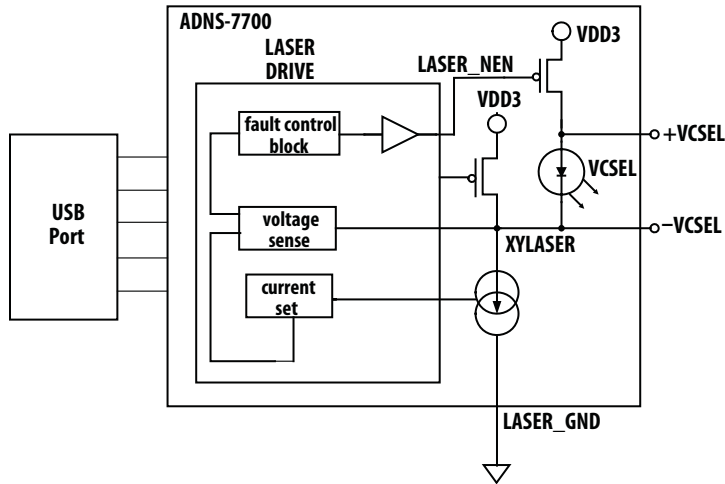


Figure 8. Single Fault Detection and Eye Safety Feature Block Diagram

### Absolute Maximum Ratings

| Parameter                   | Symbol      | Minimum | Maximum      | Units | Notes  |
|-----------------------------|-------------|---------|--------------|-------|--|
| Storage Temperature         | $T_S$       | -40     | 85           | °C    |  |
| Lead Solder Temperature     |             |         | 260          | °C    | For 7 seconds, 1.6mm below seating plane. Refer to soldering reflow profile in PCB Assembly & Soldering Considerations Application Note AN 5023. |
| Supply Voltage              | $V_{DD}$    | -0.5    | 5.5          | V     |  |
| ESD                         |             |         | 2            | kV    | All pins, human body model   |
| Input Voltage               | $V_{IN}$    | -0.5    | $V_{DD}+0.5$ | V     | All I/O pins except OSC_IN and OSC_OUT, D+, D-   |
| Input Voltage               | $V_{IN}$    | -1.0    | 4.6          | V     | D+, D-, AC waveform, see USB specification (7.1.1)   |
| Input Voltage               | $V_{IN}$    | -0.5    | 3.6          | V     | OSC_IN and OSC_OUT   |
| Input Short Circuit Voltage | $V_{SC}$    | 0       | $V_{DD}$     | V     | D+, D-, see USB specification (7.1.1)  |
| Laser Output Power          | $LOP_{max}$ |         | 716          | μW    | Class 1 eye safety AEL with ADNS-6180-001 or ADNS-6180-002 lens  |

Comments:

1. Stress greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are the stress ratings only and functional operation of the device at these or any other condition beyond those indicated for extended period of time may affect device reliability.
2. The inherent design of this component causes it to be sensitive to electrostatic discharge. The ESD threshold is listed above. To prevent ESD-induced damage, take adequate ESD precautions when handling this product.

## Recommended Operating Conditions

| Parameter                                     | Symbol    | Minimum | Typical | Maximum | Units    | Notes  |
|---|-----------|---------|---------|---------|----------|--|
| Operating Temperature                         | $T_A$     | 0       |         | 40      | °C       |  |
| Power Supply Voltage                          | $V_{DD}$  | 4.4     | 5.0     | 5.25    | Volts    | For accurate navigation and proper USB operation |
| Power Supply Rise Time                        | $V_{RT}$  | 0.1     |         | 100     | ms       |  |
| Power Supply Noise                            | $V_N$     |         |         | 100     | mVp-p    | Peak to peak within 50kHz-100MHz bandwidth       |
| Velocity                                      | $V_{el}$  |         | 45      |         | ips      |  |
| Acceleration                                  | $Acc$     |         |         | 20      | g        | In Run Mode only                                 |
| Clock Frequency                               | $f_{clk}$ | 23.64   | 24.00   | 24.36   | MHz      | Due to USB timing constraints                    |
| Resonator Impedance                           | $X_{RES}$ |         |         | 55      | $\Omega$ |  |
| Distance from lens reference plane to surface | $Z$       | 2.18    | 2.40    | 2.62    | mm       | See Figure 9                                     |
| Frame Rate                                    |           |         | 8000    |         | fps      | Internally adjusted by sensor                    |
| VCSEL's Peak Wavelength                       | $\lambda$ | 832     |         | 865     | nm       |  |

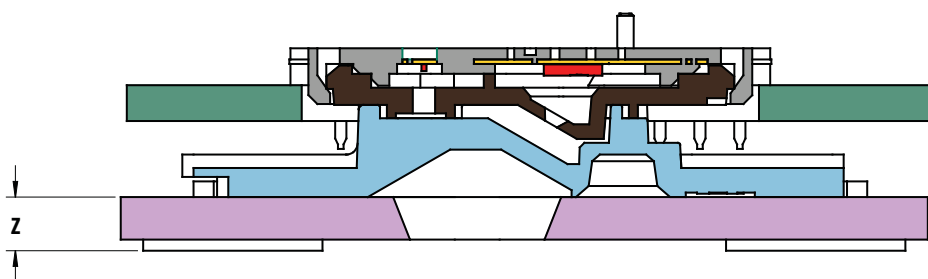


Figure 9. Distance from lens reference plane to object surface, Z

## AC Electrical Specifications

Electrical Characteristics over recommended operating conditions. Typical values at 25°C,  $V_{DD}=5.0$  V.

| Parameter                                 | Symbol     | Min. | Typical | Max. | Units | Notes  |
|---|------------|------|---------|------|-------|--|
| Wakeup delay from rest mode due to motion | $T_{WUPP}$ |      |         | 2    | ms    |  |
| Power up delay                            | $T_{PUP}$  |      |         | 50   | ms    | Delay measured from $V_{BUS}=4.4V$   |
| Debounce delay on button inputs           | $T_{DBB}$  |      | 6       | 9    | ms    |  |
| Z-Wheel sampling period                   | $T_{SW}$   | 1.9  | 2.0     | 2.8  | ms    | ZA & ZB Pins   |
| Transient Supply Current                  | $I_{DDT}$  |      |         | 75   | mA    | Max supply current during a $V_{DD}$ ramp from 0 to 5.0 V with $> 500\mu s$ rise time. Does not include charging currents for bypass capacitors. |

## DC Electrical Specifications

Electrical Characteristics over recommended operating conditions. Typical values at 25°C, V<sub>DD</sub>=5.0 V,

| Parameter   | Symbol            | Minimum                | Typical | Maximum               | Units | Notes                          |
|---|-------------------|------------------------|---------|-----------------------|-------|--------------------------------|
| Run Mode System Current (Mouse moving)                  | I <sub>DD5</sub>  |                        |         | 100                   | mA    | Includes laser current on      |
| Rest Mode System Current (Mouse not moving)             | I <sub>DD5N</sub> |                        |         | 100                   | mA    | Includes laser current         |
| USB Suspend Mode System Current (Remote Wakeup Enabled) | I <sub>DD5S</sub> |                        |         | 500                   | μA    | Includes D- pullup resistor    |
| Input Low Voltage                                       | V <sub>IL</sub>   |                        |         | 0.5                   | V     | Pins: ZA, ZB                   |
|   |                   |                        |         | 0.2*V <sub>REFB</sub> | V     | Pins: B1-B5, TW1, TW2          |
| Input High Voltage                                      | V <sub>IH</sub>   | 0.6*V <sub>DD</sub>    |         |                       | V     | Pins: ZA, ZB                   |
|   |                   | 0.8* V <sub>REFB</sub> |         |                       | V     | Pins: B1-B5, TW1, TW2          |
| Input Hysteresis  | V <sub>HYST</sub> |                        | 230     |                       | mV    | Pins: B1-B5, TW1, TW2          |
| Button Pull Up Current                                  | B <sub>IOUT</sub> | 100                    | 300     | 500                   | μA    | Pins: B1-B5, TW1, TW2          |
| Regulator output, REFA                                  | V <sub>REFA</sub> | 1.55                   | 1.8     | 2.05                  | V     | Typical operation current load |
| Regulator output, REFB                                  | V <sub>REFB</sub> | 3.0                    | 3.3     | 3.6                   | V     | Typical operation current load |

## USB Electrical Specifications

Electrical Characteristics over recommended operating conditions.

| Parameter                            | Symbol            | Minimum | Maximum | Units | Notes  |
|--------------------------------------|-------------------|---------|---------|-------|--|
| Output Signal Crossover Voltage      | V <sub>CRS</sub>  | 1.5     | 2.0     | V     | C <sub>L</sub> = 200 to 600 pF (see Figure 10)                           |
| Input Signal Crossover Voltage       | V <sub>ICRS</sub> | 1.2     | 2.1     | V     | C <sub>L</sub> = 200 to 600 pF (see Figure 10)                           |
| Output High                          | V <sub>OH</sub>   | 2.8     | 3.6     | V     | with 15kΩ to Ground and 1.5kΩ to V <sub>REFB</sub> on D- (see Figure 10) |
| Output Low                           | V <sub>OL</sub>   | 0.0     | 0.3     | V     | with 15kΩ to Ground and 1.5kΩ to V <sub>REFB</sub> on D- (see Figure 10) |
| Single Ended Output                  | V <sub>SE0</sub>  |         | 0.8     | V     |  |
| Input High (Driven)                  | V <sub>IH</sub>   | 2.0     |         | V     |  |
| Input High (Floating)                | V <sub>IHZ</sub>  | 2.7     | 3.6     | V     |  |
| Input Low                            | V <sub>IL</sub>   |         | 0.8     | V     | 1.5kΩ to V <sub>REFB</sub> on D-   |
| Differential Input Sensitivity       | V <sub>DI</sub>   | 0.2     |         | V     | {(D+)-(D-)}  See Figure 12   |
| Differential Input Common Mode Range | V <sub>CM</sub>   | 0.8     | 2.5     | V     | Includes V <sub>DI</sub> , See Figure 12                                 |
| Single Ended Receiver Threshold      | V <sub>SE</sub>   | 0.8     | 2.0     | V     |  |
| Transceiver Input Capacitance        | C <sub>IN</sub>   |         | 12      | pF    | D+ to V <sub>BUS</sub> , D- to V <sub>BUS</sub>                          |

## USB Timing Specifications

Timing Specifications over recommended operating conditions.

| Parameter  | Symbol       | Minimum | Maximum | Units   | Notes  |
|--|--------------|---------|---------|---------|--|
| D+/D- Transition rise time   | $T_{LR}$     | 75      |         | ns      | $C_L = 200$ pF (10% to 90%), see Figure 10   |
| D+/D- Transition rise time   | $T_{LR}$     |         | 300     | ns      | $C_L = 600$ pF (10% to 90%), see Figure 10   |
| D+/D- Transition fall time   | $T_{LF}$     | 75      |         | ns      | $C_L = 200$ pF (90% to 10%), see Figure 10   |
| D+/D- Transition fall time   | $T_{LF}$     |         | 300     | ns      | $C_L = 600$ pF (90% to 10%), see Figure 10   |
| Rise and Fall time matching  | $T_{LRFM}$   | 80      | 125     | %       | $T_R/T_F$ ; $C_L = 200$ pF; Excluding the first transition from the Idle State           |
| Wakeup delay from USB suspend mode due to buttons push                           | $T_{WUPB}$   |         | 17      | ms      | Delay from button push to USB operation<br>Only required if remote wakeup enabled        |
| Wakeup delay from USB suspend mode due to buttons push until accurate navigation | $T_{WUPN}$   |         | 50      | ms      | Delay from button push to navigation operation<br>Only required if remote wakeup enabled |
| USB reset time   | $T_{reset}$  | 18.7    |         | $\mu$ s |  |
| Data Rate  | $t_{LDRATE}$ | 1.4775  | 1.5225  | Mb/s    | Average bit rate, 1.5 Mb/s +/- 1.5%  |
| Receiver Jitter Tolerance  | $t_{DJR1}$   | -75     | 75      | ns      | To next transition, see Figure 13  |
| Receiver Jitter Tolerance  | $t_{DJR2}$   | -45     | 45      | ns      | For paired transitions, see Figure 13  |
| Differential to EOP Transition Skew  | $t_{LDEOP}$  | -40     | 100     | ns      | See Figure 14  |
| EOP Width at Receiver  | $t_{LEOPR}$  | 670     |         | ns      | Accepts EOP, see Figure 14   |
| Source EOP Width   | $t_{LEOPT}$  | 1.25    | 1.50    | $\mu$ s |  |
| Width of SE0 interval during Differential Transition                             | $t_{LST}$    |         | 210     | ns      | See Figure 11.   |
| Differential Output Jitter   | $t_{UDJ1}$   | -95     | 95      | ns      | To next transition, see Figure 15  |
| Differential Output Jitter   | $t_{UDJ2}$   | -150    | 150     | ns      | For paired transitions, see Figure 15  |

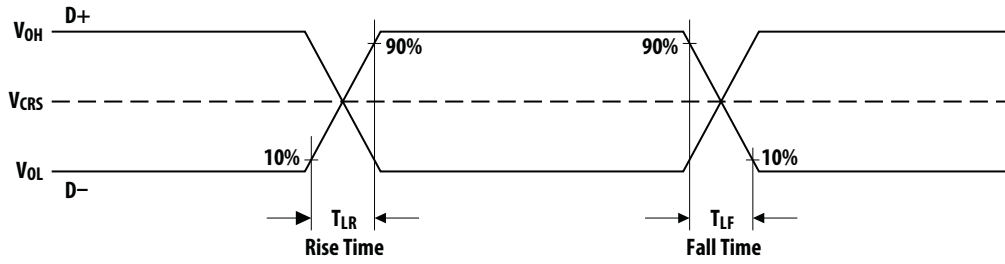


Figure 10. Data Signal Rise and Fall Times

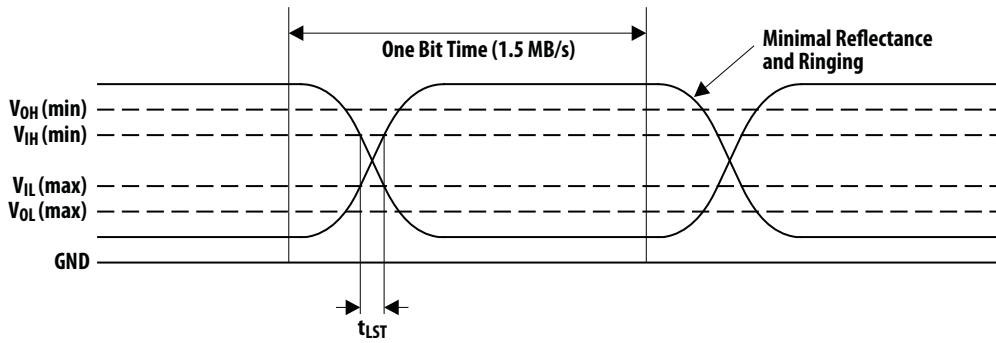


Figure 11. Data Signal Voltage Levels

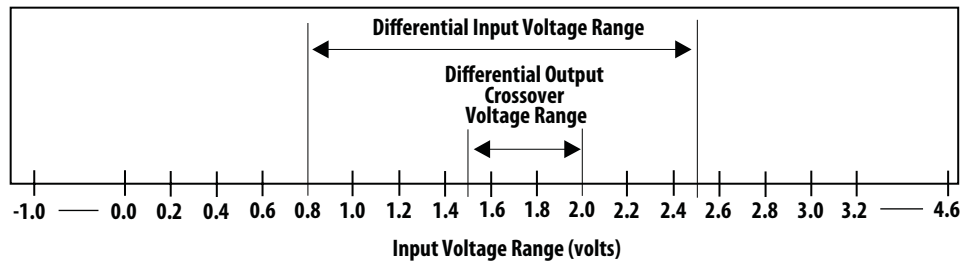


Figure 12. Differential Receiver Input Sensitivity vs. Common Mode Input Range

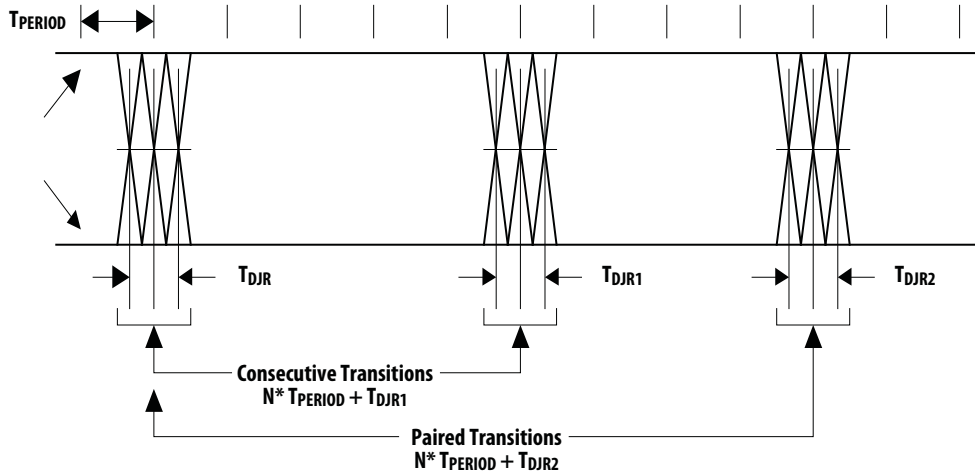


Figure 13. Receiver Jitter Tolerance

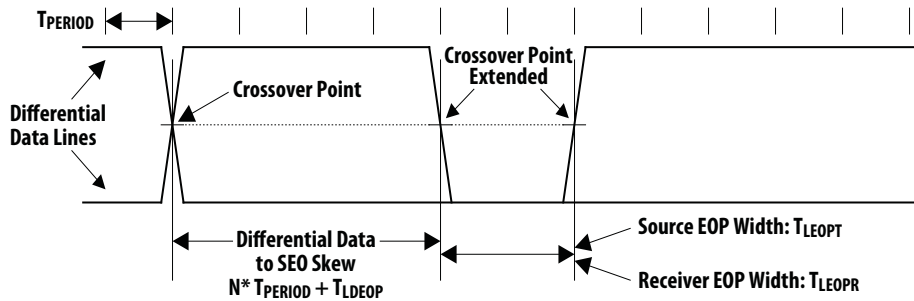


Figure 14. Differential to EOP Transition Skew and EOP Width

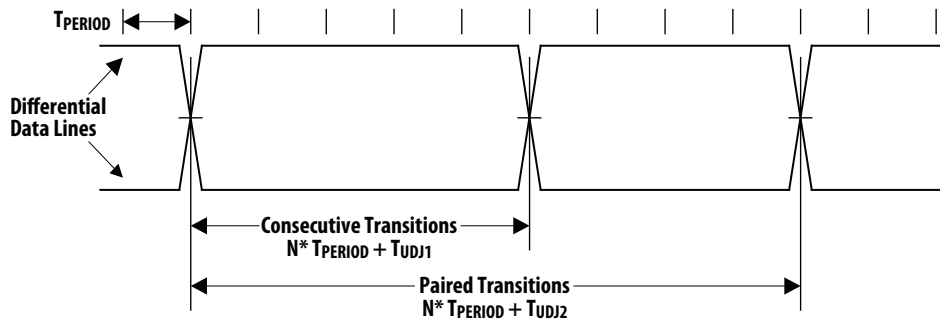


Figure 15. Differential Output Jitter

## One-Time-Programmable (OTP) Memory

The on chip OTP memory allows device configuration flexibility to override the default setting of ADNS-7700 sensors without any external software driver. Once the OTP operation is enabled, all OTP registers must be programmed accordingly as the default values of un-program OTP registers are always zero when L2\_USE\_OTP register setting is not zero value. Tips: OTP write to the OTP register can be skipped if the setting is zero value (0x00) in order to save the OTP programming time.

OTP address space is from 0x80 to 0xFE. OTP can be programmed via USB interface using Set Vendor Test and Get Vendor Test commands.

## OTP Byte Write Operation

OTP write operation flow chart is shown in Figure 16.

1. Set OTP enable bit in OTP\_CONFIG register, 0x4C: OTP\_EN = 1.
2. Write the OTP register address byte to OTP\_ADDR register, 0x4D.
3. Write the OTP data byte to OTP\_DATA register, 0x4E.
4. Set write enable bit in OTP\_CTRL register, 0x4F to enable write command to OTP: WR = 1.
5. Read the write enable bit status in OTP\_CTRL register, 0x4F. If WR = 1, repeat reading the bit status until it is clear.
6. Read the write status bit in OTP\_CTRLSTAT register, 0x50.
  - a. If WR\_OK = 1, OTP write operation is completed. Repeat Step 2 for more OTP byte write operations.
  - b. If WR\_OK = 0, repeat Step 4.
7. If Step 6b is repeated up to 10 times, OTP write operation is failed and the chip is confirmed as defective unit.

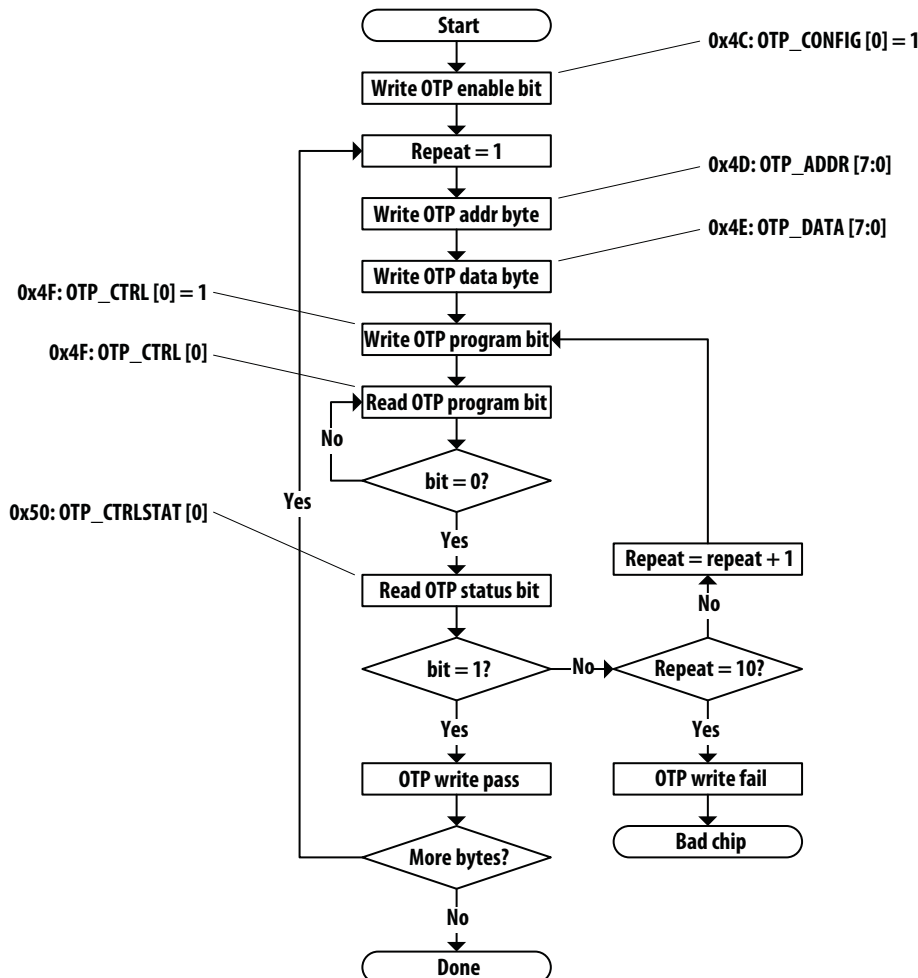


Figure 16. OTP Byte Write Flow Chart

## OTP Byte Read Operation

OTP read operation flow chart is shown in Figure 17.

1. Set OTP enable bit in OTP\_CONFIG register, 0x4C: OTP\_EN = 1.
2. Write the OTP register address byte to OTP\_ADDR register, 0x4D.
3. Set read enable bit in OTP\_CTRL register, 0x4F to enable write command to OTP: RD = 1.
4. Read the read enable bit status in OTP\_CTRL register, 0x4F. If RD = 1, repeat reading the bit status until it is clear.
5. Read the OTP data byte from OTP\_DATA register, 0x4E to complete the OTP read operation.
6. Repeat Step 2 for more OTP read operations.

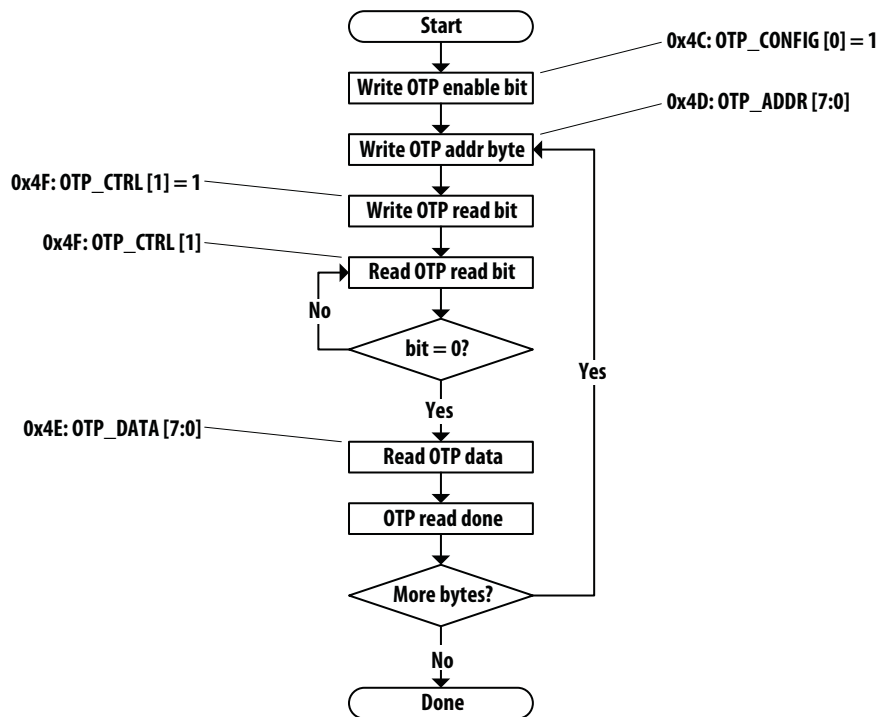


Figure 17. OTP Byte Read Flow Chart

## OTP Lock Operation

OTP lock operation MUST be performed once OTP write to OTPLOCK2 register for the sensor to function. DO not reset or power up the chip right after OTP write to OTPLOCK2 register, otherwise the chip will be malfunction. The OTP lock operation flow chart is shown in Figure 18.

1. After OTP write to OTPLOCK2 register, set OTP enable bit in OTP\_CONFIG register, 0x4C: OTP\_EN = 1.
2. Set OTP lock bit in OTP\_CTRL register, 0x4F to enable OTP lock command: LOCK\_L2 = 1.

3. Read the OTP lock bit status in OTP\_CTRL register, 0x4F. If LOCK\_L2 = 1, repeat reading the bit status until it is clear.
4. Read the lock status and CRC bits in OTP\_CTRLSTAT register, 0x50.
  - a. If both L2\_LOCK\_OK and L2\_CRC\_OK = 1, OTP lock operation is completed.
  - b. If either L2\_LOCK\_OK or L2\_CRC\_OK = 0, repeat Step 2 until both bits are set.
5. If Step 4b is repeated up to 10 times, OTP lock operation is failed and the chip is confirmed as defective unit.

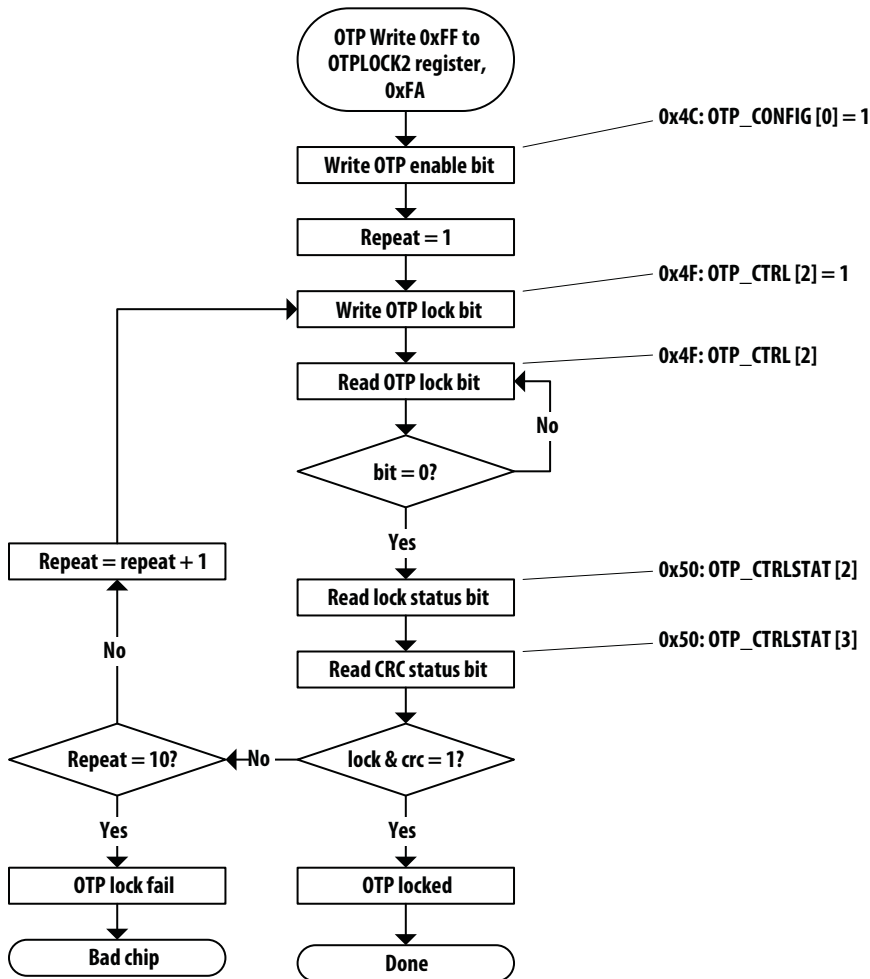


Figure 18. OTP Byte Lock Flow Chart

## Buttons and Tilt Wheel

The minimum time between button presses is  $T_{DBB}$ . Buttons, B1 through B5 and Tilt Wheel are connected to a Schmidt trigger input with  $100\mu\text{A}$  current sources pulling up to +5.0V during run, rest and USB suspend modes.

The tilt wheel feature can be enabled or disabled via OTP register. **All designers and manufacturers of final product with tilt wheel enabled must assure that they have all necessary intellectual property rights.**

## Debounce Algorithm

- Button inputs B1, B2, B3, B4, B5, TW1 and TW2 are sampled every 2ms.
- Three consecutive low values create a button press event.
- Three consecutive high values create a button release event.

## Z-Wheel

ADNS-7700 is designed to be used with mechanical Z-Wheel for vertical scrolling. The Z-Wheel reporting format which determines the vertical scroll resolution is Z/2 as most of the commonly available mechanical Z-Wheel encoders come with lower sensitivity.

## On-the-Fly (OTF) Resolution Mode

The ADNS-7700-HAMY, ADNS-7700-HCMY and ADNS-7700-HMMY sensors are enhanced with programmable On-the-Fly (OTF) resolution mode, which user is able to switch resolution setting anytime with OTF button click. OTF mode can be activated from OTP register 0xC1 by writing either 01 or 10 to OTF [1:0]. When OTF [1:0] = 00 or 11, the resolution setting is fixed as per CPI\_SET0 register configuration. Refer to Table 4 on the configurable options.

Every OTF button click triggers the change of resolution setting from current state to next state. The OTF state machine as shown in Figure 19 implements in the sequence of S0: CPI\_SET0, S1: CPI\_SET1 and S2: CPI\_SET2 in a cycle. The default state upon ADNS-7700 sensor power up is always at S0.

For ADNS-7700-HAMY sensor, the OTF state can be displayed with LED indication via LED0, LED1 and LED2 pins. LED0, LED1 and LED2 are active high output and can be connected to the base of a NPN bi-polar junction transistor (BJT) which when ON connects VDD to the LED.

The button click for OTF mode in ADNS-7700-HMMY requires long press. The long press timing is configurable via LONGPRESS register, 0xC6 with default timing of 0.256s.

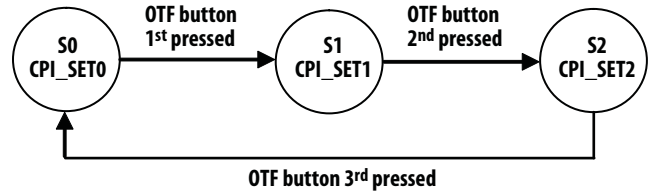


Figure 19. OTF Resolution Mode State Machine

Table 3. OTF LED Indication Status for ADNS-7700-HAMY

| State Sequence |         | Current State Status |      |      |
|----------------|---------|----------------------|------|------|
| Previous       | Current | LED0                 | LED1 | LED2 |
| S2             | S0      | High                 | Low  | Low  |
| S0             | S1      | Low                  | High | Low  |
| S1             | S2      | Low                  | Low  | High |

## KeyMap (KM)

KeyMap mode enables B4, B5, TW1 or TW2 button to be assigned as keyboard shortcut key. Thus, the sensor can be customized to implement standard Microsoft keyboard shortcut keys or special shortcut keys used in different applications, eg. Office, CAD, PC Games, etc. Table 3 shows the configuration of KM1 and KM2 pins in KeyMap mode. KM [1:0] bits in DEVCONFIG register, 0xC1 must complement to each other in order to enable KeyMap modes.

KM1 will be implemented as per CodeA setting while KM2 will be implemented as per CodeB setting. CodeA and Code B allow configuration of two and above keys combination (eg. Alt+Tab, Alt+Ctrl+Del).

CodeA = CODEA\_KEY1 register, 0xC2 + CODEA\_KEY2 register, 0xC4

CodeB = CODEB\_KEY1 register, 0xC3 + CODEB\_KEY2 register, 0xC5

CODEA\_KEY1 and CODEB\_KEY1 registers consist of 8 predefined keyboard keys: Microsoft Logo GUI, Alt, Shift and Ctrl keys located at left and right sides. CODEA\_KEY2 and CODEB\_KEY2 registers can be programmed with a keyboard key scan code available from Windows Platform Design Notes on Keyboard Scan Code Specification, which can be downloaded from:

<http://www.microsoft.com/whdc/archive/scancode.msp>

**Table 4. Resolution and KeyMap Mode OTP Configurations**

| Part Number    | Configuration Options     | REG 0xC7 | REG 0xC1  | REG 0xC1  | Pinout Configurations |              |               |             |                |                  |                   |
|----------------|---------------------------|----------|-----------|-----------|-----------------------|--------------|---------------|-------------|----------------|------------------|-------------------|
|                |                           | TW_NEN   | OTF1-0    | KM1-0     | B1                    | B2           | B3            | B4          | B5             | TW1              | TW2               |
| ADNS-7700-H4MY | 3B                        | 1        | 00        | 00        | Left                  | Right        | Middle        | NA          | NA             | NA               | NA                |
|                | <b>3B + TW (Default)</b>  | <b>0</b> | <b>00</b> | <b>00</b> | <b>Left</b>           | <b>Right</b> | <b>Middle</b> | <b>NA</b>   | <b>NA</b>      | <b>Tilt left</b> | <b>Tilt right</b> |
| ADNS-7700-HAMY | 3B                        | 1        | 00        | 00        | Left                  | Right        | Middle        | NA          | NA             | NA               | NA                |
|                | <b>3B + TW (Default)</b>  | <b>0</b> | <b>00</b> | <b>00</b> | <b>Left</b>           | <b>Right</b> | <b>Middle</b> | <b>NA</b>   | <b>NA</b>      | <b>Tilt left</b> | <b>Tilt right</b> |
|                | 3B + TW + OTF             | 0        | 01        | 00        | Left                  | Right        | Middle        | NA          | OTF            | Tilt left        | Tilt right        |
|                | 3B + OTF + 3LED           | 1        | 01        | 00        | Left                  | Right        | Middle        | LED2        | OTF            | LED1             | LED0              |
| ADNS-7700-HCMY | 5B                        | 1        | 00        | 00        | Left                  | Right        | Middle        | Back        | Forward        | NA               | NA                |
|                | <b>5B + TW (Default)</b>  | <b>0</b> | <b>00</b> | <b>00</b> | <b>Left</b>           | <b>Right</b> | <b>Middle</b> | <b>Back</b> | <b>Forward</b> | <b>Tilt left</b> | <b>Tilt right</b> |
|                | 5B + OTF                  | 1        | 01        | 00        | Left                  | Right        | Middle        | Back        | Forward        | NA               | OTF               |
|                | 4B + TW + OTF             | 0        | 01        | 00        | Left                  | Right        | Middle        | Back        | OTF            | Tilt left        | Tilt right        |
| ADNS-7700-HMMY | 5B                        | 1        | 00        | 00        | Left                  | Right        | Middle        | Back        | Forward        | NC               | NC                |
|                | <b>5B + TW (Default)</b>  | <b>0</b> | <b>00</b> | <b>00</b> | <b>Left</b>           | <b>Right</b> | <b>Middle</b> | <b>Back</b> | <b>Forward</b> | <b>Tilt left</b> | <b>Tilt right</b> |
|                | 5B + KM1/OTF_L            | 1        | 01        | 01        | Left                  | Right        | Middle        | Back        | Forward        | NC               | KM1/ OTF_L        |
|                | 5B + KM1/OTF_L + KM2      | 1        | 01        | 10        | Left                  | Right        | Middle        | Back        | Forward        | KM2              | KM1/ OTF_L        |
|                | 4B + TW + KM1/OTF_L       | 0        | 01        | 01        | Left                  | Right        | Middle        | Back        | KM1/ OTF_L     | Tilt left        | Tilt right        |
|                | 3B + TW + KM1/OTF_L       | 0        | 10        | 01        | Left                  | Right        | Middle        | NC          | KM1/ OTF_L     | Tilt left        | Tilt right        |
|                | 3B + TW + KM1/OTF_L + KM2 | 0        | 10        | 10        | Left                  | Right        | Middle        | KM2         | KM1/ OTF_L     | Tilt left        | Tilt right        |

**Configuration after Power Up (Data Values)**

| Signal Function | State from Figure 9-1 of USB spec:<br>Powered or Default Address or Configured | State from Figure 9-1 of USB spec:<br>Suspended from any other states |
|-----------------|--|---|
| B1              | Pullup active for button use   | Pullup active for button use  |
| B2              | Pullup active for button use   | Pullup active for button use  |
| B3              | Pullup active for button use   | Pullup active for button use  |
| B4              | Pullup active for button use   | Pullup active for button use  |
| B5              | Pullup active for button use   | Pullup active for button use  |
| TW1             | Pullup active for button use   | Pullup active for button use  |
| TW2             | Pullup active for button use   | Pullup active for button use  |
| D+              | USB I/O  | Hi-Z input  |
| D-              | USB I/O  | Hi-Z input  |
| OSC_IN          | 24MHz  | Drive Logic '1'   |
| OSC_OUT         | 24MHz  | Drive Logic '1'   |
| -VCSEL          | Pulsing  | Pulled high (off)   |
| ZA              | Hi-Z input   | Hi-Z input  |
| ZB              | Hi-Z input   | Hi-Z input  |

## Typical Performance Characteristics

The following graphs are the typical performance of the ADNS-7700 sensor, assembled as shown in the 2D assembly drawing with the ADNS-6180-001 or ADNS-6180-002 lens.

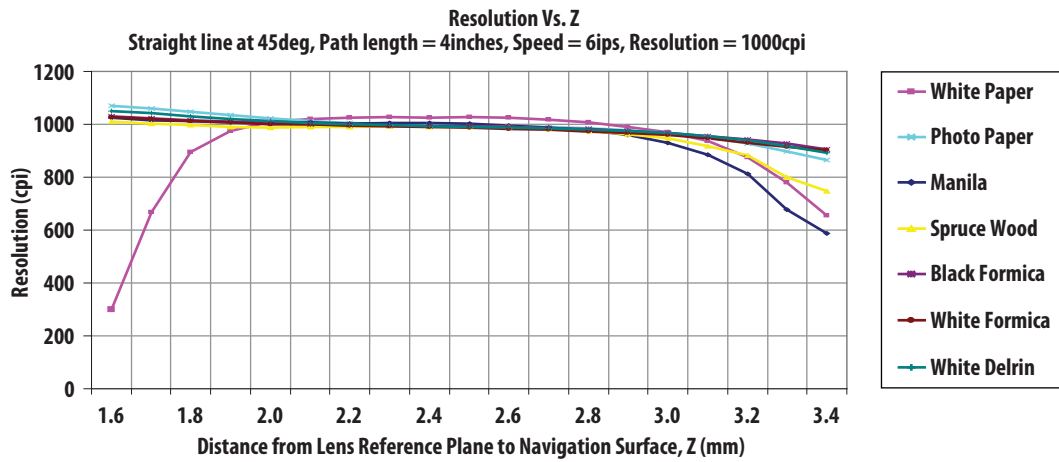


Figure 20. Mean Resolution vs. Z

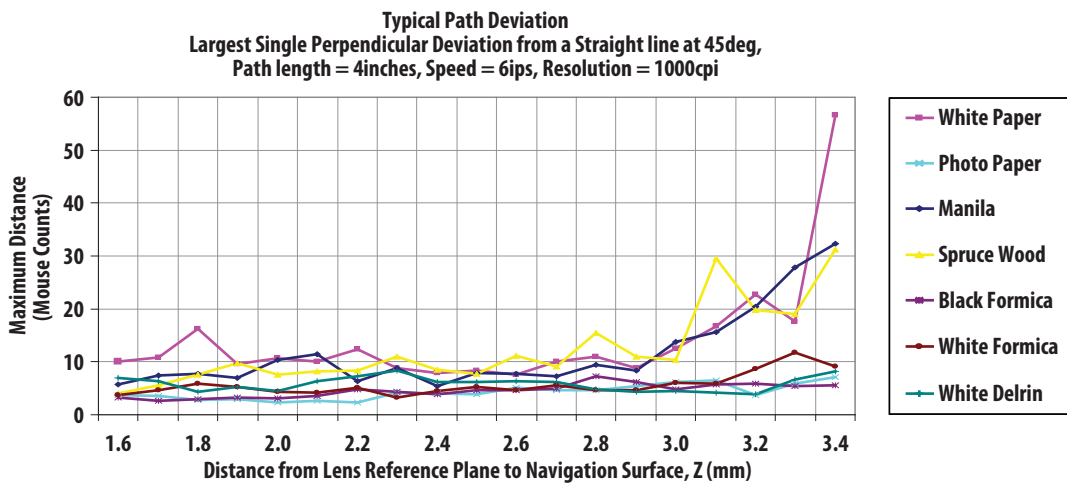


Figure 21. Average Error vs. Z

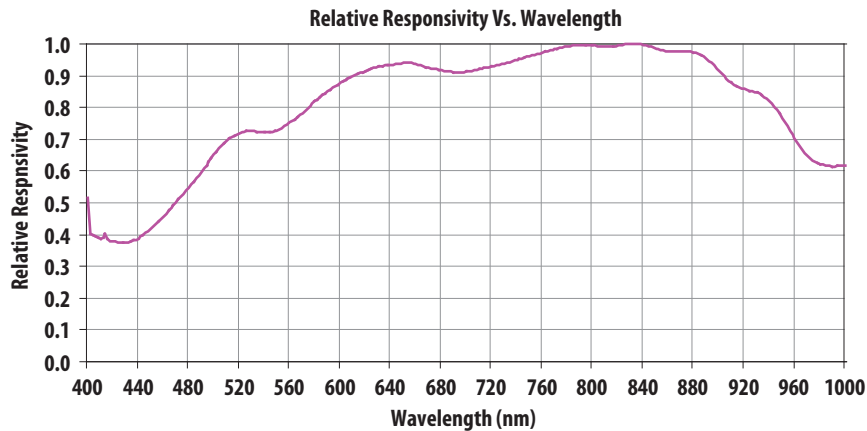


Figure 22. Wavelength Responsivity

## USB Commands

| Mnemonic             | Command                 | Notes   |
|----------------------|-------------------------|---|
| USB_RESET            | D+/D- low > 18.7us      | Device Resets; Address = 0  |
| USB_SUSPEND          | Idle state > 3mS        | Device enters USB low-power mode                                      |
| USB_RESUME           | Non-idle state          | Device exits USB low-power mode                                       |
| Get_Status_Device    | 80 00 00 00 00 00 02 00 | Normally returns 00 00,<br>Self powered 00 00,<br>Remote wakeup 02 00 |
| Get_Status_Interface | 81 00 00 00 00 00 02 00 | Normally returns 00 00  |
| Get_Status_Endpt0    | 82 00 00 00 xx 00 02 00 | OUT: xx = 00, IN: xx = 80<br>Normally returns 00 00                   |
| Get_Status_Endpt1    | 82 00 00 00 81 00 02 00 | Normally returns 00 00, Halt 00 01                                    |
| Get_Configuration    | 80 08 00 00 00 00 01 00 | Return: 00 = not config., 01 = configured                             |
| Get_Interface        | 81 0A 00 00 00 00 01 00 | Normally returns 00   |
| Get_Protocol         | A1 03 00 00 00 00 01 00 | Normally returns 01, Boot protocol 00                                 |
| Get_Desc_Device      | 80 06 00 01 00 00 nn 00 | See USB Command Details Application Note                              |
| Get_Desc_Config      | 80 06 00 02 00 00 nn 00 | See USB Command Details Application Note                              |
| Get_Desc_String      | 80 06 xx 03 00 00 nn 00 | See USB Command Details Application Note                              |
| Get_Desc_HID         | 81 06 00 21 00 00 09 00 | See USB Command Details Application Note                              |
| Get_Desc_HID_Report  | 81 06 00 22 00 00 nn 00 | See USB Command Details Application Note                              |
| Get_HID_Input        | A1 01 00 01 00 00 nn 00 | Return depends on motion & config                                     |
| Get_Idle             | A1 02 00 00 00 00 01 00 | Returns rate in multiples of 4ms                                      |
| Get_Vendor_Test      | C0 01 00 00 xx 00 01 00 | xx = address of register to read                                      |
| Set_Address          | 00 05 xx 00 00 00 00 00 | xx = address  |
| Set_Configuration    | 00 09 xx 00 00 00 00 00 | Not configured: xx = 00<br>Configured: xx = 01                        |
| Set_Interface        | 01 0B 00 00 00 00 00 00 | Only one interface supported  |
| Set_Protocol         | 21 0B xx 00 00 00 00 00 | Boot: xx=00, Report: xx=01  |
| Set_Feature_Device   | 00 03 01 00 00 00 00 00 | Enable remote wakeup  |
| Set_Feature_Endpt0   | 02 03 00 00 xx 00 00 00 | Halt. OUT: xx = 00, IN: xx = 80                                       |
| Set_Feature_Endpt1   | 02 03 00 00 81 00 00 00 | Halt  |
| Clear_Feature_Device | 00 01 01 00 00 00 00 00 | Disable Remote wakeup   |
| Clear_Feature_Endpt0 | 02 01 00 00 xx 00 00 00 | Clear Halt; OUT: xx = 00, IN: xx = 80                                 |
| Clear_Feature_Endpt1 | 02 01 00 00 81 00 00 00 | Clear Halt  |
| Set_Idle             | 21 0A 00 rr 00 00 00 00 | rr = report rate in multiples of 4ms                                  |
| Set_Vendor_Test      | 40 01 00 00 xx yy 00 00 | Write yy to address xx  |
| Poll_Endpt1          |                         | Read buttons, motion, & Z-wheel                                       |

Note: The last two bytes in a command shown as "nn 00" specify the 16-bit data size in the order of "LowByte HighByte." For example a two-byte data size would be specified as "02 00." ADNS-7700 will not provide more bytes than the number requested in the command, but it will only supply up to a maximum of 8bytes at a time. The ADNS-7700 will re-send the last packet if the transfer is not acknowledged properly.

## USB Data Packet Format

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-H4MY, ADNS-7700-HAMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 3B, 3B+OTF+3LED                |              |              |              |              |              |              |              |
| <b>Button</b>        | 3                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 8-Bit                          |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Disabled                       |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled/ Enabled              |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled/                      |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | 0            | 0            | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | Y[7]                           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 4</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-H4MY, ADNS-7700-HAMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 3B+TW, 3B+TW+OTF               |              |              |              |              |              |              |              |
| <b>Button</b>        | 3                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 8-Bit                          |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Enabled                        |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled/ Enabled              |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled                       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | 0            | 0            | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | Y[7]                           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 4</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |
| <b>Byte 5</b>        | TW[7]                          | TW[6]        | TW[5]        | TW[4]        | TW[3]        | TW[2]        | TW[1]        | TW[0]        |

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-HCMY, ADNS-7700-HMMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 5B, 5B+OTF                     |              |              |              |              |              |              |              |
| <b>Button</b>        | 5                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 8-Bit                          |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Disabled                       |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled/Enabled               |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled                       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | FB           | BB           | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | Y[7]                           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 4</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |

|                      |                |              |              |              |              |              |              |              |
|----------------------|----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-HCMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 5B+TW          |              |              |              |              |              |              |              |
| <b>Button</b>        | 5              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 8-Bit          |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Enabled        |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled       |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0              | 0            | 0            | FB           | BB           | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | Y[7]           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 4</b>        | Z[7]           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |
| <b>Byte 5</b>        | TW[7]          | TW[6]        | TW[5]        | TW[4]        | TW[3]        | TW[2]        | TW[1]        | TW[0]        |

|                      |                |
|----------------------|----------------|
| <b>Sensor</b>        | ADNS-7700-HCMY |
| <b>Configuration</b> | 4B+TW+OTF      |
| <b>Button</b>        | 5              |
| <b>Motion Format</b> | 8-Bit          |
| <b>Z-Wheel</b>       | Mechanical     |
| <b>Tilt-Wheel</b>    | Enabled        |
| <b>OTF</b>           | Enabled        |
| <b>KM</b>            | Disabled       |

|               | <b>Bit 7</b> | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Byte 1</b> | 0            | 0            | 0            | 0            | BB           | MB           | RB           | LB           |
| <b>Byte 2</b> | X[7]         | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b> | Y[7]         | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 4</b> | Z[7]         | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |
| <b>Byte 5</b> | TW[7]        | TW[6]        | TW[5]        | TW[4]        | TW[3]        | TW[2]        | TW[1]        | TW[0]        |

|                      |                                 |
|----------------------|---------------------------------|
| <b>Sensor</b>        | ADNS-7700-HMMY                  |
| <b>Configuration</b> | 5B+KM1/OTF_L, 5B+KM1/OTF_L+ KM2 |
| <b>Button</b>        | 5                               |
| <b>Motion Format</b> | 8-Bit                           |
| <b>Z-Wheel</b>       | Mechanical                      |
| <b>Tilt-Wheel</b>    | Disabled                        |
| <b>OTF</b>           | Enabled                         |
| <b>KM</b>            | Enabled                         |

|               | <b>Bit 7</b>      | <b>Bit 6</b>      | <b>Bit 5</b>      | <b>Bit 4</b>      | <b>Bit 3</b>      | <b>Bit 2</b>      | <b>Bit 1</b>      | <b>Bit 0</b>      |
|---------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Byte 1</b> | REPORT ID (01)    |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b> | 0                 | 0                 | 0                 | FB                | BB                | MB                | RB                | LB                |
| <b>Byte 3</b> | X[7]              | X[6]              | X[5]              | X[4]              | X[3]              | X[2]              | X[1]              | X[0]              |
| <b>Byte 4</b> | Y[7]              | Y[6]              | Y[5]              | Y[4]              | Y[3]              | Y[2]              | Y[1]              | Y[0]              |
| <b>Byte 5</b> | Z[7]              | Z[6]              | Z[5]              | Z[4]              | Z[3]              | Z[2]              | Z[1]              | Z[0]              |
| <b>Byte 1</b> | REPORT ID (02)    |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b> | R-Gui             | R-Alt             | R-Shift           | R-Ctrl            | L-Gui             | L-Alt             | L-Shift           | L-Ctrl            |
| <b>Byte 3</b> | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Byte 4</b> | KEY_CODE_<br>A[7] | KEY_CODE_<br>A[6] | KEY_CODE_<br>A[5] | KEY_CODE_<br>A[4] | KEY_CODE_<br>A[3] | KEY_CODE_<br>A[2] | KEY_CODE_<br>A[1] | KEY_CODE_<br>A[0] |
| <b>Byte 5</b> | KEY_CODE_<br>B[7] | KEY_CODE_<br>B[6] | KEY_CODE_<br>B[5] | KEY_CODE_<br>B[4] | KEY_CODE_<br>B[3] | KEY_CODE_<br>B[2] | KEY_CODE_<br>B[1] | KEY_CODE_<br>B[0] |

|                      |                                       |                   |                   |                   |                   |                   |                   |                   |
|----------------------|---------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Sensor</b>        | ADNS-7700-HMMY                        |                   |                   |                   |                   |                   |                   |                   |
| <b>Configuration</b> | 3B+TW+KM1/OTF_L, 3B+TW+KM1/OTF_L+ KM2 |                   |                   |                   |                   |                   |                   |                   |
| <b>Button</b>        | 5                                     |                   |                   |                   |                   |                   |                   |                   |
| <b>Motion Format</b> | 8-Bit                                 |                   |                   |                   |                   |                   |                   |                   |
| <b>Z-Wheel</b>       | Mechanical                            |                   |                   |                   |                   |                   |                   |                   |
| <b>Tilt-Wheel</b>    | Enabled                               |                   |                   |                   |                   |                   |                   |                   |
| <b>OTF</b>           | Enabled                               |                   |                   |                   |                   |                   |                   |                   |
| <b>KM</b>            | Enabled                               |                   |                   |                   |                   |                   |                   |                   |
|                      | <b>Bit 7</b>                          | <b>Bit 6</b>      | <b>Bit 5</b>      | <b>Bit 4</b>      | <b>Bit 3</b>      | <b>Bit 2</b>      | <b>Bit 1</b>      | <b>Bit 0</b>      |
| <b>Byte 1</b>        | REPORT ID (01)                        |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | 0                                     | 0                 | 0                 | 0                 | 0                 | MB                | RB                | LB                |
| <b>Byte 3</b>        | Y[7]                                  | Y[6]              | Y[5]              | Y[4]              | Y[3]              | Y[2]              | Y[1]              | Y[0]              |
| <b>Byte 4</b>        | Y[7]                                  | Y[6]              | Y[5]              | Y[4]              | Y[3]              | Y[2]              | Y[1]              | Y[0]              |
| <b>Byte 5</b>        | Z[7]                                  | Z[6]              | Z[5]              | Z[4]              | Z[3]              | Z[2]              | Z[1]              | Z[0]              |
| <b>Byte 6</b>        | TW[7]                                 | TW[6]             | TW[5]             | TW[4]             | TW[3]             | TW[2]             | TW[1]             | TW[0]             |
| <b>Byte 1</b>        | REPORT ID (02)                        |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | R-Gui                                 | R-Alt             | R-Shift           | R-Ctrl            | L-Gui             | L-Alt             | L-Shift           | L-Ctrl            |
| <b>Byte 3</b>        | 0                                     | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Byte 4</b>        | KEY_CODE_<br>A[7]                     | KEY_CODE_<br>A[6] | KEY_CODE_<br>A[5] | KEY_CODE_<br>A[4] | KEY_CODE_<br>A[3] | KEY_CODE_<br>A[2] | KEY_CODE_<br>A[1] | KEY_CODE_<br>A[0] |
| <b>Byte 5</b>        | KEY_CODE_<br>B[7]                     | KEY_CODE_<br>B[6] | KEY_CODE_<br>B[5] | KEY_CODE_<br>B[4] | KEY_CODE_<br>B[3] | KEY_CODE_<br>B[2] | KEY_CODE_<br>B[1] | KEY_CODE_<br>B[0] |

|                      |                   |                   |                   |                   |                   |                   |                   |                   |
|----------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Sensor</b>        | ADNS-7700-HMMY    |                   |                   |                   |                   |                   |                   |                   |
| <b>Configuration</b> | 4B+TW+KM1/OTF_L   |                   |                   |                   |                   |                   |                   |                   |
| <b>Button</b>        | 5                 |                   |                   |                   |                   |                   |                   |                   |
| <b>Motion Format</b> | 8-Bit             |                   |                   |                   |                   |                   |                   |                   |
| <b>Z-Wheel</b>       | Mechanical        |                   |                   |                   |                   |                   |                   |                   |
| <b>Tilt-Wheel</b>    | Enabled           |                   |                   |                   |                   |                   |                   |                   |
| <b>OTF</b>           | Enabled           |                   |                   |                   |                   |                   |                   |                   |
| <b>KM</b>            | Enabled           |                   |                   |                   |                   |                   |                   |                   |
|                      | <b>Bit 7</b>      | <b>Bit 6</b>      | <b>Bit 5</b>      | <b>Bit 4</b>      | <b>Bit 3</b>      | <b>Bit 2</b>      | <b>Bit 1</b>      | <b>Bit 0</b>      |
| <b>Byte 1</b>        | REPORT ID (01)    |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | 0                 | 0                 | 0                 | 0                 | BB                | MB                | RB                | LB                |
| <b>Byte 3</b>        | X[7]              | X[6]              | X[5]              | X[4]              | X[3]              | X[2]              | X[1]              | X[0]              |
| <b>Byte 4</b>        | Y[7]              | Y[6]              | Y[5]              | Y[4]              | Y[3]              | Y[2]              | Y[1]              | Y[0]              |
| <b>Byte 5</b>        | Z[7]              | Z[6]              | Z[5]              | Z[4]              | Z[3]              | Z[2]              | Z[1]              | Z[0]              |
| <b>Byte 6</b>        | TW[7]             | TW[6]             | TW[5]             | TW[4]             | TW[3]             | TW[2]             | TW[1]             | TW[0]             |
| <b>Byte 1</b>        | REPORT ID (02)    |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | R-Gui             | R-Alt             | R-Shift           | R-Ctrl            | L-Gui             | L-Alt             | L-Shift           | L-Ctrl            |
| <b>Byte 3</b>        | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Byte 4</b>        | KEY_CODE_<br>A[7] | KEY_CODE_<br>A[6] | KEY_CODE_<br>A[5] | KEY_CODE_<br>A[4] | KEY_CODE_<br>A[3] | KEY_CODE_<br>A[2] | KEY_CODE_<br>A[1] | KEY_CODE_<br>A[0] |

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-H4MY, ADNS-7700-HAMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 3B, 3B+OTF+3LED                |              |              |              |              |              |              |              |
| <b>Button</b>        | 3                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 12-Bit                         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Disabled                       |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled/ Enabled              |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled/                      |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | 0            | 0            | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | Y[3]                           | Y[2]         | Y[1]         | Y[0]         | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[11]                          | Y[10]        | Y[9]         | Y[8]         | Y[7]         | Y[6]         | Y[5]         | Y[4]         |
| <b>Byte 5</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-H4MY, ADNS-7700-HAMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 3B+TW, 3B+TW+OTF               |              |              |              |              |              |              |              |
| <b>Button</b>        | 3                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 12-Bit                         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Enabled                        |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled/ Enabled              |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled                       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | 0            | 0            | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | Y[3]                           | Y[2]         | Y[1]         | Y[0]         | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[11]                          | Y[10]        | Y[9]         | Y[8]         | Y[7]         | Y[6]         | Y[5]         | Y[4]         |
| <b>Byte 5</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |
| <b>Byte 6</b>        | TW[7]                          | TW[6]        | TW[5]        | TW[4]        | TW[3]        | TW[2]        | TW[1]        | TW[0]        |

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-HCMY, ADNS-7700-HMMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 5B, 5B+OTF                     |              |              |              |              |              |              |              |
| <b>Button</b>        | 5                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 12-Bit                         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Disabled                       |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled/Enabled               |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled                       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | FB           | BB           | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | Y[3]                           | Y[2]         | Y[1]         | Y[0]         | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[11]                          | Y[10]        | Y[9]         | Y[8]         | Y[7]         | Y[6]         | Y[5]         | Y[4]         |
| <b>Byte 5</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |

|                      |                |              |              |              |              |              |              |              |
|----------------------|----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-HCMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 5B+TW          |              |              |              |              |              |              |              |
| <b>Button</b>        | 5              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 12-Bit         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Enabled        |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled       |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0              | 0            | 0            | FB           | BB           | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | Y[3]           | Y[2]         | Y[1]         | Y[0]         | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[11]          | Y[10]        | Y[9]         | Y[8]         | Y[7]         | Y[6]         | Y[5]         | Y[4]         |
| <b>Byte 5</b>        | Z[7]           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |
| <b>Byte 6</b>        | TW[7]          | TW[6]        | TW[5]        | TW[4]        | TW[3]        | TW[2]        | TW[1]        | TW[0]        |

|                      |                |              |              |              |              |              |              |              |
|----------------------|----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-HCMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 4B+TW+OTF      |              |              |              |              |              |              |              |
| <b>Button</b>        | 5              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 12-Bit         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Enabled        |              |              |              |              |              |              |              |
| <b>OTF</b>           | Enabled        |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0              | 0            | 0            | 0            | BB           | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | Y[3]           | Y[2]         | Y[1]         | Y[0]         | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[11]          | Y[10]        | Y[9]         | Y[8]         | Y[7]         | Y[6]         | Y[5]         | Y[4]         |
| <b>Byte 5</b>        | Z[7]           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |
| <b>Byte 6</b>        | TW[7]          | TW[6]        | TW[5]        | TW[4]        | TW[3]        | TW[2]        | TW[1]        | TW[0]        |

|                      |                                 |                   |                   |                   |                   |                   |                   |                   |
|----------------------|---------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Sensor</b>        | ADNS-7700-HMMY                  |                   |                   |                   |                   |                   |                   |                   |
| <b>Configuration</b> | 5B+KM1/OTF_L, 5B+KM1/OTF_L+ KM2 |                   |                   |                   |                   |                   |                   |                   |
| <b>Button</b>        | 5                               |                   |                   |                   |                   |                   |                   |                   |
| <b>Motion Format</b> | 12-Bit                          |                   |                   |                   |                   |                   |                   |                   |
| <b>Z-Wheel</b>       | Mechanical                      |                   |                   |                   |                   |                   |                   |                   |
| <b>Tilt-Wheel</b>    | Disabled                        |                   |                   |                   |                   |                   |                   |                   |
| <b>OTF</b>           | Enabled                         |                   |                   |                   |                   |                   |                   |                   |
| <b>KM</b>            | Enabled                         |                   |                   |                   |                   |                   |                   |                   |
|                      | <b>Bit 7</b>                    | <b>Bit 6</b>      | <b>Bit 5</b>      | <b>Bit 4</b>      | <b>Bit 3</b>      | <b>Bit 2</b>      | <b>Bit 1</b>      | <b>Bit 0</b>      |
| <b>Byte 1</b>        | REPORT ID (01)                  |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | 0                               | 0                 | 0                 | FB                | BB                | MB                | RB                | LB                |
| <b>Byte 3</b>        | X[7]                            | X[6]              | X[5]              | X[4]              | X[3]              | X[2]              | X[1]              | X[0]              |
| <b>Byte 4</b>        | Y[3]                            | Y[2]              | Y[1]              | Y[0]              | X[11]             | X[10]             | X[9]              | X[8]              |
| <b>Byte 5</b>        | Y[11]                           | Y[10]             | Y[9]              | Y[8]              | Y[7]              | Y[6]              | Y[5]              | Y[4]              |
| <b>Byte 6</b>        | Z[7]                            | Z[6]              | Z[5]              | Z[4]              | Z[3]              | Z[2]              | Z[1]              | Z[0]              |
| <b>Byte 1</b>        | REPORT ID (02)                  |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | R-Gui                           | R-Alt             | R-Shift           | R-Ctrl            | L-Gui             | L-Alt             | L-Shift           | L-Ctrl            |
| <b>Byte 3</b>        | 0                               | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Byte 4</b>        | KEY_CODE_<br>A[7]               | KEY_CODE_<br>A[6] | KEY_CODE_<br>A[5] | KEY_CODE_<br>A[4] | KEY_CODE_<br>A[3] | KEY_CODE_<br>A[2] | KEY_CODE_<br>A[1] | KEY_CODE_<br>A[0] |
| <b>Byte 5</b>        | KEY_CODE_<br>B[7]               | KEY_CODE_<br>B[6] | KEY_CODE_<br>B[5] | KEY_CODE_<br>B[4] | KEY_CODE_<br>B[3] | KEY_CODE_<br>B[2] | KEY_CODE_<br>B[1] | KEY_CODE_<br>B[0] |

|                      |                                       |                   |                   |                   |                   |                   |                   |                   |
|----------------------|---------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Sensor</b>        | ADNS-7700-HMMY                        |                   |                   |                   |                   |                   |                   |                   |
| <b>Configuration</b> | 3B+TW+KM1/OTF_L, 3B+TW+KM1/OTF_L+ KM2 |                   |                   |                   |                   |                   |                   |                   |
| <b>Button</b>        | 5                                     |                   |                   |                   |                   |                   |                   |                   |
| <b>Motion Format</b> | 12-Bit                                |                   |                   |                   |                   |                   |                   |                   |
| <b>Z-Wheel</b>       | Mechanical                            |                   |                   |                   |                   |                   |                   |                   |
| <b>Tilt-Wheel</b>    | Enabled                               |                   |                   |                   |                   |                   |                   |                   |
| <b>OTF</b>           | Enabled                               |                   |                   |                   |                   |                   |                   |                   |
| <b>KM</b>            | Enabled                               |                   |                   |                   |                   |                   |                   |                   |
|                      | <b>Bit 7</b>                          | <b>Bit 6</b>      | <b>Bit 5</b>      | <b>Bit 4</b>      | <b>Bit 3</b>      | <b>Bit 2</b>      | <b>Bit 1</b>      | <b>Bit 0</b>      |
| <b>Byte 1</b>        | REPORT ID (01)                        |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | 0                                     | 0                 | 0                 | 0                 | 0                 | MB                | RB                | LB                |
| <b>Byte 3</b>        | X[7]                                  | X[6]              | X[5]              | X[4]              | X[3]              | X[2]              | X[1]              | X[0]              |
| <b>Byte 4</b>        | Y[3]                                  | Y[2]              | Y[1]              | Y[0]              | X[11]             | X[10]             | X[9]              | X[8]              |
| <b>Byte 5</b>        | Y[11]                                 | Y[10]             | Y[9]              | Y[8]              | Y[7]              | Y[6]              | Y[5]              | Y[4]              |
| <b>Byte 6</b>        | Z[7]                                  | Z[6]              | Z[5]              | Z[4]              | Z[3]              | Z[2]              | Z[1]              | Z[0]              |
| <b>Byte 7</b>        | TW[7]                                 | TW[6]             | TW[5]             | TW[4]             | TW[3]             | TW[2]             | TW[1]             | TW[0]             |
| <b>Byte 1</b>        | REPORT ID (02)                        |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | R-Gui                                 | R-Alt             | R-Shift           | R-Ctrl            | L-Gui             | L-Alt             | L-Shift           | L-Ctrl            |
| <b>Byte 3</b>        | 0                                     | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Byte 4</b>        | KEY_CODE_<br>A[7]                     | KEY_CODE_<br>A[6] | KEY_CODE_<br>A[5] | KEY_CODE_<br>A[4] | KEY_CODE_<br>A[3] | KEY_CODE_<br>A[2] | KEY_CODE_<br>A[1] | KEY_CODE_<br>A[0] |
| <b>Byte 5</b>        | KEY_CODE_<br>B[7]                     | KEY_CODE_<br>B[6] | KEY_CODE_<br>B[5] | KEY_CODE_<br>B[4] | KEY_CODE_<br>B[3] | KEY_CODE_<br>B[2] | KEY_CODE_<br>B[1] | KEY_CODE_<br>B[0] |

|                      |                   |                   |                   |                   |                   |                   |                   |                   |
|----------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Sensor</b>        | ADNS-7700-HMMY    |                   |                   |                   |                   |                   |                   |                   |
| <b>Configuration</b> | 4B+TW+KM1/OTF_L   |                   |                   |                   |                   |                   |                   |                   |
| <b>Button</b>        | 5                 |                   |                   |                   |                   |                   |                   |                   |
| <b>Motion Format</b> | 12-Bit            |                   |                   |                   |                   |                   |                   |                   |
| <b>Z-Wheel</b>       | Mechanical        |                   |                   |                   |                   |                   |                   |                   |
| <b>Tilt-Wheel</b>    | Enabled           |                   |                   |                   |                   |                   |                   |                   |
| <b>OTF</b>           | Enabled           |                   |                   |                   |                   |                   |                   |                   |
| <b>KM</b>            | Enabled           |                   |                   |                   |                   |                   |                   |                   |
|                      | <b>Bit 7</b>      | <b>Bit 6</b>      | <b>Bit 5</b>      | <b>Bit 4</b>      | <b>Bit 3</b>      | <b>Bit 2</b>      | <b>Bit 1</b>      | <b>Bit 0</b>      |
| <b>Byte 1</b>        | REPORT ID (01)    |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | 0                 | 0                 | 0                 | 0                 | BB                | MB                | RB                | LB                |
| <b>Byte 3</b>        | X[7]              | X[6]              | X[5]              | X[4]              | X[3]              | X[2]              | X[1]              | X[0]              |
| <b>Byte 4</b>        | Y[3]              | Y[2]              | Y[1]              | Y[0]              | X[11]             | X[10]             | X[9]              | X[8]              |
| <b>Byte 5</b>        | Y[11]             | Y[10]             | Y[9]              | Y[8]              | Y[7]              | Y[6]              | Y[5]              | Y[4]              |
| <b>Byte 6</b>        | Z[7]              | Z[6]              | Z[5]              | Z[4]              | Z[3]              | Z[2]              | Z[1]              | Z[0]              |
| <b>Byte 7</b>        | TW[7]             | TW[6]             | TW[5]             | TW[4]             | TW[3]             | TW[2]             | TW[1]             | TW[0]             |
| <b>Byte 1</b>        | REPORT ID (02)    |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | R-Gui             | R-Alt             | R-Shift           | R-Ctrl            | L-Gui             | L-Alt             | L-Shift           | L-Ctrl            |
| <b>Byte 3</b>        | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Byte 4</b>        | KEY_CODE_<br>A[7] | KEY_CODE_<br>A[6] | KEY_CODE_<br>A[5] | KEY_CODE_<br>A[4] | KEY_CODE_<br>A[3] | KEY_CODE_<br>A[2] | KEY_CODE_<br>A[1] | KEY_CODE_<br>A[0] |

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-H4MY, ADNS-7700-HAMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 3B, 3B+OTF+3LED                |              |              |              |              |              |              |              |
| <b>Button</b>        | 3                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 16-Bit                         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Disabled                       |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled/ Enabled              |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled/                      |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | 0            | 0            | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | X[15]                          | X[14]        | X[13]        | X[12]        | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[7]                           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 5</b>        | Y[15]                          | Y[14]        | Y[13]        | Y[12]        | Y[11]        | Y[10]        | Y[9]         | Y[8]         |
| <b>Byte 6</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-H4MY, ADNS-7700-HAMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 3B+TW, 3B+TW+OTF               |              |              |              |              |              |              |              |
| <b>Button</b>        | 3                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 16-Bit                         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Enabled                        |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled/ Enabled              |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled                       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | 0            | 0            | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | X[15]                          | X[14]        | X[13]        | X[12]        | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[7]                           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 5</b>        | Y[15]                          | Y[14]        | Y[13]        | Y[12]        | Y[11]        | Y[10]        | Y[9]         | Y[8]         |
| <b>Byte 6</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |
| <b>Byte 7</b>        | TW[7]                          | TW[6]        | TW[5]        | TW[4]        | TW[3]        | TW[2]        | TW[1]        | TW[0]        |

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-HCMY, ADNS-7700-HMMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 5B                             |              |              |              |              |              |              |              |
| <b>Button</b>        | 5                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 16-Bit                         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Disabled                       |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled                       |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled                       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | FB           | BB           | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | X[15]                          | X[14]        | X[13]        | X[12]        | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[7]                           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 5</b>        | Y[15]                          | Y[14]        | Y[13]        | Y[12]        | Y[11]        | Y[10]        | Y[9]         | Y[8]         |
| <b>Byte 6</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |

|                      |                                |              |              |              |              |              |              |              |
|----------------------|--------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-HCMY, ADNS-7700-HMMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 5B+TW                          |              |              |              |              |              |              |              |
| <b>Button</b>        | 5                              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 16-Bit                         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical                     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Enabled                        |              |              |              |              |              |              |              |
| <b>OTF</b>           | Disabled                       |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled                       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>                   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0                              | 0            | 0            | 0            | 0            | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]                           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | X[15]                          | X[14]        | X[13]        | X[12]        | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[7]                           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 5</b>        | Y[15]                          | Y[14]        | Y[13]        | Y[12]        | Y[11]        | Y[10]        | Y[9]         | Y[8]         |
| <b>Byte 6</b>        | Z[7]                           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |
| <b>Byte 7</b>        | TW[7]                          | TW[6]        | TW[5]        | TW[4]        | TW[3]        | TW[2]        | TW[1]        | TW[0]        |

|                      |                |              |              |              |              |              |              |              |
|----------------------|----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-HCMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 5B+ OTF        |              |              |              |              |              |              |              |
| <b>Button</b>        | 5              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 16-Bit         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Disabled       |              |              |              |              |              |              |              |
| <b>OTF</b>           | Enabled        |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0              | 0            | 0            | FB           | BB           | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | X[15]          | X[14]        | X[13]        | X[12]        | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[7]           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 5</b>        | Y[15]          | Y[14]        | Y[13]        | Y[12]        | Y[11]        | Y[10]        | Y[9]         | Y[8]         |
| <b>Byte 6</b>        | Z[7]           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |

|                      |                |              |              |              |              |              |              |              |
|----------------------|----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Sensor</b>        | ADNS-7700-HCMY |              |              |              |              |              |              |              |
| <b>Configuration</b> | 4B+TW+OTF      |              |              |              |              |              |              |              |
| <b>Button</b>        | 5              |              |              |              |              |              |              |              |
| <b>Motion Format</b> | 16-Bit         |              |              |              |              |              |              |              |
| <b>Z-Wheel</b>       | Mechanical     |              |              |              |              |              |              |              |
| <b>Tilt-Wheel</b>    | Enabled        |              |              |              |              |              |              |              |
| <b>OTF</b>           | Enabled        |              |              |              |              |              |              |              |
| <b>KM</b>            | Disabled       |              |              |              |              |              |              |              |
|                      | <b>Bit 7</b>   | <b>Bit 6</b> | <b>Bit 5</b> | <b>Bit 4</b> | <b>Bit 3</b> | <b>Bit 2</b> | <b>Bit 1</b> | <b>Bit 0</b> |
| <b>Byte 1</b>        | 0              | 0            | 0            | 0            | BB           | MB           | RB           | LB           |
| <b>Byte 2</b>        | X[7]           | X[6]         | X[5]         | X[4]         | X[3]         | X[2]         | X[1]         | X[0]         |
| <b>Byte 3</b>        | X[15]          | X[14]        | X[13]        | X[12]        | X[11]        | X[10]        | X[9]         | X[8]         |
| <b>Byte 4</b>        | Y[7]           | Y[6]         | Y[5]         | Y[4]         | Y[3]         | Y[2]         | Y[1]         | Y[0]         |
| <b>Byte 5</b>        | Y[15]          | Y[14]        | Y[13]        | Y[12]        | Y[11]        | Y[10]        | Y[9]         | Y[8]         |
| <b>Byte 6</b>        | Z[7]           | Z[6]         | Z[5]         | Z[4]         | Z[3]         | Z[2]         | Z[1]         | Z[0]         |
| <b>Byte 7</b>        | TW[7]          | TW[6]        | TW[5]        | TW[4]        | TW[3]        | TW[2]        | TW[1]        | TW[0]        |

|                      |                                 |                   |                   |                   |                   |                   |                   |                   |
|----------------------|---------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Sensor</b>        | ADNS-7700-HMMY                  |                   |                   |                   |                   |                   |                   |                   |
| <b>Configuration</b> | 5B+KM1/OTF_L, 5B+KM1/OTF_L+ KM2 |                   |                   |                   |                   |                   |                   |                   |
| <b>Button</b>        | 5                               |                   |                   |                   |                   |                   |                   |                   |
| <b>Motion Format</b> | 16-Bit                          |                   |                   |                   |                   |                   |                   |                   |
| <b>Z-Wheel</b>       | Mechanical                      |                   |                   |                   |                   |                   |                   |                   |
| <b>Tilt-Wheel</b>    | Disabled                        |                   |                   |                   |                   |                   |                   |                   |
| <b>OTF</b>           | Enabled                         |                   |                   |                   |                   |                   |                   |                   |
| <b>KM</b>            | Enabled                         |                   |                   |                   |                   |                   |                   |                   |
|                      | <b>Bit 7</b>                    | <b>Bit 6</b>      | <b>Bit 5</b>      | <b>Bit 4</b>      | <b>Bit 3</b>      | <b>Bit 2</b>      | <b>Bit 1</b>      | <b>Bit 0</b>      |
| <b>Byte 1</b>        | REPORT ID (01)                  |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | 0                               | 0                 | 0                 | FB                | BB                | MB                | RB                | LB                |
| <b>Byte 3</b>        | X[7]                            | X[6]              | X[5]              | X[4]              | X[3]              | X[2]              | X[1]              | X[0]              |
| <b>Byte 4</b>        | X[15]                           | X[14]             | X[13]             | X[12]             | X[11]             | X[10]             | X[9]              | X[8]              |
| <b>Byte 5</b>        | Y[7]                            | Y[6]              | Y[5]              | Y[4]              | Y[3]              | Y[2]              | Y[1]              | Y[0]              |
| <b>Byte 6</b>        | Y[15]                           | Y[14]             | Y[13]             | Y[12]             | Y[11]             | Y[10]             | Y[9]              | Y[8]              |
| <b>Byte 7</b>        | Z[7]                            | Z[6]              | Z[5]              | Z[4]              | Z[3]              | Z[2]              | Z[1]              | Z[0]              |
| <b>Byte 1</b>        | REPORT ID (02)                  |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | R-Gui                           | R-Alt             | R-Shift           | R-Ctrl            | L-Gui             | L-Alt             | L-Shift           | L-Ctrl            |
| <b>Byte 3</b>        | 0                               | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Byte 4</b>        | KEY_CODE_<br>A[7]               | KEY_CODE_<br>A[6] | KEY_CODE_<br>A[5] | KEY_CODE_<br>A[4] | KEY_CODE_<br>A[3] | KEY_CODE_<br>A[2] | KEY_CODE_<br>A[1] | KEY_CODE_<br>A[0] |
| <b>Byte 5</b>        | KEY_CODE_<br>B[7]               | KEY_CODE_<br>B[6] | KEY_CODE_<br>B[5] | KEY_CODE_<br>B[4] | KEY_CODE_<br>B[3] | KEY_CODE_<br>B[2] | KEY_CODE_<br>B[1] | KEY_CODE_<br>B[0] |

|                      |                                       |                   |                   |                   |                   |                   |                   |                   |
|----------------------|---------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Sensor</b>        | ADNS-7700-HMMY                        |                   |                   |                   |                   |                   |                   |                   |
| <b>Configuration</b> | 3B+TW+KM1/OTF_L, 3B+TW+KM1/OTF_L+ KM2 |                   |                   |                   |                   |                   |                   |                   |
| <b>Button</b>        | 5                                     |                   |                   |                   |                   |                   |                   |                   |
| <b>Motion Format</b> | 16-Bit                                |                   |                   |                   |                   |                   |                   |                   |
| <b>Z-Wheel</b>       | Mechanical                            |                   |                   |                   |                   |                   |                   |                   |
| <b>Tilt-Wheel</b>    | Enabled                               |                   |                   |                   |                   |                   |                   |                   |
| <b>OTF</b>           | Enabled                               |                   |                   |                   |                   |                   |                   |                   |
| <b>KM</b>            | Enabled                               |                   |                   |                   |                   |                   |                   |                   |
|                      | <b>Bit 7</b>                          | <b>Bit 6</b>      | <b>Bit 5</b>      | <b>Bit 4</b>      | <b>Bit 3</b>      | <b>Bit 2</b>      | <b>Bit 1</b>      | <b>Bit 0</b>      |
| <b>Byte 1</b>        | REPORT ID (01)                        |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | 0                                     | 0                 | 0                 | FB                | BB                | MB                | RB                | LB                |
| <b>Byte 3</b>        | X[7]                                  | X[6]              | X[5]              | X[4]              | X[3]              | X[2]              | X[1]              | X[0]              |
| <b>Byte 4</b>        | X[15]                                 | X[14]             | X[13]             | X[12]             | X[11]             | X[10]             | X[9]              | X[8]              |
| <b>Byte 5</b>        | Y[7]                                  | Y[6]              | Y[5]              | Y[4]              | Y[3]              | Y[2]              | Y[1]              | Y[0]              |
| <b>Byte 6</b>        | Y[15]                                 | Y[14]             | Y[13]             | Y[12]             | Y[11]             | Y[10]             | Y[9]              | Y[8]              |
| <b>Byte 7</b>        | Z[7]                                  | Z[6]              | Z[5]              | Z[4]              | Z[3]              | Z[2]              | Z[1]              | Z[0]              |
| <b>Byte 8</b>        | TW[7]                                 | TW[6]             | TW[5]             | TW[4]             | TW[3]             | TW[2]             | TW[1]             | TW[0]             |
| <b>Byte 1</b>        | REPORT ID (02)                        |                   |                   |                   |                   |                   |                   |                   |
| <b>Byte 2</b>        | R-Gui                                 | R-Alt             | R-Shift           | R-Ctrl            | L-Gui             | L-Alt             | L-Shift           | L-Ctrl            |
| <b>Byte 3</b>        | 0                                     | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 | 0                 |
| <b>Byte 4</b>        | KEY_CODE_<br>A[7]                     | KEY_CODE_<br>A[6] | KEY_CODE_<br>A[5] | KEY_CODE_<br>A[4] | KEY_CODE_<br>A[3] | KEY_CODE_<br>A[2] | KEY_CODE_<br>A[1] | KEY_CODE_<br>A[0] |
| <b>Byte 5</b>        | KEY_CODE_<br>B[7]                     | KEY_CODE_<br>B[6] | KEY_CODE_<br>B[5] | KEY_CODE_<br>B[4] | KEY_CODE_<br>B[3] | KEY_CODE_<br>B[2] | KEY_CODE_<br>B[1] | KEY_CODE_<br>B[0] |

|                      |                 |               |               |               |               |               |               |               |
|----------------------|-----------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Sensor</b>        | ADNS-7700-HMMY  |               |               |               |               |               |               |               |
| <b>Configuration</b> | 4B+TW+KM1/OTF_L |               |               |               |               |               |               |               |
| <b>Button</b>        | 5               |               |               |               |               |               |               |               |
| <b>Motion Format</b> | 16-Bit          |               |               |               |               |               |               |               |
| <b>Z-Wheel</b>       | Mechanical      |               |               |               |               |               |               |               |
| <b>Tilt-Wheel</b>    | Enabled         |               |               |               |               |               |               |               |
| <b>OTF</b>           | Enabled         |               |               |               |               |               |               |               |
| <b>KM</b>            | Enabled         |               |               |               |               |               |               |               |
|                      | <b>Bit 7</b>    | <b>Bit 6</b>  | <b>Bit 5</b>  | <b>Bit 4</b>  | <b>Bit 3</b>  | <b>Bit 2</b>  | <b>Bit 1</b>  | <b>Bit 0</b>  |
| <b>Byte 1</b>        | REPORT ID (01)  |               |               |               |               |               |               |               |
| <b>Byte 2</b>        | 0               | 0             | 0             | 0             | BB            | MB            | RB            | LB            |
| <b>Byte 3</b>        | X[7]            | X[6]          | X[5]          | X[4]          | X[3]          | X[2]          | X[1]          | X[0]          |
| <b>Byte 4</b>        | X[15]           | X[14]         | X[13]         | X[12]         | X[11]         | X[10]         | X[9]          | X[8]          |
| <b>Byte 5</b>        | Y[7]            | Y[6]          | Y[5]          | Y[4]          | Y[3]          | Y[2]          | Y[1]          | Y[0]          |
| <b>Byte 6</b>        | Y[15]           | Y[14]         | Y[13]         | Y[12]         | Y[11]         | Y[10]         | Y[9]          | Y[8]          |
| <b>Byte 7</b>        | Z[7]            | Z[6]          | Z[5]          | Z[4]          | Z[3]          | Z[2]          | Z[1]          | Z[0]          |
| <b>Byte 8</b>        | TW[7]           | TW[6]         | TW[5]         | TW[4]         | TW[3]         | TW[2]         | TW[1]         | TW[0]         |
| <b>Byte 1</b>        | REPORT ID (02)  |               |               |               |               |               |               |               |
| <b>Byte 2</b>        | R-Gui           | R-Alt         | R-Shift       | R-Ctrl        | L-Gui         | L-Alt         | L-Shift       | L-Ctrl        |
| <b>Byte 3</b>        | 0               | 0             | 0             | 0             | 0             | 0             | 0             | 0             |
| <b>Byte 4</b>        | KEY_CODE_A[7]   | KEY_CODE_A[6] | KEY_CODE_A[5] | KEY_CODE_A[4] | KEY_CODE_A[3] | KEY_CODE_A[2] | KEY_CODE_A[1] | KEY_CODE_A[0] |

## Registers

The sensor can be programmed through registers, via the USB port, and configuration and motion data can be read from these registers. The registers will be “disabled” by VDD5 going low or sending a USB reset command.

| Address     | Register Name | Register Type | Access     | Reset Value               |
|-------------|---------------|---------------|------------|---------------------------|
| 0x00        | PROD_ID       | Device        | Read only  | 0x37                      |
| 0x01        | REV_ID        | Device        | Read only  | 0x01                      |
| 0x02        | BUT_STAT      | Device        | Read only  | Undefined                 |
| 0x03        | DELTA_X_H     | Device        | Read only  | 0x00                      |
| 0x04        | DELTA_X_L     | Device        | Read only  | 0x00                      |
| 0x05        | DELTA_Y_H     | Device        | Read only  | 0x00                      |
| 0x06        | DELTA_Y_L     | Device        | Read only  | 0x00                      |
| 0x07        | MOTZ          | Device        | Read only  | 0x00                      |
| 0x08        | SQUAL         | Device        | Read only  | Undefined                 |
| 0x09        | SHUT_HI       | Device        | Read only  | 0x00                      |
| 0x0A        | SHUT_LO       | Device        | Read only  | Undefined                 |
| 0x0B        | PIX_MAX       | Device        | Read only  | Undefined                 |
| 0x0C        | PIX_ACCUM     | Device        | Read only  | Undefined                 |
| 0x0D        | PIX_MIN       | Device        | Read only  | Undefined                 |
| 0x0E        | PIX_GRABBER   | Device        | Read/Write | 0x00                      |
| 0x4C        | OTP_CONFIG    | Device        | Read/Write | 0x00                      |
| 0x4D        | OTP_ADDR      | Device        | Read/Write | 0x00                      |
| 0x4E        | OTP_DATA      | Device        | Read/Write | 0x00                      |
| 0x4F        | OTP_CTRL      | Device        | Read/Write | 0x00                      |
| 0x50        | OTP_CTRLSTAT  | Device        | Read only  | Undefined                 |
| 0x51        | OTP_RUNSTAT   | Device        | Read only  | Undefined                 |
| 0x75        | LSR_CTRL0     | Device        | Read/Write | 0x00                      |
| 0x76        | LSR_CTRL1     | Device        | Read/Write | 0x0F                      |
| 0x7E        | INV_REV_ID    | Device        | Read only  | 0xFE                      |
| 0xBB        | L2_USE_OTP    | OTP           | Read/Write | 0x00                      |
| 0xBC        | CPI_SET0      | OTP           | Read/Write | 0x0A                      |
| 0xBD        | CPI_SET1      | OTP           | Read/Write | 0x10                      |
| 0xBE        | CPI_SET2      | OTP           | Read/Write | 0x05                      |
| 0xBF        | MOTCONFIG1    | OTP           | Read/Write | 0x00                      |
| 0xC0        | ROTATION      | OTP           | Read/Write | 0x07                      |
| 0xC1        | DEVCONFIG     | OTP           | Read/Write | 0x00                      |
| 0xC2        | CODEA_KEY1    | OTP           | Read/Write | 0x00                      |
| 0xC3        | CODEB_KEY1    | OTP           | Read/Write | 0x00                      |
| 0xC4        | CODEA_KEY2    | OTP           | Read/Write | 0x00                      |
| 0xC5        | CODEB_KEY2    | OTP           | Read/Write | 0x00                      |
| 0xC6        | LONGPRESS     | OTP           | Read/Write | 0x10                      |
| 0xC7        | TW_CONFIG     | OTP           | Read/Write | 0x00                      |
| 0xC8 : 0xC9 | PID1 : PID0   | OTP           | Read/Write | 0x0716                    |
| 0xCA : 0xCB | VID1 : VID0   | OTP           | Read/Write | 0x192F                    |
| 0xCC        | MSTR_LEN      | OTP           | Read/Write | 0x0C                      |
| 0xCD : 0xD8 | MSTR_STR      | OTP           | Read/Write | Avago                     |
| 0xD9        | PSTR_LEN      | OTP           | Read/Write | 0x34                      |
| 0xDA : 0xF5 | PROD_STR      | OTP           | Read/Write | USB LaserStream(TM) Mouse |
| 0xF6 : 0xF7 | DEV_NUM       | OTP           | Read/Write | 0x00                      |
| 0xFA        | OTPLOCK2      | OTP           | Read/Write | 0x00                      |

**PROD\_ID** Address: 0x00  
Access: Read Only Reset Value: 0x37

|              |                  |                  |                  |                  |                  |                  |                  |                  |
|--------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| <b>Bit</b>   | 7                | 6                | 5                | 4                | 3                | 2                | 1                | 0                |
| <b>Field</b> | PID <sub>7</sub> | PID <sub>6</sub> | PID <sub>5</sub> | PID <sub>4</sub> | PID <sub>3</sub> | PID <sub>2</sub> | PID <sub>1</sub> | PID <sub>0</sub> |

Data Type: 8-bit number with the product identifier.

USAGE: The value in this register does not change; it can be used to verify that the sensor communications link is OK.

**REV\_ID** Address: 0x01  
Access: Read Only Reset Value: 0x01

|              |                  |                  |                  |                  |                  |                  |                  |                  |
|--------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| <b>Bit</b>   | 7                | 6                | 5                | 4                | 3                | 2                | 1                | 0                |
| <b>Field</b> | RID <sub>7</sub> | RID <sub>6</sub> | RID <sub>5</sub> | RID <sub>4</sub> | RID <sub>3</sub> | RID <sub>2</sub> | RID <sub>1</sub> | RID <sub>0</sub> |

Data Type: 8-bit number with current revision of the IC.

USAGE: This register contains the IC revision. It is subject to change when new IC versions are released.

**BUT\_STAT** Address: 0x02 Type: Device  
Access: Read Only Reset Value: Undefined

|              |          |                  |                  |                  |                  |                  |                  |                  |
|--------------|----------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| <b>Bit</b>   | 7        | 6                | 5                | 4                | 3                | 2                | 1                | 0                |
| <b>Field</b> | Reserved | BUT <sub>7</sub> | BUT <sub>6</sub> | BUT <sub>5</sub> | BUT <sub>4</sub> | BUT <sub>3</sub> | BUT <sub>2</sub> | BUT <sub>1</sub> |

Data Type: Bit field

USAGE: This register is included for *test purposes only*. For navigation use, use the USB HID defined commands. The button status bits reported are for the debounce signals.

| Field Name       | Description   |
|------------------|---|
| BUT <sub>7</sub> | Reports the status of TW2 (Right tilt)<br>0 = pin signal is at logic 1 (VDD5)<br>1 = pin signal is at logic 0 (GND)                             |
| BUT <sub>6</sub> | Reports the status of TW1 (Left tilt)<br>0 = pin signal is at logic 1 (VDD5)<br>1 = pin signal is at logic 0 (GND)                              |
| BUT <sub>5</sub> | When used as a 5 button mouse, reports the status of B5 button pin<br>0 = pin signal is at logic 1 (VDD5)<br>1 = pin signal is at logic 0 (GND) |
| BUT <sub>4</sub> | When used as a 5 button mouse, reports the status of B4 button pin<br>0 = pin signal is at logic 1 (VDD5)<br>1 = pin signal is at logic 0 (GND) |
| BUT <sub>3</sub> | Reports the status of B3<br>0 = pin signal is at logic 1 (VDD5)<br>1 = pin signal is at logic 0 (GND)   |
| BUT <sub>2</sub> | Reports the status of B2<br>0 = pin signal is at logic 1 (VDD5)<br>1 = pin signal is at logic 0 (GND)   |
| BUT <sub>1</sub> | Reports the status of B1<br>0 = pin signal is at logic 1 (VDD5)<br>1 = pin signal is at logic 0 (GND)   |

|                   |                 |                   |                 |                 |                 |                 |                |                |
|-------------------|-----------------|-------------------|-----------------|-----------------|-----------------|-----------------|----------------|----------------|
| <b>DELTA_X_H</b>  |                 | Address: 0x03     |                 |                 |                 |                 |                | Type: Device   |
| Access: Read Only |                 | Reset Value: 0x00 |                 |                 |                 |                 |                |                |
| <b>Bit</b>        | 7               | 6                 | 5               | 4               | 3               | 2               | 1              | 0              |
| <b>Field</b>      | X <sub>15</sub> | X <sub>14</sub>   | X <sub>13</sub> | X <sub>12</sub> | X <sub>11</sub> | X <sub>10</sub> | X <sub>9</sub> | X <sub>8</sub> |

|                   |                |                   |                |                |                |                |                |                |
|-------------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| <b>DELTA_X_L</b>  |                | Address: 0x04     |                |                |                |                |                | Type: Device   |
| Access: Read Only |                | Reset Value: 0x00 |                |                |                |                |                |                |
| <b>Bit</b>        | 7              | 6                 | 5              | 4              | 3              | 2              | 1              | 0              |
| <b>Field</b>      | X <sub>7</sub> | X <sub>6</sub>    | X <sub>5</sub> | X <sub>4</sub> | X <sub>3</sub> | X <sub>2</sub> | X <sub>1</sub> | X <sub>0</sub> |

Data Type: 16-Bit 2's Complement Data

USAGE: The value in this register reflects the last USB delta X data output or data queued for output. This register is included for *test purposes only*. For navigation use, use the HID defined commands. Absolute value is determined by the currently set resolution.

**Register read sequence Delta\_X\_H->Delta\_X\_L->Delta\_Y\_H->Delta\_Y\_L**

|                   |                 |                   |                 |                 |                 |                 |                |                |
|-------------------|-----------------|-------------------|-----------------|-----------------|-----------------|-----------------|----------------|----------------|
| <b>DELTA_Y_H</b>  |                 | Address: 0x05     |                 |                 |                 |                 |                | Type: Device   |
| Access: Read Only |                 | Reset Value: 0x00 |                 |                 |                 |                 |                |                |
| <b>Bit</b>        | 7               | 6                 | 5               | 4               | 3               | 2               | 1              | 0              |
| <b>Field</b>      | Y <sub>15</sub> | Y <sub>14</sub>   | Y <sub>13</sub> | Y <sub>12</sub> | Y <sub>11</sub> | Y <sub>10</sub> | Y <sub>9</sub> | Y <sub>8</sub> |

|                   |                |                   |                |                |                |                |                |                |
|-------------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| <b>DELTA_Y_L</b>  |                | Address: 0x06     |                |                |                |                |                | Type: Device   |
| Access: Read Only |                | Reset Value: 0x00 |                |                |                |                |                |                |
| <b>Bit</b>        | 7              | 6                 | 5              | 4              | 3              | 2              | 1              | 0              |
| <b>Field</b>      | Y <sub>7</sub> | Y <sub>6</sub>    | Y <sub>5</sub> | Y <sub>4</sub> | Y <sub>3</sub> | Y <sub>2</sub> | Y <sub>1</sub> | Y <sub>0</sub> |

Data Type: 16-Bit 2's Complement Data

USAGE: The value in this register reflects the last USB delta Y data output or data queued for output. This register is included for *test purposes only*. For navigation use, use the HID defined commands. Absolute value is determined by the currently set resolution.

**Register read sequence Delta\_X\_H->Delta\_X\_L->Delta\_Y\_H->Delta\_Y\_L**

|                   |                |                   |                |                |                |                |                |                |
|-------------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| <b>MOTZ</b>       |                | Address: 0x07     |                |                |                |                |                | Type: Device   |
| Access: Read Only |                | Reset Value: 0x00 |                |                |                |                |                |                |
| <b>Bit</b>        | 7              | 6                 | 5              | 4              | 3              | 2              | 1              | 0              |
| <b>Field</b>      | Z <sub>7</sub> | Z <sub>6</sub>    | Z <sub>5</sub> | Z <sub>4</sub> | Z <sub>3</sub> | Z <sub>2</sub> | Z <sub>1</sub> | Z <sub>0</sub> |

Data Type: 8-Bit field

USAGE: If mouse is configured to contain a Z-wheel, this register contains the Z-wheel count. Range is from -127 to +127 decimal.

|                   |                        |                 |                 |                 |                 |                 |                 |                 |
|-------------------|------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>SQUAL</b>      | Address: 0x08          |                 |                 |                 |                 |                 |                 | Type: Device    |
| Access: Read Only | Reset Value: Undefined |                 |                 |                 |                 |                 |                 |                 |
| <b>Bit</b>        | 7                      | 6               | 5               | 4               | 3               | 2               | 1               | 0               |
| <b>Field</b>      | SQ <sub>7</sub>        | SQ <sub>6</sub> | SQ <sub>5</sub> | SQ <sub>4</sub> | SQ <sub>3</sub> | SQ <sub>2</sub> | SQ <sub>1</sub> | SQ <sub>0</sub> |

Data Type: Upper 8bits of a 10-bit unsigned integer

USAGE: SQUAL (Surface Quality) is a measure of ¼ of the number of valid features visible by the sensor in the current frame. Use the following formula to find the total number of valid features. The values range from 0 to 144.

$$\text{Number of features} = \text{SQUAL register value} * 4$$

Since small changes in the current frame can result in changes in SQUAL, slight variations in SQUAL on one surface is expected. The graph below shows 800 sequentially acquired SQUAL values, while a sensor was moved slowly over white paper. SQUAL is nearly equal to zero, if there is no surface below the sensor. SQUAL is typically maximized when the navigation surface is at the optimum distance from the imaging lens (the nominal Z-height).

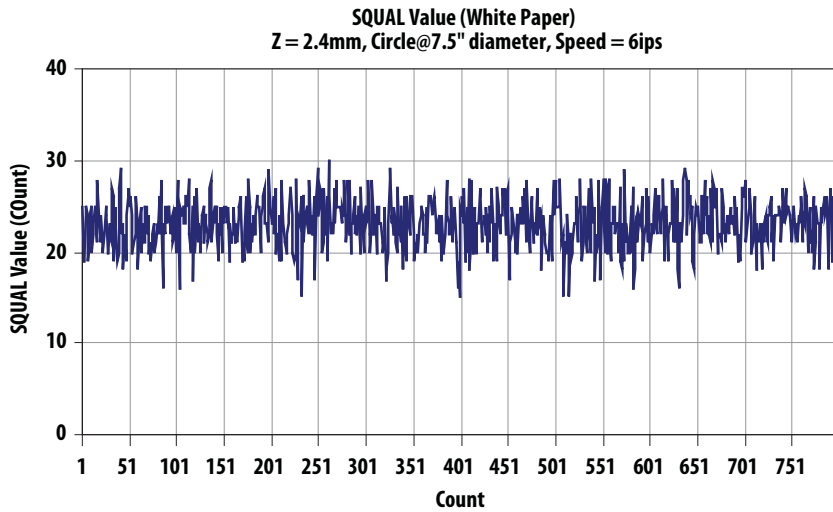


Figure 23. SQUAL Values (white paper)

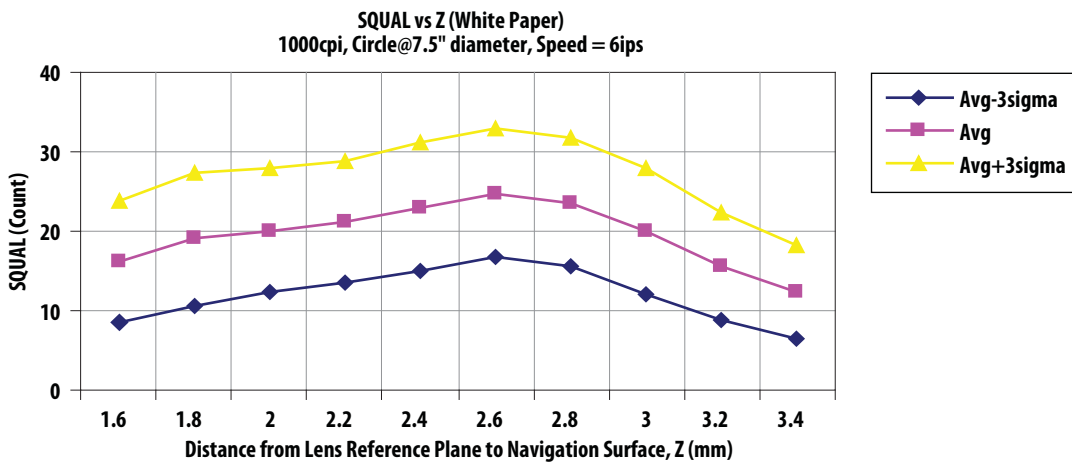


Figure 24. Mean SQUAL vs. Z (white paper)

**SHUT\_HI** Address: 0x9 Type: Device  
 Access: Read Oly Reset Value: 0x00

| Bit   | 7               | 6               | 5               | 4               | 3               | 2               | 1              | 0              |
|-------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|----------------|
| Field | S <sub>15</sub> | S <sub>14</sub> | S <sub>13</sub> | S <sub>12</sub> | S <sub>11</sub> | S <sub>10</sub> | S <sub>9</sub> | S <sub>8</sub> |

**SHUT\_LO** Address: 0x0A Type: Device  
 Access: Read Only Reset Value: Undefined

| Bit   | 7              | 6              | 5              | 4              | 3              | 2              | 1              | 0              |
|-------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Field | S <sub>7</sub> | S <sub>6</sub> | S <sub>5</sub> | S <sub>4</sub> | S <sub>3</sub> | S <sub>2</sub> | S <sub>1</sub> | S <sub>0</sub> |

Data Type: 16-bit number.

USAGE: The combination of SHUT\_HI and SHUT\_LO is a 16-bit number. This is the number of clocks the shutter was open for the last image taken. The units are in main clocks ticks (nominally 24MHz). To avoid split read issues, read SHUT\_Hi first.

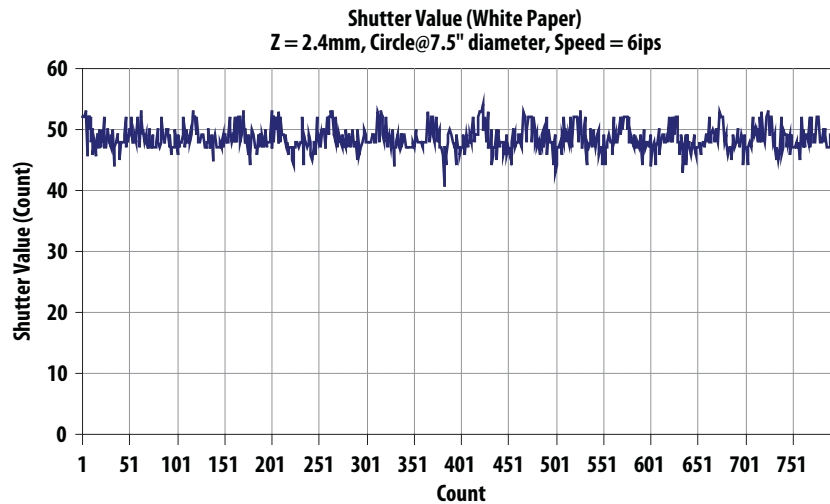


Figure 25. Shutter Values (white paper)

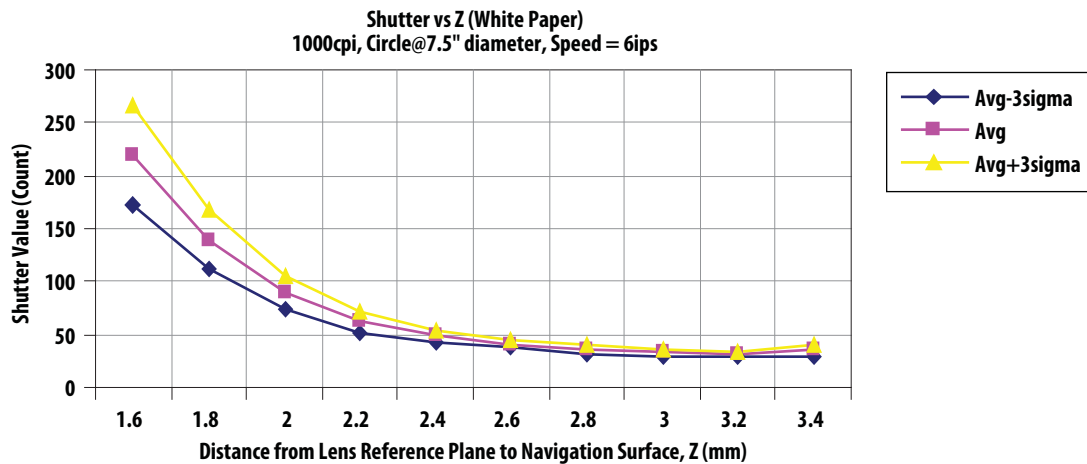


Figure 26. Mean Shutter vs. Z (white paper)

|                   |   |                        |                 |                 |                 |                 |                 |                 |
|-------------------|---|------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>PIX_MAX</b>    |   | Address: 0x0B          |                 |                 |                 |                 | Type: Device    |                 |
| Access: Read Only |   | Reset Value: Undefined |                 |                 |                 |                 |                 |                 |
| <b>Bit</b>        | 7 | 6                      | 5               | 4               | 3               | 2               | 1               | 0               |
| <b>Field</b>      | 0 | MX <sub>6</sub>        | MX <sub>5</sub> | MX <sub>4</sub> | MX <sub>3</sub> | MX <sub>2</sub> | MX <sub>1</sub> | MX <sub>0</sub> |

Data Type: 7-bit number.

USAGE: This is the maximum pixel value from the last image taken.

|                   |                 |                        |                 |                 |                 |                 |                 |                 |
|-------------------|-----------------|------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>PIX_ACCUM</b>  |                 | Address: 0x0C          |                 |                 |                 |                 | Type: Device    |                 |
| Access: Read Only |                 | Reset Value: Undefined |                 |                 |                 |                 |                 |                 |
| <b>Bit</b>        | 7               | 6                      | 5               | 4               | 3               | 2               | 1               | 0               |
| <b>Field</b>      | AC <sub>7</sub> | AC <sub>6</sub>        | AC <sub>5</sub> | AC <sub>4</sub> | AC <sub>3</sub> | AC <sub>2</sub> | AC <sub>1</sub> | AC <sub>0</sub> |

Data Type: High 8bits of 17-bit unsigned integer

USAGE: This is the accumulated pixel value from the last image taken. This register is used to find the average pixel value. For the 24x24 array raw image, only the upper 8bits are reported ([16:9]).

$$\text{Pixel\_Average} = \text{PIX\_ACCUM} / 1.125$$

|                   |   |                        |                 |                 |                 |                 |                 |                 |
|-------------------|---|------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>PIX_MIN</b>    |   | Address: 0x0D          |                 |                 |                 |                 | Type: Device    |                 |
| Access: Read Only |   | Reset Value: Undefined |                 |                 |                 |                 |                 |                 |
| <b>Bit</b>        | 7 | 6                      | 5               | 4               | 3               | 2               | 1               | 0               |
| <b>Field</b>      | 0 | MN <sub>6</sub>        | MN <sub>5</sub> | MN <sub>4</sub> | MN <sub>3</sub> | MN <sub>2</sub> | MN <sub>1</sub> | MN <sub>0</sub> |

Data Type: 8-bit number.

USAGE: This is the minimum pixel value from the last image taken.

|                    |       |                   |                 |                 |                 |                 |                 |                 |
|--------------------|-------|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>PIX_GRABBER</b> |       | Address: 0x0E     |                 |                 |                 | Type: Device    |                 |                 |
| Access: Read/Write |       | Reset Value: 0x00 |                 |                 |                 |                 |                 |                 |
| <b>Bit</b>         | 7     | 6                 | 5               | 4               | 3               | 2               | 1               | 0               |
| <b>Field</b>       | VALID | PG <sub>6</sub>   | PG <sub>5</sub> | PG <sub>4</sub> | PG <sub>3</sub> | PG <sub>2</sub> | PG <sub>1</sub> | PG <sub>0</sub> |

Data Type: 8-bit number.

USAGE: The pixel grabber captures 1 pixel per frame. If there is a valid pixel in the grabber when this is read, the MSB will be set, an internal counter will be incremented to capture the next pixel and the grabber will be armed to capture the next pixel. It will take 576 reads to upload the completed image. For each pixel read, the register should be polled (continuously read) until VALID = 1 before the PG [6:0] is taken as valid pixel data. Any write to this register will reset and arm the grabber to grab pixel 0 on the next image.

The X and Y directions with respect to the mouse case are shown in Figure 27. See pixel array numbering in Figure 28 that shows the readout order of the array. Rows are read from bottom to top and columns are from left to right.

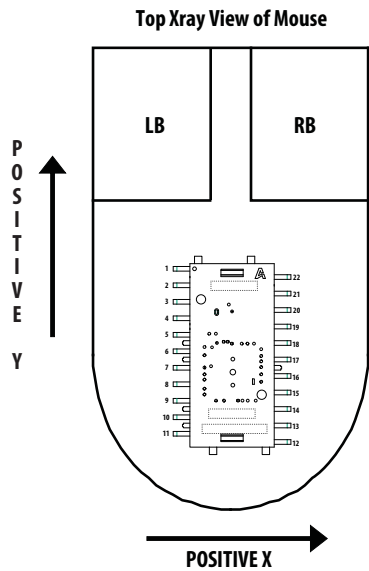


Figure 27. Directions are for a complete mouse, with the ADNS-6180-001 or ADNS-6180-002 lens

**Sensor looking at the navigation surface through the ADNS-6180-001 or ADNS-6180-002 lens from top of mouse.**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|
| 575 | 551 | 527 | 503 | 479 | 455 | 431 | 407 | 383 | 359 | 335 | 311 | 287 | 263 | 239 | 215 | 191 | 167 | 143 | 119 | 95 | 71 | 47 | 23 |
| 574 | 550 | 526 | 502 | 478 | 454 | 430 | 406 | 382 | 358 | 334 | 310 | 286 | 262 | 238 | 214 | 190 | 166 | 142 | 118 | 94 | 70 | 46 | 22 |
| 573 | 549 | 525 | 501 | 477 | 453 | 429 | 405 | 381 | 357 | 333 | 309 | 285 | 261 | 237 | 213 | 189 | 165 | 141 | 117 | 93 | 69 | 45 | 21 |
| 572 | 548 | 524 | 500 | 476 | 452 | 428 | 404 | 380 | 356 | 332 | 308 | 284 | 260 | 236 | 212 | 188 | 164 | 140 | 116 | 92 | 68 | 44 | 20 |
| 571 | 547 | 523 | 499 | 475 | 451 | 427 | 403 | 379 | 355 | 331 | 307 | 283 | 259 | 235 | 211 | 187 | 163 | 139 | 115 | 91 | 67 | 43 | 19 |
| 570 | 546 | 522 | 498 | 474 | 450 | 426 | 402 | 378 | 354 | 330 | 306 | 282 | 258 | 234 | 210 | 186 | 162 | 138 | 114 | 90 | 66 | 42 | 18 |
| 569 | 545 | 521 | 497 | 473 | 449 | 425 | 401 | 377 | 353 | 329 | 305 | 281 | 257 | 233 | 209 | 185 | 161 | 137 | 113 | 89 | 65 | 41 | 17 |
| 568 | 544 | 520 | 496 | 472 | 448 | 424 | 400 | 376 | 352 | 328 | 304 | 280 | 256 | 232 | 208 | 184 | 160 | 136 | 112 | 88 | 64 | 40 | 16 |
| 567 | 543 | 519 | 495 | 471 | 447 | 423 | 399 | 375 | 351 | 327 | 303 | 279 | 255 | 231 | 207 | 183 | 159 | 135 | 111 | 87 | 63 | 39 | 15 |
| 566 | 542 | 518 | 494 | 470 | 446 | 422 | 398 | 374 | 350 | 326 | 302 | 278 | 254 | 230 | 206 | 182 | 158 | 134 | 110 | 86 | 62 | 38 | 14 |
| 565 | 541 | 517 | 493 | 469 | 445 | 421 | 397 | 373 | 349 | 325 | 301 | 277 | 253 | 229 | 205 | 181 | 157 | 133 | 109 | 85 | 61 | 37 | 13 |
| 564 | 540 | 516 | 492 | 468 | 444 | 420 | 396 | 372 | 348 | 324 | 300 | 276 | 252 | 228 | 204 | 180 | 156 | 132 | 108 | 84 | 60 | 36 | 12 |
| 563 | 539 | 515 | 491 | 467 | 443 | 419 | 395 | 371 | 347 | 323 | 299 | 275 | 251 | 227 | 203 | 179 | 155 | 131 | 107 | 83 | 59 | 35 | 11 |
| 562 | 538 | 514 | 490 | 466 | 442 | 418 | 394 | 370 | 346 | 322 | 298 | 274 | 250 | 226 | 202 | 178 | 154 | 130 | 106 | 82 | 58 | 34 | 10 |
| 561 | 537 | 513 | 489 | 465 | 441 | 417 | 393 | 369 | 345 | 321 | 297 | 273 | 249 | 225 | 201 | 177 | 153 | 129 | 105 | 81 | 57 | 33 | 9  |
| 560 | 536 | 512 | 488 | 464 | 440 | 416 | 392 | 368 | 344 | 320 | 296 | 272 | 248 | 224 | 200 | 176 | 152 | 128 | 104 | 80 | 56 | 32 | 8  |
| 559 | 535 | 511 | 487 | 463 | 439 | 415 | 391 | 367 | 343 | 319 | 295 | 271 | 247 | 223 | 199 | 175 | 151 | 127 | 103 | 79 | 55 | 31 | 7  |
| 558 | 534 | 510 | 486 | 462 | 438 | 414 | 390 | 366 | 342 | 318 | 294 | 270 | 246 | 222 | 198 | 174 | 150 | 126 | 102 | 78 | 54 | 30 | 6  |
| 557 | 533 | 509 | 485 | 461 | 437 | 413 | 389 | 365 | 341 | 317 | 293 | 269 | 245 | 221 | 197 | 173 | 149 | 125 | 101 | 77 | 53 | 29 | 5  |
| 556 | 532 | 508 | 484 | 460 | 436 | 412 | 388 | 364 | 340 | 316 | 292 | 268 | 244 | 220 | 196 | 172 | 148 | 124 | 100 | 76 | 52 | 28 | 4  |
| 555 | 531 | 507 | 483 | 459 | 435 | 411 | 387 | 363 | 339 | 315 | 291 | 267 | 243 | 219 | 195 | 171 | 147 | 123 | 99  | 75 | 51 | 27 | 3  |
| 554 | 530 | 506 | 482 | 458 | 434 | 410 | 386 | 362 | 338 | 314 | 290 | 266 | 242 | 218 | 194 | 170 | 146 | 122 | 98  | 74 | 50 | 26 | 2  |
| 553 | 529 | 505 | 481 | 457 | 433 | 409 | 385 | 361 | 337 | 313 | 289 | 265 | 241 | 217 | 193 | 169 | 145 | 121 | 97  | 73 | 49 | 25 | 1  |
| 552 | 528 | 504 | 480 | 456 | 432 | 408 | 384 | 360 | 336 | 312 | 288 | 264 | 240 | 216 | 192 | 168 | 144 | 120 | 96  | 72 | 48 | 24 | 0  |

**Figure 28. Pixel Address Map of Navigation Surface Image**

|                    |          |          |                   |          |          |          |              |        |
|--------------------|----------|----------|-------------------|----------|----------|----------|--------------|--------|
| <b>OTP_CONFIG</b>  |          |          | Address: 0x4C     |          |          |          | Type: Device |        |
| Access: Read/Write |          |          | Reset Value: 0x00 |          |          |          |              |        |
| <b>Bit</b>         | 7        | 6        | 5                 | 4        | 3        | 2        | 1            | 0      |
| <b>Field</b>       | Reserved | Reserved | Reserved          | Reserved | Reserved | Reserved | Reserved     | OTP_EN |

Data Type: Bit field

USAGE: OTP commands enable/disable. Refer to OTP programming section.

| Field Name | Description  |
|------------|--|
| OTP_EN     | OTP commands<br>1 = Enabled<br><b>0 = Disabled</b> |

|                    |                       |                       |                       |                       |                       |                       |                       |                       |
|--------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| <b>OTP_ADDR</b>    |                       |                       | Address: 0x4D         |                       |                       |                       | Type: Device          |                       |
| Access: Read/Write |                       |                       | Reset Value: 0x00     |                       |                       |                       |                       |                       |
| <b>Bit</b>         | 7                     | 6                     | 5                     | 4                     | 3                     | 2                     | 1                     | 0                     |
| <b>Field</b>       | OTP_ADDR <sub>7</sub> | OTP_ADDR <sub>6</sub> | OTP_ADDR <sub>5</sub> | OTP_ADDR <sub>4</sub> | OTP_ADDR <sub>3</sub> | OTP_ADDR <sub>2</sub> | OTP_ADDR <sub>1</sub> | OTP_ADDR <sub>0</sub> |

Data Type: 8-bit number

USAGE: This register is the container of OTP address in OTP read/write command. Refer to OTP programming section.

|                    |                       |                       |                       |                       |                       |                       |                       |                       |
|--------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| <b>OTP_DATA</b>    |                       |                       | Address: 0x4E         |                       |                       |                       | Type: Device          |                       |
| Access: Read/Write |                       |                       | Reset Value: 0x00     |                       |                       |                       |                       |                       |
| <b>Bit</b>         | 7                     | 6                     | 5                     | 4                     | 3                     | 2                     | 1                     | 0                     |
| <b>Field</b>       | OTP_DATA <sub>7</sub> | OTP_DATA <sub>6</sub> | OTP_DATA <sub>5</sub> | OTP_DATA <sub>4</sub> | OTP_DATA <sub>3</sub> | OTP_DATA <sub>2</sub> | OTP_DATA <sub>1</sub> | OTP_DATA <sub>0</sub> |

Data Type: 8-bit number

USAGE: This register is the container of OTP data value in OTP read/write command. Refer to OTP programming section.

**OTP\_CTRL**

Access: Read/Write

Address: 0x4F

Reset Value: 0x00

Type: Device

| Bit   | 7        | 6        | 5        | 4        | 3        | 2       | 1  | 0  |
|-------|----------|----------|----------|----------|----------|---------|----|----|
| Field | Reserved | Reserved | Reserved | Reserved | Reserved | LOCK_L2 | RD | WR |

Data Type: Bit field

USAGE: This register controls the read, write and lock commands of OTP. The commands are auto clear for status check. Refer to OTP programming section.

| Field Name | Description   |
|------------|---|
| WR         | Enable write command to OTP<br>1 = Write to OTP<br><b>0 = Write command is completed</b>                      |
| RD         | Enable read command to OTP<br>1 = Read from OTP<br><b>0 = Data is ready to be read from OTP_DATA register</b> |
| LOCK_L2    | Enable OTP lock command<br>1 = Lock OTP space<br><b>0 = Lock command is completed</b>                         |

**OTP\_CTRLSTAT**

Access: Read only

Address: 0x50

Reset Value: Undefined

Type: Device

| Bit   | 7        | 6        | 5        | 4        | 3         | 2          | 1         | 0     |
|-------|----------|----------|----------|----------|-----------|------------|-----------|-------|
| Field | Reserved | Reserved | Reserved | Reserved | L2_CRC_OK | L2_LOCK_OK | WR_DENIED | WR_OK |

Data Type: Bit field

USAGE: This register shows the OTP control status. Refer to OTP programming section.

| Field Name | Description                                     |
|------------|---|
| WR_OK      | OTP write status<br>1 = OK<br>0 = Failed        |
| WR_DENIED  | OTP write access status<br>1 = Denied<br>0 = OK |
| L2_LOCK_OK | OTP lock status<br>1 = OK<br>0 = Failed         |
| L2_CRC_OK  | CRC test status<br>1 = OK<br>0 = Failed         |

**OTP\_RUNSTAT**

Access: Read only

Address: 0x51

Reset Value: Undefined

Type: Device

| Bit   | 7        | 6          | 5       | 4       | 3        | 2        | 1        | 0       |
|-------|----------|------------|---------|---------|----------|----------|----------|---------|
| Field | Reserved | L2_CHECKED | L2_LOCK | L2_USED | Reserved | Reserved | Reserved | DEV_RDY |

Data Type: Bit field

USAGE: This register shows the OTP run status. Refer to OTP programming section.

| Field Name | Description   |
|------------|---|
| DEV_RDY    | Device status<br>1 = Ready, reading or writing to OTP register is allowed<br>0 = Busy, do not read or write to OTP register yet |
| L2_USED    | OTP space status<br>1 = Used<br>0 = Unused  |
| L2_LOCKED  | OTP space locking status<br>1 = Locked<br>0 = Open  |
| L2_CHECKED | OTP status check<br>1 = Checked<br>0 = Unchecked  |

**LSR\_CTRL0**

Access: Read/Write

Address: 0x75

Reset Value: 0x00

Type: Device

| Bit   | 7 | 6 | 5 | 4 | 3 | 2       | 1 | 0       |
|-------|---|---|---|---|---|---------|---|---------|
| Field | 0 | 0 | 0 | 0 | 0 | LSR_CW1 | 0 | LSR_CW0 |

Data Type: Bit field

USAGE: This register is included strictly for *test purposes only*. It is to be used with LSR\_CTRL1 register, 0x76 where LSR\_CW\_COMP1 and LSR\_CW\_COMP0 bits must contain the complement of LSR\_CW1 and LSR\_CW0 bits in order to set the laser to continuous (CW) mode. Other bits MUST be set to 0.

| Field Name        | Description   |
|-------------------|---|
| LSR_CW1 : LSR_CW0 | Laser drive mode<br>11 = CW mode ON<br><b>00 = Normal operation in pulse mode</b> |

|                    |   |                   |   |   |   |                  |   |                  |  |
|--------------------|---|-------------------|---|---|---|------------------|---|------------------|--|
| <b>LSR_CTRL1</b>   |   | Address: 0x76     |   |   |   | Type: Device     |   |                  |  |
| Access: Read/Write |   | Reset Value: 0x0F |   |   |   |                  |   |                  |  |
| <b>Bit</b>         | 7 | 6                 | 5 | 4 | 3 | 2                | 1 | 0                |  |
| <b>Field</b>       | 0 | 0                 | 0 | 0 | 0 | LSR_CW_<br>COMP1 | 0 | LSR_CW_<br>COMP0 |  |

Data Type: Bit field

USAGE: This register is included strictly for *test purposes only*. It is to be used with LSR\_CTRL1 register, 0x76 where LSR\_CW\_COMP1 and LSR\_CW\_COMP0 bits must contain the complement of LSR\_CW1 and LSR\_CW0 bits in order to set the laser to continuous (CW) mode. Other bits MUST be set to 0.

| Field Name                     | Description  |
|--------------------------------|--|
| LSR_CW_COMP1 :<br>LSR_CW_COMP0 | MUST be complement of LSR_CW[1-0] bit in register 0x75 |

|                   |                      |                      |                      |                      |                      |                      |                      |                      |  |
|-------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--|
| <b>INV_REV_ID</b> |                      | Address: 0x7E        |                      |                      |                      | Type: Device         |                      |                      |  |
| Access: Read only |                      | Reset Value: 0xFE    |                      |                      |                      |                      |                      |                      |  |
| <b>Bit</b>        | 7                    | 6                    | 5                    | 4                    | 3                    | 2                    | 1                    | 0                    |  |
| <b>Field</b>      | INV_RID <sub>7</sub> | INV_RID <sub>6</sub> | INV_RID <sub>5</sub> | INV_RID <sub>4</sub> | INV_RID <sub>3</sub> | INV_RID <sub>2</sub> | INV_RID <sub>1</sub> | INV_RID <sub>0</sub> |  |

Data Type: 8-bit number with current revision of the IC.

USAGE: Contains the inverse of the revision ID which is located in register 0x01.

|                    |                             |                             |                             |                             |                             |                             |                             |                             |  |
|--------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|--|
| <b>L2_USE_OTP</b>  |                             | Address: 0xBB               |                             |                             |                             | Type: OTP                   |                             |                             |  |
| Access: Read/Write |                             | Reset Value: 0x00           |                             |                             |                             |                             |                             |                             |  |
| <b>Bit</b>         | 7                           | 6                           | 5                           | 4                           | 3                           | 2                           | 1                           | 0                           |  |
| <b>Field</b>       | L2_USE_<br>OTP <sub>7</sub> | L2_USE_<br>OTP <sub>6</sub> | L2_USE_<br>OTP <sub>5</sub> | L2_USE_<br>OTP <sub>4</sub> | L2_USE_<br>OTP <sub>3</sub> | L2_USE_<br>OTP <sub>2</sub> | L2_USE_<br>OTP <sub>1</sub> | L2_USE_<br>OTP <sub>0</sub> |  |

Data Type: 8-bit field.

USAGE: Bypass OTP configuration if all bits are zero. MUST write 0xFF to this register to enable OTP operation. Once enabled, all OTP registers must be written as the default values are zero value.

**CPI\_SET0**

Access: Read/Write

Address: 0xBC  
Reset Value: 0x0A

Type: OTP

|              |          |          |          |                   |                   |                   |                   |                   |
|--------------|----------|----------|----------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Bit</b>   | 7        | 6        | 5        | 4                 | 3                 | 2                 | 1                 | 0                 |
| <b>Field</b> | Reserved | Reserved | Reserved | CPI0 <sub>4</sub> | CPI0 <sub>3</sub> | CPI0 <sub>2</sub> | CPI0 <sub>1</sub> | CPI0 <sub>0</sub> |

Data Type: 8-Bit field

USAGE: This register sets the default resolution setting when the sensor is powered up. It is also the default 1<sup>st</sup> resolution setting (S1) when On-the-Fly (OTF) resolution mode is enabled. The performance of max setting is surface dependent. The resolution settings shown below are approximate values.

| <b>CPI0[4:0]</b> | <b>Approximate Resolution (cpi)</b> | <b>CPI0[4:0]</b> | <b>Approximate Resolution (cpi)</b> |
|------------------|-------------------------------------|------------------|-------------------------------------|
| 00000-00011      | Reserved                            | 01111            | 1500                                |
| 00100            | 400                                 | 10000            | 1600                                |
| 00101            | 500                                 | 10001            | 1700                                |
| 00110            | 600                                 | 10010            | 1800                                |
| 00111            | 700                                 | 10011            | 1900                                |
| 01000            | 800                                 | 10100            | 2000                                |
| 01001            | 900                                 | 10101            | 2100                                |
| <b>01010</b>     | <b>1000</b>                         | 10110            | 2200                                |
| 01011            | 1100                                | 10111            | 2300                                |
| 01100            | 1200                                | 11000            | 2400                                |
| 01101            | 1300                                | 11001-11111      | Reserved                            |
| 01110            | 1400                                |                  |                                     |

**CPI\_SET1**

Access: Read/Write

Address: 0xBD  
Reset Value: 0x10

Type: OTP

|              |          |          |          |                   |                   |                   |                   |                   |
|--------------|----------|----------|----------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>Bit</b>   | 7        | 6        | 5        | 4                 | 3                 | 2                 | 1                 | 0                 |
| <b>Field</b> | Reserved | Reserved | Reserved | CPI1 <sub>4</sub> | CPI1 <sub>3</sub> | CPI1 <sub>2</sub> | CPI1 <sub>1</sub> | CPI1 <sub>0</sub> |

Data Type: 8-Bit field

USAGE: This register sets the 2<sup>nd</sup> resolution setting (S2) when On-the-Fly (OTF) resolution mode is enabled. The performance of max setting is surface dependent. Refer to resolution table in CPI\_SET0.

|                    |          |          |                   |                   |                   |                   |                   |                   |
|--------------------|----------|----------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| <b>CPI_SET2</b>    |          |          | Address: 0xBE     |                   |                   |                   | Type: OTP         |                   |
| Access: Read/Write |          |          | Reset Value: 0x05 |                   |                   |                   |                   |                   |
| <b>Bit</b>         | 7        | 6        | 5                 | 4                 | 3                 | 2                 | 1                 | 0                 |
| <b>Field</b>       | Reserved | Reserved | Reserved          | CPI2 <sub>4</sub> | CPI2 <sub>3</sub> | CPI2 <sub>2</sub> | CPI2 <sub>1</sub> | CPI2 <sub>0</sub> |

Data Type: 8-Bit field

USAGE: This register sets the 3<sup>rd</sup> resolution setting (S3) when On-the-Fly (OTF) resolution mode is enabled. The performance of max setting is surface dependent. Refer to resolution table in CPI\_SET0.

|                    |          |          |                   |          |          |          |                 |                 |
|--------------------|----------|----------|-------------------|----------|----------|----------|-----------------|-----------------|
| <b>MOTCONFIG1</b>  |          |          | Address: 0xBF     |          |          |          | Type: OTP       |                 |
| Access: Read/Write |          |          | Reset Value: 0x00 |          |          |          |                 |                 |
| <b>Bit</b>         | 7        | 6        | 5                 | 4        | 3        | 2        | 1               | 0               |
| <b>Field</b>       | Reserved | Reserved | Reserved          | Reserved | Reserved | Reserved | MF <sub>1</sub> | MF <sub>0</sub> |

Data Type: Bit field

USAGE: This register allows configuration of USB motion reporting format. 12-bit or 16-bit is the recommended motion reporting format to achieve the optimum performance of the sensor. 8-bit is the optional setting for the system supporting 8-bit motion reporting only and it will have trade off on speed performance.

| Field Name        | Description  |
|-------------------|--|
| MF <sub>1-0</sub> | Sets USB motion reporting format<br><b>00 = 12-bit</b><br>01 = 8-bit<br>10 = 16-bit<br>11 = Reserved |

**ROTATION**

Access: Read/Write

Address: 0xC0

Reset Value: 0x07

Type: OTP

| Bit   | 7        | 6        | 5        | 4        | 3        | 2       | 1     | 0     |
|-------|----------|----------|----------|----------|----------|---------|-------|-------|
| Field | Reserved | Reserved | Reserved | Reserved | Reserved | SWAP_XY | INV_X | INV_Y |

Data Type: Bit field

USAGE: This register can be used to re-orientate the sensor motion reporting direction. The SWAP\_XY operation is always performed before INV\_X and INV\_Y inversion operations.

| Field Name | Description  |
|------------|--|
| SWAP_XY    | 1 = Swap X and Y axis motion data report direction |
| INV_X      | 1 = Invert X axis motion data report direction     |
| INV_Y      | 1 = Invert Y axis motion data report direction     |

| Rotation | SWAP | INV_X | INV_Y |
|----------|------|-------|-------|
| 0        | 1    | 1     | 1     |
| 90       | 0    | 0     | 1     |
| 180      | 1    | 0     | 0     |
| 270      | 0    | 1     | 0     |

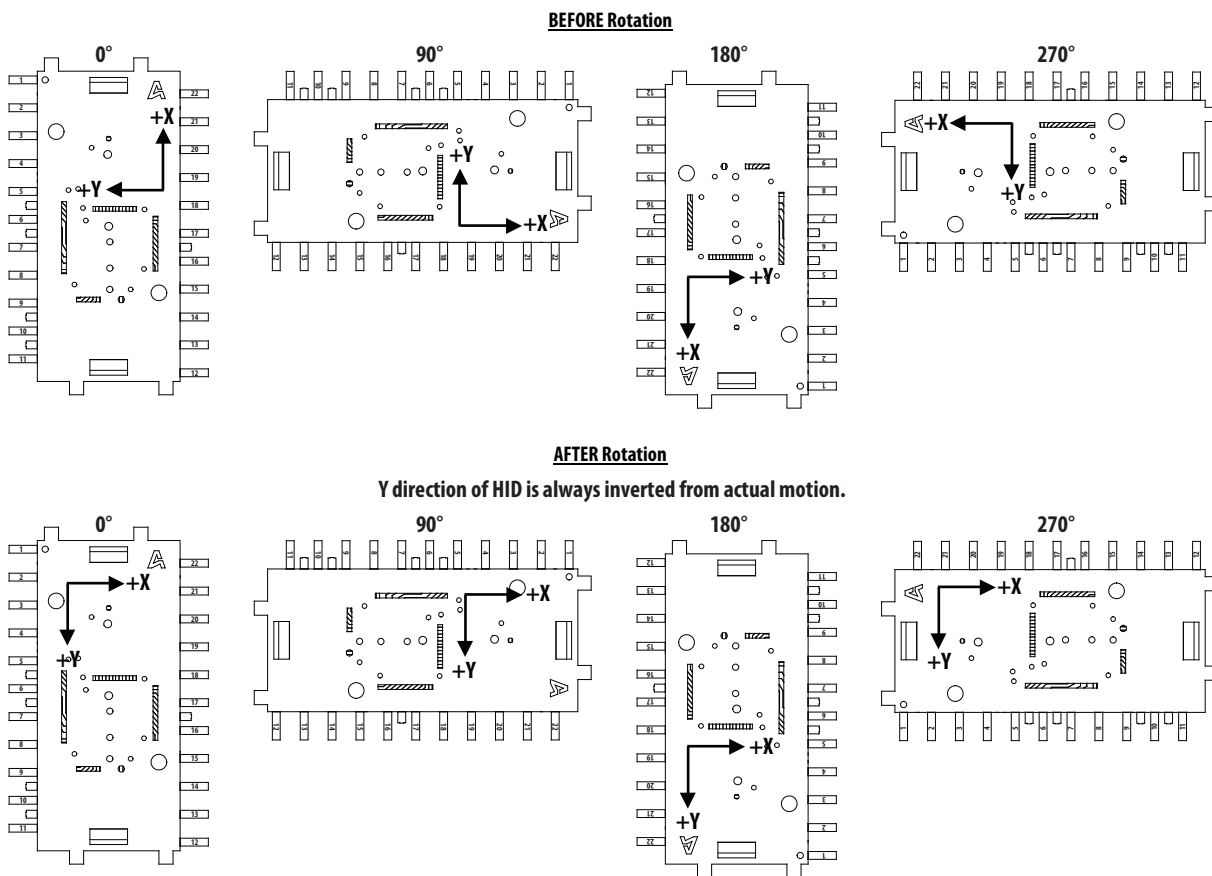


Figure 29. XY Motion Reporting Direction when Lens is attached on the Sensor

---

**DEVCONFIG**

Access: Read/Write

Address: 0xC1  
Reset Value: 0x00Type: OTP

---

|              |                 |                 |                  |                  |   |   |   |   |
|--------------|-----------------|-----------------|------------------|------------------|---|---|---|---|
| <b>Bit</b>   | 7               | 6               | 5                | 4                | 3 | 2 | 1 | 0 |
| <b>Field</b> | KM <sub>1</sub> | KM <sub>0</sub> | OTF <sub>1</sub> | OTF <sub>0</sub> | 0 | 0 | 0 | 0 |

---

Data Type: Bit field

USAGE: This register is used to enable the OTF resolution and KeyMap (KM) modes in the OTP. Refer to Table 4 on OTF Resolution and KeyMap Mode Configurations for details.

---

| <b>Field Name</b>  | <b>Description</b>  |
|--------------------|---|
| OTF <sub>1-0</sub> | Set OTF mode.<br><b>00 / 11 = Disabled</b><br>10 / 01 = Enabled |
| KM <sub>1-0</sub>  | KM mode<br><b>00 / 11 = Disabled</b><br>10 / 01 = Enabled       |

---

**CODEA\_KEY1**

Access: Read/Write

Address: 0xC2

Reset Value: 0x00

Type: OTP

| Bit   | 7     | 6     | 5       | 4      | 3     | 2     | 1       | 0      |
|-------|-------|-------|---------|--------|-------|-------|---------|--------|
| Field | R-Gui | R-Alt | R-Shift | R-Ctrl | L-Gui | L-Alt | L-Shift | L-Ctrl |

Data Type: Bit field

USAGE: This register is used together with CODEA\_KEY2 register to form CodeA for KM1 output. It is the KeyMap modifier key setting.

**CodeA = CODEA\_KEY1 + CODEA\_KEY2**

For 3D flip application, CodeA = Alt + Tab

CODEA\_KEY1 = 0x40 (R-Alt = 1) or 0x04 (L-Alt = 1)

CODEA\_KEY2 = 0x2B (Tab key)

| Field Name | Description  |
|------------|--|
| R-Gui      | Microsoft logo GUI key on the right side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled |
| R-Alt      | Alt key on the right side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled                |
| R-Shift    | Shift key on the right side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled              |
| R-Ctrl     | Ctrl key on the right side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled               |
| L-Gui      | Microsoft logo GUI on the left side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled      |
| R-Alt      | Alt key on the left side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled                 |
| R-Shift    | Shift key on the left side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled               |
| R-Ctrl     | Ctrl key on the left side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled                |

**CODEB\_KEY1**

Access: Read/Write

Address: 0xC3

Reset Value: 0x00

Type: OTP

| Bit   | 7     | 6     | 5       | 4      | 3     | 2     | 1       | 0      |
|-------|-------|-------|---------|--------|-------|-------|---------|--------|
| Field | R-Gui | R-Alt | R-Shift | R-Ctrl | L-Gui | L-Alt | L-Shift | L-Ctrl |

Data Type: Bit field

USAGE: This register is used together with CODEB\_KEY2 register to form CodeB for KM2 output. It is the KeyMap modifier key setting.

**CodeB = CODEB\_KEY1 + CODEB\_KEY2**

For Windows Security Logon/Logout application, CodeB = Alt + Ctrl + Del

CODEB\_KEY1 = 0x05 (L-Alt = 1, L-Ctrl = 1)

CODEB\_KEY2 = 0x4C (Del key)

| Field Name | Description  |
|------------|--|
| R-Gui      | Microsoft logo GUI key on the right side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled |
| R-Alt      | Alt key on the right side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled                |
| R-Shift    | Shift key on the right side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled              |
| R-Ctrl     | Ctrl key on the right side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled               |
| L-Gui      | Microsoft logo GUI on the left side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled      |
| R-Alt      | Alt key on the left side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled                 |
| R-Shift    | Shift key on the left side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled               |
| R-Ctrl     | Ctrl key on the left side of keyboard<br><b>0 = Disabled</b><br>1 = Enabled                |

|                    |       |                   |       |       |       |           |       |       |  |
|--------------------|-------|-------------------|-------|-------|-------|-----------|-------|-------|--|
| <b>CODEA_KEY2</b>  |       | Address: 0xC4     |       |       |       | Type: OTP |       |       |  |
| Access: Read/Write |       | Reset Value: 0x00 |       |       |       |           |       |       |  |
| <b>Bit</b>         | 7     | 6                 | 5     | 4     | 3     | 2         | 1     | 0     |  |
| <b>Field</b>       | SC_A7 | SC_A6             | SC_A5 | SC_A4 | SC_A3 | SC_A2     | SC_A1 | SC_A0 |  |

Data Type: 8-Bit number

USAGE: This register is used together with CODEA\_KEY1 register to form CodeA for KM1 output. Any keyboard key scan codes listed in Keyboard Scan Code Specification Windows Platform Design Notes can be used but only limited to one scan code.

**CodeA = CODEA\_KEY1 + CODEA\_KEY2**

For 3D flip application, CodeA = Alt + Tab

CODEA\_KEY1 = 0x40 (R-Alt = 1) or 0x04 (L-Alt = 1)

CODEA\_KEY2 = 0x2B (Tab key)

|                    |       |                   |       |       |       |           |       |       |  |
|--------------------|-------|-------------------|-------|-------|-------|-----------|-------|-------|--|
| <b>CODEB_KEY2</b>  |       | Address: 0xC5     |       |       |       | Type: OTP |       |       |  |
| Access: Read/Write |       | Reset Value: 0x00 |       |       |       |           |       |       |  |
| <b>Bit</b>         | 7     | 6                 | 5     | 4     | 3     | 2         | 1     | 0     |  |
| <b>Field</b>       | SC_A7 | SC_A6             | SC_A5 | SC_A4 | SC_A3 | SC_A2     | SC_A1 | SC_A0 |  |

Data Type: 8-Bit number

USAGE: This register is used together with CODEA\_KEY1 register to form CodeA for KM2 output. Any keyboard key scan codes listed in Keyboard Scan Code Specification Windows Platform Design Notes can be used but only limited to one scan code.

**CodeB = CODEB\_KEY1 + CODEB\_KEY2**

For Windows Security Logon/Logout application, CodeB = Alt + Ctrl + Del

CODEB\_KEY1 = 0x05 (L-Alt = 1, L-Ctrl = 1)

CODEB\_KEY2 = 0x4C (Del key)

|                    |          |                   |          |          |          |           |          |          |  |
|--------------------|----------|-------------------|----------|----------|----------|-----------|----------|----------|--|
| <b>LONGPRESS</b>   |          | Address: 0xC6     |          |          |          | Type: OTP |          |          |  |
| Access: Read/Write |          | Reset Value: 0x10 |          |          |          |           |          |          |  |
| <b>Bit</b>         | 7        | 6                 | 5        | 4        | 3        | 2         | 1        | 0        |  |
| <b>Field</b>       | L_Press7 | L_Press6          | L_Press5 | L_Press4 | L_Press3 | L_Press2  | L_Press1 | L_Press0 |  |

Data Type: 8-Bit number

USAGE: This register is used to set the button press duration for OTF\_L. The press duration is range from 16ms to 4s. Each bit step change is 16ms.

|                    |          |          |                   |          |          |          |           |        |
|--------------------|----------|----------|-------------------|----------|----------|----------|-----------|--------|
| <b>TW_CONFIG</b>   |          |          | Address: 0xC7     |          |          |          | Type: OTP |        |
| Access: Read/Write |          |          | Reset Value: 0x00 |          |          |          |           |        |
| <b>Bit</b>         | 7        | 6        | 5                 | 4        | 3        | 2        | 1         | 0      |
| <b>Field</b>       | Reserved | Reserved | Reserved          | Reserved | Reserved | Reserved | Reserved  | TW_NEN |

Data Type: Bit field

USAGE: This register is used to set the Tilt Wheel mode for horizontal scrolling.

| Field Name | Description   |
|------------|---|
| TW_NEN     | Set Tilt Wheel mode<br><b>0 = Enabled</b><br>1 = Disabled |

|                    |                  |                  |                   |                  |                  |                  |                  |                  |
|--------------------|------------------|------------------|-------------------|------------------|------------------|------------------|------------------|------------------|
| <b>PID0</b>        |                  |                  | Address: 0xC8     |                  |                  |                  | Type: OTP        |                  |
| Access: Read/Write |                  |                  | Reset Value: 0x16 |                  |                  |                  |                  |                  |
| <b>Bit</b>         | 7                | 6                | 5                 | 4                | 3                | 2                | 1                | 0                |
| <b>Field</b>       | PID <sub>7</sub> | PID <sub>6</sub> | PID <sub>5</sub>  | PID <sub>4</sub> | PID <sub>3</sub> | PID <sub>2</sub> | PID <sub>1</sub> | PID <sub>0</sub> |

|                    |                   |                   |                   |                   |                   |                   |                  |                  |
|--------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------------|------------------|
| <b>PID1</b>        |                   |                   | Address: 0xC9     |                   |                   |                   | Type: OTP        |                  |
| Access: Read/Write |                   |                   | Reset Value: 0x07 |                   |                   |                   |                  |                  |
| <b>Bit</b>         | 7                 | 6                 | 5                 | 4                 | 3                 | 2                 | 1                | 0                |
| <b>Field</b>       | PID <sub>15</sub> | PID <sub>14</sub> | PID <sub>13</sub> | PID <sub>12</sub> | PID <sub>11</sub> | PID <sub>10</sub> | PID <sub>9</sub> | PID <sub>8</sub> |

Data Type: 16-Bit number

USAGE: These registers are used to customize device USB PID. **Default is Avago's PID = 0x0716.**

|                    |                  |                  |                   |                  |                  |                  |                  |                  |
|--------------------|------------------|------------------|-------------------|------------------|------------------|------------------|------------------|------------------|
| <b>VID0</b>        |                  |                  | Address: 0xCA     |                  |                  |                  | Type: OTP        |                  |
| Access: Read/Write |                  |                  | Reset Value: 0x2F |                  |                  |                  |                  |                  |
| <b>Bit</b>         | 7                | 6                | 5                 | 4                | 3                | 2                | 1                | 0                |
| <b>Field</b>       | VID <sub>7</sub> | VID <sub>6</sub> | VID <sub>5</sub>  | VID <sub>4</sub> | VID <sub>3</sub> | VID <sub>2</sub> | VID <sub>1</sub> | VID <sub>0</sub> |

|                    |                   |                   |                   |                   |                   |                   |                  |                  |
|--------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------------|------------------|
| <b>VID1</b>        |                   |                   | Address: 0xCB     |                   |                   |                   | Type: OTP        |                  |
| Access: Read/Write |                   |                   | Reset Value: 0x19 |                   |                   |                   |                  |                  |
| <b>Bit</b>         | 7                 | 6                 | 5                 | 4                 | 3                 | 2                 | 1                | 0                |
| <b>Field</b>       | VID <sub>15</sub> | VID <sub>14</sub> | VID <sub>13</sub> | VID <sub>12</sub> | VID <sub>11</sub> | VID <sub>10</sub> | VID <sub>9</sub> | VID <sub>8</sub> |

Data Type: 16-Bit number

USAGE: These registers are used to customize device VID. **Default is Avago's VID = 0x192F.**

|                    |                       |                       |                       |                       |                       |                       |                       |                       |  |
|--------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|--|
| <b>MSTR_LEN</b>    |                       | Address: 0xCC         |                       |                       |                       | Type: OTP             |                       |                       |  |
| Access: Read/Write |                       | Reset Value: 0x0C     |                       |                       |                       |                       |                       |                       |  |
| <b>Bit</b>         | 7                     | 6                     | 5                     | 4                     | 3                     | 2                     | 1                     | 0                     |  |
| <b>Field</b>       | MSTR_LEN <sub>7</sub> | MSTR_LEN <sub>6</sub> | MSTR_LEN <sub>5</sub> | MSTR_LEN <sub>4</sub> | MSTR_LEN <sub>3</sub> | MSTR_LEN <sub>2</sub> | MSTR_LEN <sub>1</sub> | MSTR_LEN <sub>0</sub> |  |

Data Type: 8-bit number.

USAGE: Specifies the manufacturing string description length in bytes inclusive (plus 1 for descriptor type). One character = 2 bytes.

Number of bytes = 1 MSTR\_LEN + 2 \*(MFR\_STR characters) + 1 descriptor type

**Default: Number of bytes = 1 + (2 \* 5) + 1 = 12 = 0x0C**

|                              |                      |                       |                      |                      |                      |                      |                      |                      |  |
|------------------------------|----------------------|-----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--|
| <b>MFR_STR0 to MFR_STR11</b> |                      | Address: 0xCD to 0xD8 |                      |                      |                      | Type: OTP            |                      |                      |  |
| Access: Read/Write           |                      | Reset Value: "Avago"  |                      |                      |                      |                      |                      |                      |  |
| <b>Bit</b>                   | 7                    | 6                     | 5                    | 4                    | 3                    | 2                    | 1                    | 0                    |  |
| <b>Field</b>                 | MFR_STR <sub>7</sub> | MFR_STR <sub>6</sub>  | MFR_STR <sub>5</sub> | MFR_STR <sub>4</sub> | MFR_STR <sub>3</sub> | MFR_STR <sub>2</sub> | MFR_STR <sub>1</sub> | MFR_STR <sub>0</sub> |  |

Data Type: 12 bytes number

USAGE: These registers allow maximum of 11 characters in ASCII. Default = "Avago"

| Register Name | Address | Default Value |           |
|---------------|---------|---------------|-----------|
|               |         | ASCII         | Character |
| MFR_STR0      | 0xCD    | 0x41          | "A"       |
| MFR_STR1      | 0xCE    | 0x76          | "v"       |
| MFR_STR2      | 0xCF    | 0x61          | "a"       |
| MFR_STR3      | 0xD0    | 0x67          | "g"       |
| MFR_STR4      | 0xD1    | 0x6F          | "o"       |
| MFR_STR5      | 0xD2    | 0x00          | Null      |
| MFR_STR6      | 0xD3    | 0x00          | Null      |
| MFR_STR7      | 0xD4    | 0x00          | Null      |
| MFR_STR8      | 0xD5    | 0x00          | Null      |
| MFR_STR9      | 0xD6    | 0x00          | Null      |
| MFR_STR10     | 0xD7    | 0x00          | Null      |
| MFR_STR11     | 0xD8    | 0x00          | Null      |

|                    |                       |                       |                       |                       |                       |                       |                       |                       |  |
|--------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|--|
| <b>PSTR_LEN</b>    |                       | Address: 0xD9         |                       |                       |                       | Type: OTP             |                       |                       |  |
| Access: Read/Write |                       | Reset Value: 0x34     |                       |                       |                       |                       |                       |                       |  |
| <b>Bit</b>         | 7                     | 6                     | 5                     | 4                     | 3                     | 2                     | 1                     | 0                     |  |
| <b>Field</b>       | PSTR_LEN <sub>7</sub> | PSTR_LEN <sub>6</sub> | PSTR_LEN <sub>5</sub> | PSTR_LEN <sub>4</sub> | PSTR_LEN <sub>3</sub> | PSTR_LEN <sub>2</sub> | PSTR_LEN <sub>1</sub> | PSTR_LEN <sub>0</sub> |  |

Data Type: 8-bit number.

USAGE: Specifies the product string description length in bytes inclusive (plus 1 for descriptor type). One character = 2 bytes.

Number of bytes = 1 PSTR\_LEN + 2 \*(PROD\_STR characters) + 1 descriptor type

**Default: Number of bytes = 1 + (2 \* 25) + 1 = 52 = 0x34**

|                                |                       |  |                       |                       |                       |                       |                       |                       |  |
|--------------------------------|-----------------------|--|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|--|
| <b>PROD_STR0 to PROD_STR28</b> |                       | Address: 0xDA to 0xF5                    |                       |                       |                       | Type: OTP             |                       |                       |  |
| Access: Read/Write             |                       | Reset Value: "USB LaserStream(TM) Mouse" |                       |                       |                       |                       |                       |                       |  |
| <b>Bit</b>                     | 7                     | 6  | 5                     | 4                     | 3                     | 2                     | 1                     | 0                     |  |
| <b>Field</b>                   | PROD_STR <sub>7</sub> | PROD_STR <sub>6</sub>                    | PROD_STR <sub>5</sub> | PROD_STR <sub>4</sub> | PROD_STR <sub>3</sub> | PROD_STR <sub>2</sub> | PROD_STR <sub>1</sub> | PROD_STR <sub>0</sub> |  |

Data Type: 28 bytes number

USAGE: These registers allow maximum of 28 characters in ASCII. Default = "USB LaserStream(TM) Mouse"

| Register Name | Address | Default Value |           | Register Name | Address | Default Value |           |
|---------------|---------|---------------|-----------|---------------|---------|---------------|-----------|
|               |         | ASCII         | Character |               |         | ASCII         | Character |
| PROD_STR0     | 0xDA    | 0x55          | "U"       | PROD_STR14    | 0xE8    | 0x6D          | "m"       |
| PROD_STR1     | 0xDB    | 0x53          | "S"       | PROD_STR15    | 0xE9    | 0x28          | "("       |
| PROD_STR2     | 0xDC    | 0x42          | "B"       | PROD_STR16    | 0xEA    | 0x54          | "T"       |
| PROD_STR3     | 0xDD    | 0x20          | " "       | PROD_STR17    | 0xEB    | 0x4D          | "M"       |
| PROD_STR4     | 0xDE    | 0x4C          | "L"       | PROD_STR18    | 0xEC    | 0x29          | ")"       |
| PROD_STR5     | 0xDF    | 0x61          | "a"       | PROD_STR19    | 0xED    | 0x20          | " "       |
| PROD_STR6     | 0xE0    | 0x73          | "s"       | PROD_STR20    | 0xEE    | 0x4D          | "M"       |
| PROD_STR7     | 0xE1    | 0x65          | "e"       | PROD_STR21    | 0xEF    | 0x6F          | "o"       |
| PROD_STR8     | 0xE2    | 0x72          | "r"       | PROD_STR22    | 0xF0    | 0x75          | "u"       |
| PROD_STR9     | 0xE3    | 0x53          | "S"       | PROD_STR23    | 0xF1    | 0x73          | "s"       |
| PROD_STR10    | 0xE4    | 0x74          | "t"       | PROD_STR24    | 0xF2    | 0x65          | "e"       |
| PROD_STR11    | 0xE5    | 0x72          | "r"       | PROD_STR25    | 0xF3    | 0x00          | Null      |
| PROD_STR12    | 0xE6    | 0x65          | "e"       | PROD_STR26    | 0xF4    | 0x00          | Null      |
| PROD_STR13    | 0xE7    | 0x61          | "a"       | PROD_STR27    | 0xF5    | 0x00          | Null      |

|                    |                  |                   |                  |                  |                  |                  |                  |                  |
|--------------------|------------------|-------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| <b>DEV_NUM0</b>    |                  | Address: 0xF6     |                  |                  |                  | Type: OTP        |                  |                  |
| Access: Read/Write |                  | Reset Value: 0x00 |                  |                  |                  |                  |                  |                  |
| <b>Bit</b>         | 7                | 6                 | 5                | 4                | 3                | 2                | 1                | 0                |
| <b>Field</b>       | DEV <sub>7</sub> | DEV <sub>6</sub>  | DEV <sub>5</sub> | DEV <sub>4</sub> | DEV <sub>3</sub> | DEV <sub>2</sub> | DEV <sub>1</sub> | DEV <sub>0</sub> |

|                    |                   |                   |                   |                   |                   |                   |                  |                  |
|--------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------------|------------------|
| <b>DEV_NUM1</b>    |                   | Address: 0xF7     |                   |                   |                   | Type: OTP         |                  |                  |
| Access: Read/Write |                   | Reset Value: 0x00 |                   |                   |                   |                   |                  |                  |
| <b>Bit</b>         | 7                 | 6                 | 5                 | 4                 | 3                 | 2                 | 1                | 0                |
| <b>Field</b>       | DEV <sub>15</sub> | DEV <sub>14</sub> | DEV <sub>13</sub> | DEV <sub>12</sub> | DEV <sub>11</sub> | DEV <sub>10</sub> | DEV <sub>9</sub> | DEV <sub>8</sub> |

Data Type: 16-Bit number

USAGE: These registers are used to customize device number, which is optional to be assigned by manufacturer.

|                    |                       |                       |                       |                       |                       |                       |                       |                       |
|--------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| <b>OTPLOCK2</b>    |                       | Address: 0xFA         |                       |                       |                       | Type: OTP             |                       |                       |
| Access: Read/Write |                       | Reset Value: 0x00     |                       |                       |                       |                       |                       |                       |
| <b>Bit</b>         | 7                     | 6                     | 5                     | 4                     | 3                     | 2                     | 1                     | 0                     |
| <b>Field</b>       | OTPLOCK <sub>27</sub> | OTPLOCK <sub>26</sub> | OTPLOCK <sub>25</sub> | OTPLOCK <sub>24</sub> | OTPLOCK <sub>23</sub> | OTPLOCK <sub>22</sub> | OTPLOCK <sub>21</sub> | OTPLOCK <sub>20</sub> |

Data Type: 8-bit field.

USAGE: Must write 0xFF in this register to lock the OTP configuration. Warning: Other values will cause the sensor to be malfunction.

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View ADNS-7700-HCMY on WIN SOURCE](#)
- ⊖ [Broadcom Limited Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management