



**THE DATASHEET OF  
CY2545FC**



## Quad PLL Programmable Spread Spectrum Clock Generator with Serial I<sup>2</sup>C Interface


### Features

- Four fully integrated phase locked loops (PLLs)
  - External crystal: 8 to 48 MHz
  - External reference: 8 to 166 MHz clock
- Wide operating output frequency range
  - 3 to 166 MHz
- Serial programmable over 2-wire I<sup>2</sup>C interface
- Programmable spread spectrum with center and down spread option and Lexmark and Linear modulation profiles
- V<sub>DD</sub> supply voltage options:
  - 2.5V, 3.0V, and 3.3V for CY2545
  - 1.8V for CY2547
- Selectable output clock voltages independent of V<sub>DD</sub> supply:
  - 2.5V, 3.0V, and 3.3V for CY2545
  - 1.8V for CY2547
- Power down, output enable, or frequency select features
- Low jitter, high accuracy outputs
- Ability to synthesize nonstandard frequencies with Fractional-N capability
- Up to eight clock outputs with programmable drive strength

- Glitch-free outputs while frequency switching
- 24-pin QFN package
- Commercial and industrial temperature ranges


### Benefits

- Multiple high performance PLLs allow synthesis of unrelated frequencies
- Nonvolatile programming for personalization of PLL frequencies, spread spectrum characteristics, drive strength, crystal load capacitance, and output frequencies
- Application specific programmable EMI reduction using Spread Spectrum for clocks
- Programmable PLLs for system frequency margin tests
- Meets critical timing requirements in complex system designs
- Suitability for PC, consumer, portable, and networking applications
- Capable of Zero PPM frequency synthesis error
- Uninterrupted system operation during clock frequency switch
- Application compatibility in standard and low power systems

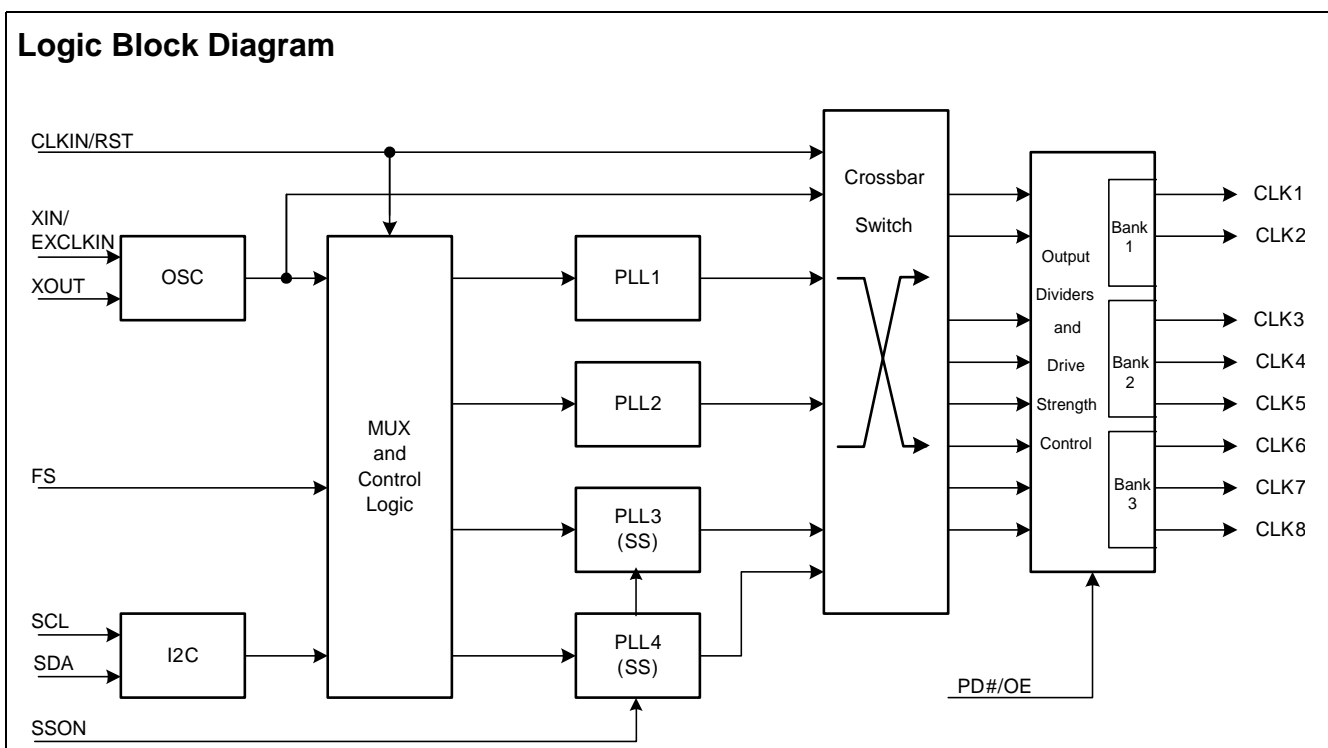

**Pinouts**

**Figure 1. Pin Diagram - CY2545 24 LD QFN**

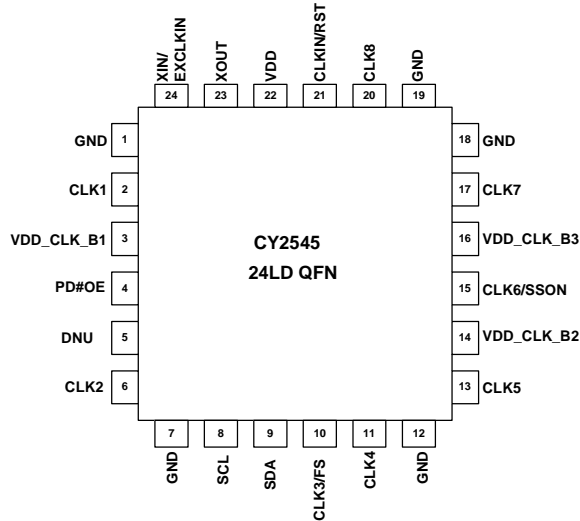


**Table 1. Pin Definition - CY2545 24 LD QFN (V<sub>DD</sub> = 2.5V, 3.0V or 3.3V Supply)**

| Pin Number | Name       | IO           | Description  |
|------------|------------|--------------|--|
| 1          | GND        | Power        | Power supply ground  |
| 2          | CLK1       | Output       | Programmable clock output. Output voltage depends on Bank1 voltage   |
| 3          | VDD_CLK_B1 | Power        | Power supply for Bank1 (CLK1, CLK2) output: 2.5V/3.0V/3.3V   |
| 4          | PD#OE      | Input        | Multifunction programmable pin: Output enable or Power down mode   |
| 5          | DNU        | DNU          | Do not use this pin  |
| 6          | CLK2       | Output       | Programmable clock output. Output voltage depends on Bank1 voltage   |
| 7          | GND        | Power        | Power supply ground  |
| 8          | SCL        | Input        | Serial data clock  |
| 9          | SDA        | Input/Output | Serial data input/output   |
| 10         | CLK3/FS    | Output/Input | Multifunction programmable pin: Programmable clock output or frequency select input pin. Output voltage of CLK3 depends on Bank2 voltage   |
| 11         | CLK4       | Output       | Programmable clock output. Output voltage depends on Bank2 voltage   |
| 12         | GND        | Power        | Power supply ground  |
| 13         | CLK5       | Output       | Programmable clock output. Output voltage depends on Bank2 voltage   |
| 14         | VDD_CLK_B2 | Power        | Power supply for Bank2 (CLK3, CLK4, CLK5) output: 2.5V/3.0V/3.3V   |
| 15         | CLK6/SSON  | Output/Input | Multifunction programmable pin: Programmable clock output or spread spectrum ON/OFF control input pin. Output voltage of CLK6 depends on Bank3 voltage                                     |
| 16         | VDD_CLK_B3 | Power        | Power supply for Bank3 (CLK6, CLK7, CLK8) output: 2.5V/3.0V/3.3V   |
| 17         | CLK7       | Output       | Programmable clock output. Output voltage depends on Bank3 voltage   |
| 18         | GND        | Power        | Power supply ground  |
| 19         | GND        | Power        | Power supply ground  |
| 20         | CLK8       | Output       | Programmable clock output. Output voltage depends on Bank3 voltage   |
| 21         | CLKIN/RST  | Input/Input  | Multifunction programmable pin. High true reset input or 2.5V/3.0V/3.3V external reference clock input. The signal level of CLKIN input must track V <sub>DD</sub> power supply on pin 22. |

**Table 1. Pin Definition - CY2545 24 LD QFN (V<sub>DD</sub> = 2.5V, 3.0V or 3.3V Supply) (continued)**

| Pin Number | Name            | IO     | Description                                      |
|------------|-----------------|--------|--|
| 22         | V <sub>DD</sub> | Power  | Power supply for core and inputs: 2.5V/3.0V/3.3V |
| 23         | XOUT            | Output | Crystal output                                   |
| 24         | XIN/EXCLKIN     | Input  | Crystal input or 1.8V external clock input       |

**Figure 2. Pin Diagram - CY2547 24 LD QFN**

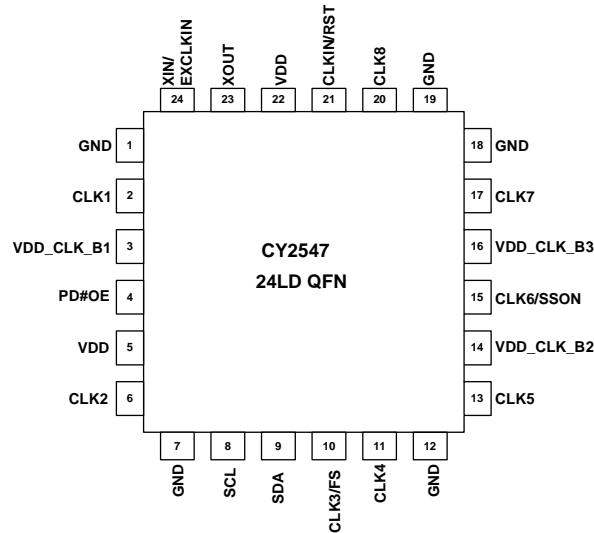

**Table 2. Pin Definition - CY2547 24 LD QFN (V<sub>DD</sub> = 1.8V Supply)**

| Pin Number | Name       | IO           | Description   |
|------------|------------|--------------|---|
| 1          | GND        | Power        | Power supply ground   |
| 2          | CLK1       | Output       | Programmable clock output. Output voltage depends on Bank1 voltage  |
| 3          | VDD_CLK_B1 | Power        | Power supply for Bank1 (CLK1, CLK2) output: 1.8V  |
| 4          | PD#/OE     | Input        | Multifunction programmable pin: Output enable or Power down mode  |
| 5          | VDD        | Power        | Power supply for core and inputs: 1.8V  |
| 6          | CLK2       | Output       | Programmable output clock. Output voltage depends on Bank1 voltage  |
| 7          | GND        | Power        | Power supply ground   |
| 8          | SCL        | Input        | Serial data clock   |
| 9          | SDA        | Input/Output | Serial data input   |
| 10         | CLK3/FS    | Output/Input | Multifunction programmable pin: Programmable clock output or frequency select input pin. Output voltage of CLK3 depends on VDD_CLK_B2 voltage               |
| 11         | CLK4       | Output       | Programmable output clock. Output voltage depends on Bank2 voltage  |
| 12         | GND        | Power        | Power supply ground   |
| 13         | CLK5       | Output       | Programmable clock output. Output voltage depends on Bank2 voltage  |
| 14         | VDD_CLK_B2 | Power        | Power supply for Bank2 (CLK3, CLK4, CLK5) output: 1.8V  |
| 15         | CLK6/SSON  | Output/Input | Multifunction programmable pin: Programmable clock output or spread spectrum ON/OFF control input pin. Output voltage of CLK6 depends on VDD_CLK_B3 voltage |
| 16         | VDD_CLK_B3 | Power        | Power supply for Bank3 (CLK6, CLK7, CLK8) output: 1.8V  |
| 17         | CLK7       | Output       | Programmable clock output. Output voltage depends on Bank3 voltage  |
| 18         | GND        | Power        | Power supply ground   |

**Table 2. Pin Definition - CY2547 24 LD QFN (VDD = 1.8V Supply)** (continued)

| Pin Number | Name        | IO          | Description  |
|------------|-------------|-------------|--|
| 19         | GND         | Power       | Power supply ground  |
| 20         | CLK8        | Output      | Programmable clock output. Output voltage depends on Bank3 voltage                                       |
| 21         | CLKIN/RST   | Input/Input | Multifunction programmable pin: High true reset input or 1.8V external low voltage reference clock input |
| 22         | VDD         | Power       | Power supply for core and inputs: 1.8V   |
| 23         | XOUT        | Output      | Crystal output   |
| 24         | XIN/EXCLKIN | Input       | Crystal input or 1.8V external clock input   |

## General Description

### Four Configurable PLLs

The CY2545 and CY2547 have four I<sup>2</sup>C programmable PLLs available to generate output frequencies ranging from 3 to 166 MHz. The advantage of having four PLLs is that a single device generates up to four independent frequencies from a single crystal. Two sets of frequencies for each PLL can be programmed. This enables in system frequency switching using multifunction frequency select pin, FS.

### I<sup>2</sup>C Programming

The CY2545 and CY2547 have a serial I<sup>2</sup>C interface that programs the configuration memory array to synthesize output frequencies by programmable output divider, spread characteristics, drive strength, and crystal load capacitance. I<sup>2</sup>C can also be used for in system control of these programmable features.

### Input Reference Clocks

The input to the CY2545 and CY2547 is either a crystal or a clock signal. The input frequency range for crystals is 8 MHz to 48 MHz. There is provision for two reference clock inputs, CLKIN and EXCLKIN with frequency range of 8 MHz to 166 MHz. For both devices, when CLKIN signal at pin 21 is used as a reference input, a valid signal at EXCLKIN (as specified in the AC and DC Electrical Specification table), must be present for the devices to operate properly.

### Multiple Power Supplies

The CY2545 and CY2547 are designed to operate at internal core supply voltage of 1.8V. In the case of the high voltage part (CY2545), an internal regulator is used to generate 1.8V from the 2.5V/3.0V/3.3V V<sub>DD</sub> supply voltage at pin 22. For the low voltage part (CY2547), this internal regulator is bypassed and 1.8V at V<sub>DD</sub> pin 22 is directly used.

### Output Bank Settings

These devices have eight clock outputs grouped in three output driver banks. The Bank 1, Bank 2, and Bank 3 correspond to (CLK1, CLK2), (CLK3, CLK4, CLK5), and (CLK6, CLK7, CLK8), respectively. Separate power supplies are used for each of these banks and they can be any of 2.5V, 3.0V, or 3.3V for CY2545 and 1.8V for CY2547 giving user multiple choice of output clock voltage levels.

### Output Source Selection

These devices have eight clock outputs (CLK1 - 8). There are six available clock sources for these outputs. These clock sources are: XIN/EXCLKIN, CLKIN, PLL1, PLL2, PLL3, or PLL4. Output clock source selection is done using four out of six crossbar switch. Thus, any one of these six available clock sources can be arbitrarily selected for the clock outputs. This gives user a flexibility to have up to four independent clock outputs.

### Spread Spectrum Control

Two of the four PLLs (PLL3 and PLL4) have spread spectrum capability for EMI reduction in the system. The device uses a Cypress proprietary PLL and Spread Spectrum Clock (SSC) technology to synthesize and modulate the frequency of the PLL. The spread spectrum feature can be turned on or off using a multifunction control pin (CLK7/SSON). It can be programmed to either center spread range from ±0.125% to ±2.50% or down spread range from -0.25% to -5.0% with Lexmark or Linear profile.

### Frequency Select

The device can store two different PLL frequency configurations, output source selection and output divider values for all eight outputs in its nonvolatile memory location. There is a multifunction programmable pin, CLK3/FS which, if programmed as frequency select input, can be used to select between these two arbitrarily programmed settings.

### Glitch-Free Frequency Switch

When the frequency select pin (FS) is used to switch frequency, the outputs are glitch-free provided frequency is switched using output dividers. This feature enables uninterrupted system operation while clock frequency is switched.

### Device Reset Function

There is a multifunction CLKIN/RST (pin 21) that can be programmed to use for the device reset function. There are two different programmable modes of operation for this device reset function. First one (called POR like reset), when used brings the device in the default register settings losing all configuration changes made through the I<sup>2</sup>C interface. The second (called Clean Start), keeps the I<sup>2</sup>C programmed values while giving all outputs a simultaneous clean start from its low pull down state.

**PD#/OE Mode**

PD#/OE (Pin 4) is programmable to operate as either power down (PD#) or output enable (OE) mode. PD# is a low true input. If activated it shuts off the entire chip, resulting in minimum device power consumption. Setting this signal high brings the device into operational mode with default register settings.

When this pin is programmed as output enable (OE), clock outputs are enabled or disabled using OE pin. Individual clock outputs can be programmed to be sensitive to this OE pin.

**Keep Alive Mode**

By activating the device in the keep alive mode, power down mode is changed to power saving mode. This disables all PLLs and outputs, but preserves the contents of the volatile registers. Thus, any configuration changes made through the I<sup>2</sup>C interface are preserved. By deactivating the keep alive mode, I<sup>2</sup>C memory is not preserved during power down, but power consumption is reduced relative to the keep alive mode.

**Output Drive Strength**

The DC drive strength of the individual clock output can be programmed for different values. Table 3 shows the typical rise and fall times for different drive strength settings.

**Table 3. Output Drive Strength**

| Output Drive Strength | Rise/Fall Time (ns)<br>(Typical Value) |
|-----------------------|--|
| Low                   | 6.8                                    |
| Mid Low               | 3.4                                    |
| Mid High              | 2.0                                    |
| High                  | 1.0                                    |

**Generic Configuration and Custom Frequency**

There is a generic set of output frequencies available from the factory that can be used for the device evaluation purposes. The device, CY2545/CY2547 can be custom programmed to any desired frequencies and listed features. For customer specific programming and I<sup>2</sup>C programmable memory bitmap definitions, please contact your local Cypress Field Application Engineer (FAE) or sales representative.

## Serial I<sup>2</sup>C Programming Interface Protocol and Timing

To enhance the flexibility and function of the clock synthesizer, a two signal serial interface is provided. Through the Serial Data Interface, various device functions, such as individual clock output buffers, are individually enabled or disabled. The registers associated with the Serial Data Interface initialize to their default setting upon power up and therefore, use of this interface is optional. Clock device register changes are normally made at system initialization, if any are required.

The CY2545 and CY2547 use a 2-wire serial interface SDA and SCL that operates up to 400 kbits/s in read or write mode. The SDA and SCL timing and data transfer sequence is shown in [Figure 3](#). The basic write serial format is:

Start Bit; 7-bit Device Address (DA); R/W Bit; Slave Clock Acknowledge (ACK); 8-bit Memory Address (MA); ACK; 8-bit Data; ACK; 8-bit Data in MA+1 if desired; ACK; 8-bit Data in MA+2; ACK; etc. until STOP Bit. The basic serial format is illustrated in [Figure 4](#).

### Device Address

The device serial interface address is 69H. The device address is combined with a read/write bit as the LSB and is sent after each start bit.

### Data Valid

Data is valid when the clock is HIGH, and is only transitioned when the clock is LOW, as illustrated in [Figure 5](#).

### Data Frame

A start and stop sequence indicates every new data frame, as illustrated in [Figure 6](#).

**Start Sequence** - The start frame is indicated by SDA going LOW when SCL is HIGH. Every time a start signal is supplied, the next 8-bit data must be the device address (seven bits) and a R/W bit, followed by register address (eight bits) and register data (eight bits).

**Stop Sequence** - The stop frame is indicated by SDA going HIGH when SCL is HIGH. A stop frame frees the bus to go to another part on the same bus or to another random register address.

### Acknowledge Pulse

During write mode the CY2545/CY2547 responds with an acknowledge pulse after every eight bits. Do this by pulling the SDA line LOW during the N\*9<sup>th</sup> clock cycle as illustrated in [Figure 7](#) (N = the number of bytes transmitted). During read mode, the master generates the acknowledge pulse after reading the data packet.

## Write Operations

### Writing Individual Bytes

A valid write operation must have a full 8-bit register address after the device address word from the master, which is followed by an acknowledge bit from the slave (ack = 0/LOW). The next

eight bits must contain the data word intended for storage. After the data word is received, the slave responds with another acknowledge bit (ack = 0/LOW), and the master must end the write sequence with a STOP condition.

### Writing Multiple Bytes

To write multiple bytes at a time, the master does not end the write sequence with a STOP condition; instead, the master sends multiple contiguous bytes of data to be stored. After each byte, the slave responds with an acknowledge bit, the same as after the first byte, and accepts data until the STOP condition responds to the acknowledge bit. When receiving multiple bytes, the CY2545 and CY2547 internally increment the register address.

## Read Operations

Read operations are initiated the same way as write operations except that the R/W bit of the slave address is set to '1' (HIGH). There are three basic read operations: current address read, random read, and sequential read.

### Current Address Read

The CY2545 and CY2547 have an onboard address counter that retains 1 more than the address of the last word access. If the last word written or read was word 'n', then a current address read operation returns the value stored in location 'n+1'. When the CY2545/CY2547 receive the slave address with the R/W bit set to a '1', the CY2545/CY2547 issue an acknowledge and transmit the 8-bit word. The master device does not acknowledge the transfer, but generates a STOP condition, which causes the CY2545/CY2547 to stop transmission.

### Random Read

Through random read operations, the master may access any memory location. To perform this type of read operation, first the word address must be set. This is done by sending the address to the CY2545/CY2547 as part of a write operation. After sending the word address, the master generates a START condition following the acknowledge. This terminates the write operation before any data is stored in the address, but not before the internal address pointer is set. Next, the master reissues the control byte with the R/W byte set to '1'. The CY2545/CY2547 then issue an acknowledge and transmit the 8-bit word. The master device does not acknowledge the transfer, but generates a STOP condition, which causes the CY2545/CY2547 to stop transmission.

### Sequential Read

Sequential read operations follow the same process as random reads except that the master issues an acknowledge instead of a STOP condition after transmitting the first 8-bit data word. This action increments the internal address pointer, and subsequently output of the next 8-bit data word. By continuing to issue acknowledges instead of STOP conditions, the master serially reads the entire contents of the slave device memory. When the internal address pointer points to the FFH register, after the next increment, the pointer points to the 00H register.

Figure 3. Data Transfer Sequence on the Serial Bus

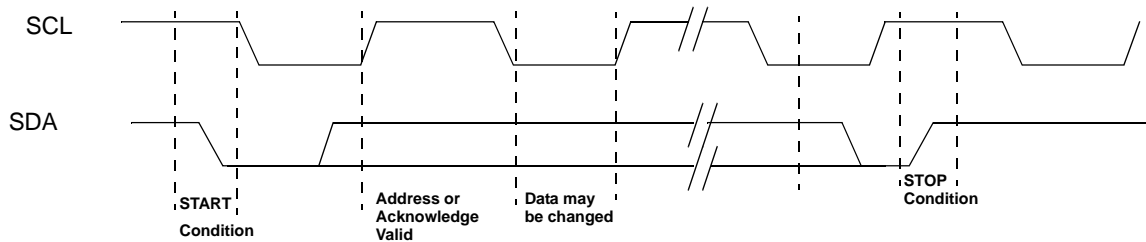


Figure 4. Data Frame Architecture


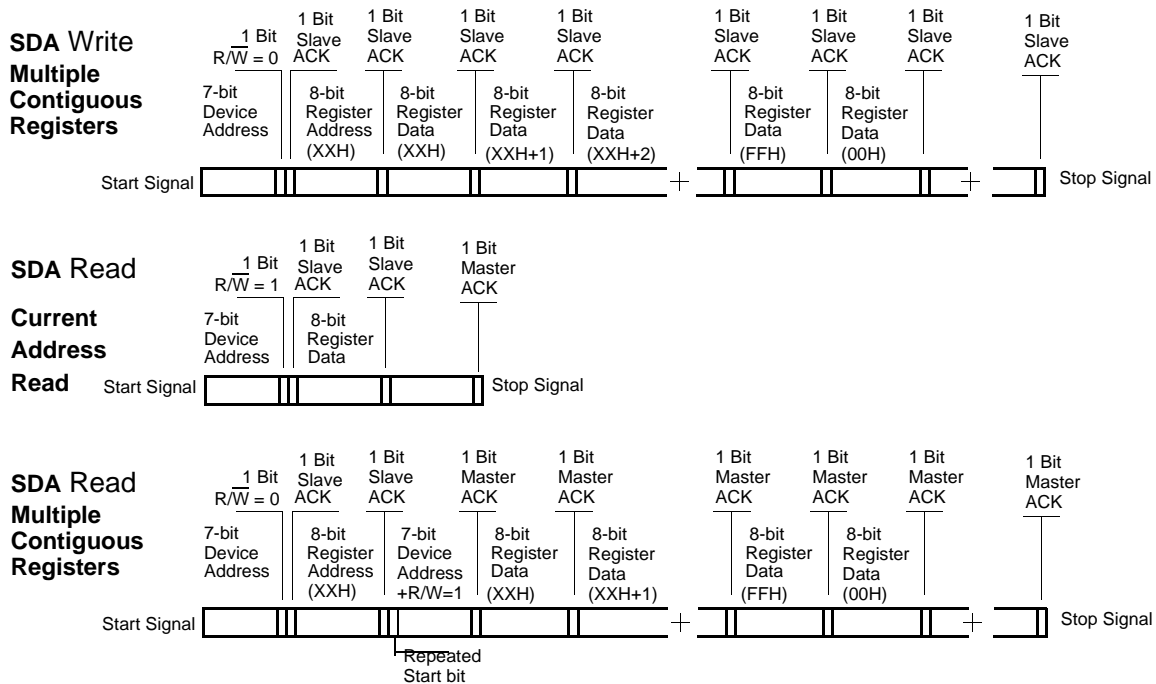


Figure 5. Data Valid and Data Transition Periods

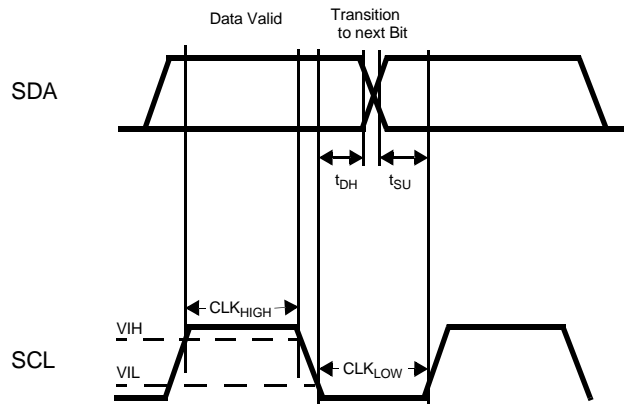

## Serial I<sup>2</sup>C Programming Interface Timing

Figure 6. Start and Stop Frame


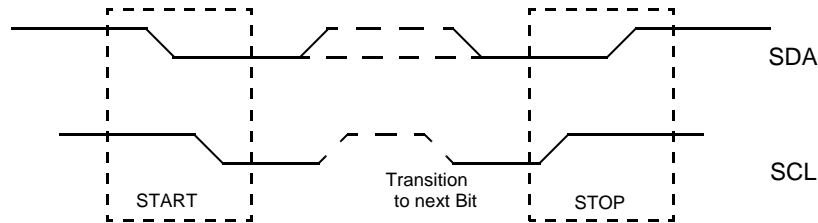


Figure 7. Frame Format (Device Address, R/W, Register Address, Register Data)

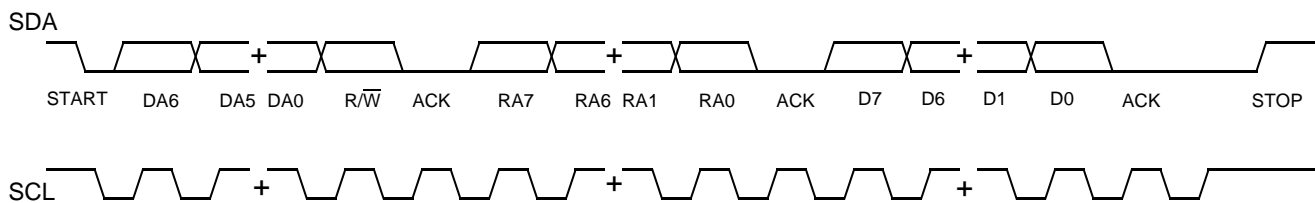

## Serial I<sup>2</sup>C Programming Interface Timing Specifications

| Parameter    | Description                              | Min | Max | Unit    |
|--------------|--|-----|-----|---------|
| $f_{SCL}$    | Frequency of SCL                         | –   | 400 | kHz     |
|              | Start Mode Time from SDA LOW to SCL LOW  | 0.6 | –   | $\mu$ s |
| $CLK_{LOW}$  | SCL LOW Period                           | 1.3 | –   | $\mu$ s |
| $CLK_{HIGH}$ | SCL HIGH Period                          | 0.6 | –   | $\mu$ s |
| $t_{SU}$     | Data Transition to SCL HIGH              | 250 | –   | ns      |
| $t_{DH}$     | Data Hold (SCL LOW to data transition)   | 0   | –   | ns      |
|              | Rise Time of SCL and SDA                 | –   | 300 | ns      |
|              | Fall Time of SCL and SDA                 | –   | 300 | ns      |
|              | Stop Mode Time from SCL HIGH to SDA HIGH | 0.6 | –   | $\mu$ s |
|              | Stop Mode to Start Mode                  | 1.3 | –   | $\mu$ s |

### Absolute Maximum Conditions

| Parameter              | Description                       | Condition                   | Min  | Max                  | Unit  |
|------------------------|-----------------------------------|-----------------------------|------|----------------------|-------|
| V <sub>DD</sub>        | Supply voltage for CY2545         |                             | -0.5 | 4.5                  | V     |
| V <sub>DD</sub>        | Supply Voltage for CY2547         |                             | -0.5 | 2.6                  | V     |
| V <sub>DD_CLK_BX</sub> | Output Bank supply voltage        |                             | -0.5 | 4.5                  | V     |
| V <sub>IN</sub>        | Input voltage for CY2545          | Relative to V <sub>SS</sub> | -0.5 | V <sub>DD</sub> +0.5 | V     |
| V <sub>IN</sub>        | Input voltage for CY2547          | Relative to V <sub>SS</sub> | -0.5 | 2.2                  | V     |
| T <sub>S</sub>         | Temperature and storage           | Nonfunctional               | -65  | +150                 | °C    |
| ESD <sub>HBM</sub>     | ESD protection (Human Body Model) | JEDEC EIA/JESD22-A114-E     | 2000 |                      | Volts |
| UL-94                  | Flammability rating               | V-0 @ 1/8 in.               |      | 10                   | ppm   |
| MSL                    | Moisture sensitivity level        |                             |      | 3                    |       |

### Recommended Operating Conditions

| Parameter              | Description  | Min  | Typ | Max  | Unit |
|------------------------|--|------|-----|------|------|
| V <sub>DD</sub>        | V <sub>DD</sub> Operating voltage for CY2545   | 2.25 | -   | 3.60 | V    |
| V <sub>DD</sub>        | V <sub>DD</sub> Operating voltage for CY2547   | 1.65 | 1.8 | 1.95 | V    |
| V <sub>DD_CLK_BX</sub> | Output driver voltage for Bank 1, 2 and 3  | 1.43 | -   | 3.60 | V    |
| T <sub>AC</sub>        | Commercial ambient temperature   | 0    | -   | +70  | °C   |
| T <sub>AI</sub>        | Industrial ambient temperature   | -40  | --  | +85  | °C   |
| C <sub>LOAD</sub>      | Maximum load capacitance   | -    | -   | 15   | pF   |
| t <sub>PU</sub>        | Power up time for all V <sub>DD</sub> to reach minimum specified voltage (power ramps must be monotonic) | 0.05 | -   | 500  | ms   |

## DC Electrical Specifications

| Parameter                        | Description   | Conditions   | Min                             | Typ | Max                 | Unit |
|----------------------------------|---|--|---------------------------------|-----|---------------------|------|
| V <sub>OL</sub>                  | Output low voltage  | I <sub>OL</sub> = 2 mA, drive strength = [00]                            | –                               | –   | 0.4                 | V    |
|                                  |   | I <sub>OL</sub> = 3 mA, drive strength = [01]                            |                                 |     |                     |      |
|                                  |   | I <sub>OL</sub> = 7 mA, drive strength = [10]                            |                                 |     |                     |      |
|                                  |   | I <sub>OL</sub> = 12 mA, drive strength = [11]                           |                                 |     |                     |      |
| V <sub>OH</sub>                  | Output high voltage   | I <sub>OH</sub> = –2 mA, drive strength = [00]                           | V <sub>DD_CLK_BX</sub><br>– 0.4 | –   | –                   | V    |
|                                  |   | I <sub>OH</sub> = –3 mA, drive strength = [01]                           |                                 |     |                     |      |
|                                  |   | I <sub>OH</sub> = –7 mA, drive strength = [10]                           |                                 |     |                     |      |
|                                  |   | I <sub>OH</sub> = –12 mA, drive strength = [11]                          |                                 |     |                     |      |
| V <sub>OLSD</sub>                | Output low voltage, SDA   | I <sub>OL</sub> = 4 mA   | –                               | –   | 0.4                 | V    |
| V <sub>IL1</sub>                 | Input low voltage of PD#/OE, RST, FS, and SSON                    |  | –                               | –   | 0.2*V <sub>DD</sub> | V    |
| V <sub>IL2</sub>                 | Input low voltage of CLKIN for CY2545                             |  | –                               | –   | 0.1*V <sub>DD</sub> | V    |
| V <sub>IL3</sub>                 | Input low voltage of EXCLKIN for CY2545                           |  | –                               | –   | 0.18                | V    |
| V <sub>IL4</sub>                 | Input low voltage of CLKIN, EXCLKIN for CY2547                    |  | –                               | –   | 0.1*V <sub>DD</sub> | V    |
| V <sub>IH1</sub>                 | Input high voltage of PD#/OE, RST, FS, and SSON                   |  | 0.8*V <sub>DD</sub>             | –   | –                   | V    |
| V <sub>IH2</sub>                 | Input high voltage of CLKIN for CY2545                            |  | 0.9*V <sub>DD</sub>             | –   | –                   | V    |
| V <sub>IH3</sub>                 | Input high voltage of EXCLKIN for CY2545                          |  | 1.62                            | –   | 2.2                 | V    |
| V <sub>IH4</sub>                 | Input high voltage of CLKIN, EXCLKIN for CY2547                   |  | 0.9*V <sub>DD</sub>             | –   | –                   | V    |
| I <sub>ILPD</sub>                | Input low current of RST and PD#/OE                               | V <sub>IL</sub> = 0V   | –                               | –   | 10                  | μA   |
| I <sub>IHPD</sub>                | Input high current of RST and PD#/OE                              | V <sub>IH</sub> = V <sub>DD</sub>  | –                               | –   | 10                  | μA   |
| I <sub>ILSR</sub>                | Input low current of SSON and FS                                  | V <sub>IL</sub> = 0V (Internal pull dn = 160k typ)                       | –                               | –   | 10                  | μA   |
| I <sub>IHSR</sub>                | Input high current of SSON and FS                                 | V <sub>IH</sub> = V <sub>DD</sub> (Internal pull dn = 160k typ)          | 14                              | –   | 36                  | μA   |
| R <sub>DN</sub>                  | Pull down resistor of (CLK1-CLK8) when off, CLK6/SSON and CLK3/FS |  | 100                             | 160 | 250                 | kΩ   |
| I <sub>DD</sub> <sup>[1,2]</sup> | Supply current for CY2547   | PD# = High, No load  | –                               | 20  | –                   | mA   |
|                                  | Supply current for CY2545   | PD# = High, No load  | –                               | 22  | –                   | mA   |
| I <sub>DDS</sub> <sup>[1]</sup>  | Standby current   | PD# = Low, No load, with I <sup>2</sup> C circuit not in Keep Alive Mode | –                               | 3   | –                   | μA   |
| I <sub>PD</sub> <sup>[1]</sup>   | Power down current  | PD# = Low, No load, with I <sup>2</sup> C circuit in Keep Alive Mode     | –                               | –   | 1                   | mA   |
| C <sub>IN</sub> <sup>[1]</sup>   | Input capacitance   | SSON, RST, PD#/OE or FS inputs   | –                               | –   | 7                   | pF   |

## AC Electrical Specifications

| Parameter                         | Description                                  | Conditions   | Min | Typ | Max | Unit |
|-----------------------------------|--|--|-----|-----|-----|------|
| F <sub>IN</sub> (crystal)         | Crystal frequency, XIN                       |  | 8   | –   | 48  | MHz  |
| F <sub>IN</sub> (clock)           | Input clock frequency                        | Clock inputs CLKIN or EXCLKIN  | 8   | –   | 166 | MHz  |
| F <sub>CLK</sub>                  | Output clock frequency                       |  | 3   | –   | 166 | MHz  |
| DC1                               | Output duty cycle, all clocks except Ref Out | Duty cycle is defined in Figure 9; t <sub>1</sub> /t <sub>2</sub> , measured 50% of V <sub>DD</sub>                        | 45  | 50  | 55  | %    |
| DC2                               | Ref out clock duty cycle                     | Ref In Min 45%, Max 55%  | 40  | –   | 60  | %    |
| T <sub>RF1</sub> <sup>[1]</sup>   | Output rise/fall time                        | Measured from 20% to 80% of V <sub>DD-CLK_BX</sub> , as shown in Figure 10, C <sub>LOAD</sub> = 15 pF, Drive strength [00] | –   | 6.8 | –   | ns   |
| T <sub>RF2</sub> <sup>[1]</sup>   | Output rise/fall time                        | Measured from 20% to 80% of V <sub>DD-CLK_BX</sub> , as shown in Figure 10, C <sub>LOAD</sub> = 15 pF, Drive strength [01] | –   | 3.4 | –   | ns   |
| T <sub>RF3</sub> <sup>[1]</sup>   | Output rise/fall time                        | Measured from 20% to 80% of V <sub>DD-CLK_BX</sub> , as shown in Figure 10, C <sub>LOAD</sub> = 15 pF, Drive strength [10] | –   | 2.0 | –   | ns   |
| T <sub>RF4</sub> <sup>[1]</sup>   | Output rise/fall time                        | Measured from 20% to 80% of V <sub>DD-CLK_BX</sub> , as shown in Figure 10, C <sub>LOAD</sub> = 15 pF, Drive strength [11] | –   | 1.0 | –   | ns   |
| T <sub>CCJ</sub> <sup>[1,2]</sup> | Cycle-to-cycle jitter max (Pk-Pk)            | Configuration dependent. See Table 4   | –   | 150 | –   | ps   |
| T <sub>LOCK</sub> <sup>[1]</sup>  | PLL Lock time                                | Measured from 90% of the applied power supply level  | –   | 1   | 3   | ms   |

Table 4. Configuration Example for C-C Jitter

| Ref. Freq. (MHz) | CLK1 Output |                     | CLK2 Output |                     | CLK3 Output |                     | CLK4 Output |                     | CLK5 Output |                     |
|------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|
|                  | Freq. (MHz) | C-C Jitter Typ (ps) | Freq. (MHz) | C-C Jitter Typ (ps) | Freq. (MHz) | C-C Jitter Typ (ps) | Freq. (MHz) | C-C Jitter Typ (ps) | Freq. (MHz) | C-C Jitter Typ (ps) |
| 14.3181          | 8.0         | 134                 | 166         | 103                 | 48          | 92                  | 74.25       | 81                  | Not Used    |                     |
| 19.2             | 74.25       | 99                  | 166         | 94                  | 8           | 91                  | 27          | 110                 | 48          | 75                  |
| 27               | 48          | 67                  | 27          | 109                 | 166         | 103                 | 74.25       | 97                  | Not Used    |                     |
| 48               | 48          | 93                  | 27          | 123                 | 166         | 137                 | 166         | 138                 | 8           | 103                 |

## Recommended Crystal Specification for SMD Package

| Parameter | Description                 | Range 1 | Range 2 | Range 3 | Unit |
|-----------|-----------------------------|---------|---------|---------|------|
| Fmin      | Minimum frequency           | 8       | 14      | 28      | MHz  |
| Fmax      | Maximum frequency           | 14      | 28      | 48      | MHz  |
| R1        | Motional resistance (ESR)   | 135     | 50      | 30      | Ω    |
| C0        | Shunt capacitance           | 4       | 4       | 2       | pF   |
| CL        | Parallel load capacitance   | 18      | 14      | 12      | pF   |
| DL(max)   | Maximum crystal drive level | 300     | 300     | 300     | μW   |

## Recommended Crystal Specification for Thru-Hole Package


| Parameter | Description                 | Range 1 | Range 2 | Range 3 | Unit |
|-----------|-----------------------------|---------|---------|---------|------|
| Fmin      | Minimum frequency           | 8       | 14      | 24      | MHz  |
| Fmax      | Maximum frequency           | 14      | 24      | 32      | MHz  |
| R1        | Motional resistance (ESR)   | 90      | 50      | 30      | Ω    |
| C0        | Shunt capacitance           | 7       | 7       | 7       | pF   |
| CL        | Parallel load capacitance   | 18      | 12      | 12      | pF   |
| DL(max)   | Maximum crystal drive level | 1000    | 1000    | 1000    | μW   |

### Notes

1. Guaranteed by design but not 100% tested.
2. Configuration dependent.

## Test and Measurement Setup

Figure 8. Test and Measurement Setup

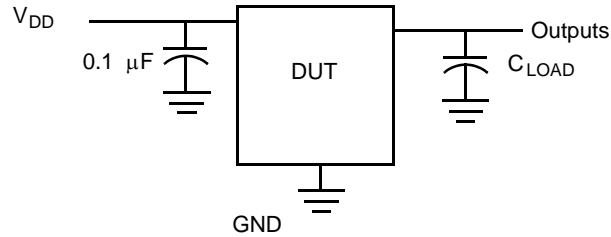

## Voltage and Timing Definitions

Figure 9. Duty Cycle Definition


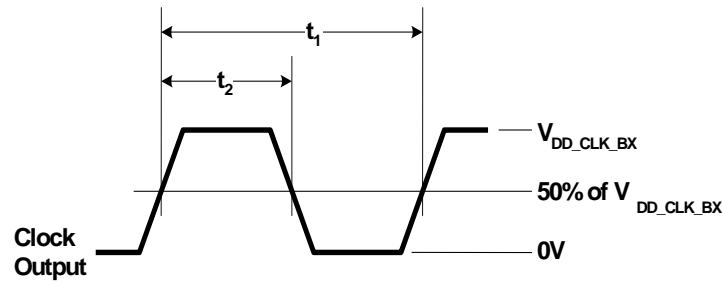


Figure 10. Rise Time =  $T_{RF}$  Fall Time =  $T_{RF}$

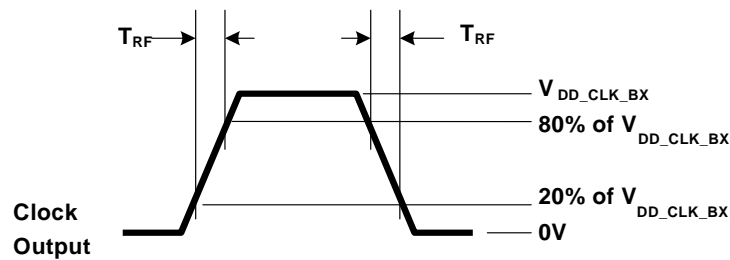

## Ordering Information


| Part Number <sup>[1]</sup> | Type                   | V <sub>DD</sub> (V)                | Production Flow           |
|----------------------------|------------------------|------------------------------------|---------------------------|
| Pb-free                    |                        |                                    |                           |
| CY2545Cxxx                 | 24-pin QFN             | Supply voltage: 2.5V, 3.0V or 3.3V | Commercial, 0°C to 70°C   |
| CY2545CxxxT                | 24-pin QFN Tape & Reel | Supply voltage: 2.5V, 3.0V or 3.3V | Commercial, 0°C to 70°C   |
| CY2547Cxxx                 | 24-pin QFN             | Supply voltage: 1.8V               | Commercial, 0°C to 70°C   |
| CY2547CxxxT                | 24-pin QFN Tape & Reel | Supply voltage: 1.8V               | Commercial, 0°C to 70°C   |
| CY2545Ixxx                 | 24-pin QFN             | Supply voltage: 2.5V, 3.0V or 3.3V | Industrial, -40°C to 85°C |
| CY2545IxxxT                | 24-pin QFN Tape & Reel | Supply voltage: 2.5V, 3.0V or 3.3V | Industrial, -40°C to 85°C |
| CY2547Ixxx                 | 24-pin QFN             | Supply voltage: 1.8V               | Industrial, -40°C to 85°C |
| CY2547IxxxT                | 24-pin QFN Tape & Reel | Supply voltage: 1.8V               | Industrial, -40°C to 85°C |

**Note**


1. xxx indicates Factory Programmable and are factory programmed configurations. For more details, contact your local Cypress FAE or Cypress Sales Representative.

## Package Drawing and Dimensions

Figure 11. 24-LD QFN 4x4 mm (Subcon Punch Type Pkg with 2.49x2.49 EPAD) LF24A/LY24A

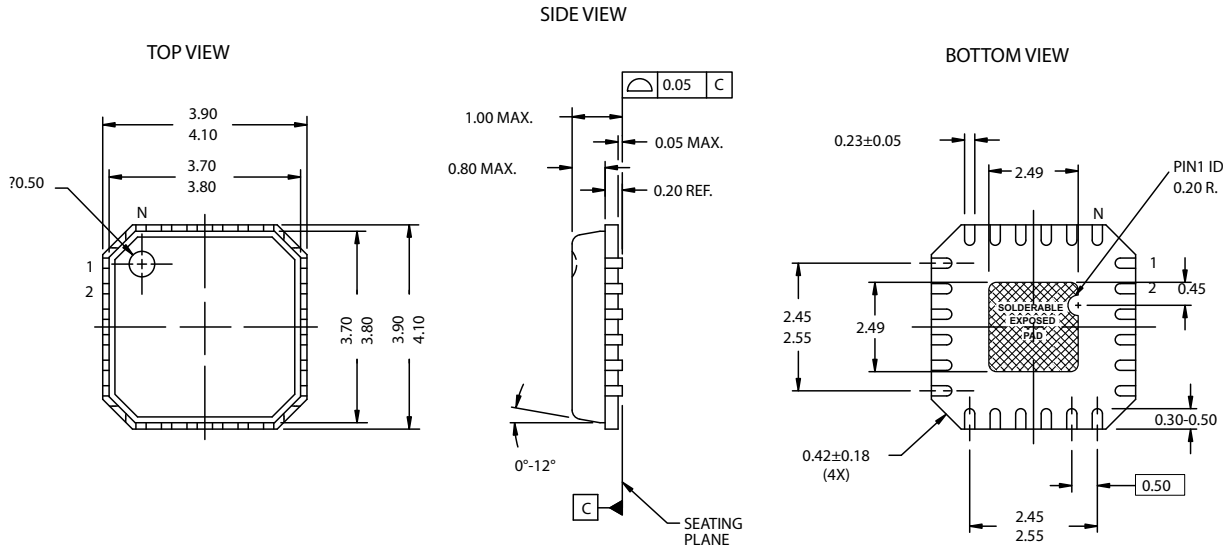

**NOTES:**

1.  HATCH IS SOLDERABLE EXPOSED METAL.
2. REFERENCE JEDEC#: MO-220
3. PACKAGE WEIGHT: 0.042g
4. ALL DIMENSIONS ARE IN MM [MIN/MAX]
5. PACKAGE CODE

51-85203-\*A

| PART # | DESCRIPTION |
|--------|-------------|
| LF24A  | STANDARD    |
| LY24A  | LEAD FREE   |

## Document History Page

| Document Title: CY2545 CY2547 Quad PLL Programmable Spread Spectrum Clock Generator with Serial I <sup>2</sup> C Interface |         |            |                 |  |
|--|---------|------------|-----------------|--|
| Document Number: 001-13196   |         |            |                 |  |
| REV.   | ECN NO. | Issue Date | Orig. of Change | Description of Change  |
| **   | 870780  | See ECN    | RGL/AESA        | New Data Sheet   |
| *A   | 1504843 | See ECN    | RGL/AESA        | Changed I2C Tsu specification from 100ns to 250 ns<br>Changed ESD spec from MIL-STD to JEDEC<br>Combined V <sub>DD</sub> operating condition spec for CY2545 to a single V <sub>DD</sub> spec<br>Changed name from VDD_CORE to V <sub>DD</sub> |

© Cypress Semiconductor Corporation, 2007. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.



Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CY2545FC on WIN SOURCE](#)
-  [Cypress Semiconductor Corp Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management