



THE DATASHEET OF PT6304N


PT6300 Series

3 Amp Adjustable Positive Step-down
Integrated Switching Regulators


Power Trends Products
from Texas Instruments

SLTS031B

(Revised 9/30/2000)

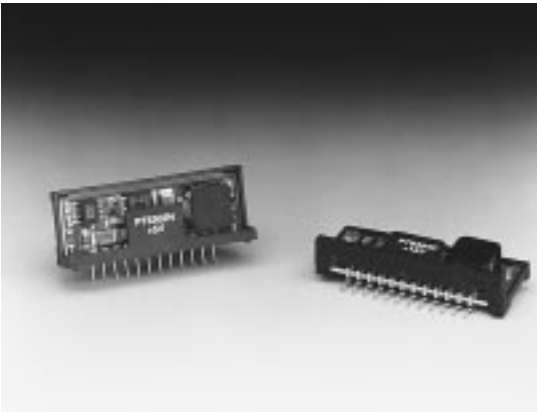

Standard Application



Specifications

Characteristics ($T_a = 25^\circ\text{C}$ unless noted)	Symbols	Conditions	PT6300 SERIES			
			Min	Typ	Max	Units
Output Current	I_o	Over V_{in} range	0.1 (2)	—	3.0	A
Short Circuit Current	I_{sc}	$V_{in} = V_o + 5V$	—	5.0	—	Apk
Input Voltage Range (Note: inhibit function cannot be used above 30V.)	V_{in}	$0.1 \leq I_o \leq 3.0 \text{ A}$	$V_o = 12V$ 16 $V_o = 5.0V$ 9 $V_o = 3.3V$ 9 $V_o = 1.5V$ 9.0	—	30/38 (3) 30/38 (3) 26 17	V
Output Voltage Tolerance	ΔV_o	Over V_{in} Range, $I_o = 3.0 \text{ A}$ $T_a = 0^\circ\text{C}$ to $+60^\circ\text{C}$	—	± 1.0	± 2.0	% V_o
Line Regulation	Reg_{line}	Over V_{in} range	—	± 0.25	± 0.5	% V_o
Load Regulation	Reg_{load}	$0.1 \leq I_o \leq 3.0 \text{ A}$	—	± 0.25	± 0.5	% V_o
V_o Ripple/Noise	V_n	$V_{in} = V_{in \text{ min}}$, $I_o = 3.0 \text{ A}$	—	± 2	—	% V_o
Transient Response with $C_o = 100\mu\text{F}$	t_{tr} V_{os}	50% load change V_o over/undershoot	—	100 5.0	200 —	μSec % V_o
Efficiency	η	$V_{in} = 16V$, $I_o = 0.5 \text{ A}$, $V_{in} = 9V$, $I_o = 0.5 \text{ A}$, $V_{in} = 9V$, $I_o = 0.5 \text{ A}$, $V_{in} = 9V$, $I_o = 0.5 \text{ A}$, $V_o = 12V$ 91 $V_o = 5.0V$ 89 $V_o = 3.3V$ 84 $V_o = 1.5V$ 72	—	—	—	%
Switching Frequency	f_o	Over V_{in} and I_o ranges, $V_o = 12V$ 600 $V_o = 3.3V/5V$ 400 $V_o = 1.5V$ 350	—	750 500 450	900 600 550	kHz
Shutdown Current	I_{sc}	$V_{in} = 15V$	—	100	—	μA
Quiescent Current	I_{nl}	$I_o = 0A$, $V_{in} = 10V$	—	10	—	mA
Absolute Maximum Operating Temperature Range	T_a	Over V_{in} range	-40	—	+85 (4)	$^\circ\text{C}$
Thermal Resistance	θ_{ja}	Free Air Convection (40-60LFM)	—	30	—	$^\circ\text{C}/\text{W}$
Storage Temperature	T_s	—	-40	—	+125	$^\circ\text{C}$
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3, 1 msec, Half Sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, Soldered in a PC board	—	10	—	G's
Weight	—	—	—	6.5	—	grams

Notes: (1) The PT6300 Series requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications.

(2) The ISR will operate to no load with reduced specifications.

(3) Input voltage cannot exceed 30V when the inhibit function is used.

(4) See Thermal Derating charts.


(5) Consult the related application note for guidance on adjusting the output voltage.

Pin-Out Information

Pin	Function
1	Inhibit (30V max)
2	V_{in}
3	V_{in}
4	V_{in}
5	GND
6	GND
7	GND
8	GND
9	V_{out}
10	V_{out}
11	V_{out}
12	V_{out} Adj (5)

Ordering Information

PT6302□	= +5 Volts
PT6303□	= +3.3 Volts
PT6304□	= +12 Volts
PT6314□	= +1.5 Volts




PT Series Suffix (PT1234X)

Case/Pin Configuration	
Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C



3 Amp Adjustable Positive Step-down
Integrated Switching Regulators

PT6303, 3.3 VDC (See Note A)


Efficiency vs Output Current

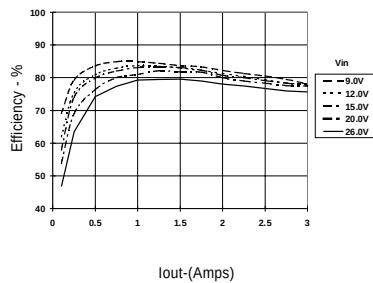

Ripple vs Output Current

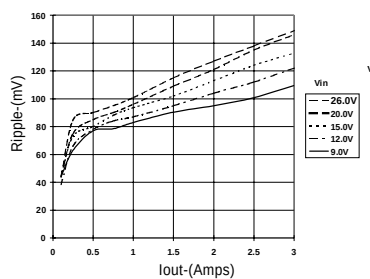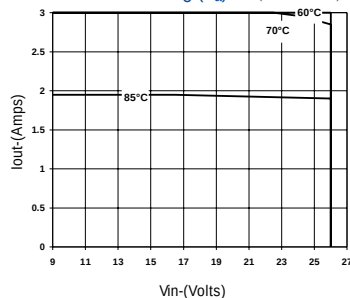
Thermal Derating (T_A) (See Note B)

Power Dissipation vs Output Current


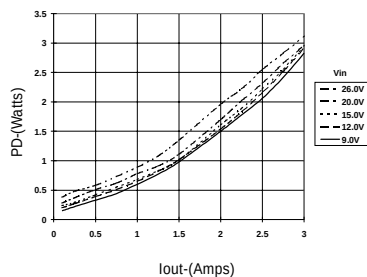


PT6302, 5.0 VDC (See Note A)


Efficiency vs Output Current

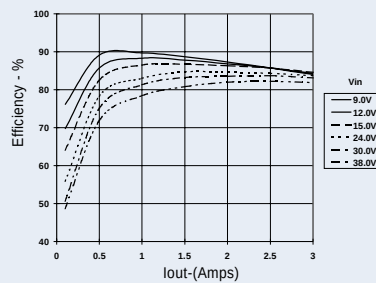

Ripple vs Output Current


Thermal Derating (T_A) (See Note B)

Power Dissipation vs Output Current


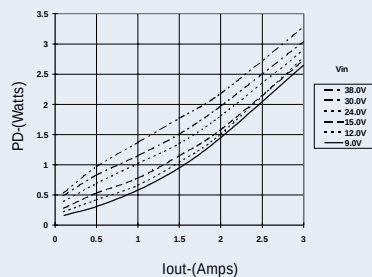


PT6304, 12.0 VDC (See Note A)


Efficiency vs Output Current

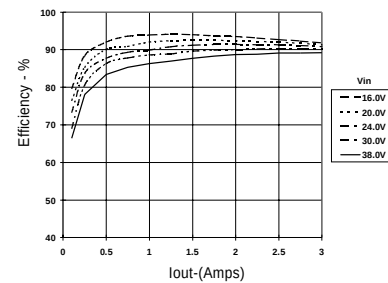

Ripple vs Output Current

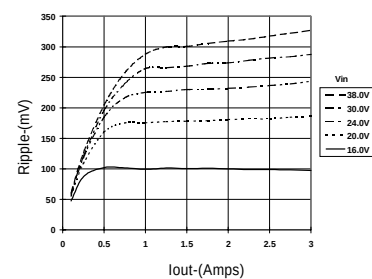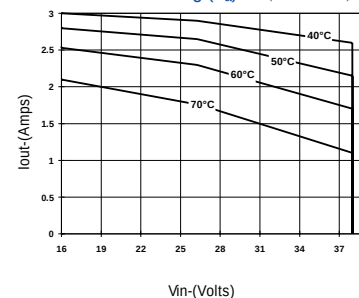Thermal Derating (T_A) (See Note B)

Power Dissipation vs Output Current

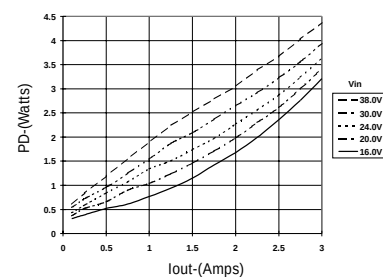

Note A: Characteristic data listed in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.
 Note B: Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application note.)

PT6100/6210/6300 Series


Adjusting the Output Voltage of Power Trends' Wide Input Range Bus ISRs

The output voltage of the Power Trends' Wide Input Range Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model for either series as V_a (min) and V_a (max).

Adjust Up: An increase in the output voltage is obtained by adding a resistor R2, between pin 12 (V_o adjust) and pins 5-8 (GND).

Adjust Down: Add a resistor (R1), between pin 12 (V_o adjust) and pins 9-11 (V_{out}).

Figure 1

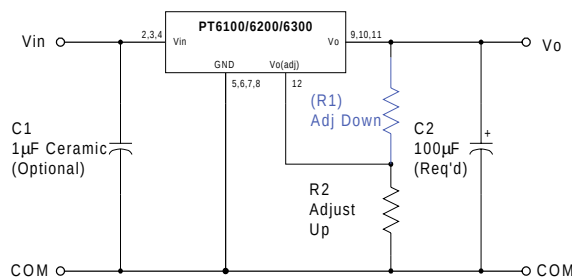

The values of (R1) [adjust down], and R2 [adjust up], can also be calculated using the following formulas. Refer to Figure 1 and Table 2 for both the placement and value of the required resistor; either (R1) or R2 as appropriate.

$$(R1) = \frac{R_o (V_a - 1.25)}{V_o - V_a} \quad k\Omega$$

$$R2 = \frac{1.25 R_o}{V_a - V_o} \quad k\Omega$$

Where: V_o = Original output voltage
 V_a = Adjusted output voltage
 R_o = The resistance value from Table 1

Table 1

ISR ADJUSTMENT RANGE AND FORMULA PARAMETERS					
1Adc Rated		PT6102	PT6101		PT6103
2Adc Rated	PT6216	PT6213		PT6212	PT6214
3Adc Rated	PT6314	PT6303		PT6302	PT6304
V_o (nom)	1.5	3.3	5.0	5.0	12.0
V_a (min)	1.3	1.8	1.88	2.18	2.43
V_a (max)	1.9	6.07	11.25	8.5	22.12
R_o (k Ω)	8.25	66.5	150.0	90.9	243.0

Notes:

1. Use only a single 1% resistor in either the (R1) or R2 location. Place the resistor as close to the ISR as possible.
2. Never connect capacitors from V_o adjust to either GND or V_{out} . Any capacitance added to the V_o adjust pin will affect the stability of the ISR.
3. Adjustments to the output voltage may place additional limits on the maximum and minimum input voltage for the part. The revised maximum and minimum input voltage limits must comply with the following requirements. The limits are model dependant.

PT6216/PT6314:

$V_{in} \text{ (max)} = (10 \times V_a)V$ or 17V, whichever is less.

$V_{in} \text{ (min)} = 9.0V$

All other models:

$V_{in} \text{ (max)} = (8 \times V_a)V$ or as specified.

$V_{in} \text{ (min)} = (V_a + 4)V$ or 9V, whichever is greater.

PT6100/6210/6300 Series

Table 2

ISR ADJUSTMENT RESISTOR VALUES

1Adc Rated		PT6102	PT6101		PT6103
2Adc Rated	PT6216	PT6213		PT6212	PT6214
3Adc Rated	PT6314	PT6303		PT6302	PT6304
V ₀ (nom)	1.5	3.3	5.0	5.0	12.0
V _A (req.d)					
1.3	(2.1kΩ)				
1.4	(12.4kΩ)				
1.5					
1.6	103.0kΩ				
1.7	51.6kΩ				
1.8	34.4kΩ	(24.4)kΩ			
1.9	25.8kΩ	(30.9)kΩ	(31.5)kΩ		
2.0		(38.4)kΩ	(37.5)kΩ		
2.1		(47.1)kΩ	(44.0)kΩ		
2.2		(57.4)kΩ	(50.9)kΩ	(30.8)kΩ	
2.3		(69.8)kΩ	(58.3)kΩ	(35.4)kΩ	
2.4		(85.0)kΩ	(66.3)kΩ	(40.2)kΩ	
2.5		(104.0)kΩ	(75.0)kΩ	(45.5)kΩ	(32.0)kΩ
2.6		(128.0)kΩ	(84.4)kΩ	(51.1)kΩ	(34.9)kΩ
2.7		(161.0)kΩ	(94.6)kΩ	(57.3)kΩ	(37.9)kΩ
2.8		(206.0)kΩ	(106.0)kΩ	(64.0)kΩ	(40.9)kΩ
2.9		(274.0)kΩ	(118.0)kΩ	(71.4)kΩ	(44.1)kΩ
3.0		(388.0)kΩ	(131.0)kΩ	(79.5)kΩ	(47.3)kΩ
3.1		(615.0)kΩ	(146.0)kΩ	(88.5)kΩ	(50.5)kΩ
3.2		(1300.0)kΩ	(163.0)kΩ	(98.5)kΩ	(53.8)kΩ
3.3		(181.0)kΩ	(110.0)kΩ	(57.3)kΩ	
3.4		831.0kΩ	(202.0)kΩ	(122.0)kΩ	(60.8)kΩ
3.5		416.0kΩ	(225.0)kΩ	(136.0)kΩ	(64.3)kΩ
3.6		227.0kΩ	(252.0)kΩ	(153.0)kΩ	(68.0)kΩ
3.7		208.0kΩ	(283.0)kΩ	(171.0)kΩ	(71.7)kΩ
3.8		166.0kΩ	(319.0)kΩ	(193.0)kΩ	(75.6)kΩ
3.9		139.0kΩ	(361.0)kΩ	(219.0)kΩ	(79.5)kΩ
4.0		119.0kΩ	(413.0)kΩ	(250.0)kΩ	(83.5)kΩ
4.1		104.0kΩ	(475.0)kΩ	(288.0)kΩ	(87.7)kΩ
4.2		92.4kΩ	(533.0)kΩ	(335.0)kΩ	(91.9)kΩ
4.3		83.1kΩ	(654.0)kΩ	(396.0)kΩ	(96.3)kΩ
4.4		75.6kΩ	(788.0)kΩ	(477.0)kΩ	(101.0)kΩ
4.5		69.3kΩ	(975.0)kΩ	(591.0)kΩ	(105.0)kΩ
4.6		63.9kΩ	(1260.0)kΩ	(761.0)kΩ	(110.0)kΩ
4.7		59.4kΩ	(1730.0)kΩ	(1050.0)kΩ	(115.0)kΩ
4.8		55.4kΩ		(1610.0)kΩ	(120.0)kΩ
4.9		52.0kΩ			(125.0)kΩ
5.0		48.9kΩ			(130.0)kΩ
5.1		46.2kΩ	1880.0kΩ	1140.0kΩ	(136.0)kΩ
5.2		43.8kΩ	937.0kΩ	568.0kΩ	(141.0)kΩ
5.3		41.6kΩ	625.0kΩ	379.0kΩ	(147.0)kΩ
5.4		39.6kΩ	469.0kΩ	284.0kΩ	(153.0)kΩ
5.5		37.8kΩ	375.0kΩ	227.0kΩ	(159.0)kΩ
5.6		36.1kΩ	313.0kΩ	189.0kΩ	(165.0)kΩ
5.7		34.6kΩ	268.0kΩ	162.0kΩ	(172.0)kΩ
5.8		33.3kΩ	234.0kΩ	142.0kΩ	(178.0)kΩ
5.9		32.0kΩ	208.0kΩ	126.0kΩ	(185.0)kΩ
6.0		30.8kΩ	188.0kΩ	114.0kΩ	(192.0)kΩ

R1 = (Blue) R2 = Black

ISR ADJUSTMENT RESISTOR VALUES (Cont)

1Adc Rated	PT6101		PT6103
2Adc Rated		PT6212	PT6214
3Adc Rated		PT6302	PT6304
V ₀ (nom)	5.0	5.0	12.0
V _A (req.d)			
6.2	156.0kΩ	94.7kΩ	(207.0)kΩ
6.4	134.0kΩ	81.2kΩ	(223.0)kΩ
6.6	117.0kΩ	71.0kΩ	(241.0)kΩ
6.8	104.0kΩ	63.1kΩ	(259.0)kΩ
7.0	93.8kΩ	56.8kΩ	(279.0)kΩ
7.2	85.2kΩ	51.6kΩ	(301.0)kΩ
7.4	78.1kΩ	47.3kΩ	(325.0)kΩ
7.6	72.1kΩ	43.7kΩ	(351.0)kΩ
7.8	67.0kΩ	40.6kΩ	(379.0)kΩ
8.0	62.5kΩ	37.9kΩ	(410.0)kΩ
8.2	58.6kΩ	35.5kΩ	(444.0)kΩ
8.4	55.1kΩ	33.4kΩ	(483.0)kΩ
8.6	52.1kΩ		(525.0)kΩ
8.8	49.3kΩ		(573.0)kΩ
9.0	46.9kΩ		(628.0)kΩ
9.5	41.7kΩ		(802.0)kΩ
10.0	37.5kΩ		(1060.0)kΩ
10.5	34.1kΩ		(1500.0)kΩ
11.0	31.3kΩ		
11.5			
12.0			
12.5			608.0kΩ
13.0			304.0kΩ
13.5			203.0kΩ
14.0			152.0kΩ
14.5			122.0kΩ
15.0			101.0kΩ
15.5			86.8kΩ
16.0			75.9kΩ
16.5			67.5kΩ
17.0			60.8kΩ
17.5			55.2kΩ
18.0			50.6kΩ
18.5			46.7kΩ
19.0			43.4kΩ
19.5			40.5kΩ
20.0			38.0kΩ
20.5			35.7kΩ
21.5			33.8kΩ
21.5			32.0kΩ
22.0			30.4kΩ

PT6100/6210/6300 Series

Using the Inhibit Function on Power Trends' Wide Input Range Bus ISRs

For applications requiring output voltage On/Off control, the 12pin ISR products incorporate an inhibit function. The function has uses in areas such as battery conservation, power-up sequencing, or any other application where the regulated output from the module is required to be switched off. The On/Off function is provided by the Pin 1 (*Inhibit*) control.

The ISR functions normally with Pin 1 open-circuit, providing a regulated output whenever a valid source voltage is applied to V_{in} , (pins 2, 3, & 4). When a low-level² ground signal is applied to Pin 1, the regulator output will be disabled.

Figure 1 shows an application schematic, which details the typical use of the Inhibit function. Note the discrete transistor (Q1). The Inhibit control has its own internal pull-up with a maximum open-circuit voltage of 8.3VDC. Only devices with a true open-collector or open-drain output can be used to control this pin. A discrete bipolar transistor or MOSFET is recommended.

Equation 1 may be used to determine the approximate current drawn by Q1 when the inhibit is active.


Equation 1

$$I_{stby} = V_{in} \div 155k\Omega \pm 20\%$$

Notes:


1. The Inhibit control logic is similar for all Power Trends' modules, but the flexibility and threshold tolerances will be different. For specific information on the inhibit function of other ISR models, consult the applicable application note.
2. Use only a true open-collector device (preferably a discrete transistor) for the Inhibit input. **Do Not** use a pull-up resistor, or drive the input directly from the output of a TTL or other logic gate. To disable the output voltage, the control pin should be pulled low to less than +1.5VDC.
3. When the Inhibit control pin is active, i.e. pulled low, the maximum allowed input voltage is limited to +30Vdc.
4. Do not control the Inhibit input with an external DC voltage. This will lead to erratic operation of the ISR and may over-stress the regulator.
5. Avoid capacitance greater than 500pF at the Inhibit control pin. Excessive capacitance at this pin will cause the ISR to produce a pulse on the output voltage bus at turn-on.
6. Keep the On/Off transition to less than 10 μ s. This prevents erratic operation of the ISR, which can cause a momentary high output voltage.

Figure 1

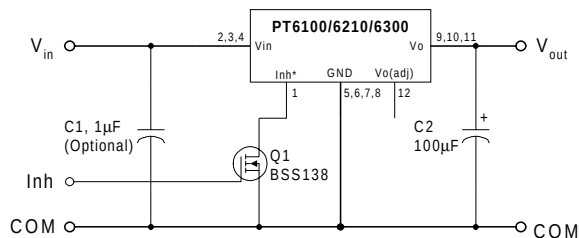

Turn-On Time: The output of the ISR is enabled automatically when external power is applied to the input. The *Inhibit* control pin is pulled high by its internal pull-up resistor. The ISR produces a fully regulated output voltage within 1-msec of either the release of the Inhibit control pin, or the application of power. The actual turn-on time will vary with the input voltage, output load, and the total amount of capacitance connected to the output. Using the circuit of Figure 1, Figure 2 shows the typical rise in output voltage for the PT6101 following the turn-off of Q1 at time $t = 0$. The waveform was measured with a 9Vdc input voltage, and 5-Ohm resistive load.

Figure 2

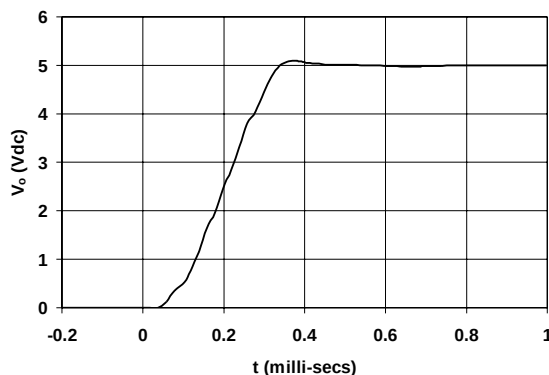

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PT6304N](#) on WIN SOURCE

 [Texas Instruments](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management