



**THE DATASHEET OF
MR752RLG**



MR750 SERIES

MR754 and MR760 are Preferred Devices

High Current Lead Mounted Rectifiers

Features

- Current Capacity Comparable to Chassis Mounted Rectifiers
- Very High Surge Capacity
- Insulated Case
- Pb-Free Packages are Available*

Mechanical Characteristics:


- Case: Epoxy, Molded
- Weight: 2.5 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Lead Temperature for Soldering Purposes:
260°C Max. for 10 Seconds
- Polarity: Cathode Polarity Band



ON Semiconductor®


<http://onsemi.com>

**HIGH CURRENT
LEAD MOUNTED
SILICON RECTIFIERS
50 – 1000 VOLTS
DIFFUSED JUNCTION**



**AXIAL LEAD
BUTTON
CASE 194
STYLE 1**

MARKING DIAGRAM



MR7 = Device Code
xx = 50, 51, 52, 54, 56 or 60
A = Location Code
YY = Year
WW = Work Week
▪ = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

Preferred devices are recommended choices for future use and best overall value.

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

MR750 SERIES

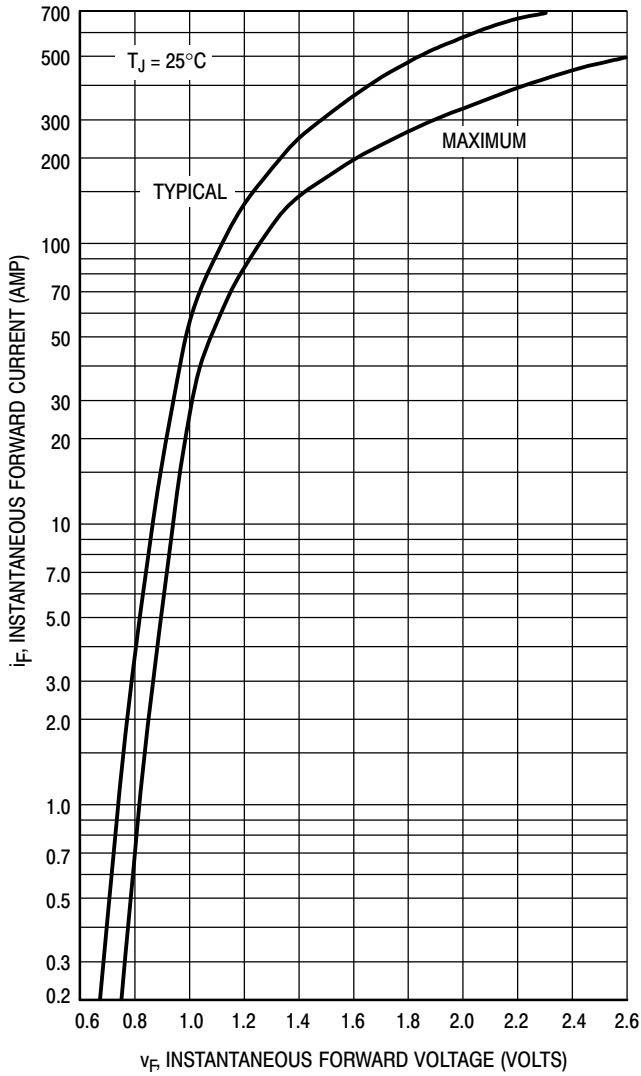


Figure 1. Forward Voltage

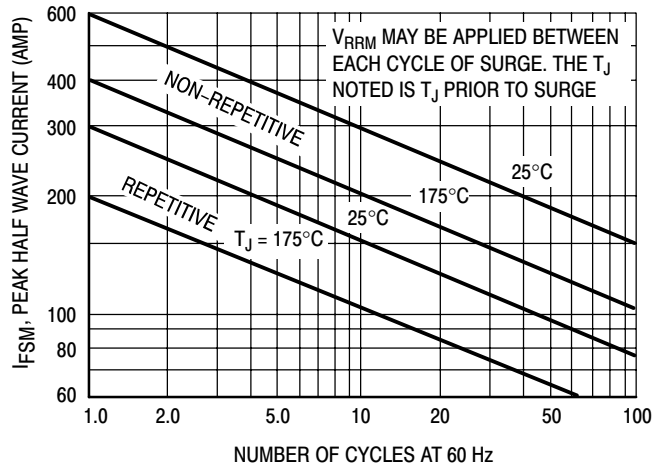


Figure 2. Maximum Surge Capability

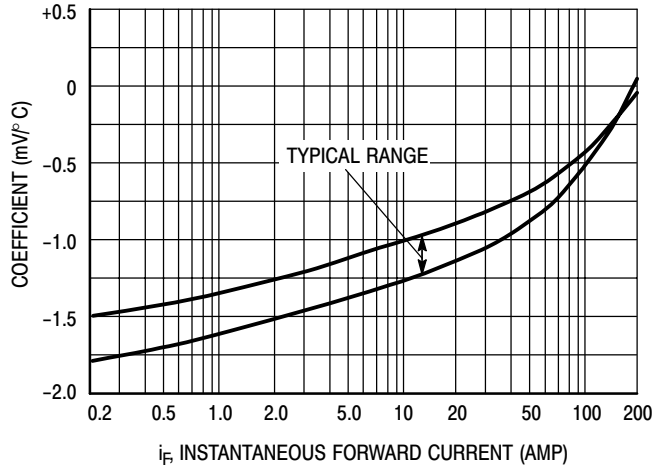


Figure 3. Forward Voltage Temperature Coefficient

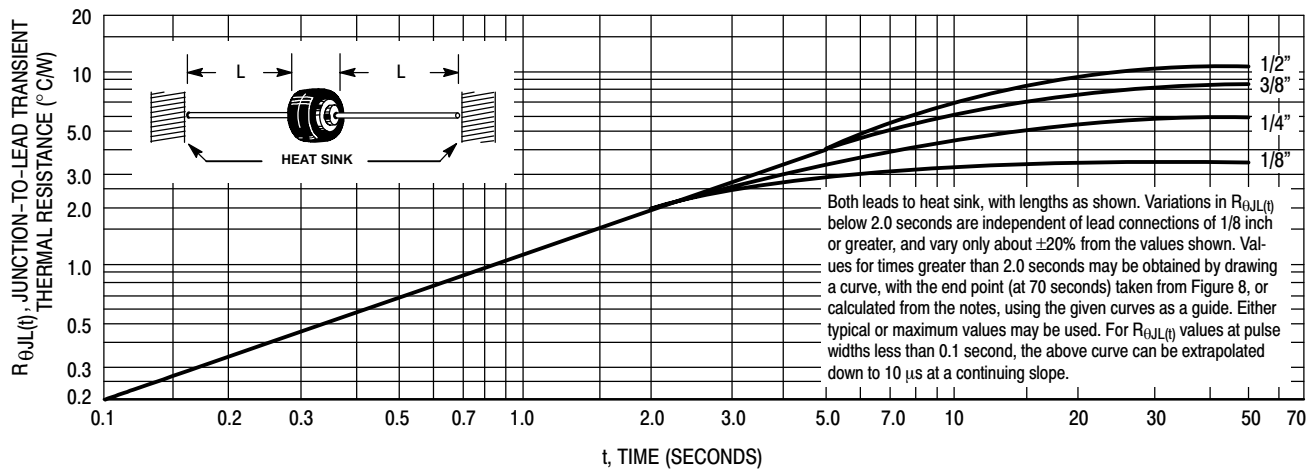


Figure 4. Typical Transient Thermal Resistance

MR750 SERIES

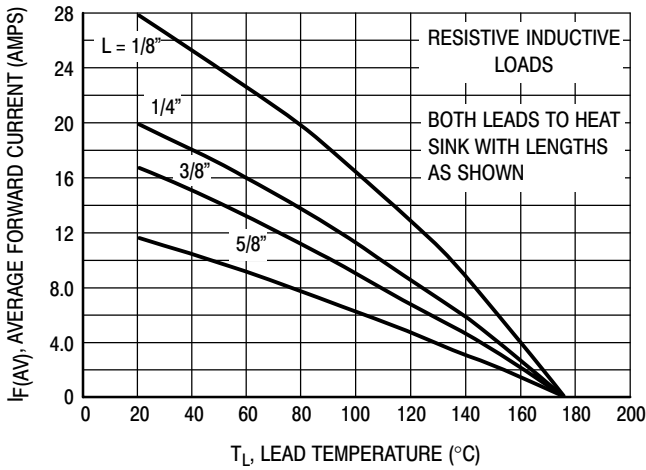


Figure 5. Maximum Current Ratings

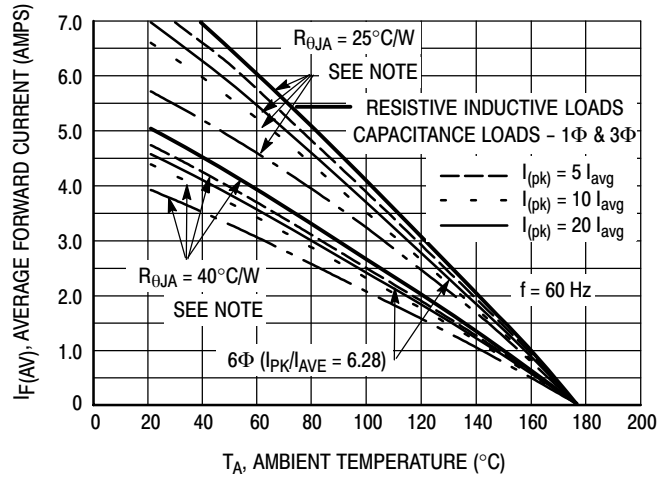


Figure 6. Maximum Current Ratings


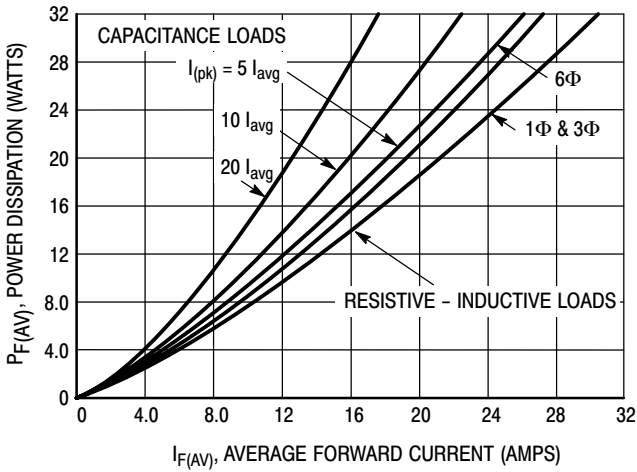


Figure 7. Power Dissipation

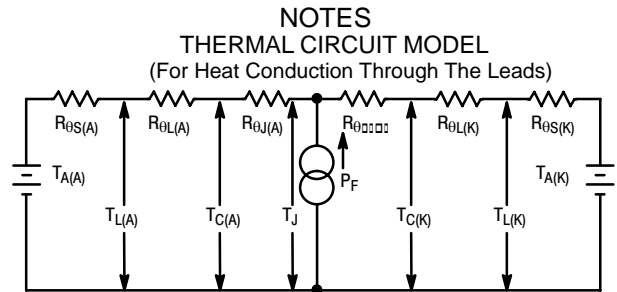

Use of the above model permits junction to lead thermal resistance for any mounting configuration to be found. Lowest values occur when one side of the rectifier is brought as close as possible to the heat sink as shown below. Terms in the model signify:

- T_A = Ambient Temperature
- T_L = Lead Temperature
- $R_{\theta S}$ = Thermal Resistance, Heat Sink to Ambient
- $R_{\theta L}$ = Thermal Resistance, Lead to Heat Sink
- $R_{\theta J}$ = Thermal Resistance, Junction to Case
- P_F = Power Dissipation
- T_C = Case Temperature
- T_J = Junction Temperature

Values for thermal resistance components are:
 $R_{\theta L} = 40^\circ\text{C/W/in.}$ Typically and 44°C/W/in. Maximum.
 $R_{\theta J} = 2^\circ\text{C/W}$ typically and 4°C/W Maximum.

Since $R_{\theta J}$ is so low, measurements of the case temperature, T_C , will be approximately equal to junction temperature in practical lead mounted applications. When used as a 60 Hz rectifier the slow thermal response holds $T_{J(pk)}$ close to $T_{J(ave)}$. Therefore maximum lead temperature may be found from: $T_L = 175^\circ - R_{\theta JL} P_F$. P_F may be found from Figure 7.

The recommended method of mounting to a P.C. board is shown on the sketch, where $R_{\theta JA}$ is approximately 25°C/W for a $1-1/2'' \times 1-1/2''$ copper surface area. Values of 40°C/W are typical for mounting to terminal strips or P.C. boards where available surface area is small.


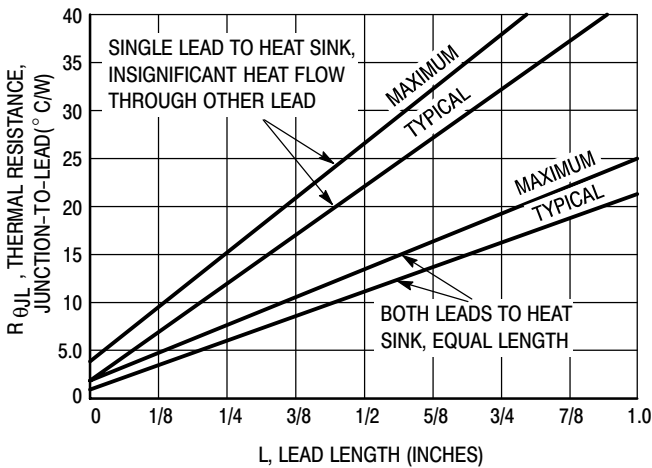


Figure 8. Steady State Thermal Resistance

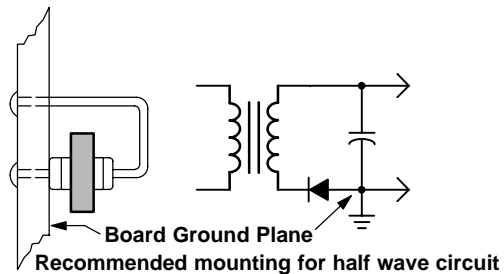

MR750 SERIES

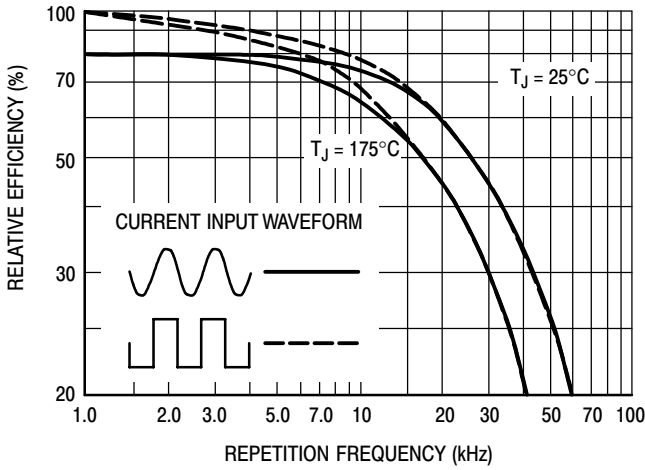


Figure 9. Rectification Efficiency

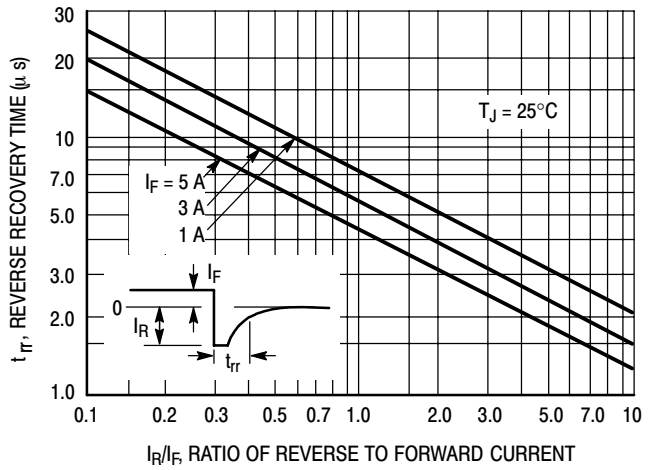


Figure 10. Reverse Recovery Time

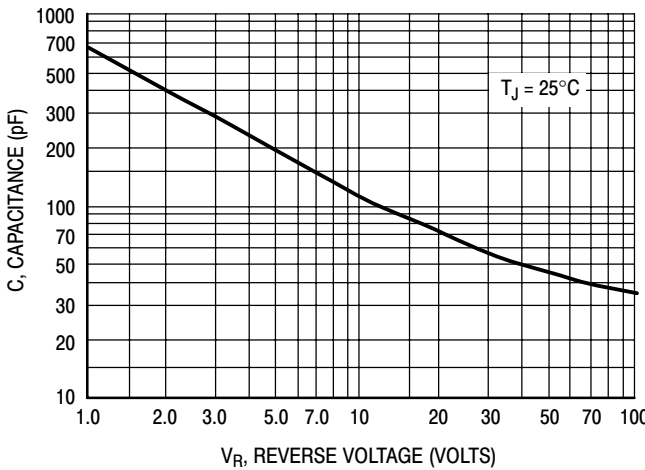


Figure 11. Junction Capacitance

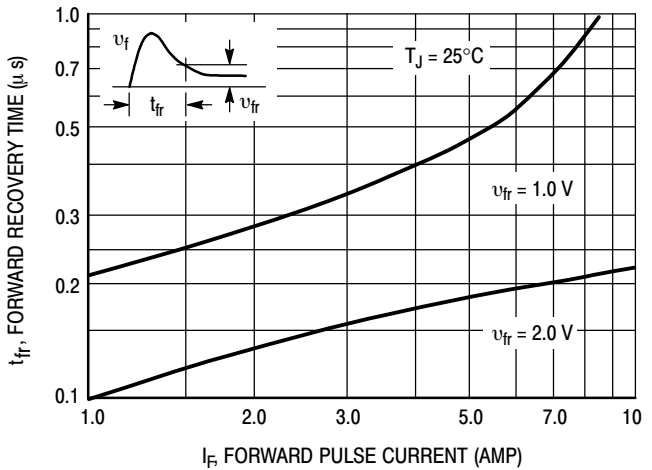


Figure 12. Forward Recovery Time

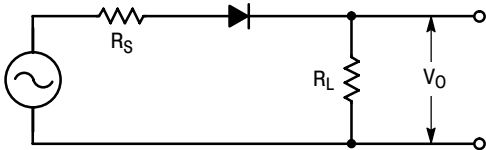


Figure 13. Single-Phase Half-Wave Rectifier Circuit

The rectification efficiency factor σ shown in Figure 9 was calculated using the formula:

$$\sigma = \frac{P_{(dc)}}{P_{(rms)}} = \frac{\frac{\sqrt{2}V_o(dc)}{R_L}}{\frac{\sqrt{2}V_o(rms)}{R_L}} \cdot 100\% = \frac{V_o(dc)}{\sqrt{2}V_o(ac) + V_o(dc)} \cdot 100\% \quad (1)$$

For a sine wave input $V_m \sin(\omega t)$ to the diode, assumed lossless, the maximum theoretical efficiency factor becomes:

$$\sigma_{(sine)} = \frac{\frac{\sqrt{2}V_m}{\pi^2 R_L}}{\frac{\sqrt{2}V_m}{4R_L}} \cdot 100\% = \frac{4}{\pi^2} \cdot 100\% = 40.6\% \quad (2)$$

For a square wave input of amplitude V_m , the efficiency factor becomes:

$$\sigma_{(square)} = \frac{\frac{\sqrt{2}V_m}{2R_L}}{\frac{\sqrt{2}V_m}{R_L}} \cdot 100\% = 50\% \quad (3)$$

(A full wave circuit has twice these efficiencies)

As the frequency of the input signal is increased, the reverse recovery time of the diode (Figure 10) becomes significant, resulting in an increasing AC voltage component across R_L which is opposite in polarity to the forward current, thereby reducing the value of the efficiency factor σ , as shown on Figure 9.

It should be emphasized that Figure 9 shows waveform efficiency only; it does not provide a measure of diode losses. Data was obtained by measuring the AC component of V_o with a true rms AC voltmeter and the DC component with a DC voltmeter. The data was used in Equation 1 to obtain points for Figure 9.

MR750 SERIES

ORDERING INFORMATION


| Device | Package | Shipping† |
|----------|-------------------------|-------------------|
| MR750 | Axial Lead | 1000 Units / Box |
| MR750G | Axial Lead (Pb-Free) | |
| MR750RL | Axial Lead | 800 / Tape & Reel |
| MR750RLG | Axial Lead (Pb-Free) | |
| MR751 | Axial Lead | 1000 Units / Box |
| MR751G | Axial Lead (Pb-Free) | |
| MR751RL | Axial Lead | 800 / Tape & Reel |
| MR751RLG | Axial Lead (Pb-Free) | |
| MR752 | Axial Lead | 1000 Units / Box |
| MR752G | Axial Lead (Pb-Free) | |
| MR752RL | Axial Lead | 800 / Tape & Reel |
| MR752RLG | Axial Lead (Pb-Free) | |
| MR754 | Axial Lead | 1000 Units / Box |
| MR754G | Axial Lead (Pb-Free) | |
| MR754RL | Axial Lead | 800 / Tape & Reel |
| MR754RLG | Axial Lead (Pb-Free) | |
| MR756 | Axial Lead | 1000 Units / Box |
| MR756G | Axial Lead (Pb-Free) | |
| MR756RL | Axial Lead | 800 / Tape & Reel |
| MR756RLG | Axial Lead (Pb-Free) | |
| MR760 | Axial Lead | 1000 Units / Box |
| MR760G | Axial Lead (Pb-Free) | |
| MR760RL | Axial Lead | 800 / Tape & Reel |
| MR760RLG | Axial Lead (Pb-Free) | |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.




**MICRODE AXIAL
CASE 194-04
ISSUE H**

DATE 09 SEP 2003



SCALE 1:1

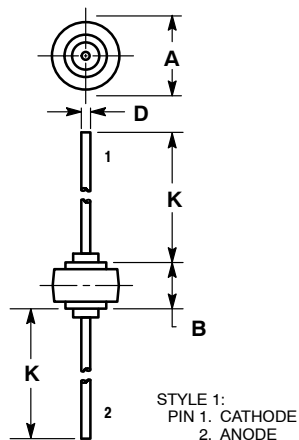

NOTES:

1. CATHODE SYMBOL ON PACKAGE.
2. 194-01 OBSOLETE, 194-04 NEW STANDARD.

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|--------|-------|
| | MIN | MAX | MIN | MAX |
| A | 8.43 | 8.69 | 0.332 | 0.342 |
| B | 5.94 | 6.25 | 0.234 | 0.246 |
| D | 1.27 | 1.35 | 0.050 | 0.053 |
| K | 25.15 | 25.65 | 0.990 | 1.010 |

**GENERIC
MARKING DIAGRAM***



- DEV = Specific Device Code
- A = Assembly Location
- YY = Year
- WW = Work Week

*This information is generic. Please refer to device data sheet for actual part marking.

| | | |
|-------------------------|----------------------|--|
| DOCUMENT NUMBER: | 98ASB42126B | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | MICRODE AXIAL | PAGE 1 OF 1 |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MR752RLG on WIN SOURCE](#)

 [ON Semiconductor](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management