



**THE DATASHEET OF
PT78ST212V**



PT78ST200 Series

12V 2 Amp Positive Step-Down
Integrated Switching Regulator

 Power Trends Products
from Texas Instruments


SLTS060A

(Revised 6/30/2000)

- High Efficiency > 87%
- Wide Input Range
- Aluminum Heatsink for Applications with Airflow
- Self-Contained Inductor
- Short Circuit Protection
- Over-Temperature Protection
- Pin Compatible with Linear 3-Terminal, "78" Series Regulators
- Small Footprint

The Power Trends' PT78ST200 is a series of 3-terminal Integrated Switching Regulators (ISRs) that can supply up to 24 watts of regulated 12V power. With a surge capability of 3 Amps and an output voltage that is laser trimmed, it is ideal for inductive load applications such as disk drive motors.


Standard Application

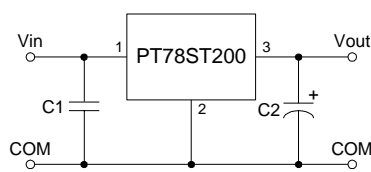

C₁ = Optional 1 μ F ceramic
C₂ = Required 100 μ F electrolytic

Pin-Out Information

Pin	Function
1	V _{in}
2	GND
3	V _{out}



SUGGESTED BOARD LAYOUT
COMPONENT SIDE VIEW

Pkg Style 600

Ordering Information

PT78ST2 XX Y

Output Voltage

12 = 12.0 Volts

Package Suffix

V = Vertical Mount

Specifications

Characteristics (T _a = 25°C unless noted)	Symbols	Conditions	PT78ST200 SERIES			Units
			Min	Typ	Max	
Output Current	I _o	Over V _{in} range With forced air cooling	0.1*	—	2.0	A
Short Circuit Current	I _{sc}	V _{in} = V _{in} min	—	5.0	—	A _{pk}
Input Voltage Range	V _{in}	0.1 ≤ I _o ≤ 2.0A	16	—	28	V
Output Voltage Tolerance	ΔV _o	Over V _{in} range, I _f = 2.0A T _a = 0°C to +60°C	—	±1.0	±2.0	%V _o
Line Regulation	Reg _{line}	Over V _{in} range	—	±0.4	±0.8	%V _o
Load Regulation	Reg _{load}	0.1 ≤ I _o ≤ 2.0A	—	±0.2	±0.4	%V _o
V _o Ripple/Noise	V _n	V _{in} = 17V, I _o = 2.0A, V _o = 12V	—	120	—	mV _{pp}
Transient Response (with 100 μ F output cap)	t _{tr}	50% load change V _o over/undershoot	—	100	—	μSec
			—	5.0	—	%V _o
Efficiency	η	V _{in} = 17V, I _o = 2.0A	—	87	—	%
Switching Frequency	f _o	Over V _{in} and I _o ranges	0.95	1.0	1.05	MHz
Absolute Maximum Operating Temperature Range	T _a	—	-40	—	+65	°C
Recommended Operating Temperature Range	T _a	Free Air Convection, (40-60LFM) at V _{in} = 24V, I _o = 2A	-40	—	+55**	°C
Thermal Resistance	θ _{ja}	Free Air Convection, (40-60LFM)	—	35	—	°C/W
Storage Temperature	T _s	—	-40	—	+125	°C
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3	—	500	—	G's
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, Soldered in a PC board	—	10	—	G's
Weight	—	—	—	11	—	Grams

*ISR will operate down to no load with reduced specifications.

**See Thermal Derating chart.

Note: The PT78ST200 Series requires a 100 μ F electrolytic or tantalum output capacitor for proper operation in all applications.


PT78ST200 Series

Typical Characteristics


12V 2 Amp Positive Step-Down
Integrated Switching Regulator

PT78ST212 12.0 VDC (See Note 1)


Efficiency vs Output Current

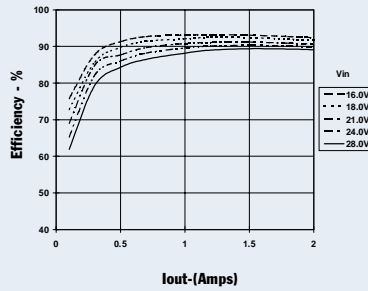


Ripple vs Output Current

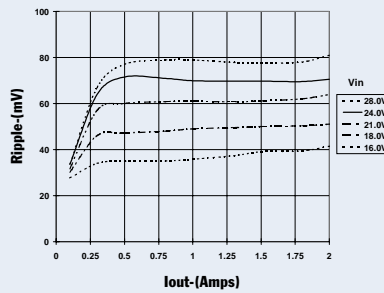

Thermal Derating (T_a) (See Note 2)

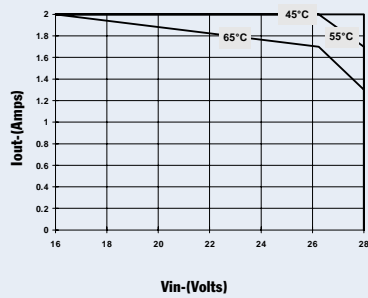

Power Dissipation vs Output Current

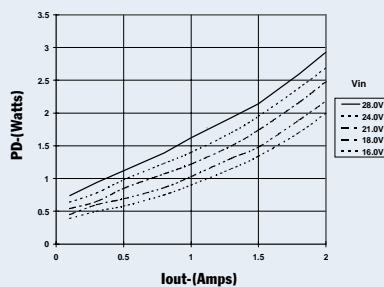

Note 1: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.
Note 2: Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.



Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View PT78ST212V on WIN SOURCE](#)
-  [Texas Instruments](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management