



# THE DATASHEET OF BC847BW-TP





Micro Commercial Components



Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

# BC846AW/BW BC847AW/BW/CW BC848AW/BW/CW

## Features

- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Low current (max. 100mA)
- Low voltage (max. 65V)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Halogen free available upon request by adding suffix "-HF"

## Maximum Ratings

- Operating temperature : -65°C to +150°C
- Storage temperature : -65°C to +150°C
- Thermal resistance from junction to ambient\*: 625K/W
- Marking: BC846AW---1A ; BC846BW---1B  
BC847AW---1E ; BC847BW---1F ; BC847CW---1G  
BC848AW---1JS/1J ; BC848BW---1KS/1K ; BC848CW---1LS/1L

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------


### OFF CHARACTERISTICS

$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ( $I_C=10\mu A_{dc}$ , $I_E=0$ )			Vdc
	BC846AW/BW	---	80	
	BC847AW/BW/CW	---	50	
	BC848AW/BW/CW	---	30	
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ( $I_C=10mAdc$ , $I_B=0$ )			Vdc
	BC846AW/BW	---	65	
	BC847AW/BW/CW	---	45	
	BC848AW/BW/CW	---	30	
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ( $I_E=1\mu A_{dc}$ , $I_C=0$ )			Vdc
	BC846AW/BW, BC847AW/BW/CW	---	6	
	BC848AW/BW/CW	---	5	
$I_C$	Collector Current (DC)	---	100	mAdc
$I_{CM}$	Peak Collector Current	---	200	mAdc
$I_{BM}$	Peak Base Current	---	200	mAdc

\* Transistor mounted on an FR4 printed-circuit board


## NPN General Purpose Transistors

### SOT-323

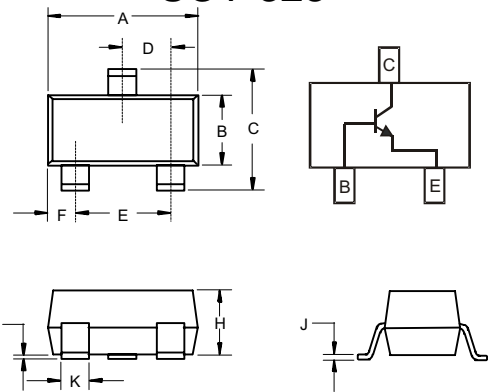

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.083	.096	2.10	2.45	
D	.026 Nominal		0.65 Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.006	.016	.15	.40	

### Suggested Solder Pad Layout

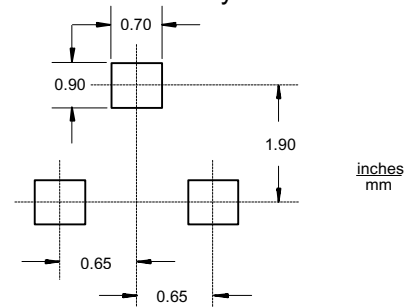

**ON CHARACTERISTICS**

Symbol	Parameter	Min	Typ	Max	Units
I <sub>CBO</sub>	Collector-base Cut-off Current (I <sub>CE</sub> =0, V <sub>CB</sub> =30Vdc) (I <sub>CE</sub> =0, V <sub>CB</sub> =30Vdc, T <sub>J</sub> =150°C)	---	---	15	nA
		---	---	5	μA
I <sub>CEO</sub>	Emitter-base Cut-off Current (I <sub>C</sub> =0, V <sub>EB</sub> =5Vdc)	---	---	100	nA
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage (I <sub>C</sub> =10mAdc, I <sub>B</sub> =0.5mAdc) (I <sub>C</sub> =100mAdc, I <sub>B</sub> =5mAdc*)	---	90	250	mVdc
		---	200	600	mVdc
V <sub>BE(sat)</sub>	Base-Emitter Saturation Voltage (I <sub>C</sub> =10mAdc, I <sub>B</sub> =0.5mAdc) (I <sub>C</sub> =100mAdc, I <sub>B</sub> =5mAdc*)	---	700	---	mVdc
		---	900	---	mVdc
h <sub>FE</sub>	DC Current Gain (I <sub>C</sub> =10μA; V <sub>CE</sub> =5V) BC846AW; BC847AW; BC848AW BC846BW; BC847BW; BC848BW BC847CW; BC848CW	---	90	---	
		---	150	---	
		---	270	---	
	DC Current Gain (I <sub>C</sub> =2mA; V <sub>CE</sub> =5V) BC846AW; BC847AW; BC848AW BC846BW; BC847BW; BC848BW BC847CW; BC848CW	110	180	220	
		200	290	450	
420		520	800		
V <sub>BE</sub>	Base-emitter Voltage (I <sub>C</sub> =2mAdc, V <sub>CE</sub> =5V) (I <sub>C</sub> =10mAdc, V <sub>CE</sub> =5V)	580	660	700	mVdc
		---	---	770	mVdc
C <sub>C</sub>	Collector Capacitance (V <sub>CB</sub> =10V; I <sub>E</sub> =I <sub>C</sub> =0; f=1MHz)	---	---	4.5	pF
f <sub>T</sub>	Transition Frequency (V <sub>CE</sub> =5V; I <sub>C</sub> =10mA; f=100MHz)	100	---	---	MHz
F	Noise Figure (V <sub>CE</sub> =5V; I <sub>C</sub> =200μA; f=1KHz; B=200Hz; R <sub>S</sub> =2KΩ)	---	---	10	dB

\* Pulse test: t<sub>p</sub> ≤ 300μs; δ ≤ 0.02

Typical Characteristics

846AW, BW; BC847AW, BW, CW; BC848AW, BW, CW

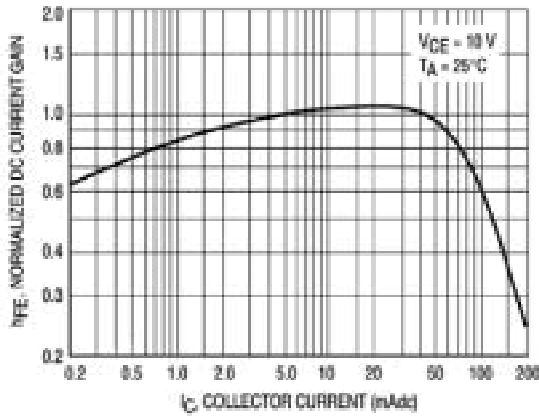


Figure 1. Normalized DC Current Gain

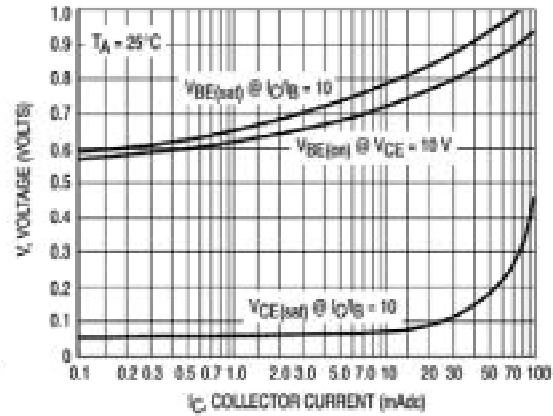


Figure 2. "Saturation" and "On" Voltages

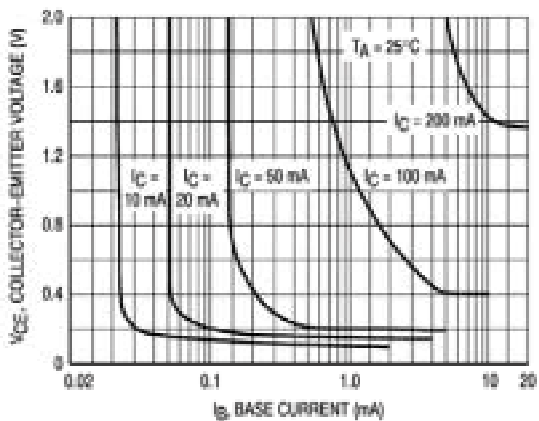


Figure 3. Collector Saturation Region

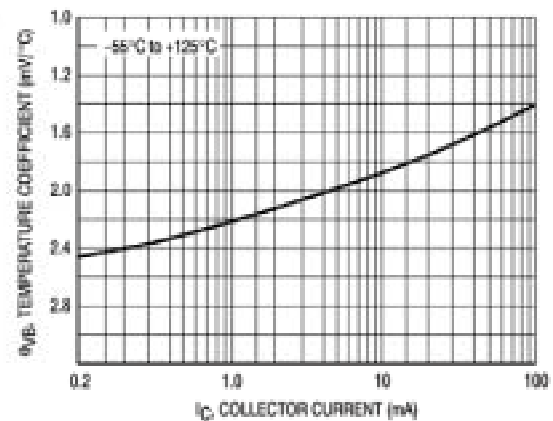


Figure 4. Base-Emitter Temperature Coefficient

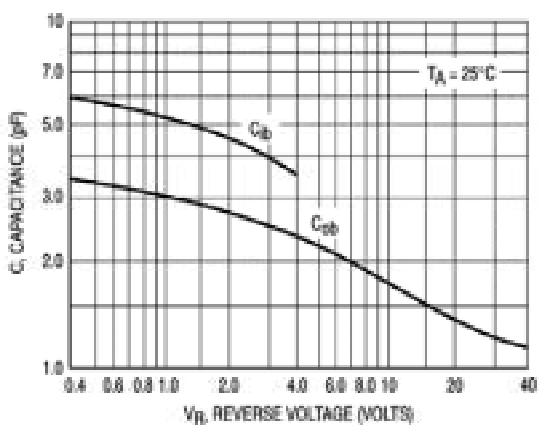


Figure 5. Capacitances

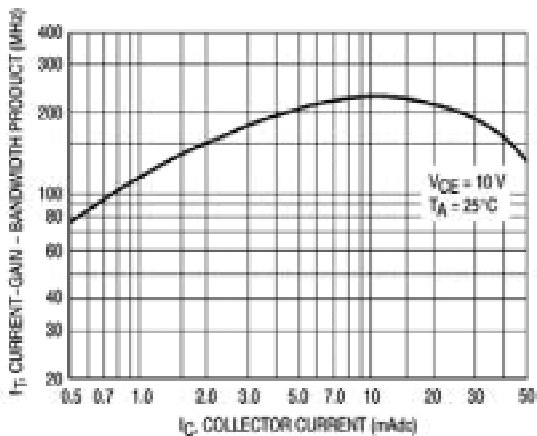


Figure 6. Current-Gain - Bandwidth Product

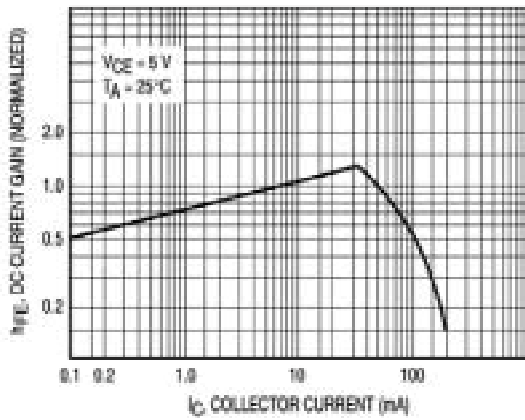


Figure 7. DC Current Gain

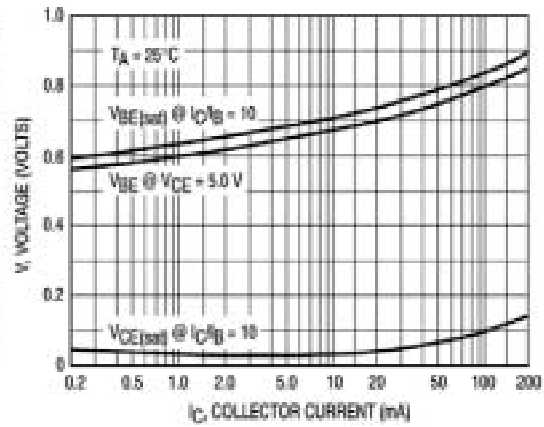


Figure 8. "On" Voltage

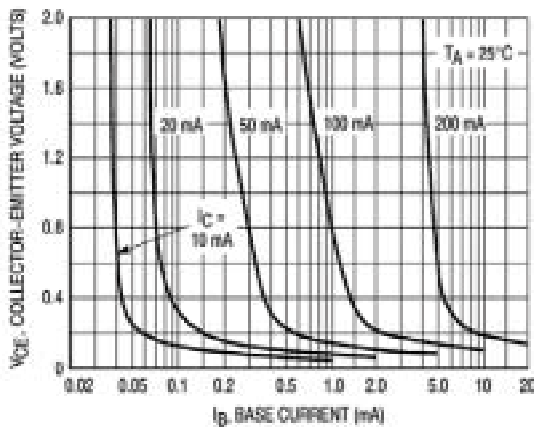


Figure 9. Collector Saturation Region

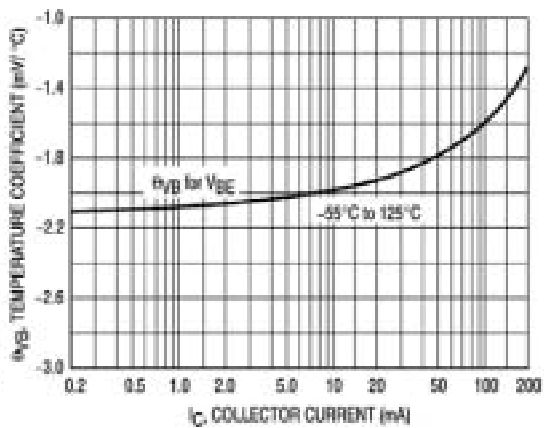


Figure 10. Base-Emitter Temperature Coefficient

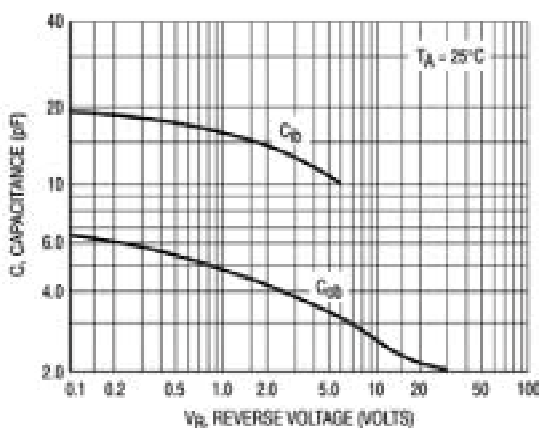


Figure 11. Capacitance

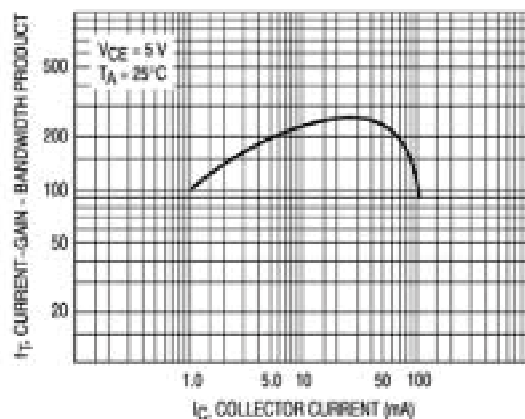


Figure 12. Current-Gain - Bandwidth Product



TM

Micro Commercial Components

## Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel; 3Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.



### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

[www.mccsemi.com](http://www.mccsemi.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BC847BW-TP on WIN SOURCE](#)
-  [Micro Commercial Co](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management