



**THE DATASHEET OF
PA4342.223ANLT**



SMT Power Inductor

High Current Molded Power Inductor - PA4342.XXXANLT Series



- Ⓟ **Height:** 4.0mm Max
- Ⓟ **Footprint:** 11.3mm x 10.3mm Max
- Ⓟ **Current Rating:** up to 38.0A
- Ⓟ **Inductance Range:** 0.15uH to 100.0uH
- Ⓟ Shielded construction and compact design
- Ⓟ High current, low DCR, and high efficiency
- Ⓟ Minimized acoustic noise and minimized leakage flux
- Ⓟ 200 Vdc Isolation between terminal and core


Electrical Specifications @ 25°C - Operating Temperature -55°C to +155°C

Part Number	Inductance ^{5,8} 100KHz, 1V	Rated ⁷ Current	DC Resistance		Saturation ² Current	SRF	Mechanical	K Factor
			TYP.	MAX.	TYP.	TYP.		
	uH±20%	A	mΩ	mΩ	A	MHz		
PA4342.151ANLT	0.15*	38	0.5	0.6	75	190	Footprint 1	176.8
PA4342.221ANLT	0.22	33	0.72	0.83	60	150	Footprint 1	93.5
PA4342.361ANLT	0.36	29	1.05	1.18	45	105	Footprint 1	96.2
PA4342.471ANLT	0.47	28	1.3	1.5	40	78	Footprint 1	118.4
PA4342.561ANLT	0.56	23	1.6	1.8	29	68	Footprint 1	111.4
PA4342.681ANLT	0.68	20	1.9	2.2	28	60	Footprint 1	92.1
PA4342.901ANLT	0.9	19	2.2	2.6	27	55	Footprint 1	
PA4342.102ANLT	1	18	2.9	3.25	26	50	Footprint 1	58.9
PA4342.152ANLT	1.5	16	3.7	4.2	22	36	Footprint 1	43.7
PA4342.222ANLT	2.2	13	5.8	6.7	16	26	Footprint 2	37.0
PA4342.332ANLT	3.3	10	10.5	11.8	14	20	Footprint 2	24.7
PA4342.472ANLT	4.7	8.0	15.8	19	13	16	Footprint 2	17.9
PA4342.562ANLT	5.6	7.2	19	22.8	11.5	14	Footprint 2	14.4
PA4342.682ANLT	6.8	6.8	22	24.5	11	13	Footprint 2	14.8
PA4342.822ANLT	8.2	6.5	25	28	8.5	12	Footprint 2	20.3
PA4342.103ANLT	10	6.1	27	30	7.5	11	Footprint 2	17.8
PA4342.153ANLT	15	5.0	41	45	6.0	9.0	Footprint 2	17.8
PA4342.223ANLT	22	4.1	58	66	5.5	8.0	Footprint 2	11.7
PA4342.333ANLT	33	3.5	84	91	5.0	6.5	Footprint 2	9.1
PA4342.473ANLT	47	3.0	125	143	3.7	5.0	Footprint 2	6.6
PA4342.683ANLT	68	2.4	184	210	3.0	4.0	Footprint 2	8.8
PA4342.823ANLT	82	2.1	240	270	2.8	4.0	Footprint 2	7.2
PA4342.104ANLT	100	1.8	270	310	2.4	3.0	Footprint 2	6.9

SMT Power Inductor


High Current Molded Power Inductor - PA4342.XXXANLT Series

Notes:


- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance drops by approximately 30% at the stated ambient temperature. The maximum allowable drop at this stated current is 40% of the initial inductance. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The rated current is the DC current required to raise the component temperature by approximately 40°C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- The part temperature (ambient+temp rise) should not exceed maximum operating temperature under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Please note that the inductance tolerance of all parts are $\pm 20\%$, except those indicated by an * which are $\pm 30\%$.
- Parts shown in bold are standard catalog parts and are available through sample stock and distribution. Parts in lighter font are available but are not necessarily held in sample stock or distribution and lead times may be longer. Please contact Pulse for availability.
- The mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) 1.33 and therefore may not strictly conform to PPAP.
- Special Characteristics 

Mechanical

PA4342.XXXANLT

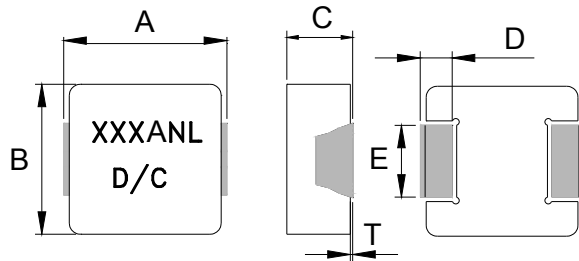


Footprint 1

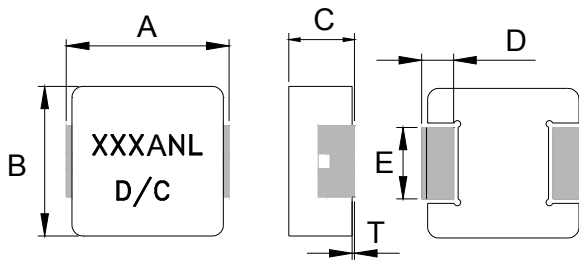

Footprint 2

FINAL LAYOUT



SUGGESTED PAD LAYOUT


Series	Mechanical	A	B	C	D	E	T	L	G	H
PA4342.XXXANLT	Footprint 1	11.0 \pm 0.3	10.0 \pm 0.3	3.8 \pm 0.2	2.2 \pm 0.3	2.5 \pm 0.3	(0-0.2)	12.5	(5.4)	(3.5)
PA4342.XXXANLT	Footprint 2	11.0 \pm 0.3	10.0 \pm 0.3	3.8 \pm 0.2	2.2 \pm 0.3	3.0 \pm 0.3	(0-0.2)	12.5	(5.4)	(3.5)

All Dimensions in mm.

SMT Power Inductor










High Current Molded Power Inductor - PA4342.XXXANLT Series

TAPE & REEL INFO

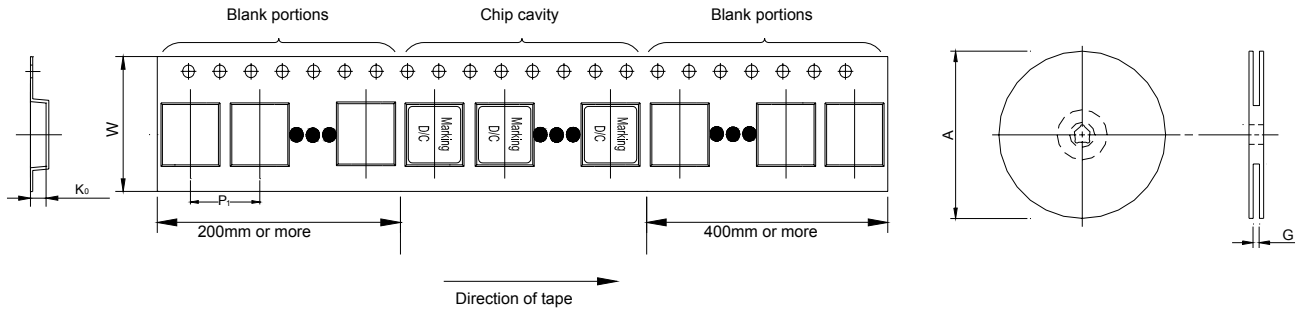














SURFACE MOUNTING TYPE, REEL/TAPE LIST						
TYPE	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P ₁	W	K ₀	PCS/REEL
PA4342.XXXANLT	Ø330	24.4	16	24	4.5	500

Typical Performance Curves

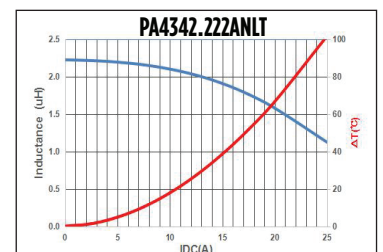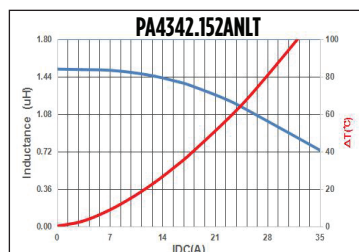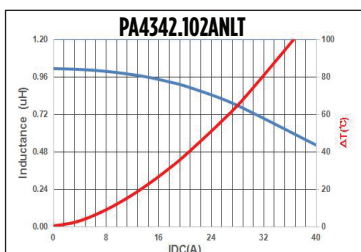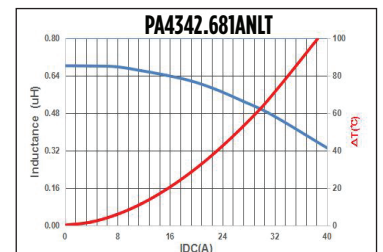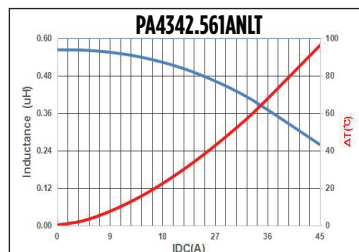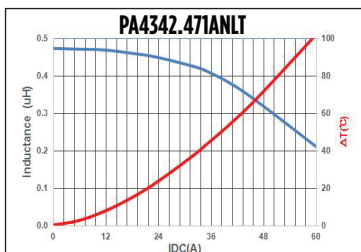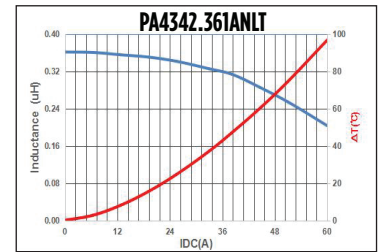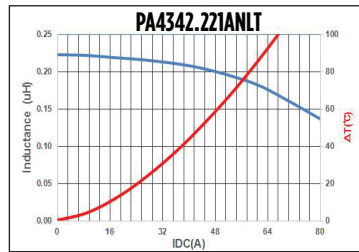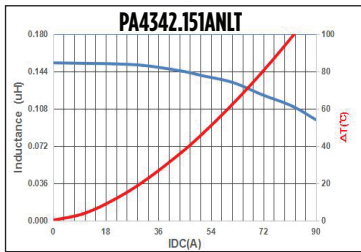

SMT Power Inductor


High Current Molded Power Inductor - PA4342.XXXANLT Series

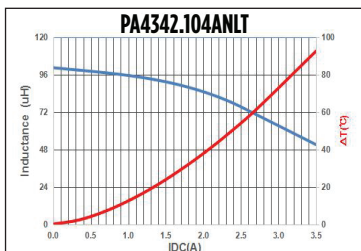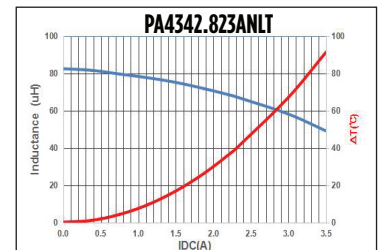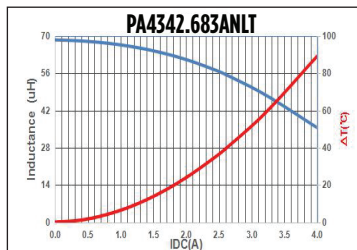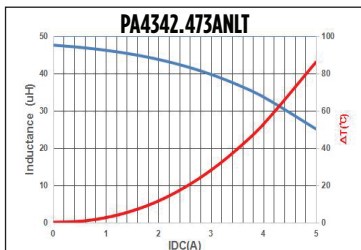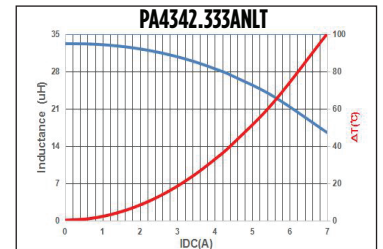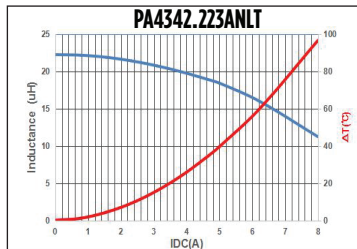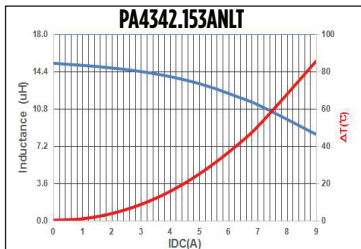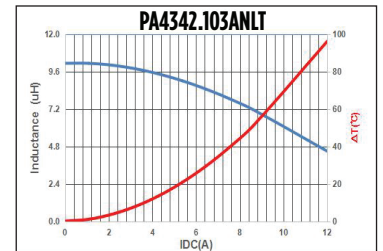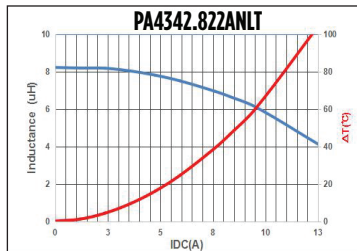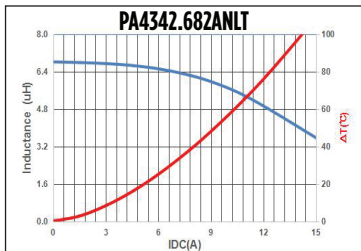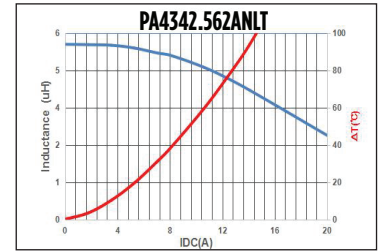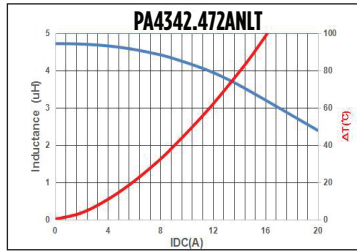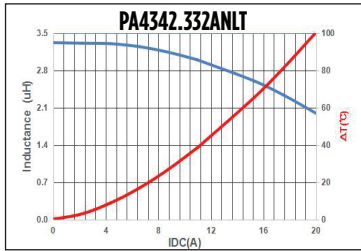

SMT Power Inductor

High Current Molded Power Inductor - PA4342.XXXANLT Series

Core Loss

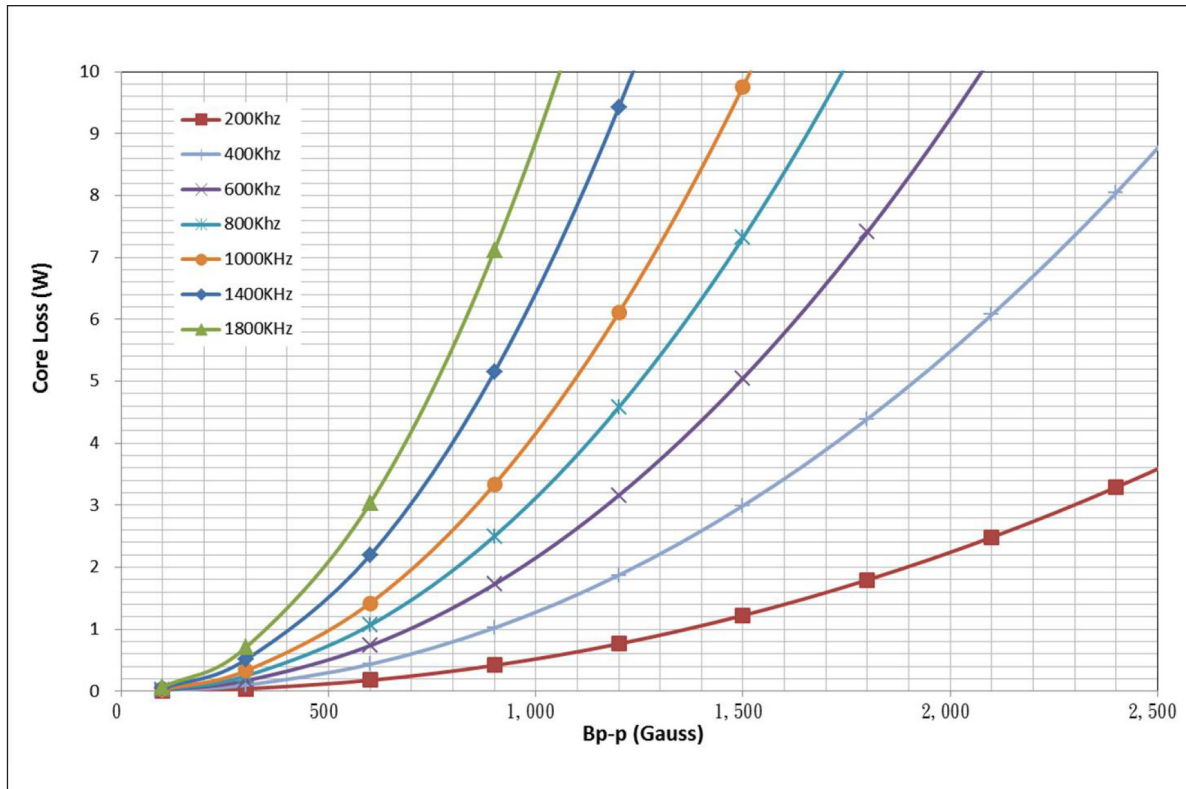

$$B_{p-p} = K * L(\mu H) * \Delta I(A)$$

For More Information:

Americas - proinfo_power_americas@yageo.com | Europe - proinfo_power_emea@yageo.com | Asia - proinfo_power_asia@yageo.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2023. Pulse Electronics, Inc. All rights reserved.

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PA4342.223ANLT on WIN SOURCE](#)

 [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management