



**THE DATASHEET OF  
74AUP1T45GN,132**



# 74AUP1T45

Low-power dual supply translating transceiver; 3-state

Rev. 8 — 20 July 2023

Product data sheet

## 1. General description

---

The 74AUP1T45 is a single bit transceiver featuring two data input-outputs (A and B), a direction control input (DIR) and dual supply pins ( $V_{CC(A)}$  and  $V_{CC(B)}$ ) which enable bidirectional level translation. Both  $V_{CC(A)}$  and  $V_{CC(B)}$  can be supplied at any voltage between 1.1 V and 3.6 V making the device suitable for interfacing between any of the low voltage nodes (1.2 V, 1.5 V, 1.8 V, 2.5 V and 3.3 V). Pins A and DIR are referenced to  $V_{CC(A)}$  and pin B is referenced to  $V_{CC(B)}$ . A HIGH on DIR allows transmission from A to B and a LOW on DIR allows transmission from B to A.

Schmitt trigger action on all inputs makes the circuit tolerant of slower input rise and fall times across the entire  $V_{CC(A)}$  and  $V_{CC(B)}$  ranges. The device ensures low static and dynamic power consumption and is fully specified for partial power-down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing any damaging backflow current through the device when it is powered down. In suspend mode when either  $V_{CC(A)}$  or  $V_{CC(B)}$  are at GND, both A and B are in the high-impedance OFF-state.

## 2. Features and benefits

---

- Wide supply voltage range:
  - $V_{CC(A)}$ : 1.1 V to 3.6 V
  - $V_{CC(B)}$ : 1.1 V to 3.6 V
- High noise immunity
- Low static power consumption;  $I_{CC} = 0.9 \mu\text{A}$  (maximum)
- Suspend mode
- Latch-up performance exceeds 100 mA per JESD 78 Class II
- Inputs accept voltages up to 3.6 V
- Low noise overshoot and undershoot < 10 % of  $V_{CC}$
- $I_{OFF}$  circuitry provides partial power-down mode operation
- Complies with JEDEC standards:
  - JESD8-7 (1.2 V to 1.95 V)
  - JESD8-5 (1.8 V to 2.7 V)
  - JESD8-B (2.7 V to 3.6 V)
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 class 3A exceeds 5000 V
  - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1000 V
- Multiple package options
- Specified from -40 °C to +85 °C and -40 °C to +125 °C

### 3. Ordering information

Table 1. Ordering information

| Type number                 | Package           |        |   | Version                  |
|-----------------------------|-------------------|--------|---|--------------------------|
|                             | Temperature range | Name   | Description   |                          |
| <a href="#">74AUP1T45GW</a> | -40 °C to +125 °C | TSSOP6 | plastic thin shrink small outline package; 6 leads; body width 1.25 mm                      | <a href="#">SOT363-2</a> |
| <a href="#">74AUP1T45GM</a> | -40 °C to +125 °C | XSON6  | plastic extremely thin small outline package; no leads; 6 terminals; body 1 × 1.45 × 0.5 mm | <a href="#">SOT886</a>   |
| <a href="#">74AUP1T45GN</a> | -40 °C to +125 °C | XSON6  | extremely thin small outline package; no leads; 6 terminals; body 0.9 × 1.0 × 0.35 mm       | <a href="#">SOT1115</a>  |
| <a href="#">74AUP1T45GS</a> | -40 °C to +125 °C | XSON6  | extremely thin small outline package; no leads; 6 terminals; body 1.0 × 1.0 × 0.35 mm       | <a href="#">SOT1202</a>  |


### 4. Marking

Table 2. Marking

| Type number | Marking code[1] |
|-------------|-----------------|
| 74AUP1T45GW | p5              |
| 74AUP1T45GM | p5              |
| 74AUP1T45GN | p5              |
| 74AUP1T45GS | p5              |


[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.

### 5. Functional diagram

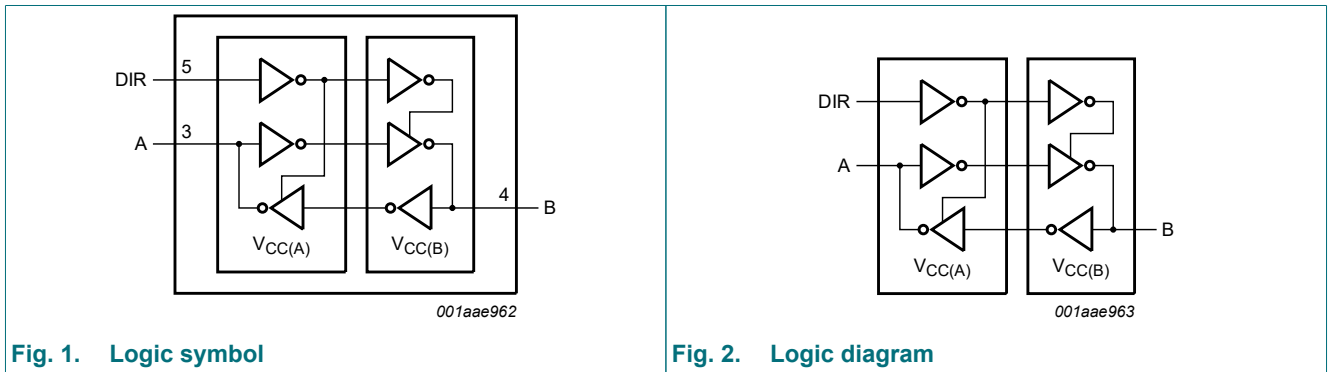

## 6. Pinning information

### 6.1. Pinning

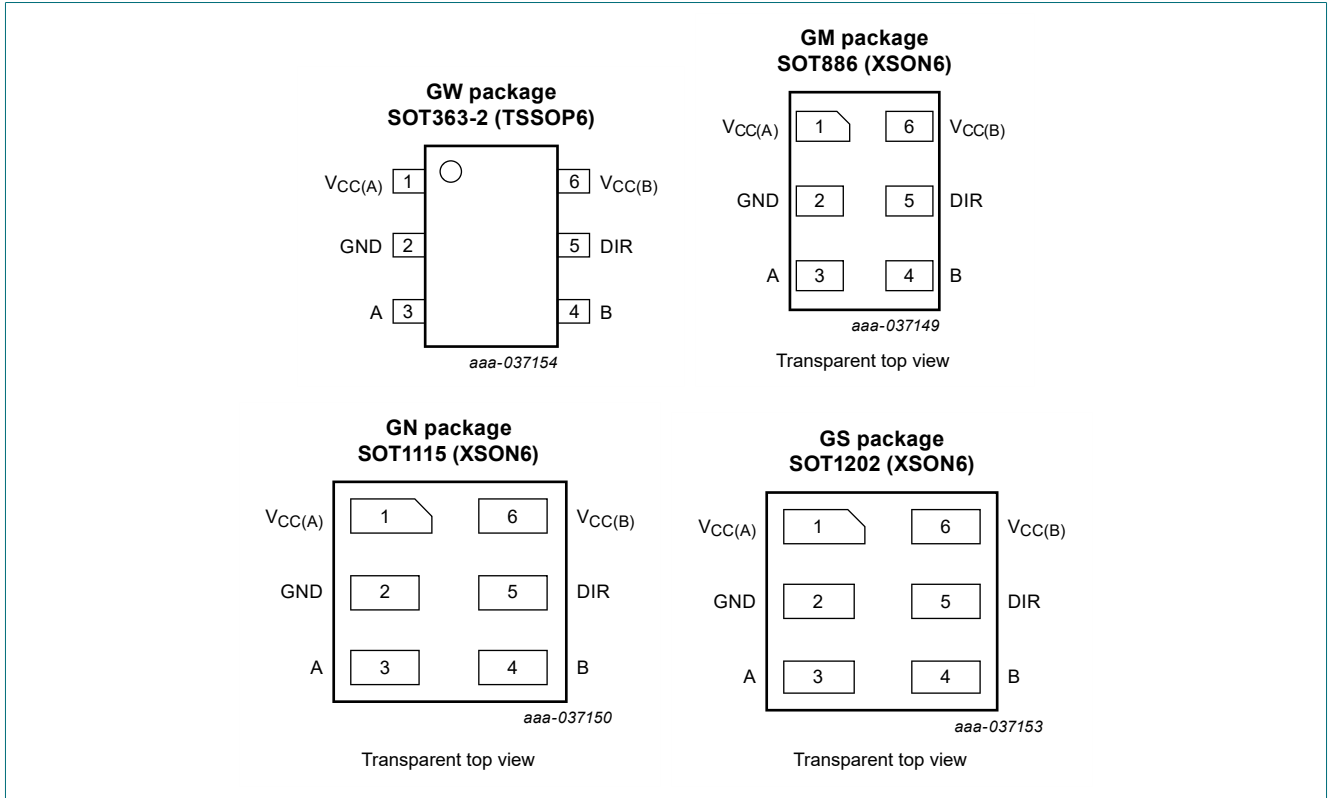

### 6.2. Pin description

Table 3. Pin description

| Symbol             | Pin | Description            |
|--------------------|-----|------------------------|
| V <sub>CC(A)</sub> | 1   | supply voltage A       |
| GND                | 2   | ground (0 V)           |
| A                  | 3   | data input or output A |
| B                  | 4   | data input or output B |
| DIR                | 5   | direction control DIR  |
| V <sub>CC(B)</sub> | 6   | supply voltage B       |

## 7. Functional description

**Table 4. Function table**

H = HIGH voltage level; L = LOW voltage level; X = don't care.

| Supply voltage            | Input[1] | Input/output[2] |              |
|---------------------------|----------|-----------------|--------------|
| $V_{CC(A)}$ , $V_{CC(B)}$ | DIR      | A               | B            |
| 1.1 V to 3.6 V            | L        | A = B           | input        |
| 1.1 V to 3.6 V            | H        | input           | B = A        |
| GND                       | X        | suspend mode    | suspend mode |

[1] The DIR input circuit is referenced to  $V_{CC(A)}$ .

[2] The input circuit of the data I/Os are always active.

## 8. Limiting values

**Table 5. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol      | Parameter               | Conditions                    | Min    | Max      | Unit              |    |
|-------------|-------------------------|-------------------------------|--------|----------|-------------------|----|
| $V_{CC(A)}$ | supply voltage A        |                               | -0.5   | +4.6     | V                 |    |
| $V_{CC(B)}$ | supply voltage B        |                               | -0.5   | +4.6     | V                 |    |
| $I_{IK}$    | input clamping current  | $V_I < 0$ V                   | -50    | -        | mA                |    |
| $V_I$       | input voltage           | [1]                           | -0.5   | +4.6     | V                 |    |
| $I_{OK}$    | output clamping current | $V_O < 0$ V                   | -50    | -        | mA                |    |
| $V_O$       | output voltage          | Active mode                   |        |          |                   |    |
|             |                         | A port                        | [1][2] | -0.5     | $V_{CC(A)} + 0.5$ | V  |
|             |                         | B port                        | [1][2] | -0.5     | $V_{CC(B)} + 0.5$ | V  |
|             |                         | suspend or 3-state mode       | [1][2] | -0.5     | +4.6              | V  |
| $I_O$       | output current          | $V_O = 0$ V to $V_{CC}$       | -      | $\pm 20$ | mA                |    |
| $I_{CC}$    | supply current          |                               | -      | 50       | mA                |    |
| $I_{GND}$   | ground current          |                               | -50    | -        | mA                |    |
| $T_{stg}$   | storage temperature     |                               | -65    | +150     | °C                |    |
| $P_{tot}$   | total power dissipation | $T_{amb} = -40$ °C to +125 °C | [3]    | -        | 250               | mW |

[1] The minimum input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] The values of  $V_{CC(A)}$  and  $V_{CC(B)}$  are provided in the recommended operating conditions; see [Table 6](#).

[3] For SOT363-2 (TSSOP6) package:  $P_{tot}$  derates linearly with 3.7 mW/K above 83 °C.

For SOT886 (XSON6) package:  $P_{tot}$  derates linearly with 3.3 mW/K above 74 °C.

For SOT1115 (XSON6) package:  $P_{tot}$  derates linearly with 3.2 mW/K above 71 °C.

For SOT1202 (XSON6) package:  $P_{tot}$  derates linearly with 3.3 mW/K above 74 °C.

## 9. Recommended operating conditions

Table 6. Recommended operating conditions

| Symbol              | Parameter                           | Conditions                                  | Min | Max       | Unit |
|---------------------|-------------------------------------|---|-----|-----------|------|
| $V_{CC(A)}$         | supply voltage A                    |   | 1.1 | 3.6       | V    |
| $V_{CC(B)}$         | supply voltage B                    |   | 1.1 | 3.6       | V    |
| $V_I$               | input voltage                       |   | 0   | 3.6       | V    |
| $V_O$               | output voltage                      | [1]   | 0   | $V_{CCO}$ | V    |
| $T_{amb}$           | ambient temperature                 |   | -40 | +125      | °C   |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CCI} = 1.1 \text{ V to } 3.6 \text{ V}$ | 0   | 200       | ns/V |

[1]  $V_{CCO}$  is the supply voltage associated with the output port.

## 10. Static characteristics

Table 7. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol  | Parameter                 | Conditions   | Min                     | Typ | Max                     | Unit |
|---|---------------------------|--|-------------------------|-----|-------------------------|------|
| <b><math>T_{amb} = 25 \text{ °C}</math></b>                       |                           |  |                         |     |                         |      |
| $V_{IH}$  | HIGH-level input voltage  | data input [1][2]  |                         |     |                         |      |
|   |                           | $V_{CCI} = 1.1 \text{ V to } 1.95 \text{ V}$   | $0.65 \times V_{CCI}$   | -   | -                       | V    |
|   |                           | $V_{CCI} = 2.3 \text{ V to } 2.7 \text{ V}$  | 1.6                     | -   | -                       | V    |
|   |                           | $V_{CCI} = 3.0 \text{ V to } 3.6 \text{ V}$  | 2.0                     | -   | -                       | V    |
|   |                           | DIR input [1][3]   |                         |     |                         |      |
|   |                           | $V_{CCI} = 1.1 \text{ V to } 1.95 \text{ V}$   | $0.65 \times V_{CC(A)}$ | -   | -                       | V    |
|   |                           | $V_{CCI} = 2.3 \text{ V to } 2.7 \text{ V}$  | 1.6                     | -   | -                       | V    |
| $V_{IL}$  | LOW-level input voltage   | data input [1][2]  |                         |     |                         |      |
|   |                           | $V_{CCI} = 1.1 \text{ V to } 1.95 \text{ V}$   | -                       | -   | $0.35 \times V_{CCI}$   | V    |
|   |                           | $V_{CCI} = 2.3 \text{ V to } 2.7 \text{ V}$  | -                       | -   | 0.7                     | V    |
|   |                           | $V_{CCI} = 3.0 \text{ V to } 3.6 \text{ V}$  | -                       | -   | 0.9                     | V    |
|   |                           | DIR input [1][3]   |                         |     |                         |      |
|   |                           | $V_{CCI} = 1.1 \text{ V to } 1.95 \text{ V}$   | -                       | -   | $0.35 \times V_{CC(A)}$ | V    |
|   |                           | $V_{CCI} = 2.3 \text{ V to } 2.7 \text{ V}$  | -                       | -   | 0.7                     | V    |
| $V_{OH}$  | HIGH-level output voltage | $V_I = V_{IH}$   |                         |     |                         |      |
|   |                           | $I_O = -20 \text{ }\mu\text{A}$ ;<br>$V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V to } 3.6 \text{ V}$ [4] | $V_{CCO} - 0.1$         | -   | -                       | V    |
|   |                           | $I_O = -1.1 \text{ mA}$ ; $V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V}$ [4]                              | $0.75 \times V_{CCO}$   | -   | -                       | V    |
|   |                           | $I_O = -1.7 \text{ mA}$ ; $V_{CC(A)} = V_{CC(B)} = 1.4 \text{ V}$                                  | 1.11                    | -   | -                       | V    |
|   |                           | $I_O = -1.9 \text{ mA}$ ; $V_{CC(A)} = V_{CC(B)} = 1.65 \text{ V}$                                 | 1.32                    | -   | -                       | V    |
|   |                           | $I_O = -2.3 \text{ mA}$ ; $V_{CC(A)} = V_{CC(B)} = 2.3 \text{ V}$                                  | 2.05                    | -   | -                       | V    |
|   |                           | $I_O = -3.1 \text{ mA}$ ; $V_{CC(A)} = V_{CC(B)} = 2.3 \text{ V}$                                  | 1.9                     | -   | -                       | V    |
|   |                           | $I_O = -2.7 \text{ mA}$ ; $V_{CC(A)} = V_{CC(B)} = 3.0 \text{ V}$                                  | 2.72                    | -   | -                       | V    |
| $I_O = -4.0 \text{ mA}$ ; $V_{CC(A)} = V_{CC(B)} = 3.0 \text{ V}$ | 2.6                       | -  | -                       | V   |                         |      |

## Low-power dual supply translating transceiver; 3-state

| Symbol            | Parameter                            | Conditions  | Min | Typ | Max                    | Unit |
|-------------------|--------------------------------------|---|-----|-----|------------------------|------|
| V <sub>OL</sub>   | LOW-level output voltage             | V <sub>I</sub> = V <sub>IL</sub>  |     |     |                        |      |
|                   |                                      | I <sub>O</sub> = 20 μA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V  | -   | -   | 0.1                    | V    |
|                   |                                      | I <sub>O</sub> = 1.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V [4]  | -   | -   | 0.3 × V <sub>CCO</sub> | V    |
|                   |                                      | I <sub>O</sub> = 1.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.4 V  | -   | -   | 0.31                   | V    |
|                   |                                      | I <sub>O</sub> = 1.9 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.65 V   | -   | -   | 0.31                   | V    |
|                   |                                      | I <sub>O</sub> = 2.3 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V  | -   | -   | 0.31                   | V    |
|                   |                                      | I <sub>O</sub> = 3.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V  | -   | -   | 0.44                   | V    |
|                   |                                      | I <sub>O</sub> = 2.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V  | -   | -   | 0.31                   | V    |
|                   |                                      | I <sub>O</sub> = 4.0 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V  | -   | -   | 0.44                   | V    |
| I <sub>I</sub>    | input leakage current                | DIR input; V <sub>I</sub> = GND to V <sub>CC(A)</sub> ;<br>V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V   | -   | -   | ±0.1                   | μA   |
| I <sub>OZ</sub>   | OFF-state output current             | A or B port; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>O</sub> = 0 V to V <sub>CCO</sub> ;<br>V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V [4]                 | -   | -   | ±0.1                   | μA   |
| I <sub>OFF</sub>  | power-off leakage current            | A port; V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V; V <sub>CC(A)</sub> = 0 V;<br>V <sub>CC(B)</sub> = 1.1 V to 3.6 V   | -   | -   | ±0.2                   | μA   |
|                   |                                      | B port; V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V; V <sub>CC(B)</sub> = 0 V;<br>V <sub>CC(A)</sub> = 1.1 V to 3.6 V   | -   | -   | ±0.2                   | μA   |
|                   |                                      | DIR input; V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V;<br>V <sub>CC(A)</sub> = 0 V; V <sub>CC(B)</sub> = 1.1 V to 3.6 V  | -   | -   | ±0.2                   | μA   |
| ΔI <sub>OFF</sub> | additional power-off leakage current | A port; V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V;<br>V <sub>CC(A)</sub> = 0 V to 0.2 V; V <sub>CC(B)</sub> = 1.1 V to 3.6 V  | -   | -   | ±0.2                   | μA   |
|                   |                                      | B port; V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V;<br>V <sub>CC(B)</sub> = 0 V to 0.2 V; V <sub>CC(A)</sub> = 1.1 V to 3.6 V  | -   | -   | ±0.2                   | μA   |
|                   |                                      | DIR input; V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V;<br>V <sub>CC(A)</sub> = 0 V to 0.2 V; V <sub>CC(B)</sub> = 1.1 V to 3.6 V   | -   | -   | ±0.2                   | μA   |
| I <sub>CC</sub>   | supply current                       | A port; V <sub>I</sub> = GND or V <sub>CCI</sub> ; I <sub>O</sub> = 0 A [1]   |     |     |                        |      |
|                   |                                      | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V  | -   | -   | 0.5                    | μA   |
|                   |                                      | V <sub>CC(A)</sub> = 3.6 V; V <sub>CC(B)</sub> = 0 V  | -   | -   | 0.5                    | μA   |
|                   |                                      | V <sub>CC(A)</sub> = 0 V; V <sub>CC(B)</sub> = 3.6 V  | -   | 0   | -                      | μA   |
|                   |                                      | B port; V <sub>I</sub> = GND or V <sub>CCI</sub> ; I <sub>O</sub> = 0 A [1]   |     |     |                        |      |
|                   |                                      | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V  | -   | -   | 0.5                    | μA   |
|                   |                                      | V <sub>CC(A)</sub> = 3.6 V; V <sub>CC(B)</sub> = 0 V  | -   | 0   | -                      | μA   |
|                   |                                      | V <sub>CC(A)</sub> = 0 V; V <sub>CC(B)</sub> = 3.6 V  | -   | -   | 0.5                    | μA   |
|                   |                                      | A plus B port (I <sub>CC(A)</sub> + I <sub>CC(B)</sub> );<br>I <sub>O</sub> = 0 A; V <sub>I</sub> = GND or V <sub>CCI</sub> ;<br>V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V [1] | -   | -   | 0.5                    | μA   |
| ΔI <sub>CC</sub>  | additional supply current            | A port; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V;<br>A port at V <sub>CC(A)</sub> - 0.6 V; DIR at V <sub>CC(A)</sub> ;<br>B port = open  | -   | -   | 40                     | μA   |
|                   |                                      | B port; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V;<br>B port at V <sub>CC(B)</sub> - 0.6 V; DIR at GND;<br>A port = open  | -   | -   | 40                     | μA   |
|                   |                                      | DIR input; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V;<br>A port at V <sub>CC(A)</sub> or GND; B port = open;<br>DIR at V <sub>CC(A)</sub> - 0.6 V                                       | -   | -   | 40                     | μA   |
| C <sub>I</sub>    | input capacitance                    | DIR input; V <sub>I</sub> = GND or V <sub>CC(A)</sub> ;<br>V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V   | -   | 0.9 | -                      | pF   |
| C <sub>I/O</sub>  | input/output capacitance             | A and B port; suspend mode; V <sub>CCI</sub> = 0 V;<br>V <sub>CCO</sub> = 1.1 V to 3.6 V; V <sub>O</sub> = V <sub>CCO</sub> or GND [1][4]   | -   | 2.0 | -                      | pF   |

## Low-power dual supply translating transceiver; 3-state

| Symbol  | Parameter                 | Conditions   | Min                       | Typ | Max                       | Unit |
|---|---------------------------|--|---------------------------|-----|---------------------------|------|
| <b>T<sub>amb</sub> = -40 °C to +85 °C</b>                                 |                           |  |                           |     |                           |      |
| V <sub>IH</sub>   | HIGH-level input voltage  | data input [1][2]  |                           |     |                           |      |
|   |                           | V <sub>CCI</sub> = 1.1 V to 1.95 V   | 0.65 × V <sub>CCI</sub>   | -   | -                         | V    |
|   |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  | 1.6                       | -   | -                         | V    |
|   |                           | V <sub>CCI</sub> = 3.0 V to 3.6 V  | 2.0                       | -   | -                         | V    |
|   |                           | DIR input [1][3]   |                           |     |                           |      |
|   |                           | V <sub>CCI</sub> = 1.1 V to 1.95 V   | 0.65 × V <sub>CC(A)</sub> | -   | -                         | V    |
|   |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  | 1.6                       | -   | -                         | V    |
| V <sub>CCI</sub> = 3.0 V to 3.6 V   | 2.0                       | -  | -                         | V   |                           |      |
| V <sub>IL</sub>   | LOW-level input voltage   | data input [1][2]  |                           |     |                           |      |
|   |                           | V <sub>CCI</sub> = 1.1 V to 1.95 V   | -                         | -   | 0.35 × V <sub>CCI</sub>   | V    |
|   |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  | -                         | -   | 0.7                       | V    |
|   |                           | V <sub>CCI</sub> = 3.0 V to 3.6 V  | -                         | -   | 0.9                       | V    |
|   |                           | DIR input [1][3]   |                           |     |                           |      |
|   |                           | V <sub>CCI</sub> = 1.1 V to 1.95 V   | -                         | -   | 0.35 × V <sub>CC(A)</sub> | V    |
|   |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  | -                         | -   | 0.7                       | V    |
| V <sub>CCI</sub> = 3.0 V to 3.6 V   | -                         | -  | 0.9                       | V   |                           |      |
| V <sub>OH</sub>   | HIGH-level output voltage | V <sub>I</sub> = V <sub>IH</sub>   |                           |     |                           |      |
|   |                           | I <sub>O</sub> = -20 μA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V [4]  | V <sub>CCO</sub> - 0.1    | -   | -                         | V    |
|   |                           | I <sub>O</sub> = -1.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V [4]  | 0.7 × V <sub>CCO</sub>    | -   | -                         | V    |
|   |                           | I <sub>O</sub> = -1.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.4 V  | 1.03                      | -   | -                         | V    |
|   |                           | I <sub>O</sub> = -1.9 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.65 V   | 1.30                      | -   | -                         | V    |
|   |                           | I <sub>O</sub> = -2.3 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V  | 1.97                      | -   | -                         | V    |
|   |                           | I <sub>O</sub> = -3.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V  | 1.85                      | -   | -                         | V    |
|   |                           | I <sub>O</sub> = -2.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V  | 2.67                      | -   | -                         | V    |
| I <sub>O</sub> = -4.0 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V | 2.55                      | -  | -                         | V   |                           |      |
| V <sub>OL</sub>   | LOW-level output voltage  | V <sub>I</sub> = V <sub>IL</sub>   |                           |     |                           |      |
|   |                           | I <sub>O</sub> = 20 μA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V   | -                         | -   | 0.1                       | V    |
|   |                           | I <sub>O</sub> = 1.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V [4]   | -                         | -   | 0.3 × V <sub>CCO</sub>    | V    |
|   |                           | I <sub>O</sub> = 1.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.4 V   | -                         | -   | 0.37                      | V    |
|   |                           | I <sub>O</sub> = 1.9 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.65 V  | -                         | -   | 0.35                      | V    |
|   |                           | I <sub>O</sub> = 2.3 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V   | -                         | -   | 0.33                      | V    |
|   |                           | I <sub>O</sub> = 3.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V   | -                         | -   | 0.45                      | V    |
|   |                           | I <sub>O</sub> = 2.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V   | -                         | -   | 0.33                      | V    |
| I <sub>O</sub> = 4.0 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V  | -                         | -  | 0.45                      | V   |                           |      |
| I <sub>I</sub>  | input leakage current     | DIR input; V <sub>I</sub> = GND to V <sub>CC(A)</sub> ; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V   | -                         | -   | ±0.5                      | μA   |
| I <sub>OZ</sub>   | OFF-state output current  | A or B port; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>O</sub> = 0 V to V <sub>CCO</sub> ; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V [4] | -                         | -   | ±0.5                      | μA   |

## Low-power dual supply translating transceiver; 3-state

| Symbol   | Parameter                            | Conditions   | Min                       | Typ  | Max           | Unit          |
|--|--------------------------------------|--|---------------------------|--|---------------|---------------|
| $I_{OFF}$  | power-off leakage current            | A port; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ; $V_{CC(A)} = 0\text{ V}$ ;<br>$V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$                                     | -                         | -  | $\pm 0.5$     | $\mu\text{A}$ |
|  |                                      | B port; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ; $V_{CC(B)} = 0\text{ V}$ ;<br>$V_{CC(A)} = 1.1\text{ V to }3.6\text{ V}$                                     | -                         | -  | $\pm 0.5$     | $\mu\text{A}$ |
|  |                                      | DIR input; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ;<br>$V_{CC(A)} = 0\text{ V}$ ; $V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$                                  | -                         | -  | $\pm 0.5$     | $\mu\text{A}$ |
| $\Delta I_{OFF}$   | additional power-off leakage current | A port; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ;<br>$V_{CC(A)} = 0\text{ V to }0.2\text{ V}$ ; $V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$                     | -                         | -  | $\pm 0.6$     | $\mu\text{A}$ |
|  |                                      | B port; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ;<br>$V_{CC(B)} = 0\text{ V to }0.2\text{ V}$ ; $V_{CC(A)} = 1.1\text{ V to }3.6\text{ V}$                     | -                         | -  | $\pm 0.6$     | $\mu\text{A}$ |
|  |                                      | DIR input; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ;<br>$V_{CC(A)} = 0\text{ V to }0.2\text{ V}$ ; $V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$                  | -                         | -  | $\pm 0.6$     | $\mu\text{A}$ |
| $I_{CC}$   | supply current                       | A port; $V_I = \text{GND}$ or $V_{CCI}$ ; $I_O = 0\text{ A}$ [1]<br>$V_{CC(A)} = V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$   | -                         | -  | 0.9           | $\mu\text{A}$ |
|  |                                      | $V_{CC(A)} = 3.6\text{ V}$ ; $V_{CC(B)} = 0\text{ V}$  | -                         | -  | 0.9           | $\mu\text{A}$ |
|  |                                      | $V_{CC(A)} = 0\text{ V}$ ; $V_{CC(B)} = 3.6\text{ V}$  | -                         | 0  | -             | $\mu\text{A}$ |
|  |                                      | B port; $V_I = \text{GND}$ or $V_{CCI}$ ; $I_O = 0\text{ A}$ [1]<br>$V_{CC(A)} = V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$   | -                         | -  | 0.9           | $\mu\text{A}$ |
|  |                                      | $V_{CC(A)} = 3.6\text{ V}$ ; $V_{CC(B)} = 0\text{ V}$  | -                         | 0  | -             | $\mu\text{A}$ |
|  |                                      | $V_{CC(A)} = 0\text{ V}$ ; $V_{CC(B)} = 3.6\text{ V}$  | -                         | -  | 0.9           | $\mu\text{A}$ |
|  |                                      | A plus B port ( $I_{CC(A)} + I_{CC(B)}$ );<br>$I_O = 0\text{ A}$ ; $V_I = \text{GND}$ or $V_{CCI}$ ;<br>$V_{CC(A)} = V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$ [1] | -                         | -  | 0.9           | $\mu\text{A}$ |
|  |                                      | $\Delta I_{CC}$  | additional supply current | A port; $V_{CC(A)} = V_{CC(B)} = 3.3\text{ V}$ ;<br>A port at $V_{CC(A)} - 0.6\text{ V}$ ; DIR at $V_{CC(A)}$ ;<br>B port = open | -             | -             |
| B port; $V_{CC(A)} = V_{CC(B)} = 3.3\text{ V}$ ;<br>B port at $V_{CC(B)} - 0.6\text{ V}$ ; DIR at GND;<br>A port = open                  | -                                    | -  |                           | 50   | $\mu\text{A}$ |               |
| DIR input; $V_{CC(A)} = V_{CC(B)} = 3.3\text{ V}$ ;<br>A port at $V_{CC(A)}$ or GND; B port = open;<br>DIR at $V_{CC(A)} - 0.6\text{ V}$ | -                                    | -  |                           | 50   | $\mu\text{A}$ |               |

## Low-power dual supply translating transceiver; 3-state

| Symbol  | Parameter                 | Conditions   | Min                      | Typ | Max                      | Unit |
|---|---------------------------|--|--------------------------|-----|--------------------------|------|
| <b>T<sub>amb</sub> = -40 °C to +125 °C</b>                                |                           |  |                          |     |                          |      |
| V <sub>IH</sub>   | HIGH-level input voltage  | data input [1][2]  |                          |     |                          |      |
|   |                           | V <sub>CCI</sub> = 1.1 V to 1.95 V   | 0.7 × V <sub>CCI</sub>   | -   | -                        | V    |
|   |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  | 1.6                      | -   | -                        | V    |
|   |                           | V <sub>CCI</sub> = 3.0 V to 3.6 V  | 2.0                      | -   | -                        | V    |
|   |                           | DIR input [1][3]   |                          |     |                          |      |
|   |                           | V <sub>CCI</sub> = 1.1 V to 1.95 V   | 0.7 × V <sub>CC(A)</sub> | -   | -                        | V    |
|   |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  | 1.6                      | -   | -                        | V    |
| V <sub>CCI</sub> = 3.0 V to 3.6 V   | 2.0                       | -  | -                        | V   |                          |      |
| V <sub>IL</sub>   | LOW-level input voltage   | data input [1][2]  |                          |     |                          |      |
|   |                           | V <sub>CCI</sub> = 1.1 V to 1.95 V   | -                        | -   | 0.3 × V <sub>CCI</sub>   | V    |
|   |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  | -                        | -   | 0.7                      | V    |
|   |                           | V <sub>CCI</sub> = 3.0 V to 3.6 V  | -                        | -   | 0.9                      | V    |
|   |                           | DIR input [1][3]   |                          |     |                          |      |
|   |                           | V <sub>CCI</sub> = 1.1 V to 1.95 V   | -                        | -   | 0.3 × V <sub>CC(A)</sub> | V    |
|   |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  | -                        | -   | 0.7                      | V    |
| V <sub>CCI</sub> = 3.0 V to 3.6 V   | -                         | -  | 0.9                      | V   |                          |      |
| V <sub>OH</sub>   | HIGH-level output voltage | V <sub>I</sub> = V <sub>IH</sub>   |                          |     |                          |      |
|   |                           | I <sub>O</sub> = -20 μA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V [4]  | V <sub>CCO</sub> - 0.11  | -   | -                        | V    |
|   |                           | I <sub>O</sub> = -1.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V [4]  | 0.6 × V <sub>CCO</sub>   | -   | -                        | V    |
|   |                           | I <sub>O</sub> = -1.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.4 V  | 0.93                     | -   | -                        | V    |
|   |                           | I <sub>O</sub> = -1.9 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.65 V   | 1.17                     | -   | -                        | V    |
|   |                           | I <sub>O</sub> = -2.3 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V  | 1.77                     | -   | -                        | V    |
|   |                           | I <sub>O</sub> = -3.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V  | 1.67                     | -   | -                        | V    |
|   |                           | I <sub>O</sub> = -2.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V  | 2.40                     | -   | -                        | V    |
| I <sub>O</sub> = -4.0 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V | 2.30                      | -  | -                        | V   |                          |      |
| V <sub>OL</sub>   | LOW-level output voltage  | V <sub>I</sub> = V <sub>IL</sub>   |                          |     |                          |      |
|   |                           | I <sub>O</sub> = 20 μA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V   | -                        | -   | 0.11                     | V    |
|   |                           | I <sub>O</sub> = 1.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V [4]   | -                        | -   | 0.33 × V <sub>CCO</sub>  | V    |
|   |                           | I <sub>O</sub> = 1.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.4 V   | -                        | -   | 0.41                     | V    |
|   |                           | I <sub>O</sub> = 1.9 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.65 V  | -                        | -   | 0.39                     | V    |
|   |                           | I <sub>O</sub> = 2.3 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V   | -                        | -   | 0.36                     | V    |
|   |                           | I <sub>O</sub> = 3.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V   | -                        | -   | 0.50                     | V    |
|   |                           | I <sub>O</sub> = 2.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V   | -                        | -   | 0.36                     | V    |
| I <sub>O</sub> = 4.0 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V  | -                         | -  | 0.50                     | V   |                          |      |
| I <sub>I</sub>  | input leakage current     | DIR input; V <sub>I</sub> = GND to V <sub>CC(A)</sub> ; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V   | -                        | -   | ±0.75                    | μA   |
| I <sub>OZ</sub>   | OFF-state output current  | A or B port; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>O</sub> = 0 V to V <sub>CCO</sub> ; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V [4] | -                        | -   | ±0.75                    | μA   |

## Low-power dual supply translating transceiver; 3-state

| Symbol   | Parameter                            | Conditions  | Min | Typ           | Max        | Unit          |
|--|--------------------------------------|---|-----|---------------|------------|---------------|
| $I_{OFF}$  | power-off leakage current            | A port; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ; $V_{CC(A)} = 0\text{ V}$ ;<br>$V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$                    | -   | -             | $\pm 0.75$ | $\mu\text{A}$ |
|  |                                      | B port; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ; $V_{CC(B)} = 0\text{ V}$ ;<br>$V_{CC(A)} = 1.1\text{ V to }3.6\text{ V}$                    | -   | -             | $\pm 0.75$ | $\mu\text{A}$ |
|  |                                      | DIR input; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ;<br>$V_{CC(A)} = 0\text{ V}$ ; $V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$                 | -   | -             | $\pm 0.75$ | $\mu\text{A}$ |
| $\Delta I_{OFF}$   | additional power-off leakage current | A port; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ;<br>$V_{CC(A)} = 0\text{ V to }0.2\text{ V}$ ; $V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$    | -   | -             | $\pm 0.75$ | $\mu\text{A}$ |
|  |                                      | B port; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ;<br>$V_{CC(B)} = 0\text{ V to }0.2\text{ V}$ ; $V_{CC(A)} = 1.1\text{ V to }3.6\text{ V}$    | -   | -             | $\pm 0.75$ | $\mu\text{A}$ |
|  |                                      | DIR input; $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$ ;<br>$V_{CC(A)} = 0\text{ V to }0.2\text{ V}$ ; $V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$ | -   | -             | $\pm 0.75$ | $\mu\text{A}$ |
| $I_{CC}$   | supply current                       | A port; $V_I = \text{GND}$ or $V_{CCI}$ ; $I_O = 0\text{ A}$ [1]  |     |               |            |               |
|  |                                      | $V_{CC(A)} = V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$  | -   | -             | 1.4        | $\mu\text{A}$ |
|  |                                      | $V_{CC(A)} = 3.6\text{ V}$ ; $V_{CC(B)} = 0\text{ V}$   | -   | -             | 1.4        | $\mu\text{A}$ |
|  |                                      | $V_{CC(A)} = 0\text{ V}$ ; $V_{CC(B)} = 3.6\text{ V}$   | -   | 0             | -          | $\mu\text{A}$ |
|  |                                      | B port; $V_I = \text{GND}$ or $V_{CCI}$ ; $I_O = 0\text{ A}$ [1]  |     |               |            |               |
|  |                                      | $V_{CC(A)} = V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$  | -   | -             | 1.4        | $\mu\text{A}$ |
|  |                                      | $V_{CC(A)} = 3.6\text{ V}$ ; $V_{CC(B)} = 0\text{ V}$   | -   | 0             | -          | $\mu\text{A}$ |
|  |                                      | $V_{CC(A)} = 0\text{ V}$ ; $V_{CC(B)} = 3.6\text{ V}$   | -   | -             | 1.4        | $\mu\text{A}$ |
| A plus B port ( $I_{CC(A)} + I_{CC(B)}$ );<br>$I_O = 0\text{ A}$ ; $V_I = \text{GND}$ or $V_{CCI}$ ;<br>$V_{CC(A)} = V_{CC(B)} = 1.1\text{ V to }3.6\text{ V}$ [1] | -                                    | -   | 1.4 | $\mu\text{A}$ |            |               |
| $\Delta I_{CC}$  | additional supply current            | A port; $V_{CC(A)} = V_{CC(B)} = 3.3\text{ V}$ ;<br>A port at $V_{CC(A)} - 0.6\text{ V}$ ; DIR at $V_{CC(A)}$ ;<br>B port = open                  | -   | -             | 75         | $\mu\text{A}$ |
|  |                                      | B port; $V_{CC(A)} = V_{CC(B)} = 3.3\text{ V}$ ;<br>B port at $V_{CC(B)} - 0.6\text{ V}$ ; DIR at GND;<br>A port = open                           | -   | -             | 75         | $\mu\text{A}$ |
|  |                                      | DIR input; $V_{CC(A)} = V_{CC(B)} = 3.3\text{ V}$ ;<br>A port at $V_{CC(A)}$ or GND; B port = open;<br>DIR at $V_{CC(A)} - 0.6\text{ V}$          | -   | -             | 75         | $\mu\text{A}$ |

[1]  $V_{CCI}$  is the supply voltage associated with the data input port.

[2] For  $V_{CCI}$  values not specified in the data sheet: minimum  $V_{IH} = 0.7 \times V_{CCI}$  and maximum  $V_{IL} = 0.3 \times V_{CCI}$ .

[3] For  $V_{CCI}$  values not specified in the data sheet: minimum  $V_{IH} = 0.7 \times V_{CC(A)}$  and maximum  $V_{IL} = 0.3 \times V_{CC(A)}$ .

[4]  $V_{CCO}$  is the supply voltage associated with the output port.

## 11. Dynamic characteristics

**Table 8. Dynamic characteristics**

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 5.

| Symbol   | Parameter         | Conditions                                      | 25 °C |   |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |      |    |
|--|-------------------|---|-------|---|------|------------------|------|-------------------|------|------|------|----|
|  |                   |   | Min   | Typ[1]  | Max  | Min              | Max  | Min               | Max  |      |      |    |
| <b><math>C_L = 5 \text{ pF}</math>; <math>V_{CC(A)} = 1.1 \text{ V to } 1.3 \text{ V}</math></b> |                   |   |       |   |      |                  |      |                   |      |      |      |    |
| $t_{pd}$   | propagation delay | A to B or B to A; see Fig. 3 [2]                |       |   |      |                  |      |                   |      |      |      |    |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.8   | 15.4  | 28.0 | 2.4              | 28.3 | 2.4               | 31.2 | ns   |      |    |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.8   | 10.2  | 16.2 | 2.6              | 17.5 | 2.6               | 19.3 | ns   |      |    |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.4   | 8.1   | 13.0 | 2.2              | 14.4 | 2.2               | 15.9 | ns   |      |    |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.5   | 6.3   | 10.0 | 2.1              | 10.7 | 2.1               | 11.8 | ns   |      |    |
|  |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.3   | 5.6   | 9.0  | 1.9              | 9.7  | 1.9               | 10.7 | ns   |      |    |
| $t_{dis}$  | disable time      | DIR to A; see Fig. 4 [3]                        |       |   |      |                  |      |                   |      |      |      |    |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.7   | 5.3   | 8.5  | 2.5              | 8.7  | 2.5               | 9.6  | ns   |      |    |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.9   | 5.3   | 8.4  | 2.7              | 8.7  | 2.7               | 9.7  | ns   |      |    |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.7   | 5.3   | 8.5  | 2.5              | 9.0  | 2.5               | 10.0 | ns   |      |    |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.7   | 5.3   | 8.7  | 2.5              | 8.9  | 2.5               | 9.9  | ns   |      |    |
|  |                   |   |       | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.9  | 5.3              | 8.7  | 2.5               | 9.1  | 2.5  | 10.1 | ns |
|  |                   |   |       | DIR to B; see Fig. 4 [3]                        |      |                  |      |                   |      |      |      |    |
|  |                   |   |       | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.1  | 13.2             | 22.1 | 5.4               | 23.4 | 5.4  | 25.8 | ns |
|  |                   |   |       | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.0  | 9.3              | 13.9 | 4.4               | 15.2 | 4.4  | 16.7 | ns |
|  |                   |   |       | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 4.2  | 8.1              | 12.3 | 3.6               | 13.5 | 3.6  | 14.9 | ns |
|  |                   |   |       | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.3  | 6.3              | 9.3  | 2.9               | 10.2 | 2.9  | 11.2 | ns |
|  |                   |   |       | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.6  | 6.3              | 9.2  | 3.2               | 9.7  | 3.2  | 10.7 | ns |
| <b><math>C_L = 5 \text{ pF}</math>; <math>V_{CC(A)} = 1.4 \text{ V to } 1.6 \text{ V}</math></b> |                   |   |       |   |      |                  |      |                   |      |      |      |    |
| $t_{pd}$   | propagation delay | A to B or B to A; see Fig. 3 [2]                |       |   |      |                  |      |                   |      |      |      |    |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.5   | 14.5  | 26.6 | 2.2              | 27.1 | 2.2               | 29.9 | ns   |      |    |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.5   | 9.4   | 14.5 | 2.3              | 15.9 | 2.3               | 17.5 | ns   |      |    |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.1   | 7.4   | 11.2 | 1.9              | 12.7 | 1.9               | 14.0 | ns   |      |    |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.2   | 5.5   | 8.0  | 1.8              | 8.9  | 1.8               | 9.8  | ns   |      |    |
|  |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.0   | 4.7   | 6.8  | 1.6              | 7.6  | 1.6               | 8.4  | ns   |      |    |
| $t_{dis}$  | disable time      | DIR to A; see Fig. 4 [3]                        |       |   |      |                  |      |                   |      |      |      |    |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.0   | 3.8   | 5.3  | 1.9              | 5.7  | 1.9               | 6.3  | ns   |      |    |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.2   | 3.8   | 5.3  | 2.0              | 5.7  | 2.0               | 6.4  | ns   |      |    |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.1   | 3.8   | 5.5  | 1.8              | 5.9  | 1.8               | 6.6  | ns   |      |    |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.1   | 3.8   | 5.5  | 1.9              | 5.9  | 1.9               | 6.6  | ns   |      |    |
|  |                   |   |       | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.2  | 3.8              | 5.5  | 1.9               | 6.0  | 1.9  | 6.6  | ns |
|  |                   |   |       | DIR to B; see Fig. 4 [3]                        |      |                  |      |                   |      |      |      |    |
|  |                   |   |       | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.7  | 12.7             | 21.0 | 5.2               | 22.3 | 5.2  | 24.6 | ns |
|  |                   |   |       | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.7  | 8.7              | 12.7 | 4.1               | 14.1 | 4.1  | 15.5 | ns |
|  |                   |   |       | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.9  | 7.4              | 10.9 | 3.3               | 12.3 | 3.3  | 13.5 | ns |
|  |                   |   |       | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.0  | 5.6              | 7.8  | 2.6               | 8.8  | 2.6  | 9.7  | ns |
|  |                   |   |       | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.3  | 5.5              | 7.4  | 2.9               | 8.1  | 2.9  | 8.9  | ns |

## Low-power dual supply translating transceiver; 3-state

| Symbol   | Parameter         | Conditions                                      | 25 °C |        |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|--|-------------------|---|-------|--------|------|------------------|------|-------------------|------|------|
|  |                   |   | Min   | Typ[1] | Max  | Min              | Max  | Min               | Max  |      |
| <b><math>C_L = 5 \text{ pF}</math>; <math>V_{CC(A)} = 1.65 \text{ V to } 1.95 \text{ V}</math></b> |                   |   |       |        |      |                  |      |                   |      |      |
| $t_{pd}$   | propagation delay | A to B or B to A; see Fig. 3 [2]                |       |        |      |                  |      |                   |      |      |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.4   | 14.2   | 26.1 | 2.0              | 26.5 | 2.0               | 29.2 | ns   |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.4   | 9.1    | 13.9 | 2.1              | 15.4 | 2.1               | 17.0 | ns   |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.0   | 7.0    | 10.7 | 1.7              | 12.1 | 1.7               | 13.4 | ns   |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.0   | 5.1    | 7.4  | 1.6              | 8.2  | 1.6               | 9.1  | ns   |
|  |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 1.9   | 4.3    | 6.1  | 1.5              | 6.9  | 1.5               | 7.7  | ns   |
| $t_{dis}$  | disable time      | DIR to A; see Fig. 4 [3]                        |       |        |      |                  |      |                   |      |      |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.0   | 3.5    | 4.8  | 1.8              | 5.2  | 1.8               | 5.8  | ns   |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.1   | 3.5    | 4.8  | 1.9              | 5.2  | 1.9               | 5.7  | ns   |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.0   | 3.5    | 5.0  | 1.8              | 5.4  | 1.8               | 6.0  | ns   |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.0   | 3.5    | 4.9  | 1.8              | 5.4  | 1.8               | 6.0  | ns   |
|  |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.1   | 3.5    | 4.9  | 1.8              | 5.4  | 1.8               | 6.0  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]                        |       |        |      |                  |      |                   |      |      |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.8   | 12.4   | 20.6 | 5.1              | 21.9 | 5.1               | 24.2 | ns   |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.6   | 8.4    | 12.2 | 3.9              | 13.5 | 3.9               | 14.9 | ns   |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.8   | 7.1    | 10.4 | 3.2              | 11.8 | 3.2               | 13.0 | ns   |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.9   | 5.2    | 7.3  | 2.5              | 8.3  | 2.5               | 9.1  | ns   |
|  |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.1   | 5.1    | 6.9  | 2.7              | 7.5  | 2.7               | 8.3  | ns   |
| <b><math>C_L = 5 \text{ pF}</math>; <math>V_{CC(A)} = 2.3 \text{ V to } 2.7 \text{ V}</math></b>   |                   |   |       |        |      |                  |      |                   |      |      |
| $t_{pd}$   | propagation delay | A to B or B to A; see Fig. 3 [2]                |       |        |      |                  |      |                   |      |      |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.4   | 13.6   | 25.5 | 2.0              | 25.9 | 2.0               | 28.6 | ns   |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.3   | 8.5    | 13.3 | 2.1              | 14.7 | 2.1               | 16.2 | ns   |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 1.9   | 6.5    | 10.0 | 1.7              | 11.4 | 1.7               | 12.5 | ns   |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 1.9   | 4.6    | 6.7  | 1.6              | 7.5  | 1.6               | 8.3  | ns   |
|  |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 1.8   | 3.8    | 5.3  | 1.4              | 6.2  | 1.4               | 6.8  | ns   |
| $t_{dis}$  | disable time      | DIR to A; see Fig. 4 [3]                        |       |        |      |                  |      |                   |      |      |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 1.4   | 2.5    | 3.3  | 1.3              | 3.6  | 1.3               | 4.0  | ns   |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 1.6   | 2.5    | 3.3  | 1.4              | 3.6  | 1.4               | 4.0  | ns   |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 1.5   | 2.5    | 3.4  | 1.3              | 3.8  | 1.3               | 4.2  | ns   |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 1.4   | 2.5    | 3.4  | 1.3              | 3.8  | 1.3               | 4.2  | ns   |
|  |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 1.6   | 2.5    | 3.4  | 1.3              | 3.7  | 1.3               | 4.1  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]                        |       |        |      |                  |      |                   |      |      |
|  |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.8   | 12.3   | 20.4 | 5.1              | 21.8 | 5.1               | 24.0 | ns   |
|  |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.5   | 8.3    | 11.9 | 4.0              | 13.2 | 4.0               | 14.5 | ns   |
|  |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.7   | 7.0    | 10.0 | 3.2              | 11.3 | 3.2               | 12.5 | ns   |
|  |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.8   | 5.0    | 6.8  | 2.5              | 7.8  | 2.5               | 8.6  | ns   |
|  |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.1   | 4.9    | 6.4  | 2.7              | 7.0  | 2.7               | 7.8  | ns   |

## Low-power dual supply translating transceiver; 3-state

| Symbol   | Parameter         | Conditions                            | 25 °C |        |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|--|-------------------|---------------------------------------|-------|--------|------|------------------|------|-------------------|------|------|
|  |                   |                                       | Min   | Typ[1] | Max  | Min              | Max  | Min               | Max  |      |
| <b>C<sub>L</sub> = 5 pF; V<sub>CC(A)</sub> = 3.0 V to 3.6 V</b>  |                   |                                       |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]      |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 2.3   | 13.1   | 24.9 | 2.0              | 25.2 | 2.0               | 27.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 2.3   | 8.1    | 12.8 | 2.0              | 14.1 | 2.0               | 15.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 1.9   | 6.1    | 9.5  | 1.7              | 10.8 | 1.7               | 12.0 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 1.9   | 4.3    | 6.2  | 1.6              | 7.0  | 1.6               | 7.7  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 1.7   | 3.5    | 5.0  | 1.4              | 5.7  | 1.4               | 6.3  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 1.7   | 2.8    | 3.5  | 1.5              | 3.8  | 1.5               | 4.2  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 1.8   | 2.8    | 3.5  | 1.7              | 3.8  | 1.7               | 4.2  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 1.7   | 2.8    | 3.6  | 1.5              | 4.0  | 1.5               | 4.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 1.7   | 2.8    | 3.6  | 1.5              | 3.9  | 1.5               | 4.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 1.8   | 2.8    | 3.6  | 1.5              | 3.9  | 1.5               | 4.3  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 5.8   | 12.3   | 20.6 | 5.1              | 22.0 | 5.1               | 24.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 4.6   | 8.3    | 11.8 | 4.0              | 13.1 | 4.0               | 14.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 3.8   | 6.9    | 10.0 | 3.2              | 11.3 | 3.2               | 12.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 2.8   | 5.0    | 6.7  | 2.5              | 7.6  | 2.5               | 8.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 3.1   | 4.9    | 6.3  | 2.7              | 6.9  | 2.7               | 7.6  | ns   |
| <b>C<sub>L</sub> = 10 pF; V<sub>CC(A)</sub> = 1.1 V to 1.3 V</b> |                   |                                       |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]      |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 3.0   | 16.2   | 29.8 | 2.7              | 30.2 | 2.7               | 33.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 3.0   | 10.8   | 17.5 | 2.7              | 18.6 | 2.7               | 20.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 3.1   | 8.7    | 13.5 | 2.8              | 14.6 | 2.8               | 16.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 2.7   | 6.8    | 10.5 | 2.4              | 11.2 | 2.4               | 12.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 2.7   | 6.1    | 9.6  | 2.4              | 10.1 | 2.4               | 11.1 | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 3.2   | 6.5    | 9.9  | 3.1              | 10.2 | 3.1               | 11.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 3.5   | 6.5    | 10.0 | 3.2              | 10.2 | 3.2               | 11.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 3.7   | 6.5    | 9.8  | 3.5              | 10.1 | 3.5               | 11.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 3.2   | 6.5    | 10.1 | 3.1              | 10.2 | 3.1               | 11.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 3.6   | 6.5    | 10.1 | 3.2              | 10.3 | 3.2               | 11.4 | ns   |
|  |                   | DIR to B; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 6.4   | 14.3   | 23.5 | 5.8              | 24.8 | 5.8               | 27.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 5.3   | 10.2   | 15.4 | 4.6              | 16.6 | 4.6               | 18.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 5.2   | 9.2    | 13.6 | 4.7              | 14.7 | 4.7               | 16.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 3.6   | 7.1    | 10.1 | 3.2              | 11.0 | 3.2               | 12.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 4.4   | 7.6    | 10.8 | 3.8              | 11.4 | 3.8               | 12.5 | ns   |

## Low-power dual supply translating transceiver; 3-state

| Symbol   | Parameter         | Conditions                            | 25 °C |        |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|--|-------------------|---------------------------------------|-------|--------|------|------------------|------|-------------------|------|------|
|  |                   |                                       | Min   | Typ[1] | Max  | Min              | Max  | Min               | Max  |      |
| <b>C<sub>L</sub> = 10 pF; V<sub>CC(A)</sub> = 1.4 V to 1.6 V</b>   |                   |                                       |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]      |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 2.7   | 15.3   | 28.3 | 2.4              | 29.0 | 2.4               | 31.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 2.7   | 10.0   | 15.8 | 2.5              | 17.0 | 2.5               | 18.7 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 2.8   | 7.9    | 11.8 | 2.5              | 13.0 | 2.5               | 14.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 2.4   | 6.0    | 8.6  | 2.2              | 9.4  | 2.2               | 10.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 2.4   | 5.2    | 7.4  | 2.1              | 8.0  | 2.1               | 8.9  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 2.5   | 4.7    | 6.4  | 2.3              | 6.8  | 2.3               | 7.6  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 2.7   | 4.7    | 6.5  | 2.4              | 6.9  | 2.4               | 7.6  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 2.9   | 4.7    | 6.5  | 2.6              | 6.9  | 2.6               | 7.6  | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 2.5   | 4.7    | 6.5  | 2.3              | 6.9  | 2.3               | 7.6  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 2.8   | 4.7    | 6.6  | 2.4              | 6.9  | 2.4               | 7.7  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 6.1   | 13.7   | 22.4 | 5.6              | 23.8 | 5.6               | 26.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 5.0   | 9.6    | 14.2 | 4.3              | 15.5 | 4.3               | 17.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 4.9   | 8.5    | 12.3 | 4.4              | 13.4 | 4.4               | 14.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 3.3   | 6.4    | 8.7  | 3.0              | 9.6  | 3.0               | 10.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 4.1   | 6.7    | 9.1  | 3.5              | 9.7  | 3.5               | 10.8 | ns   |
| <b>C<sub>L</sub> = 10 pF; V<sub>CC(A)</sub> = 1.65 V to 1.95 V</b> |                   |                                       |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]      |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 2.6   | 15.0   | 27.8 | 2.3              | 28.3 | 2.3               | 31.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 2.6   | 9.7    | 15.2 | 2.3              | 16.5 | 2.3               | 18.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 2.7   | 7.5    | 11.2 | 2.3              | 12.4 | 2.3               | 13.7 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 2.3   | 5.6    | 7.9  | 2.0              | 8.8  | 2.0               | 9.7  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 2.3   | 4.8    | 6.7  | 1.9              | 7.4  | 1.9               | 8.2  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 2.5   | 4.6    | 6.2  | 2.4              | 6.6  | 2.4               | 7.3  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 2.7   | 4.6    | 6.3  | 2.5              | 6.7  | 2.5               | 7.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 2.9   | 4.6    | 6.3  | 2.7              | 6.7  | 2.7               | 7.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 2.5   | 4.6    | 6.2  | 2.4              | 6.7  | 2.4               | 7.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 2.8   | 4.6    | 6.3  | 2.5              | 6.7  | 2.5               | 7.4  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 6.1   | 13.5   | 22.1 | 5.4              | 23.4 | 5.4               | 25.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 5.0   | 9.3    | 13.6 | 4.2              | 14.9 | 4.2               | 16.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 4.8   | 8.3    | 11.8 | 4.2              | 13.0 | 4.2               | 14.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 3.2   | 6.0    | 8.1  | 2.8              | 9.1  | 2.8               | 10.0 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 3.9   | 6.4    | 8.5  | 3.3              | 9.2  | 3.3               | 10.2 | ns   |

## Low-power dual supply translating transceiver; 3-state

| Symbol   | Parameter         | Conditions                            | 25 °C |        |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|--|-------------------|---------------------------------------|-------|--------|------|------------------|------|-------------------|------|------|
|  |                   |                                       | Min   | Typ[1] | Max  | Min              | Max  | Min               | Max  |      |
| <b>C<sub>L</sub> = 10 pF; V<sub>CC(A)</sub> = 2.3 V to 2.7 V</b> |                   |                                       |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]      |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 2.5   | 14.4   | 27.2 | 2.3              | 27.8 | 2.3               | 30.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 2.5   | 9.1    | 14.6 | 2.3              | 15.8 | 2.3               | 17.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 2.6   | 7.0    | 10.5 | 2.2              | 11.7 | 2.2               | 12.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 2.2   | 5.1    | 7.2  | 1.9              | 8.0  | 1.9               | 8.9  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 2.2   | 4.3    | 5.9  | 1.9              | 6.6  | 1.9               | 7.3  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 1.8   | 3.3    | 4.2  | 1.7              | 4.6  | 1.7               | 5.1  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 2.0   | 3.3    | 4.4  | 1.8              | 4.7  | 1.8               | 5.2  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 2.1   | 3.3    | 4.4  | 2.0              | 4.7  | 2.0               | 5.2  | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 1.8   | 3.3    | 4.3  | 1.7              | 4.7  | 1.7               | 5.2  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 2.1   | 3.3    | 4.4  | 1.8              | 4.7  | 1.8               | 5.2  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 6.1   | 13.4   | 21.8 | 5.4              | 23.2 | 5.4               | 25.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 4.9   | 9.2    | 13.3 | 4.2              | 14.6 | 4.2               | 16.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 4.8   | 8.1    | 11.4 | 4.2              | 12.5 | 4.2               | 13.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 3.1   | 5.8    | 7.7  | 2.8              | 8.6  | 2.8               | 9.5  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 3.9   | 6.2    | 8.0  | 3.3              | 8.7  | 3.3               | 9.6  | ns   |
| <b>C<sub>L</sub> = 10 pF; V<sub>CC(A)</sub> = 3.0 V to 3.6 V</b> |                   |                                       |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]      |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 2.5   | 14.0   | 26.6 | 2.2              | 27.0 | 2.2               | 29.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 2.5   | 8.7    | 14.0 | 2.3              | 15.1 | 2.3               | 16.7 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 2.5   | 6.6    | 10.1 | 2.2              | 11.2 | 2.2               | 12.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 2.2   | 4.8    | 6.8  | 1.9              | 7.5  | 1.9               | 8.3  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 2.1   | 4.0    | 5.5  | 1.9              | 6.1  | 1.9               | 6.8  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 2.3   | 4.0    | 5.0  | 2.2              | 5.3  | 2.2               | 5.9  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 2.5   | 4.0    | 5.2  | 2.3              | 5.4  | 2.3               | 6.0  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 2.6   | 4.0    | 5.2  | 2.5              | 5.4  | 2.5               | 6.0  | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 2.3   | 4.0    | 5.1  | 2.2              | 5.4  | 2.2               | 6.0  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 2.6   | 4.0    | 5.2  | 2.3              | 5.4  | 2.3               | 6.0  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]              |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V   | 6.2   | 13.5   | 22.0 | 5.5              | 23.4 | 5.5               | 25.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V   | 4.9   | 9.2    | 13.2 | 4.2              | 14.6 | 4.2               | 16.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V | 4.8   | 8.1    | 11.3 | 4.3              | 12.4 | 4.3               | 13.7 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V   | 3.1   | 5.8    | 7.6  | 2.8              | 8.5  | 2.8               | 9.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V   | 3.9   | 6.2    | 7.9  | 3.3              | 8.5  | 3.3               | 9.5  | ns   |

## Low-power dual supply translating transceiver; 3-state

| Symbol   | Parameter         | Conditions   | 25 °C |        |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|--|-------------------|--|-------|--------|------|------------------|------|-------------------|------|------|
|  |                   |  | Min   | Typ[1] | Max  | Min              | Max  | Min               | Max  |      |
| <b>C<sub>L</sub> = 15 pF; V<sub>CC(A)</sub> = 1.1 V to 1.3 V</b> |                   |  |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]                                 |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.4   | 16.9   | 31.6 | 3.0              | 32.0 | 3.0               | 35.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 3.7   | 11.3   | 18.2 | 3.1              | 19.5 | 3.1               | 21.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 3.2   | 9.1    | 14.3 | 3.0              | 15.6 | 3.0               | 17.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.2   | 7.3    | 11.2 | 2.8              | 12.0 | 2.8               | 13.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 3.1   | 6.5    | 10.2 | 2.6              | 10.7 | 2.6               | 11.8 | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.9   | 7.6    | 11.4 | 3.8              | 11.7 | 3.8               | 12.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 4.5   | 7.6    | 11.3 | 4.1              | 11.7 | 4.1               | 12.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 4.2   | 7.6    | 11.3 | 4.1              | 11.7 | 4.1               | 12.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.9   | 7.6    | 11.7 | 3.8              | 11.9 | 3.8               | 13.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 4.5   | 7.6    | 11.7 | 4.1              | 11.9 | 4.1               | 13.1 | ns   |
|  |                   | DIR to B; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 7.2   | 15.4   | 24.9 | 6.5              | 26.3 | 6.5               | 29.0 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 6.3   | 11.1   | 16.3 | 5.4              | 17.7 | 5.4               | 19.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 5.7   | 10.4   | 15.0 | 5.2              | 16.2 | 5.2               | 17.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 4.1   | 7.9    | 11.4 | 3.8              | 12.1 | 3.8               | 13.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 5.3   | 8.8    | 12.2 | 4.9              | 12.7 | 4.9               | 14.1 | ns   |
|  |                   | <b>C<sub>L</sub> = 15 pF; V<sub>CC(A)</sub> = 1.4 V to 1.6 V</b> |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]                                 |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.1   | 16.1   | 30.1 | 2.8              | 30.7 | 2.8               | 33.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 3.4   | 10.5   | 16.5 | 2.8              | 17.9 | 2.8               | 19.7 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 3.0   | 8.4    | 12.6 | 2.7              | 13.9 | 2.7               | 15.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 2.9   | 6.4    | 9.3  | 2.5              | 10.1 | 2.5               | 11.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 2.8   | 5.6    | 8.0  | 2.3              | 8.7  | 2.3               | 9.6  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.1   | 5.6    | 7.6  | 2.9              | 8.0  | 2.9               | 8.9  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 3.5   | 5.6    | 7.5  | 3.1              | 8.0  | 3.1               | 8.8  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 3.3   | 5.6    | 7.6  | 3.1              | 8.0  | 3.1               | 8.9  | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.1   | 5.6    | 7.7  | 2.9              | 8.1  | 2.9               | 9.0  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 3.5   | 5.6    | 7.8  | 3.1              | 8.1  | 3.1               | 9.0  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 6.9   | 14.9   | 23.8 | 6.4              | 25.3 | 6.4               | 27.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 6.0   | 10.5   | 15.1 | 5.2              | 16.6 | 5.2               | 18.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 5.4   | 9.7    | 13.7 | 5.0              | 15.0 | 5.0               | 16.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.8   | 7.2    | 9.9  | 3.5              | 10.7 | 3.5               | 11.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 5.0   | 8.0    | 10.5 | 4.6              | 11.1 | 4.6               | 12.3 | ns   |

## Low-power dual supply translating transceiver; 3-state

| Symbol   | Parameter         | Conditions   | 25 °C |        |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|--|-------------------|--|-------|--------|------|------------------|------|-------------------|------|------|
|  |                   |  | Min   | Typ[1] | Max  | Min              | Max  | Min               | Max  |      |
| <b>C<sub>L</sub> = 15 pF; V<sub>CC(A)</sub> = 1.65 V to 1.95 V</b> |                   |  |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]                                 |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.0   | 15.8   | 29.6 | 2.6              | 30.1 | 2.6               | 33.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 3.2   | 10.2   | 15.9 | 2.6              | 17.4 | 2.6               | 19.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 2.8   | 8.0    | 12.0 | 2.5              | 13.4 | 2.5               | 14.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 2.8   | 6.0    | 8.6  | 2.3              | 9.5  | 2.3               | 10.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 2.6   | 5.2    | 7.3  | 2.2              | 8.0  | 2.2               | 8.9  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.2   | 5.8    | 7.6  | 3.1              | 8.0  | 3.1               | 8.9  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 3.7   | 5.8    | 7.6  | 3.3              | 8.1  | 3.3               | 8.9  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 3.5   | 5.8    | 7.7  | 3.3              | 8.1  | 3.3               | 9.0  | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.2   | 5.8    | 7.8  | 3.1              | 8.2  | 3.1               | 9.0  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 3.7   | 5.8    | 7.8  | 3.4              | 8.1  | 3.4               | 9.0  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 6.9   | 14.7   | 23.4 | 6.2              | 24.9 | 6.2               | 27.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 5.9   | 10.2   | 14.6 | 5.0              | 16.0 | 5.0               | 17.7 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 5.3   | 9.4    | 13.2 | 4.8              | 14.5 | 4.8               | 16.0 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.7   | 6.8    | 9.4  | 3.4              | 10.2 | 3.4               | 11.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 4.9   | 7.6    | 9.9  | 4.4              | 10.6 | 4.4               | 11.7 | ns   |
|  |                   | <b>C<sub>L</sub> = 15 pF; V<sub>CC(A)</sub> = 2.3 V to 2.7 V</b> |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]                                 |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.0   | 15.2   | 29.0 | 2.6              | 29.5 | 2.6               | 32.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 3.1   | 9.6    | 15.3 | 2.6              | 16.7 | 2.6               | 18.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 2.7   | 7.5    | 11.3 | 2.5              | 12.6 | 2.5               | 13.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 2.7   | 5.5    | 7.9  | 2.3              | 8.7  | 2.3               | 9.6  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 2.5   | 4.7    | 6.5  | 2.1              | 7.2  | 2.1               | 8.0  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 2.4   | 4.1    | 5.2  | 2.2              | 5.6  | 2.2               | 6.2  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 2.7   | 4.1    | 5.3  | 2.4              | 5.7  | 2.4               | 6.3  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 2.5   | 4.1    | 5.4  | 2.4              | 5.7  | 2.4               | 6.3  | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 2.4   | 4.1    | 5.4  | 2.2              | 5.7  | 2.2               | 6.3  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 2.7   | 4.1    | 5.3  | 2.4              | 5.6  | 2.4               | 6.2  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 6.9   | 14.6   | 23.2 | 6.2              | 24.7 | 6.2               | 27.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 5.9   | 10.1   | 14.2 | 5.0              | 15.6 | 5.0               | 17.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 5.3   | 9.2    | 12.8 | 4.8              | 14.0 | 4.8               | 15.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.7   | 6.7    | 8.9  | 3.4              | 9.8  | 3.4               | 10.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 4.8   | 7.4    | 9.4  | 4.4              | 10.1 | 4.4               | 11.2 | ns   |

## Low-power dual supply translating transceiver; 3-state

| Symbol  | Parameter         | Conditions                                      | 25 °C |        |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|---|-------------------|---|-------|--------|------|------------------|------|-------------------|------|------|
|   |                   |   | Min   | Typ[1] | Max  | Min              | Max  | Min               | Max  |      |
| <b><math>C_L = 15 \text{ pF}</math>; <math>V_{CC(A)} = 3.0 \text{ V to } 3.6 \text{ V}</math></b> |                   |   |       |        |      |                  |      |                   |      |      |
| $t_{pd}$  | propagation delay | A to B or B to A; see Fig. 3 [2]                |       |        |      |                  |      |                   |      |      |
|   |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.9   | 14.7   | 28.3 | 2.6              | 28.8 | 2.6               | 31.7 | ns   |
|   |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.1   | 9.2    | 14.7 | 2.6              | 16.0 | 2.6               | 17.7 | ns   |
|   |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.7   | 7.1    | 10.9 | 2.4              | 12.1 | 2.4               | 13.4 | ns   |
|   |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.7   | 5.2    | 7.4  | 2.2              | 8.2  | 2.2               | 9.1  | ns   |
|   |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.5   | 4.5    | 6.1  | 2.1              | 6.8  | 2.1               | 7.5  | ns   |
| $t_{dis}$   | disable time      | DIR to A; see Fig. 4 [3]                        |       |        |      |                  |      |                   |      |      |
|   |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.1   | 5.3    | 6.5  | 3.0              | 6.9  | 3.0               | 7.6  | ns   |
|   |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.5   | 5.3    | 6.6  | 3.2              | 7.0  | 3.2               | 7.7  | ns   |
|   |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.3   | 5.3    | 6.7  | 3.2              | 7.0  | 3.2               | 7.8  | ns   |
|   |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.1   | 5.3    | 6.8  | 3.0              | 7.1  | 3.0               | 7.8  | ns   |
|   |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.5   | 5.3    | 6.6  | 3.2              | 6.9  | 3.2               | 7.6  | ns   |
|   |                   | DIR to B; see Fig. 4 [3]                        |       |        |      |                  |      |                   |      |      |
|   |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.9   | 14.6   | 23.4 | 6.3              | 24.9 | 6.3               | 27.4 | ns   |
|   |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.9   | 10.1   | 14.2 | 5.0              | 15.6 | 5.0               | 17.2 | ns   |
|   |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.3   | 9.2    | 12.7 | 4.8              | 13.9 | 4.8               | 15.4 | ns   |
|   |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.7   | 6.6    | 8.8  | 3.4              | 9.6  | 3.4               | 10.6 | ns   |
|   |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 4.8   | 7.4    | 9.3  | 4.4              | 10.0 | 4.4               | 11.0 | ns   |
| <b><math>C_L = 30 \text{ pF}</math>; <math>V_{CC(A)} = 1.1 \text{ V to } 1.3 \text{ V}</math></b> |                   |   |       |        |      |                  |      |                   |      |      |
| $t_{pd}$  | propagation delay | A to B or B to A; see Fig. 3 [2]                |       |        |      |                  |      |                   |      |      |
|   |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 4.2   | 19.1   | 36.0 | 3.8              | 36.8 | 3.8               | 40.5 | ns   |
|   |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.5   | 12.8   | 20.6 | 4.0              | 22.0 | 4.0               | 24.2 | ns   |
|   |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 4.2   | 10.4   | 16.2 | 3.8              | 17.4 | 3.8               | 19.2 | ns   |
|   |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 4.0   | 8.3    | 12.4 | 3.5              | 13.2 | 3.5               | 14.5 | ns   |
|   |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 4.0   | 7.5    | 11.5 | 3.7              | 12.5 | 3.7               | 13.8 | ns   |
| $t_{dis}$   | disable time      | DIR to A; see Fig. 4 [3]                        |       |        |      |                  |      |                   |      |      |
|   |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.6   | 11.0   | 15.7 | 5.5              | 16.2 | 5.5               | 17.9 | ns   |
|   |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 6.1   | 11.0   | 15.6 | 6.0              | 15.9 | 6.0               | 17.5 | ns   |
|   |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 6.6   | 11.0   | 15.5 | 6.5              | 15.8 | 6.5               | 17.4 | ns   |
|   |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 5.6   | 11.0   | 15.6 | 5.5              | 15.8 | 5.5               | 17.5 | ns   |
|   |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 7.0   | 11.0   | 15.9 | 6.6              | 16.7 | 6.6               | 18.4 | ns   |
|   |                   | DIR to B; see Fig. 4 [3]                        |       |        |      |                  |      |                   |      |      |
|   |                   | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 8.7   | 18.9   | 29.0 | 8.1              | 30.5 | 8.1               | 33.6 | ns   |
|   |                   | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 7.3   | 13.8   | 19.3 | 6.8              | 20.7 | 6.8               | 22.8 | ns   |
|   |                   | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 8.1   | 13.7   | 19.2 | 7.7              | 20.3 | 7.7               | 22.4 | ns   |
|   |                   | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 5.2   | 10.3   | 14.0 | 4.9              | 14.7 | 4.9               | 16.2 | ns   |
|   |                   | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 8.1   | 12.5   | 16.5 | 7.5              | 18.0 | 7.5               | 19.9 | ns   |

## Low-power dual supply translating transceiver; 3-state

| Symbol   | Parameter         | Conditions   | 25 °C |        |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|--|-------------------|--|-------|--------|------|------------------|------|-------------------|------|------|
|  |                   |  | Min   | Typ[1] | Max  | Min              | Max  | Min               | Max  |      |
| <b>C<sub>L</sub> = 30 pF; V<sub>CC(A)</sub> = 1.4 V to 1.6 V</b> |                   |  |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]                                   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                                | 4.0   | 18.2   | 34.5 | 3.5              | 35.5 | 3.5               | 39.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                                | 4.2   | 12.0   | 18.9 | 3.7              | 20.3 | 3.7               | 22.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                              | 3.9   | 9.6    | 14.4 | 3.5              | 15.8 | 3.5               | 17.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                                | 3.8   | 7.5    | 10.4 | 3.2              | 11.4 | 3.2               | 12.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                                | 3.7   | 6.7    | 9.3  | 3.4              | 10.4 | 3.4               | 11.4 | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                                | 4.4   | 8.3    | 10.8 | 4.3              | 11.4 | 4.3               | 12.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                                | 4.8   | 8.3    | 10.7 | 4.6              | 11.2 | 4.6               | 12.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                              | 5.2   | 8.3    | 10.8 | 5.0              | 11.2 | 5.0               | 12.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                                | 4.4   | 8.3    | 10.8 | 4.3              | 11.1 | 4.3               | 12.3 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                                | 5.5   | 8.3    | 11.0 | 5.1              | 11.8 | 5.1               | 13.0 | ns   |
|  |                   | DIR to B; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                                | 8.4   | 18.3   | 27.9 | 7.9              | 29.5 | 7.9               | 32.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                                | 7.1   | 13.2   | 18.2 | 6.6              | 19.6 | 6.6               | 21.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                              | 7.8   | 13.1   | 17.9 | 7.4              | 19.1 | 7.4               | 21.0 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                                | 4.9   | 9.6    | 12.6 | 4.6              | 13.4 | 4.6               | 14.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                                | 7.7   | 11.7   | 14.8 | 7.2              | 16.3 | 7.2               | 18.0 | ns   |
|  |                   | <b>C<sub>L</sub> = 30 pF; V<sub>CC(A)</sub> = 1.65 V to 1.95 V</b> |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]                                   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                                | 3.9   | 18.0   | 34.0 | 3.4              | 34.9 | 3.4               | 38.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                                | 4.1   | 11.7   | 18.3 | 3.5              | 19.8 | 3.5               | 21.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                              | 3.8   | 9.2    | 13.9 | 3.4              | 15.2 | 3.4               | 16.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                                | 3.6   | 7.1    | 9.8  | 3.1              | 10.8 | 3.1               | 11.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                                | 3.5   | 6.3    | 8.6  | 3.2              | 9.7  | 3.2               | 10.7 | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                                | 5.0   | 9.2    | 11.7 | 4.8              | 12.3 | 4.8               | 13.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                                | 5.4   | 9.2    | 11.7 | 5.3              | 12.1 | 5.3               | 13.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                              | 5.8   | 9.1    | 11.9 | 5.7              | 12.3 | 5.7               | 13.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                                | 5.0   | 9.1    | 11.7 | 4.8              | 12.1 | 4.8               | 13.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                                | 6.2   | 9.2    | 11.9 | 5.8              | 12.7 | 5.8               | 14.1 | ns   |
|  |                   | DIR to B; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                                | 8.4   | 18.1   | 27.6 | 7.8              | 29.1 | 7.8               | 32.0 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                                | 7.0   | 12.9   | 17.7 | 6.4              | 19.1 | 6.4               | 21.0 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                              | 7.7   | 12.8   | 17.4 | 7.2              | 18.6 | 7.2               | 20.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                                | 4.8   | 9.3    | 12.0 | 4.5              | 12.9 | 4.5               | 14.2 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                                | 7.6   | 11.3   | 14.2 | 7.0              | 15.8 | 7.0               | 17.4 | ns   |

## Low-power dual supply translating transceiver; 3-state


| Symbol   | Parameter         | Conditions   | 25 °C |        |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|--|-------------------|--|-------|--------|------|------------------|------|-------------------|------|------|
|  |                   |  | Min   | Typ[1] | Max  | Min              | Max  | Min               | Max  |      |
| <b>C<sub>L</sub> = 30 pF; V<sub>CC(A)</sub> = 2.3 V to 2.7 V</b> |                   |  |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]                                 |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.8   | 17.4   | 33.4 | 3.4              | 34.3 | 3.4               | 37.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 4.0   | 11.1   | 17.7 | 3.5              | 19.1 | 3.5               | 21.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 3.7   | 8.7    | 13.2 | 3.3              | 14.4 | 3.3               | 15.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.4   | 6.5    | 9.1  | 3.0              | 10.0 | 3.0               | 11.1 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 3.5   | 5.7    | 7.8  | 3.1              | 8.9  | 3.1               | 9.8  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.6   | 6.5    | 8.1  | 3.5              | 8.5  | 3.5               | 9.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 3.9   | 6.5    | 8.1  | 3.8              | 8.5  | 3.8               | 9.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 4.2   | 6.5    | 8.3  | 4.1              | 8.6  | 4.1               | 9.5  | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.6   | 6.5    | 8.2  | 3.5              | 8.5  | 3.5               | 9.4  | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 4.5   | 6.5    | 8.2  | 4.2              | 8.9  | 4.2               | 9.8  | ns   |
|  |                   | DIR to B; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 8.4   | 18.0   | 27.4 | 7.8              | 28.8 | 7.8               | 31.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 7.0   | 12.8   | 17.3 | 6.4              | 18.7 | 6.4               | 20.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 7.7   | 12.6   | 17.0 | 7.2              | 18.2 | 7.2               | 20.0 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 4.8   | 9.1    | 11.6 | 4.5              | 12.4 | 4.5               | 13.7 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 7.6   | 11.1   | 13.7 | 7.0              | 15.3 | 7.0               | 16.9 | ns   |
|  |                   | <b>C<sub>L</sub> = 30 pF; V<sub>CC(A)</sub> = 3.0 V to 3.6 V</b> |       |        |      |                  |      |                   |      |      |
| t <sub>pd</sub>  | propagation delay | A to B or B to A; see Fig. 3 [2]                                 |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 3.8   | 16.9   | 32.8 | 3.3              | 33.5 | 3.3               | 36.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 3.9   | 10.7   | 17.1 | 3.5              | 18.5 | 3.5               | 20.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 3.7   | 8.3    | 12.7 | 3.3              | 13.9 | 3.3               | 15.4 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 3.2   | 6.3    | 8.6  | 2.9              | 9.5  | 2.9               | 10.5 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 3.4   | 5.5    | 7.4  | 3.1              | 8.4  | 3.1               | 9.3  | ns   |
| t <sub>dis</sub>   | disable time      | DIR to A; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 5.0   | 9.0    | 11.0 | 4.9              | 11.5 | 4.9               | 12.7 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 5.4   | 9.0    | 11.1 | 5.3              | 11.4 | 5.3               | 12.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 5.9   | 9.0    | 11.3 | 5.7              | 11.6 | 5.7               | 12.8 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 5.0   | 9.0    | 11.2 | 4.9              | 11.4 | 4.9               | 12.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 6.2   | 9.0    | 11.2 | 5.9              | 11.9 | 5.9               | 13.2 | ns   |
|  |                   | DIR to B; see Fig. 4 [3]   |       |        |      |                  |      |                   |      |      |
|  |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V                              | 8.4   | 18.1   | 27.6 | 7.8              | 29.1 | 7.8               | 32.0 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V                              | 7.0   | 12.8   | 17.3 | 6.4              | 18.6 | 6.4               | 20.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V                            | 7.7   | 12.6   | 17.0 | 7.2              | 18.1 | 7.2               | 19.9 | ns   |
|  |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V                              | 4.8   | 9.0    | 11.5 | 4.5              | 12.3 | 4.5               | 13.6 | ns   |
|  |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V                              | 7.6   | 11.1   | 13.6 | 7.0              | 15.1 | 7.0               | 16.7 | ns   |

Low-power dual supply translating transceiver; 3-state

| Symbol  | Parameter                     | Conditions                                      | 25 °C |        |     | -40 °C to +85 °C |     | -40 °C to +125 °C |     | Unit |
|---|-------------------------------|---|-------|--------|-----|------------------|-----|-------------------|-----|------|
|   |                               |   | Min   | Typ[1] | Max | Min              | Max | Min               | Max |      |
| <b>C<sub>L</sub> = 5 pF, 10 pF, 15 pF and 30 pF</b> |                               |   |       |        |     |                  |     |                   |     |      |
| C <sub>PD</sub>                                     | power dissipation capacitance | A port; (direction A to B) [4][5]               |       |        |     |                  |     |                   |     |      |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.2 V | -     | 0.6    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.5 V | -     | 0.7    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.8 V | -     | 0.7    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.5 V | -     | 0.9    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V | -     | 1.1    | -   | -                | -   | -                 | -   | pF   |
|   |                               | A port; (direction B to A) [4][5]               |       |        |     |                  |     |                   |     |      |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.2 V | -     | 3.7    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.5 V | -     | 3.8    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.8 V | -     | 4.0    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.5 V | -     | 4.6    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V | -     | 5.2    | -   | -                | -   | -                 | -   | pF   |
|   |                               | B port; (direction A to B) [4][5]               |       |        |     |                  |     |                   |     |      |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.2 V | -     | 3.7    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.5 V | -     | 3.8    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.8 V | -     | 4.0    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.5 V | -     | 4.6    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V | -     | 5.2    | -   | -                | -   | -                 | -   | pF   |
|   |                               | B port; (direction B to A) [4][5]               |       |        |     |                  |     |                   |     |      |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.2 V | -     | 0.6    | -   | -                | -   | -                 | -   | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.5 V | -     | 0.7    | -   | -                | -   | -                 | -   | pF   |
| V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.8 V     | -                             | 0.7   | -     | -      | -   | -                | -   | pF                |     |      |
| V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.5 V     | -                             | 0.9   | -     | -      | -   | -                | -   | pF                |     |      |
| V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V     | -                             | 1.1   | -     | -      | -   | -                | -   | pF                |     |      |

- [1] All typical values are measured at nominal V<sub>CC(A)</sub> and V<sub>CC(B)</sub>.
- [2] t<sub>pd</sub> is the same as t<sub>PLH</sub> and t<sub>PHL</sub>.
- [3] t<sub>dis</sub> is the same as t<sub>PLZ</sub> and t<sub>PHZ</sub>.
- [4] C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW).  
 $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$  where:  
 f<sub>i</sub> = input frequency in MHz;  
 f<sub>o</sub> = output frequency in MHz;  
 C<sub>L</sub> = load capacitance in pF;  
 V<sub>CC</sub> = supply voltage in V;  
 N = number of inputs switching;  
 Σ(C<sub>L</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>o</sub>) = sum of the outputs.
- [5] f<sub>i</sub> = 1 MHz; V<sub>i</sub> = GND to V<sub>CC</sub>


11.1. Waveforms and test circuit

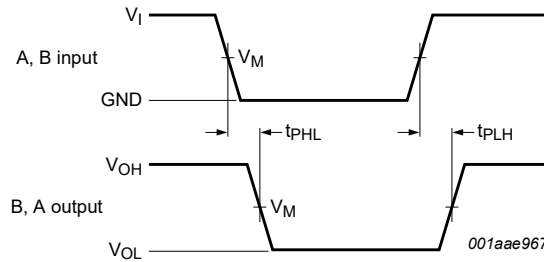

Measurement points are given in [Table 9](#).

$V_{OL}$  and  $V_{OH}$  are typical output voltage drops that occur with the output load.

Fig. 3. The data input (A, B) to output (B, A) propagation delay times

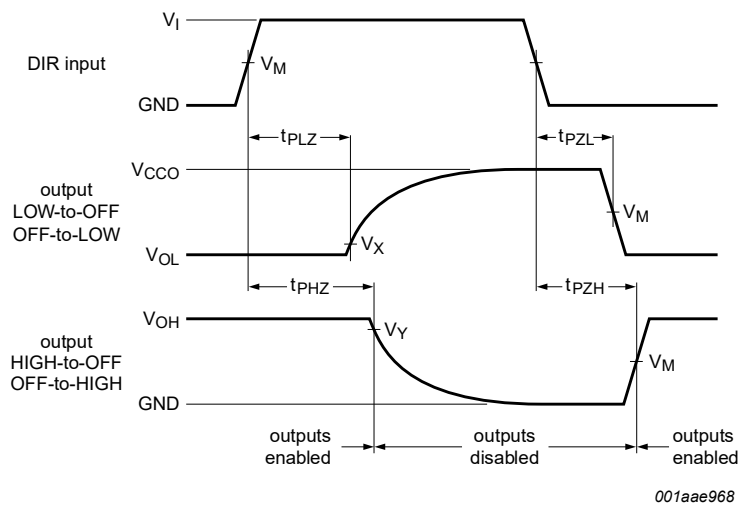

Measurement points are given in [Table 9](#).

$V_{OL}$  and  $V_{OH}$  are typical output voltage drops that occur with the output load.


Fig. 4. Enable and disable times

Table 9. Measurement points

| Supply voltage         | Input[1]             | Output[2]            |                           |                           |
|------------------------|----------------------|----------------------|---------------------------|---------------------------|
| $V_{CC(A)}, V_{CC(B)}$ | $V_M$                | $V_M$                | $V_X$                     | $V_Y$                     |
| 1.1 V to 1.6 V         | $0.5 \times V_{CCI}$ | $0.5 \times V_{CCO}$ | $V_{OL} + 0.1 \text{ V}$  | $V_{OH} - 0.1 \text{ V}$  |
| 1.65 V to 2.7 V        | $0.5 \times V_{CCI}$ | $0.5 \times V_{CCO}$ | $V_{OL} + 0.15 \text{ V}$ | $V_{OH} - 0.15 \text{ V}$ |
| 3.0 V to 3.6 V         | $0.5 \times V_{CCI}$ | $0.5 \times V_{CCO}$ | $V_{OL} + 0.3 \text{ V}$  | $V_{OH} - 0.3 \text{ V}$  |

[1]  $V_{CCI}$  is the supply voltage associated with the data input port.

[2]  $V_{CCO}$  is the supply voltage associated with the output port.

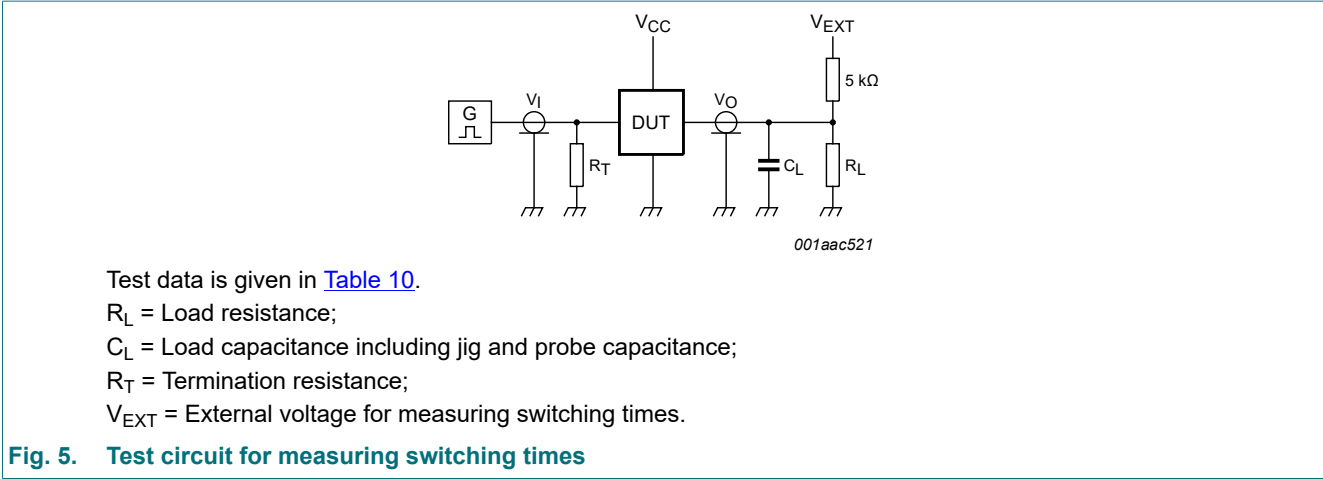

**Fig. 5. Test circuit for measuring switching times**

**Table 10. Test data**

| Supply voltage         | Input     |               | Load                         |              | $V_{EXT}$          |                    |                        |
|------------------------|-----------|---------------|------------------------------|--------------|--------------------|--------------------|------------------------|
| $V_{CC(A)}, V_{CC(B)}$ | $V_I$ [1] | $t_r = t_f$   | $C_L$                        | $R_L$ [2]    | $t_{PLH}, t_{PHL}$ | $t_{PZH}, t_{PHZ}$ | $t_{PZL}, t_{PLZ}$ [3] |
| 1.1 V to 3.6 V         | $V_{CCI}$ | $\leq 3.0$ ns | 5 pF, 10 pF, 15 pF and 30 pF | 5 kΩ or 1 MΩ | open               | GND                | $2 \times V_{CCO}$     |

- [1]  $V_{CCI}$  is the supply voltage associated with the data input port.
- [2] For measuring enable and disable times  $R_L = 5$  kΩ.  
For measuring propagation delays, setup and hold times and pulse width  $R_L = 1$  MΩ.
- [3]  $V_{CCO}$  is the supply voltage associated with the output port.

## 12. Application information

### 12.1. Unidirectional logic level-shifting application

The circuit given in Fig. 6 is an example of the 74AUP1T45 being used in an unidirectional logic level-shifting application.

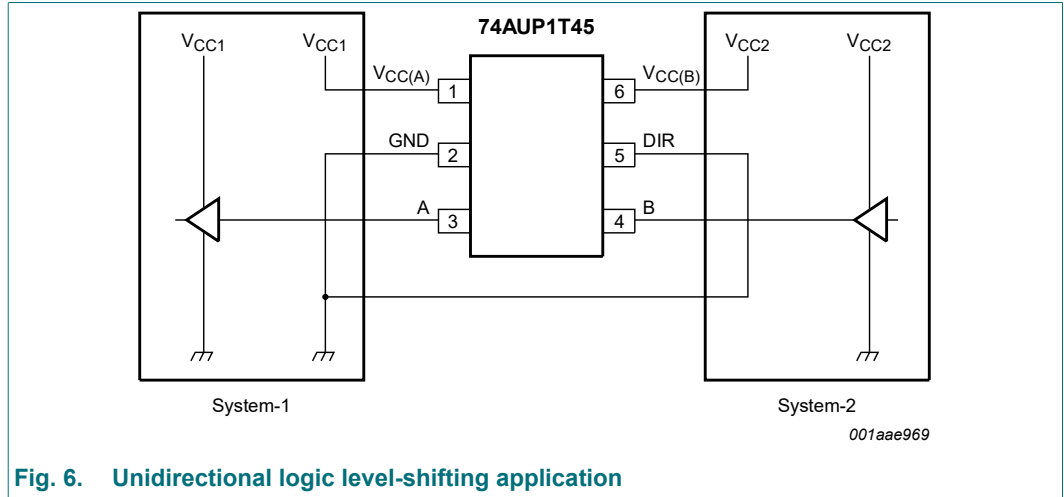


Fig. 6. Unidirectional logic level-shifting application

Table 11. Description unidirectional logic level-shifting application

| Pin | Name               | Function         | Description   |
|-----|--------------------|------------------|---|
| 1   | V <sub>CC(A)</sub> | V <sub>CC1</sub> | supply voltage of system-1 (1.1 V to 3.6 V)               |
| 2   | GND                | GND              | device ground (0 V)                                       |
| 3   | A                  | OUT              | output level depends on V <sub>CC1</sub> voltage          |
| 4   | B                  | IN               | input threshold value depends on V <sub>CC2</sub> voltage |
| 5   | DIR                | DIR              | the GND (LOW level) determines B port to A port direction |
| 6   | V <sub>CC(B)</sub> | V <sub>CC2</sub> | supply voltage of system-2 (1.1 V to 3.6 V)               |

### 12.2. Bidirectional logic level-shifting application

Fig. 7 shows the 74AUP1T45 being used in a bidirectional logic level-shifting application. Since the device does not have an output enable (OE) pin, the system designer should take precautions to avoid bus contention between system-1 and system-2 when changing directions.

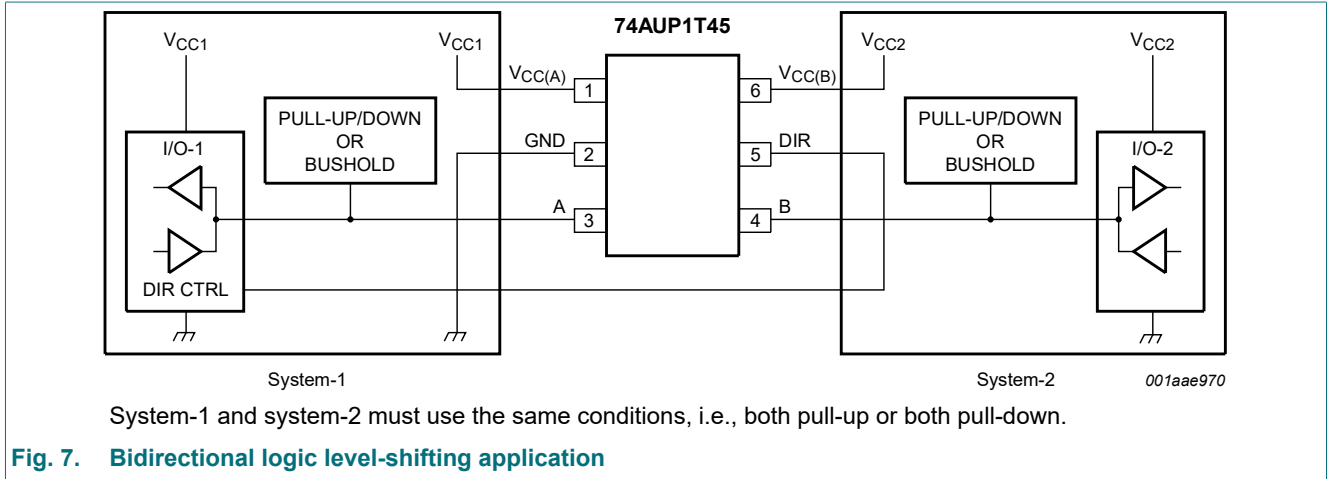


Table 12 gives a sequence that will illustrate data transmission from system-1 to system-2 and then from system-2 to system-1.

**Table 12. Description bidirectional logic level-shifting application**

*H = HIGH voltage level; L = LOW voltage level; Z = high-impedance OFF-state.*

*System-1 and system-2 must use the same conditions, i.e., both pull-up or both pull-down.*

| State | DIR CTRL | I/O-1  | I/O-2  | Description   |
|-------|----------|--------|--------|---|
| 1     | H        | output | input  | system-1 data to system-2   |
| 2     | H        | Z      | Z      | system-2 is getting ready to send data to system-1. I/O-1 and I/O-2 are disabled. The bus-line state depends on the pull-up or pull-down. |
| 3     | L        | Z      | Z      | DIR bit is flipped. I/O-1 and I/O-2 still are disabled. The bus-line state depends on the pull-up or pull-down.                           |
| 4     | L        | input  | output | system-2 data to system-1   |

### 12.3. Power-up considerations

A proper power-up sequence always should be followed to avoid excessive supply current, bus contention, oscillations, or other anomalies. Take the following precautions to guard against such power-up problems:

- Connect ground before any supply voltage is applied.
- Power-up  $V_{CC(A)}$ .
- $V_{CC(B)}$  can be ramped up along with or after  $V_{CC(A)}$ .

### 12.4. Enable times

Calculate the enable times for the 74AUP1T45 using the following formulas:

- $t_{PZH}(\text{DIR to A}) = t_{PLZ}(\text{DIR to B}) + t_{PLH}(\text{B to A})$
- $t_{PZL}(\text{DIR to A}) = t_{PHZ}(\text{DIR to B}) + t_{PHL}(\text{B to A})$
- $t_{PZH}(\text{DIR to B}) = t_{PLZ}(\text{DIR to A}) + t_{PLH}(\text{A to B})$
- $t_{PZL}(\text{DIR to B}) = t_{PHZ}(\text{DIR to A}) + t_{PHL}(\text{A to B})$

In a bidirectional application, these enable times provide the maximum delay from the time the DIR bit is switched until an output is expected. For example, if the 74AUP1T45 initially is transmitting from A to B, then the DIR bit is switched, the B port of the device must be disabled before presenting it with an input. After the B port has been disabled, an input signal applied to it appears on the corresponding A port after the specified propagation delay.

### 13. Package outline

TSSOP6: plastic thin shrink small outline package; 6 leads; body width 1.25 mm

SOT363-2

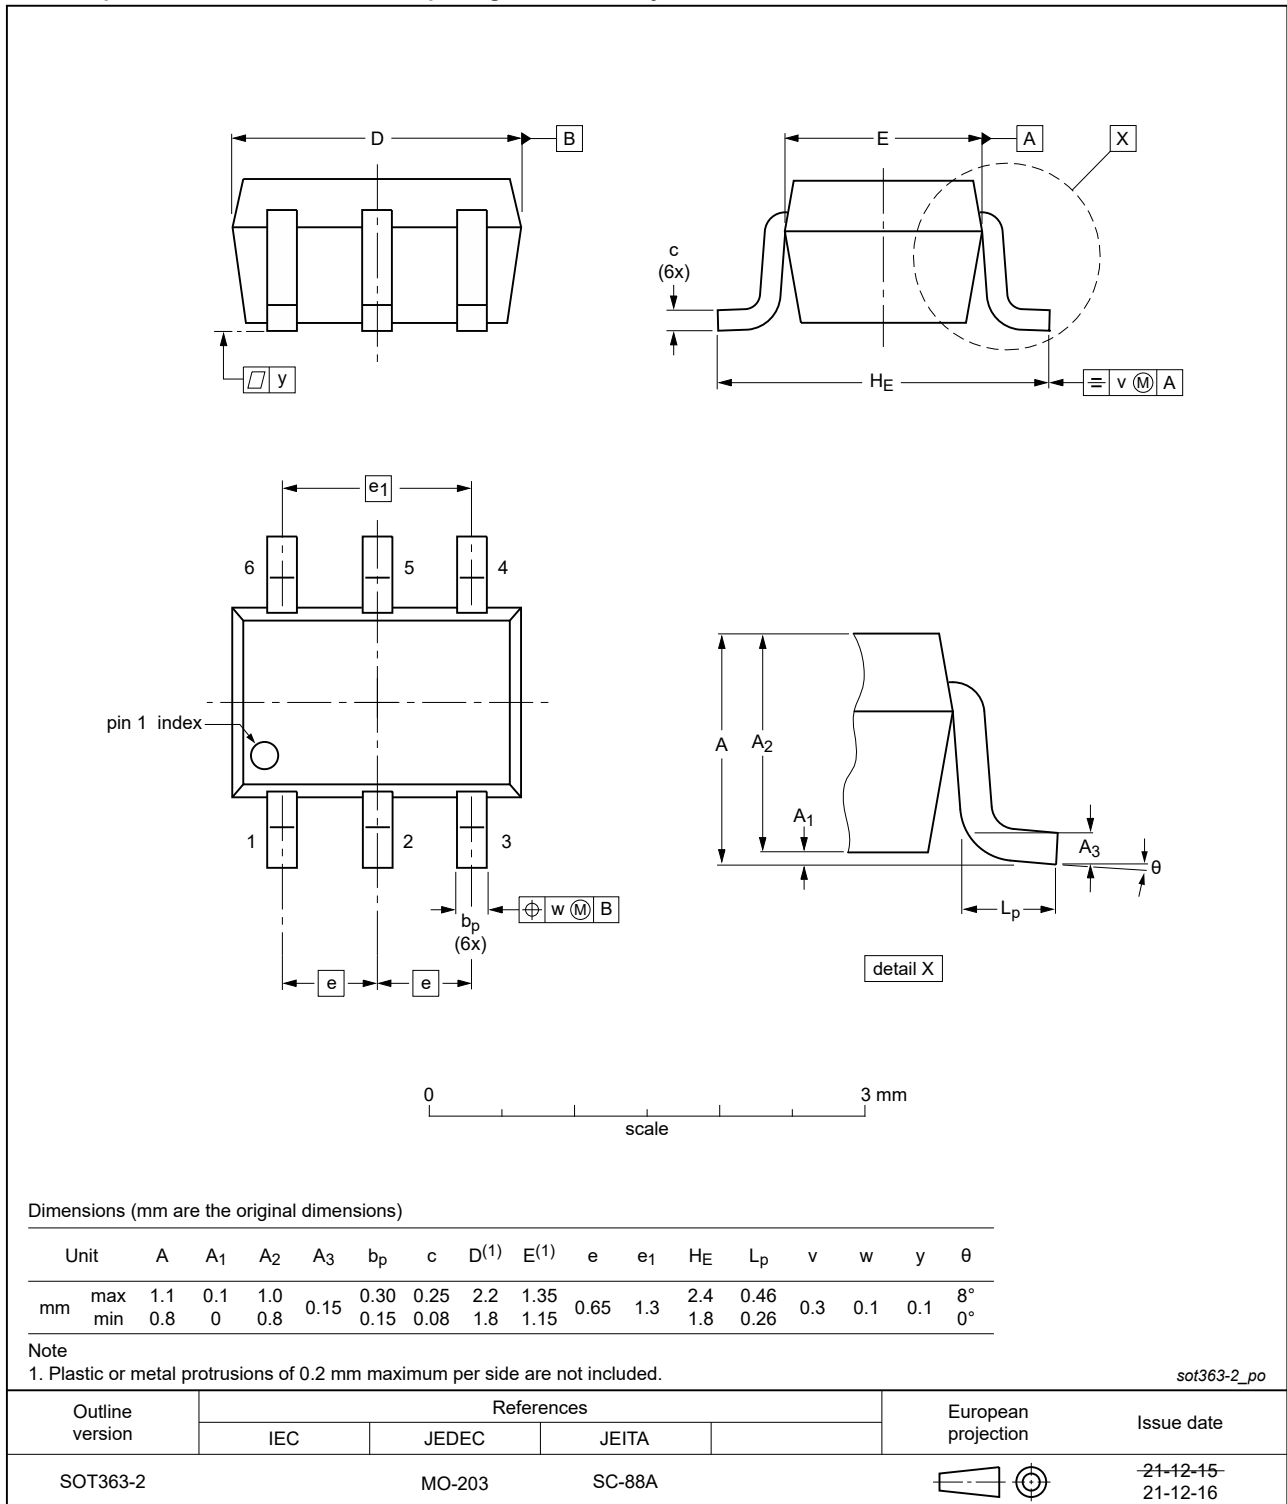


Fig. 8. Package outline SOT363-2 (TSSOP6)

XSON6: plastic extremely thin small outline package; no leads; 6 terminals; body 1 x 1.45 x 0.5 mm

SOT886

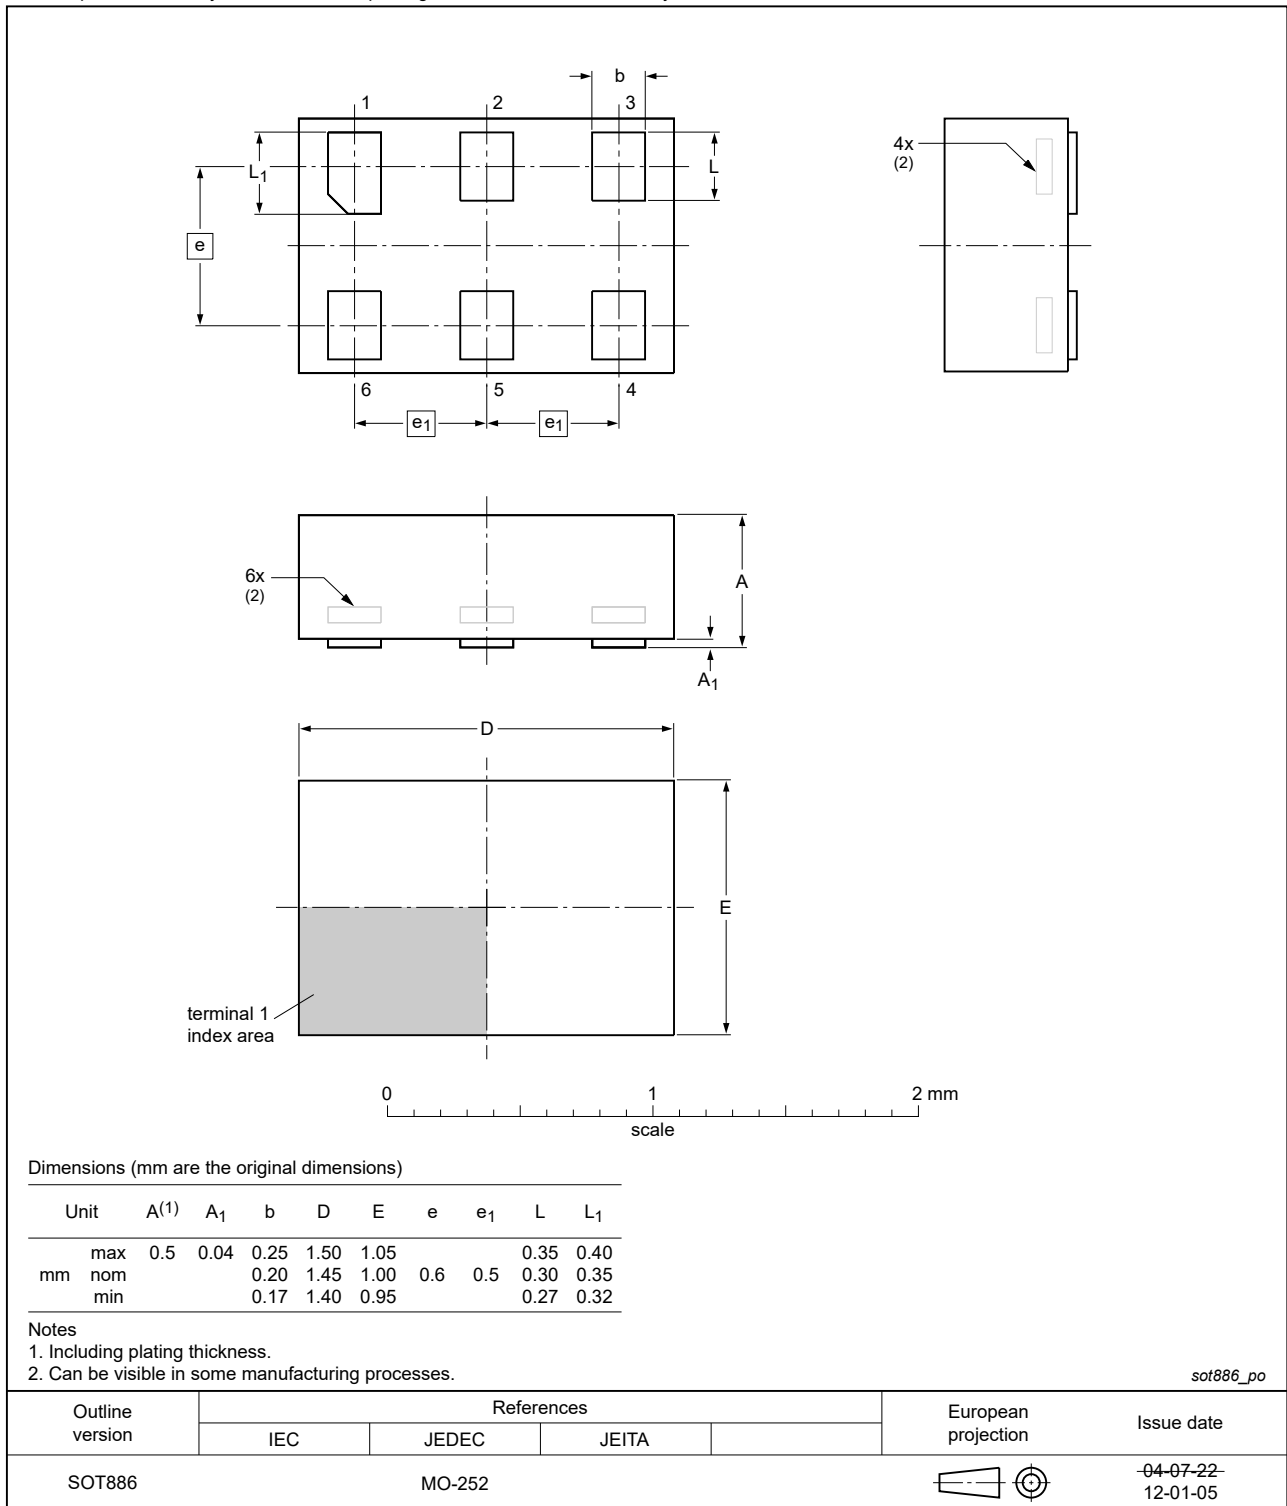


Fig. 9. Package outline SOT886 (XSON6)

XSON6: extremely thin small outline package; no leads;  
6 terminals; body 0.9 x 1.0 x 0.35 mm

SOT1115

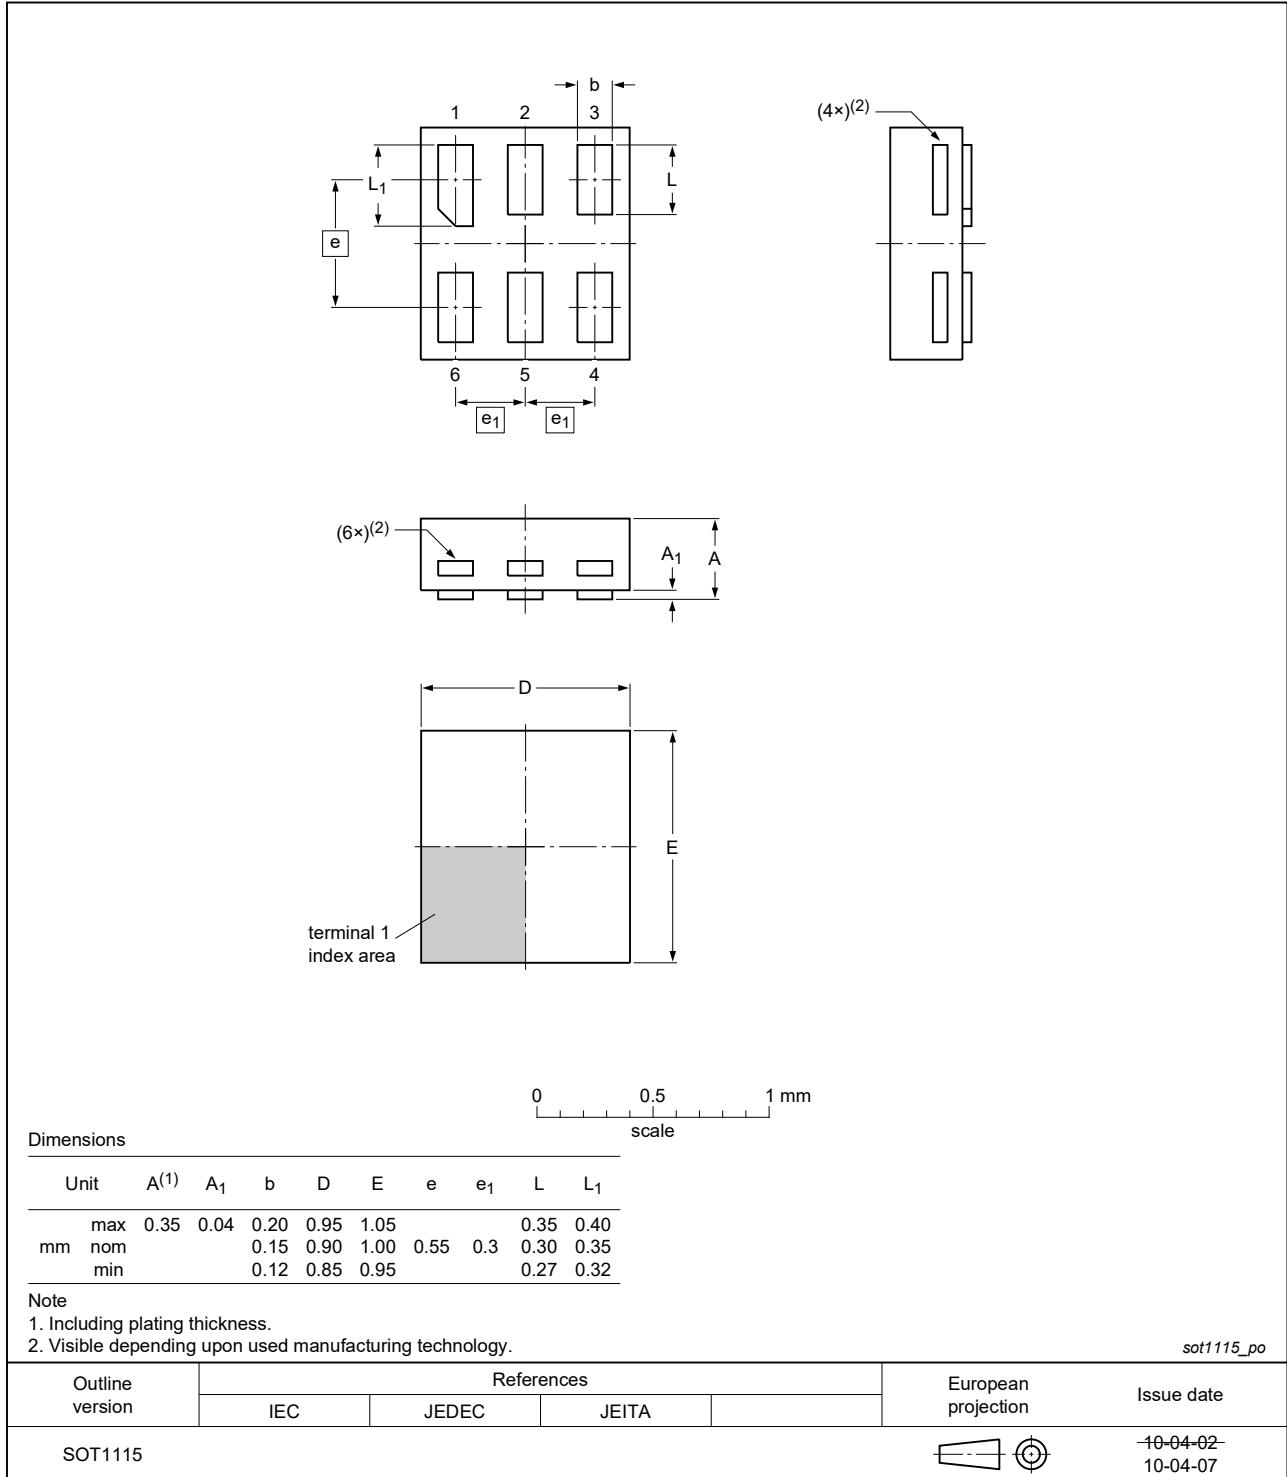


Fig. 10. Package outline SOT1115 (XSON6)

XSON6: extremely thin small outline package; no leads;  
6 terminals; body 1.0 x 1.0 x 0.35 mm

SOT1202

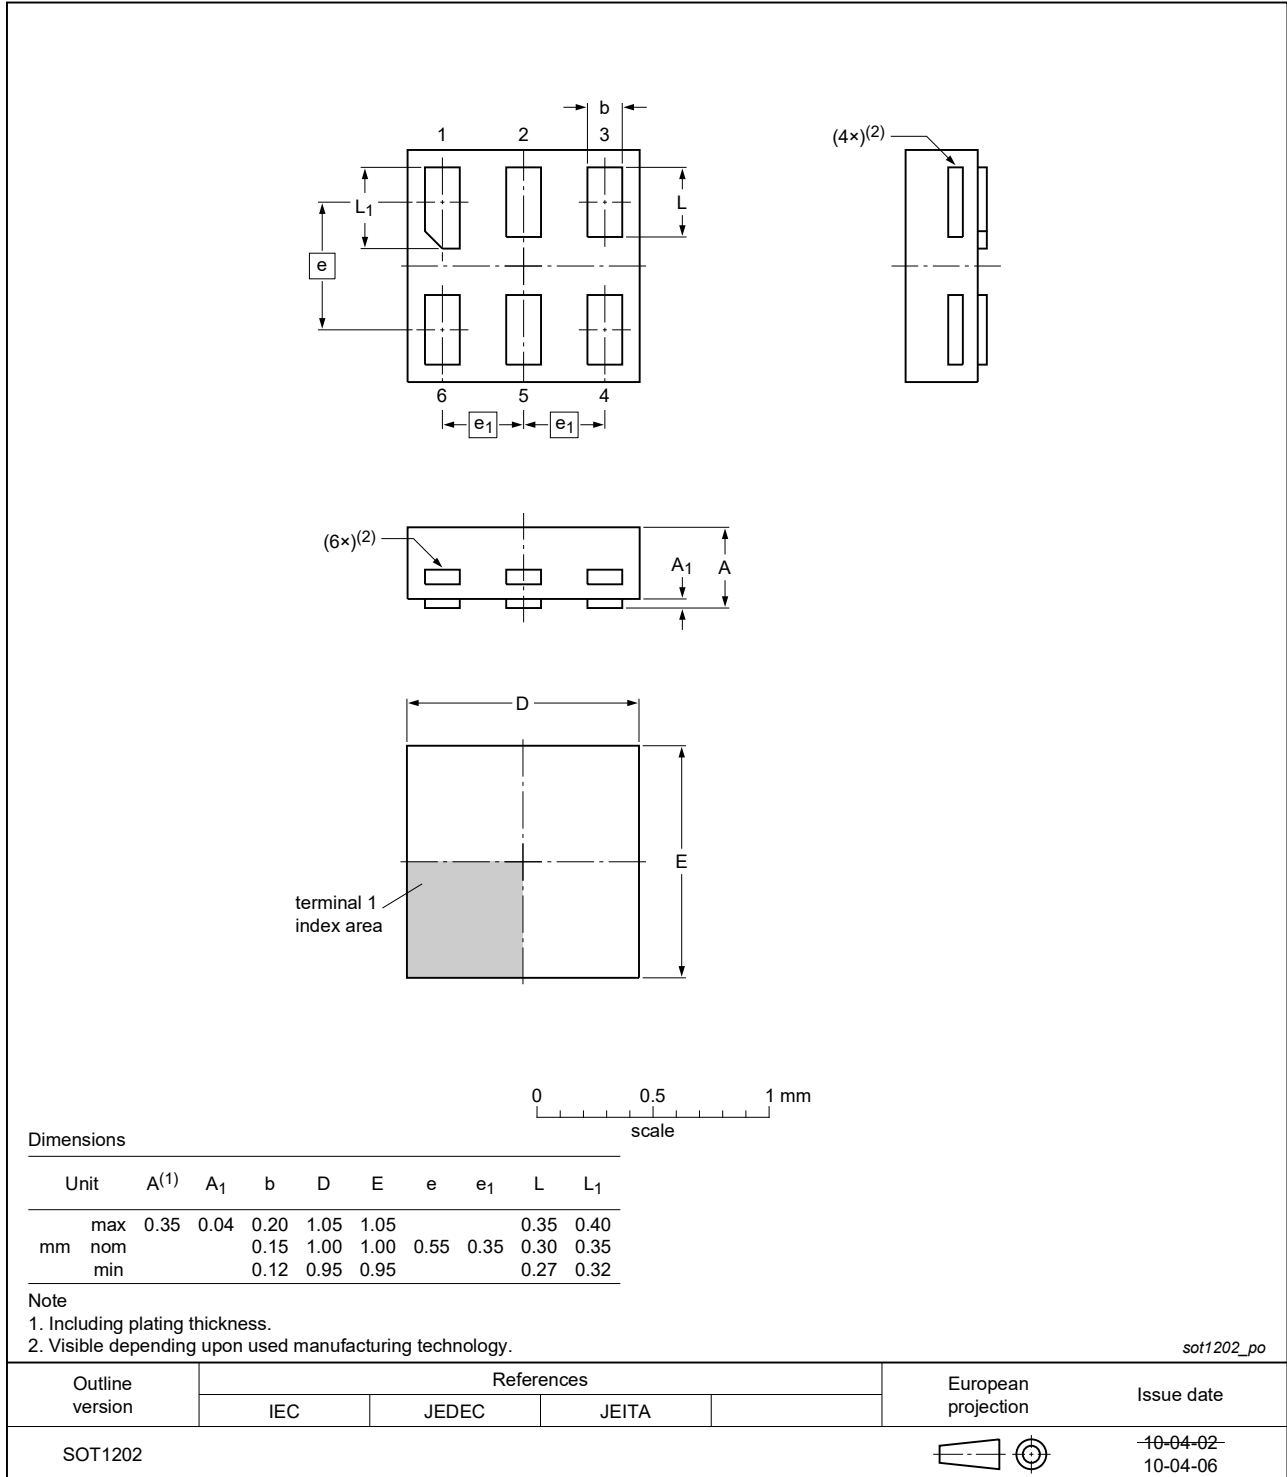


Fig. 11. Package outline SOT1202 (XSON6)

## 14. Abbreviations

Table 13. Abbreviations

| Acronym | Description             |
|---------|-------------------------|
| CDM     | Charged Device Model    |
| DUT     | Device Under Test       |
| ESD     | ElectroStatic Discharge |
| HBM     | Human Body Model        |

## 15. Revision history

Table 14. Revision history

| Document ID    | Release date   | Data sheet status  | Change notice | Supersedes    |
|----------------|--|--------------------|---------------|---------------|
| 74AUP1T45 v.8  | 20230720   | Product data sheet | -             | 74AUP1T45 v.7 |
| Modifications: | <ul style="list-style-type: none"> <li><a href="#">Section 2</a>: ESD specification updated according to the latest JEDEC standard.</li> </ul>   |                    |               |               |
| 74AUP1T45 v.7  | 20220126   | Product data sheet | -             | 74AUP1T45 v.6 |
| Modifications: | <ul style="list-style-type: none"> <li>Package SOT363 (SC-88) changed to SOT363-2 (TSSOP6).</li> </ul>   |                    |               |               |
| 74AUP1T45 v.6  | 20201009   | Product data sheet | -             | 74AUP1T45 v.5 |
| Modifications: | <ul style="list-style-type: none"> <li>Type number 74AUP1T45GF removed.</li> <li><a href="#">Table 5</a>: Derating values for <math>P_{tot}</math> total power dissipation updated.</li> </ul> |                    |               |               |
| 74AUP1T45 v.5  | 20120809   | Product data sheet | -             | 74AUP1T45 v.4 |
| Modifications: | <ul style="list-style-type: none"> <li>Package outline drawing of SOT886 (<a href="#">Fig. 9</a>) modified.</li> </ul>   |                    |               |               |
| 74AUP1T45 v.4  | 20111128   | Product data sheet | -             | 74AUP1T45 v.3 |
| Modifications: | <ul style="list-style-type: none"> <li>Legal pages updated.</li> </ul>   |                    |               |               |
| 74AUP1T45 v.3  | 20101104   | Product data sheet | -             | 74AUP1T45 v.2 |
| 74AUP1T45 v.2  | 20090803   | Product data sheet | -             | 74AUP1T45 v.1 |
| 74AUP1T45 v.1  | 20061018   | Product data sheet | -             | -             |

## 16. Legal information

### Data sheet status

| Document status [1][2]         | Product status [3] | Definition  |
|--------------------------------|--------------------|---|
| Objective [short] data sheet   | Development        | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification      | This document contains data from the preliminary specification.                       |
| Product [short] data sheet     | Production         | This document contains the product specification.                                     |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## Contents

|  |           |
|--|-----------|
| <b>1. General description</b> .....                        | <b>1</b>  |
| <b>2. Features and benefits</b> .....                      | <b>1</b>  |
| <b>3. Ordering information</b> .....                       | <b>2</b>  |
| <b>4. Marking</b> .....                                    | <b>2</b>  |
| <b>5. Functional diagram</b> .....                         | <b>2</b>  |
| <b>6. Pinning information</b> .....                        | <b>3</b>  |
| 6.1. Pinning.....  | 3         |
| 6.2. Pin description.....                                  | 3         |
| <b>7. Functional description</b> .....                     | <b>4</b>  |
| <b>8. Limiting values</b> .....                            | <b>4</b>  |
| <b>9. Recommended operating conditions</b> .....           | <b>5</b>  |
| <b>10. Static characteristics</b> .....                    | <b>5</b>  |
| <b>11. Dynamic characteristics</b> .....                   | <b>11</b> |
| 11.1. Waveforms and test circuit.....                      | 22        |
| <b>12. Application information</b> .....                   | <b>24</b> |
| 12.1. Unidirectional logic level-shifting application..... | 24        |
| 12.2. Bidirectional logic level-shifting application.....  | 25        |
| 12.3. Power-up considerations.....                         | 26        |
| 12.4. Enable times.....                                    | 26        |
| <b>13. Package outline</b> .....                           | <b>27</b> |
| <b>14. Abbreviations</b> .....                             | <b>31</b> |
| <b>15. Revision history</b> .....                          | <b>31</b> |
| <b>16. Legal information</b> .....                         | <b>32</b> |

© Nexperia B.V. 2023. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 20 July 2023

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 74AUP1T45GN,132 on WIN SOURCE](#)

 [Nexperia USA Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management