



**THE DATASHEET OF
MAX873AESA-T**





Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

General Description

The MAX873/MAX875/MAX876 precision 2.5V, 5V, and 10V references offer excellent accuracy and very low power consumption. Extremely low temperature drift combined with excellent line and load regulation permit stable operation over a wide range of electrical and environmental conditions. Operation for the MAX873 is guaranteed with a +4.5V supply, making the part ideal in systems running from a +5V $\pm 10\%$ supply. Low 10Hz to 1kHz noise—typically 3.8 μ V_{RMS}, 9 μ V_{RMS}, and 18 μ V_{RMS}, respectively, for the MAX873, MAX875, MAX876—make the parts suitable for 12-bit data-acquisition systems.

A TRIM pin facilitates adjustment of the reference voltage over a $\pm 6\%$ range, using only a 100k Ω potentiometer. A voltage output proportional to temperature provides a source for temperature compensation circuits, temperature warning circuits, and other applications.

Applications


12-Bit ADCs and DACs
Digital Multimeters
Portable Data-Acquisition Systems
Low-Power Test Equipment

Pin Configuration appears at end of data sheet.

Features

- ◆ MAX873/MAX875/MAX876
+2.5V/+5V/+10V Outputs
 $\pm 1.5\text{mV}/\pm 2.0\text{mV}/\pm 3.0\text{mV}$ (max) Initial Accuracy
- ◆ 7ppm/ $^{\circ}\text{C}$ (max) Temperature Coefficient
- ◆ 450 μA (max) Quiescent Current
- ◆ Low Noise: 3.8 $\mu\text{Vp-p}$ (typ at 2.5V)
- ◆ Sources 10mA, Sinks 2mA
- ◆ 15ppm/mA Load Regulation (max)
- ◆ 4ppm/V Line Regulation (max)
- ◆ Wide Supply Voltage Range, +4.5V to +18V (MAX873)
- ◆ TEMP Output Proportional to Temperature

Typical Operating Circuit

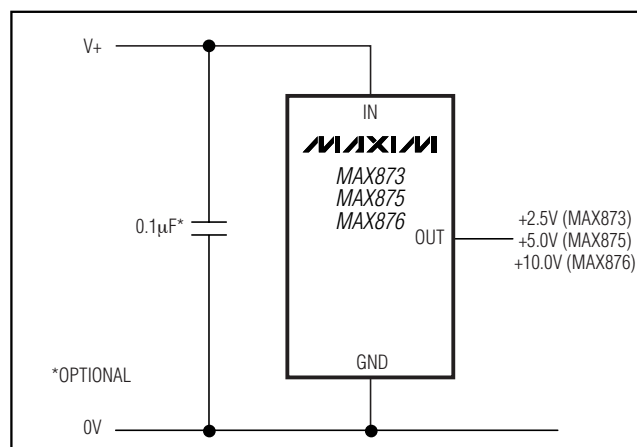

Ordering Information/Selector Guide

| PART | PIN-PACKAGE | OUTPUT VOLTAGE (V) | MAX TEMPCO (ppm/ $^{\circ}\text{C}$) | INITIAL ACCURACY % | PKG CODE |
|---------------------|-------------|--------------------|---------------------------------------|--------------------|----------|
| MAX873 AESA+ | 8 SO | 2.500 | 7 | ± 0.06 | S8-4 |
| MAX873BESA+ | 8 SO | 2.500 | 20 | ± 0.10 | S8-4 |
| MAX875 AESA+ | 8 SO | 5.000 | 7 | ± 0.04 | S8-4 |
| MAX875BESA+ | 8 SO | 5.000 | 20 | ± 0.06 | S8-4 |
| MAX876 AESA+ | 8 SO | 10.000 | 7 | ± 0.03 | S8-4 |
| MAX876BESA+ | 8 SO | 10.000 | 20 | ± 0.05 | S8-4 |

+Denotes a lead-free package.

Note: All devices are specified over the -40°C to $+85^{\circ}\text{C}$ operating temperature range.



For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

ABSOLUTE MAXIMUM RATINGS

IN to GND-0.3V to +20V
 OUT, TRIM, TEMP, TEST- 0.3V to (IN + 0.3V)
 Output Short-Circuit Duration (to GND).....5s
 Continuous Power Dissipation ($T_A = +70^\circ\text{C}$)
 SO (derate 5.88mW/ $^\circ\text{C}$ above +70 $^\circ\text{C}$).....471mW

Operating Temperature Ranges:

MAX87_E_A-40 $^\circ\text{C}$ to +85 $^\circ\text{C}$
 Storage Temperature Range-65 $^\circ\text{C}$ to +150 $^\circ\text{C}$
 Lead Temperature (soldering, 10s)+300 $^\circ\text{C}$
 Junction Temperature (T_J)+150 $^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—MAX873

($V_{IN} = +5\text{V}$, $I_L = 0\text{mA}$, $C_{LOAD} < 100\text{pF}$, $T_A = -40^\circ\text{C}$ to +85 $^\circ\text{C}$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS | |
|-------------------------------|--------------|---|---|---|-----------|--------|-----------------------|------|
| Output Voltage | V_{OUT} | $T_A = +25^\circ\text{C}$ | MAX873A (0.06%) | 2.4985 | 2.5000 | 2.5015 | V | |
| | | | MAX873B (0.10%) | 2.4975 | 2.5000 | 2.5025 | | |
| Output-Voltage Drift (Note 1) | TCV_{OUT} | MAX873A | | | 2 | 7 | ppm/ $^\circ\text{C}$ | |
| | | MAX873B | | | 5 | 20 | | |
| Output-Noise Voltage | e_n | $T_A = +25^\circ\text{C}$ | 0.1Hz to 10Hz | | 3.8 | | μV_{P-P} | |
| | | | 10Hz to 1kHz | | 6.8 | | μV_{RMS} | |
| Line Regulation | | $V_{IN} = 4.5\text{V}$ to 18V | $T_A = +25^\circ\text{C}$ | | 1 | 4.0 | ppm/V | |
| | | | $T_A = -40^\circ\text{C}$ to +85 $^\circ\text{C}$ | | 2 | 6 | | |
| Load Regulation | | $I_L = 0$ to 10mA (source) | $T_A = +25^\circ\text{C}$ | | 3 | 15 | ppm/mA | |
| | | | $T_A = -40^\circ\text{C}$ to +85 $^\circ\text{C}$ | | 3 | 20 | | |
| | | | $I_L = 0$ to -1mA (sink) | $T_A = +25^\circ\text{C}$ | | 100 | | 900 |
| | | | | $T_A = -40^\circ\text{C}$ to +85 $^\circ\text{C}$ | | 150 | | 1900 |
| Quiescent Supply Current | I_Q | $T_A = +25^\circ\text{C}$ | | | 300 | 450 | μA | |
| | | $T_A = -40^\circ\text{C}$ to +85 $^\circ\text{C}$ | | | 300 | 600 | | |
| Short-Circuit Output Current | I_{SC} | Output shorted to GND | | | 60 | | mA | |
| V_{OUT} Adjust Range | | | | | ± 100 | | mV | |
| Long-Term Output Drift | | | | | 50 | | ppm/kh | |
| TEMP PIN | | | | | | | | |
| Voltage Output | V_{TEMP} | $T_A = +25^\circ\text{C}$ | | | 570 | | mV | |
| Temperature Sensitivity | TCV_{TEMP} | | | | 1.9 | | mV/ $^\circ\text{C}$ | |

ELECTRICAL CHARACTERISTICS—MAX875

($V_{IN} = +15\text{V}$, $I_L = 0\text{mA}$, $C_{LOAD} < 100\text{pF}$, $T_A = -40^\circ\text{C}$ to +85 $^\circ\text{C}$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|-------------------------------|-------------|-----------------------------|---|-------|-------|-------|-----------------------|
| Output Voltage | V_{OUT} | $T_A = +25^\circ\text{C}$ | MAX875A (0.04%) | 4.998 | 5.000 | 5.002 | V |
| | | | MAX875B (0.06%) | 4.997 | 5.000 | 5.003 | |
| Output Voltage Drift (Note 1) | TCV_{OUT} | MAX875A | | | 2 | 7 | ppm/ $^\circ\text{C}$ |
| | | MAX875B | | | 5 | 20 | |
| Output-Noise Voltage | e_n | $T_A = +25^\circ\text{C}$ | 0.1Hz to 10Hz | | 9 | | μV_{P-P} |
| | | | 10Hz to 1kHz | | 14.5 | | μV_{RMS} |
| Line Regulation | | $V_{IN} = 7\text{V}$ to 18V | $T_A = +25^\circ\text{C}$ | | 1 | 4.0 | ppm/V |
| | | | $T_A = -40^\circ\text{C}$ to +85 $^\circ\text{C}$ | | 2 | 6 | |

Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

MAX873/MAX875/MAX876

ELECTRICAL CHARACTERISTICS—MAX875 (continued)

($V_{IN} = +15V$, $I_L = 0mA$, $C_{LOAD} < 100pF$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|------------------------------|--------------|--|--|-----------|------|---------|-----------------|
| Load Regulation | | $I_L = 0$ to 10mA (source) | $T_A = +25^{\circ}C$ | 3 | 15 | ppm/mA | |
| | | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | 3 | 20 | | |
| | | $I_L = 0$ to -1mA (sink) | $T_A = +25^{\circ}C$ | 100 | 900 | | |
| | | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | 150 | 1900 | | |
| Quiescent Supply Current | I_Q | $T_A = +25^{\circ}C$ | | 320 | 550 | μA | |
| | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | | 320 | 700 | | |
| Short-Circuit Output Current | I_{SC} | Output shorted to GND | | 60 | | mA | |
| V_{OUT} Adjust Range | | | | ± 300 | | mV | |
| Long-Term Output Drift | | | | 50 | | ppm/kh | |
| TEMP PIN | | | | | | | |
| Voltage Output | V_{TEMP} | $T_A = +25^{\circ}C$ | | | 630 | | mV |
| Temperature Sensitivity | TCV_{TEMP} | | | | 2.1 | | mV/ $^{\circ}C$ |

ELECTRICAL CHARACTERISTICS—MAX876

($V_{IN} = +15V$, $I_L = 0mA$, $C_{LOAD} < 100pF$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|-------------------------------|--------------|--|--|-------|-----------|--------|------------------|
| Output Voltage | V_{OUT} | $T_A = +25^{\circ}C$ | MAX876A (0.03%) | 9.997 | 10.000 | 10.003 | V |
| | | | MAX876B (0.05%) | 9.995 | 10.000 | 10.005 | |
| Output Voltage Drift (Note 1) | TCV_{OUT} | MAX876A | | | 2 | 7 | ppm/ $^{\circ}C$ |
| | | MAX876B | | | 5 | 20 | |
| Output-Noise Voltage | e_n | $T_A = +25^{\circ}C$ | 0.1Hz to 10Hz | | 18 | | μV_{P-P} |
| | | | 10Hz to 1kHz | | 29 | | μV_{RMS} |
| Line Regulation | | $V_{IN} = 12V$ to 18V | $T_A = +25^{\circ}C$ | | 1 | 4.0 | ppm/V |
| | | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | | 1 | 6 | |
| Load Regulation | | $I_L = 0$ to 10mA (source) | $T_A = +25^{\circ}C$ | | 1 | 15 | ppm/mA |
| | | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | | 1 | 20 | |
| | | $I_L = 0$ to -1mA (sink) | $T_A = +25^{\circ}C$ | | 100 | 900 | |
| | | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | | 150 | 1900 | |
| Quiescent Supply Current | I_Q | $T_A = +25^{\circ}C$ | | | 320 | 550 | μA |
| | | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | | | 340 | 700 | |
| Short-Circuit Output Current | I_{SC} | Output shorted to GND | | | 60 | | mA |
| V_{OUT} Adjust Range | | | | | ± 600 | | mV |
| Long-Term Output Drift | | | | | 50 | | ppm/kh |
| TEMP PIN | | | | | | | |
| Voltage Output | V_{TEMP} | $T_A = +25^{\circ}C$ | | | 630 | | mV |
| Temperature Sensitivity | TCV_{TEMP} | | | | 2.1 | | mV/ $^{\circ}C$ |


Note 1: Temperature coefficient is defined as maximum ΔV_{OUT} divided by maximum ΔT of the temperature range.

Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References


Typical Operating Characteristics

($V_{IN} = +5V$ for $V_{OUT} = +2.5V$, $V_{IN} = +15V$ for $V_{OUT} = +10V$, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.)


OUTPUT VOLTAGE vs. TEMPERATURE
($V_{OUT} = 2.5V$)

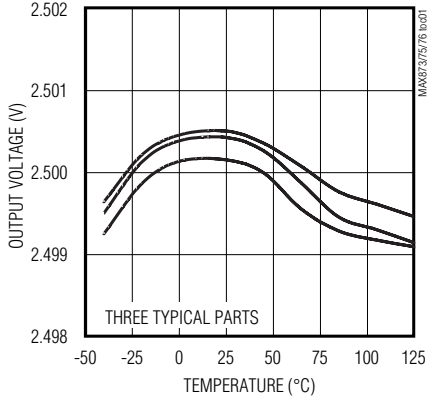


OUTPUT VOLTAGE vs. TEMPERATURE
($V_{OUT} = 10V$)

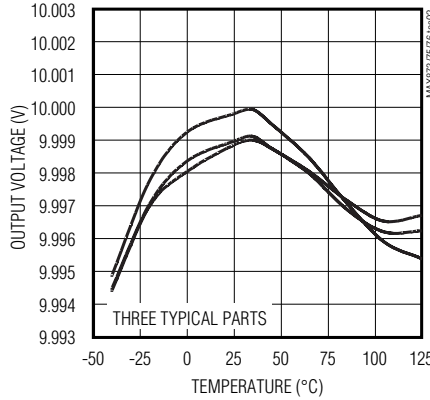


LOAD REGULATION vs. SOURCE CURRENT
($V_{OUT} = 2.5V$)

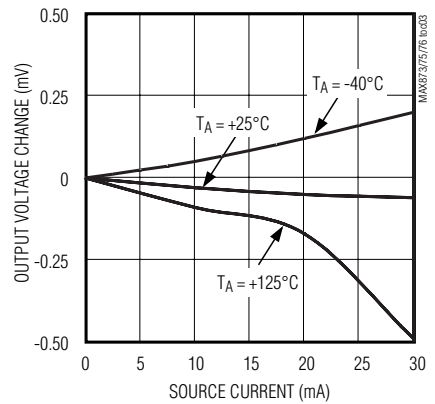


LOAD REGULATION vs. SOURCE CURRENT
($V_{OUT} = 10V$)

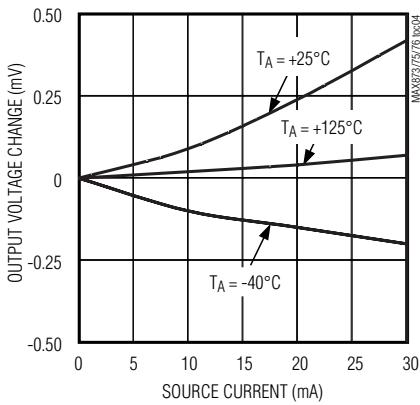


LOAD REGULATION vs. SINK CURRENT
($V_{OUT} = 2.5V$)

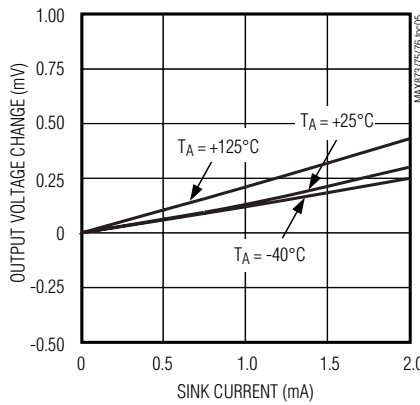


LOAD REGULATION vs. SINK CURRENT
($V_{OUT} = 10V$)

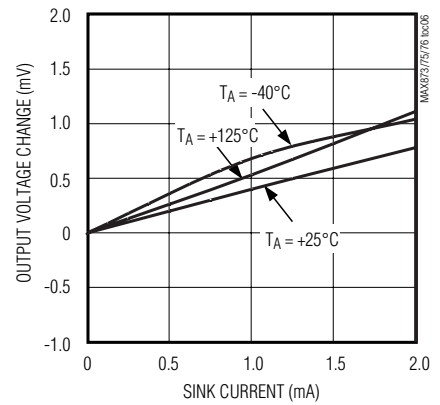


LINE REGULATION vs. TEMPERATURE
($V_{OUT} = 2.5V$)

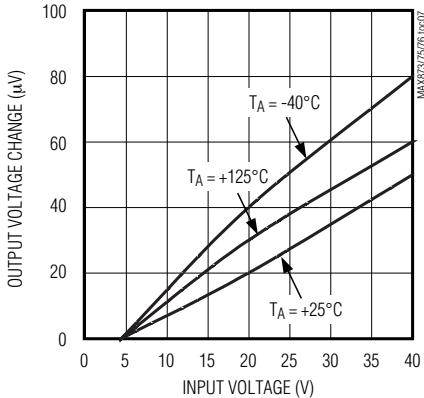

LINE REGULATION vs. TEMPERATURE
($V_{OUT} = 10V$)

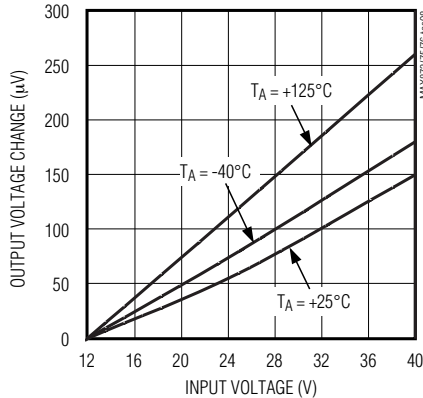

MINIMUM INPUT-OUTPUT DIFFERENTIAL vs. SOURCE CURRENT
($V_{OUT} = 2.5V$)

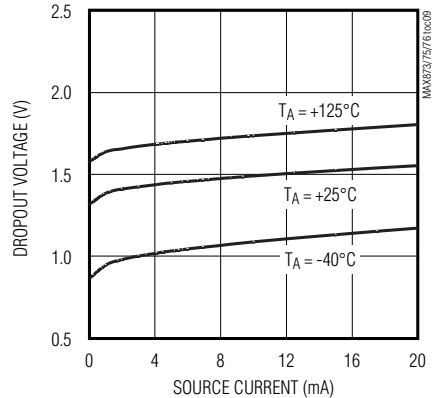


Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

Typical Operating Characteristics (continued)


($V_{IN} = +5V$ for $V_{OUT} = +2.5V$, $V_{IN} = +15V$ for $V_{OUT} = +10V$, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX873/MAX875/MAX876


MINIMUM INPUT-OUTPUT DIFFERENTIAL vs. SOURCE CURRENT ($V_{OUT} = 10V$)

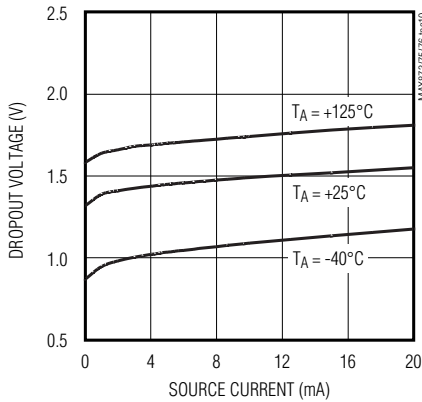


POWER-SUPPLY REJECTION RATIO vs. FREQUENCY ($V_{OUT} = 2.5V$)

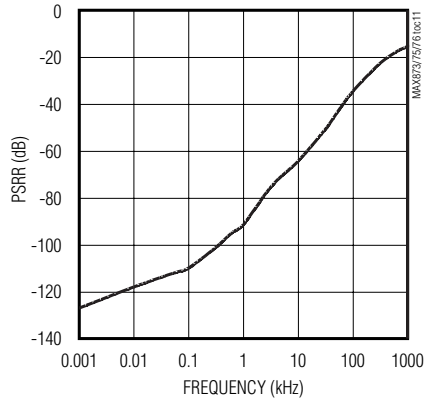


POWER-SUPPLY REJECTION RATIO vs. FREQUENCY ($V_{OUT} = 10V$)

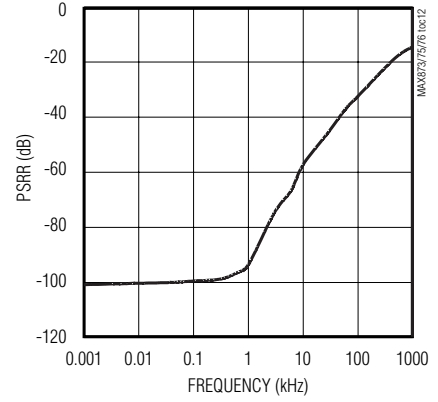


OUTPUT IMPEDANCE vs. FREQUENCY ($V_{OUT} = 2.5V$)

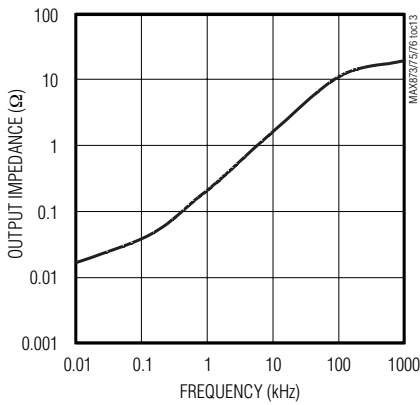


SUPPLY CURRENT vs. INPUT VOLTAGE ($V_{OUT} = 2.5V$)

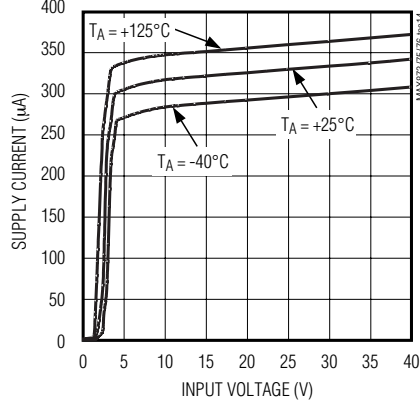


SUPPLY CURRENT vs. INPUT VOLTAGE ($V_{OUT} = 10V$)

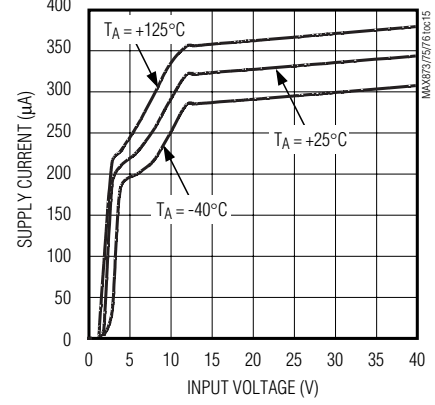


SUPPLY CURRENT vs. TEMPERATURE ($V_{OUT} = 2.5V$)

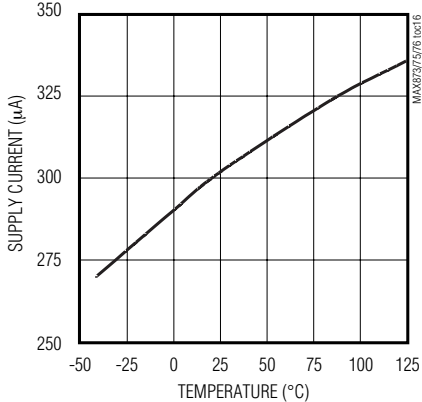

SUPPLY CURRENT vs. TEMPERATURE ($V_{OUT} = 10V$)

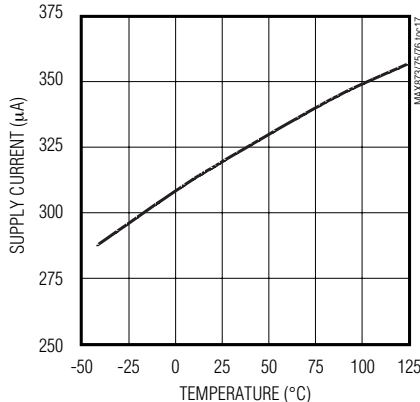









TEMP VOLTAGE vs. TEMPERATURE ($V_{OUT} = 2.5V$)

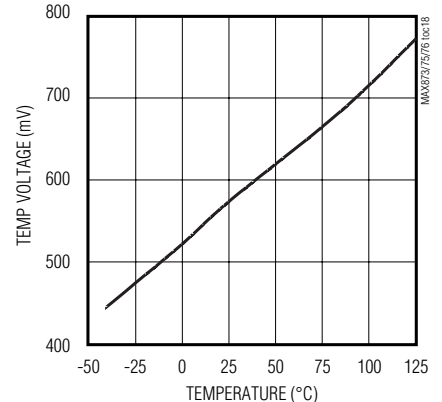

Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

Typical Operating Characteristics (continued)







($V_{IN} = +5V$ for $V_{OUT} = +2.5V$, $V_{IN} = +15V$ for $V_{OUT} = +10V$, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.)

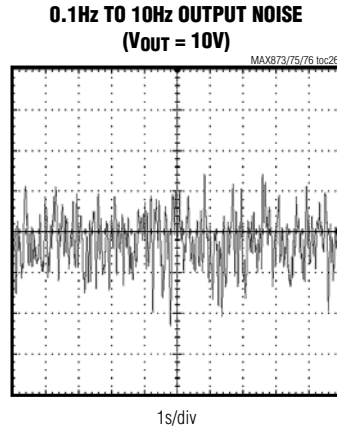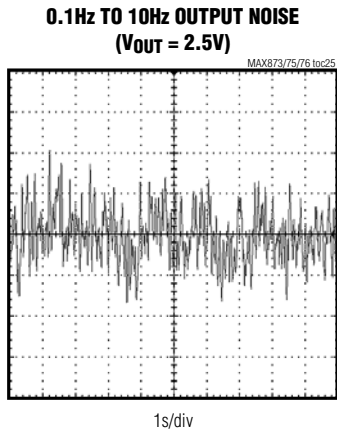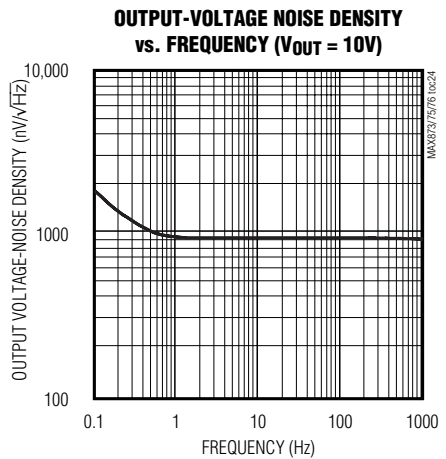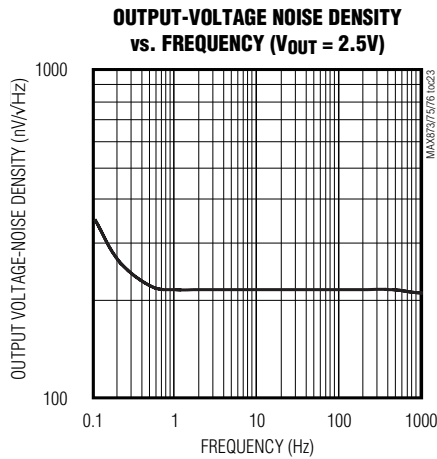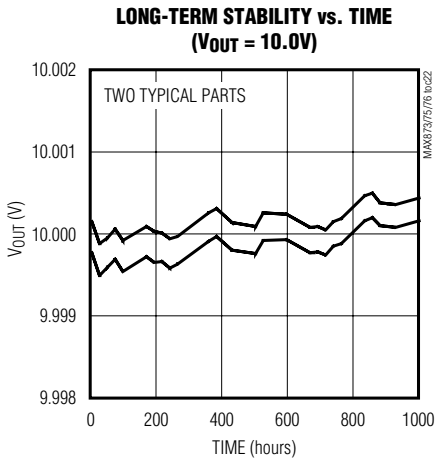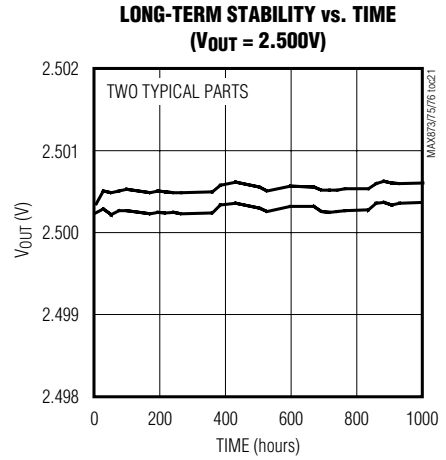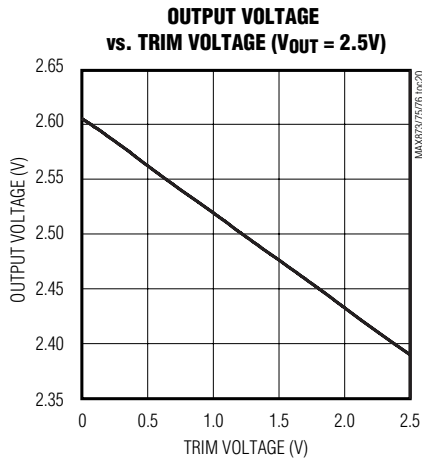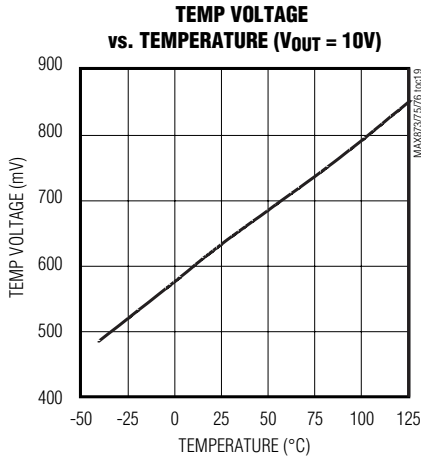

Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

Typical Operating Characteristics (continued)

($V_{IN} = +5V$ for $V_{OUT} = +2.5V$, $V_{IN} = +15V$ for $V_{OUT} = +10V$, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.)

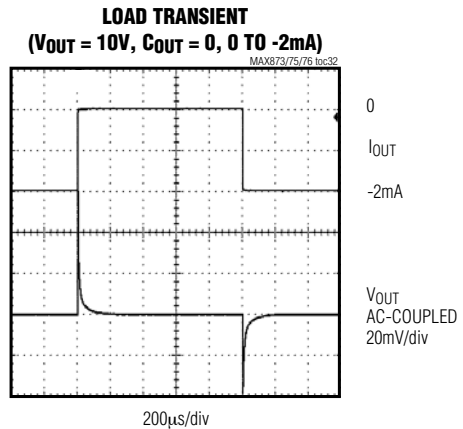
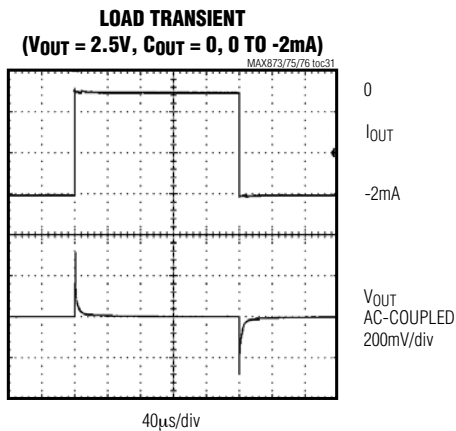
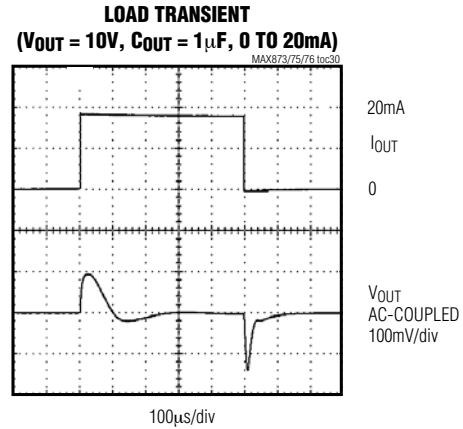
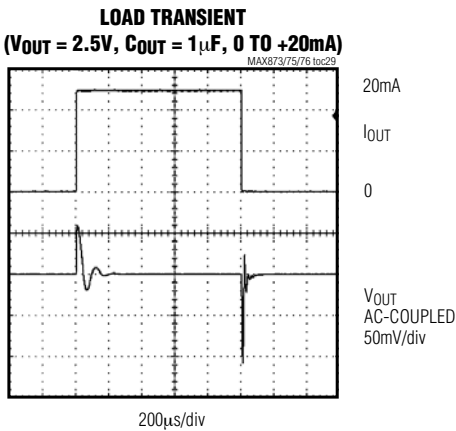
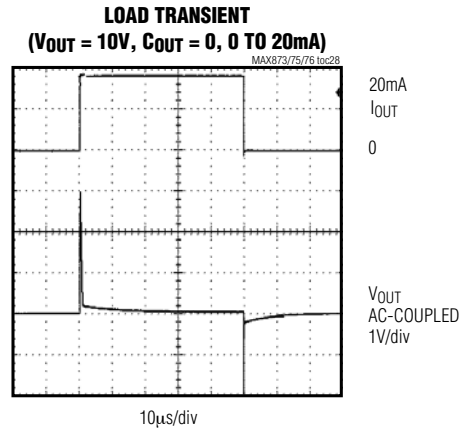
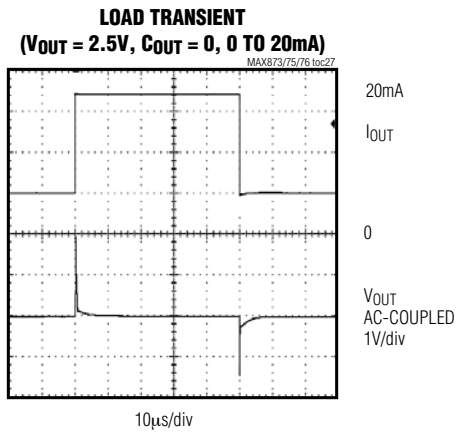


MAX873/MAX875/MAX876

Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

Typical Operating Characteristics (continued)


($V_{IN} = +5V$ for $V_{OUT} = +2.5V$, $V_{IN} = +15V$ for $V_{OUT} = +10V$, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.)

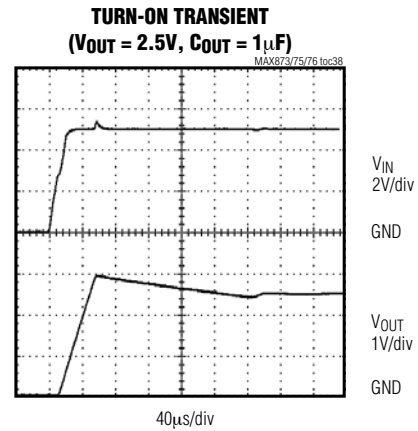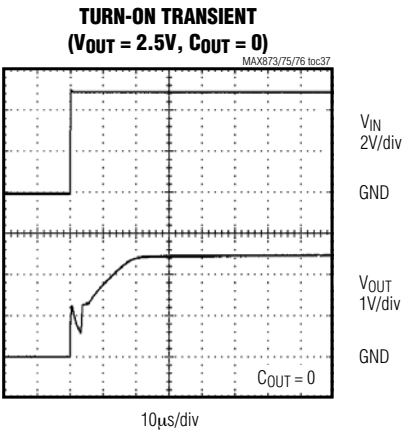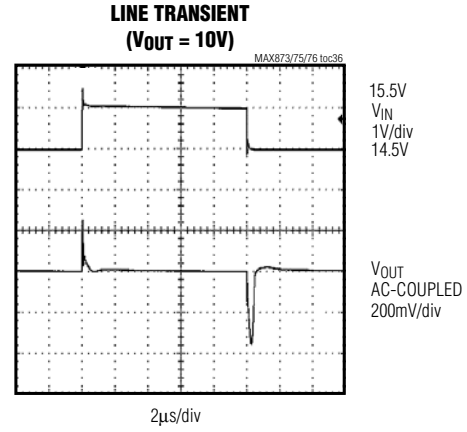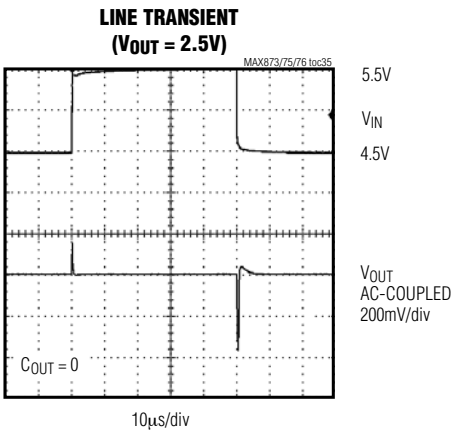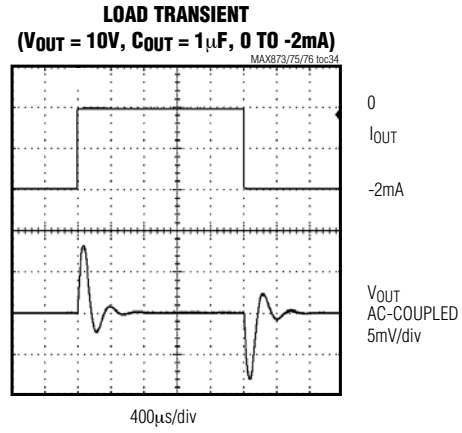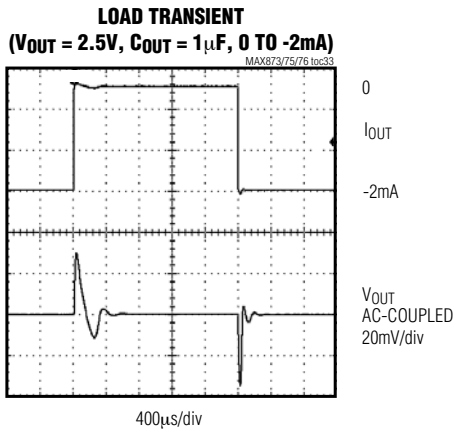

Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

Typical Operating Characteristics (continued)

($V_{IN} = +5V$ for $V_{OUT} = +2.5V$, $V_{IN} = +15V$ for $V_{OUT} = +10V$, $I_{OUT} = 0$, $T_A = +25^\circ C$, unless otherwise noted.)

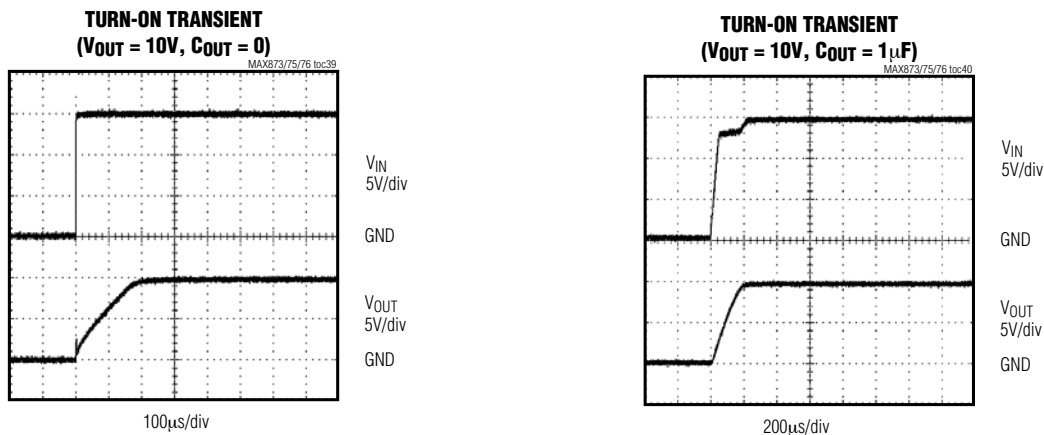

Pin Description

| PIN | NAME | FUNCTION |
|------|------|--|
| 1, 8 | I.C. | Internally Connected. Do not connect externally. |
| 2 | IN | Positive Power-Supply Input |
| 3 | TEMP | Temperature Proportional Output Voltage. TEMP generates an output voltage proportional to the die temperature. |
| 4 | GND | Ground |
| 5 | TRIM | Output Voltage Trim. Connect TRIM to the center of a voltage-divider between OUT and GND for trimming. Leave unconnected to use the preset output voltage. |
| 6 | OUT | Output Voltage |
| 7 | N.C. | No Connection. Not internally connected. |

Detailed Description

The MAX873/MAX875/MAX876 precision voltage references provide accurate preset +2.5V, +5.0V, and +10V reference voltages from up to +40V input voltages. These devices feature a proprietary temperature-coefficient curvature-correction circuit and laser-trimmed thin-film resistors that result in a very low 3ppm/°C temperature coefficient and excellent 0.05% initial accuracy. The MAX873/MAX875/MAX876 draw 340µA of supply current and source 30mA or sink 2mA of load current.

Trimming the Output Voltage

Trim the factory-preset output voltage on the MAX873/MAX875/MAX876 by placing a resistive divider network between OUT, TRIM, and GND.

Use the following formula to calculate the change in output voltage from its preset value:

$$\Delta V_{OUT} = 2 \times (V_{TRIM} - V_{TRIM (open)}) \times k$$

where:

$$V_{TRIM} = 0V \text{ to } V_{OUT}$$

$$V_{TRIM (open)} = V_{OUT (nominal)} / 2 \text{ (typ)}$$

$$k = \pm 6\% \text{ (typ)}$$

For example, use a 50kΩ potentiometer (such as the MAX5436) between OUT, TRIM, and GND with the potentiometer wiper connected to TRIM (see Figure 2). As the TRIM voltage changes from V_{OUT} to GND, the output voltage changes accordingly. Set R2 to 1MΩ or less. Currents through resistors R1 and R2 add to the quiescent supply current.

Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

Temp Output

The MAX873/MAX875/MAX876 provide a temperature output proportional to die temperature. TEMP can be calculated from the following formula:

$$\text{TEMP (V)} = T_J (\text{°K}) \times n$$

where T_J = the die temperature,

n = the temperature multiplier,

$$n = \frac{V_{\text{TEMP}}(\text{at } T_J = T_0)}{T_0} \approx 1.9\text{mV/°K}$$

T_A = the ambient temperature.

Self-heating affects the die temperature and conversely, the TEMP output. The TEMP equation assumes the output is not loaded. If device power dissipation is negligible, then $T_J \approx T_A$.

Applications Information

Bypassing/Output Capacitance

For the best line-transient performance, decouple the input with a 0.1µF ceramic capacitor as shown in the *Typical Operating Circuit*. Place the capacitor as close to IN as possible. When transient performance is less important, no capacitor is necessary.

The MAX873/MAX875/MAX876 do not require an output capacitor for stability and are stable with capacitive loads up to 100µF. In applications where the load or the

supply can experience step changes, a larger output capacitor reduces the amount of overshoot (undershoot) and improves the circuit's transient response. Place output capacitors as close to the devices as possible for best performance.

Supply Current

The MAX873/MAX875/MAX876 consume 320µA (typ) of quiescent supply current. This improved efficiency reduces power dissipation and extends battery life.

Thermal Hysteresis

Thermal hysteresis is the change in the output voltage at $T_A = +25^\circ\text{C}$ before and after the device is cycled over its entire operating temperature range. Hysteresis is caused by differential package stress appearing across the bandgap core transistors. The typical thermal hysteresis value is 120ppm.

Turn-On Time

The MAX873/MAX875/MAX876 typically turn on and settle to within 0.1% of the preset output voltage in 150µs (2.5V output). The turn-on time can increase up to 150µs with the device operating with a 1µF load.

Short-Circuited Outputs

The MAX873/MAX875/MAX876 feature a short-circuit-protected output. Internal circuitry limits the output current to 60mA when short circuiting the output to ground. The output current is limited to 3mA when short circuiting the output to the input.

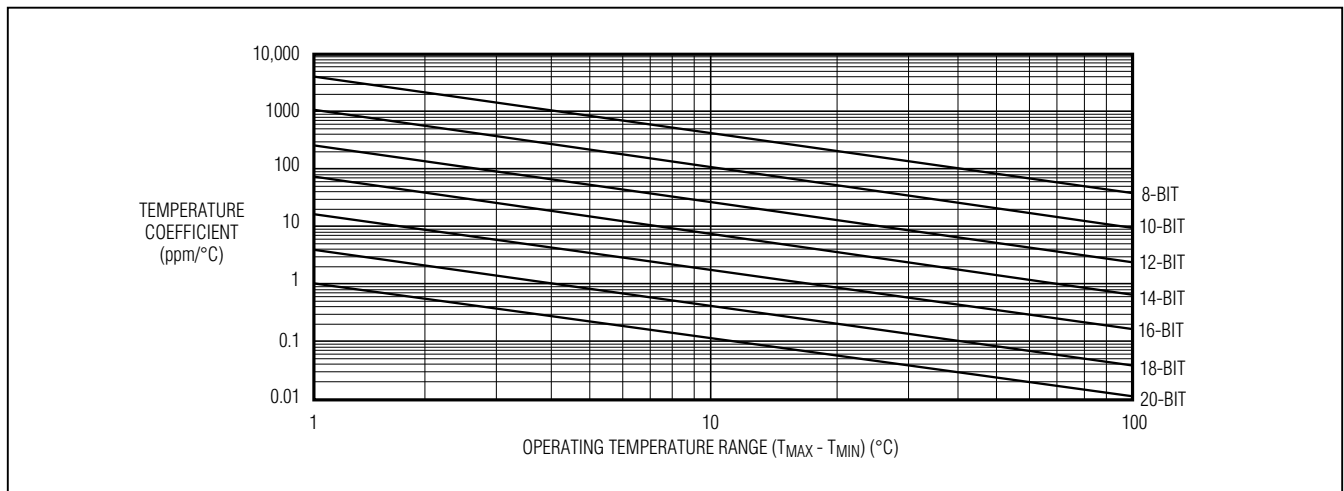


Figure 1. Temperature Coefficient vs. Operating Temperature Range for a 1 LSB Maximum Error

Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

Temperature Coefficient vs. Operating Temperature Range for a 1 LSB Maximum Error

In a data converter application, the reference voltage of the converter must stay within a certain limit to keep the error in the data converter smaller than the resolution limit through the operating temperature range. Figure 1 shows the maximum allowable reference-voltage temperature coefficient to keep the conversion error to less than 1 LSB, as a function of the operating temperature range ($T_{MAX} - T_{MIN}$) with the converter resolution as a parameter. The graph assumes the reference-voltage temperature coefficient as the only parameter affecting accuracy.

In reality, the absolute static accuracy of a data converter is dependent on the combination of many parameters such as integral nonlinearity, differential nonlinearity, offset error, gain error, as well as voltage-reference changes.


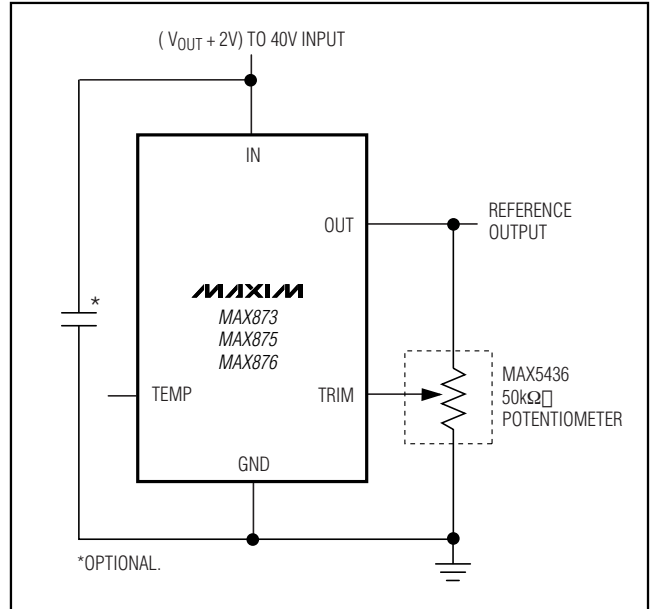


Figure 2. Applications Circuit Using the MAX5436 Potentiometer

MAX873/MAX875/MAX876

Pin Configuration

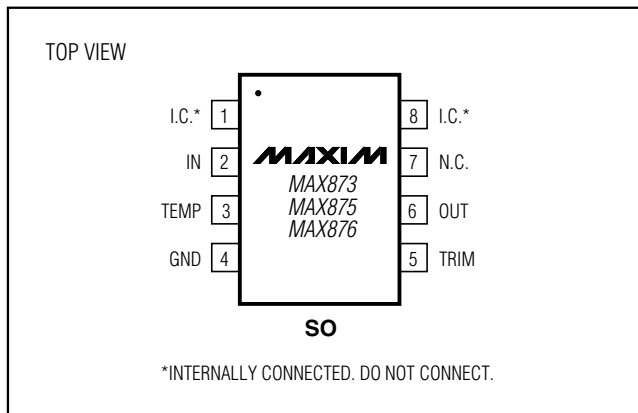


Chip Information

TRANSISTOR COUNT: 429
PROCESS: BICMOS


Low-Power, Low-Drift, +2.5V/+5V/+10V Precision Voltage References

Package Information


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)



TOP VIEW

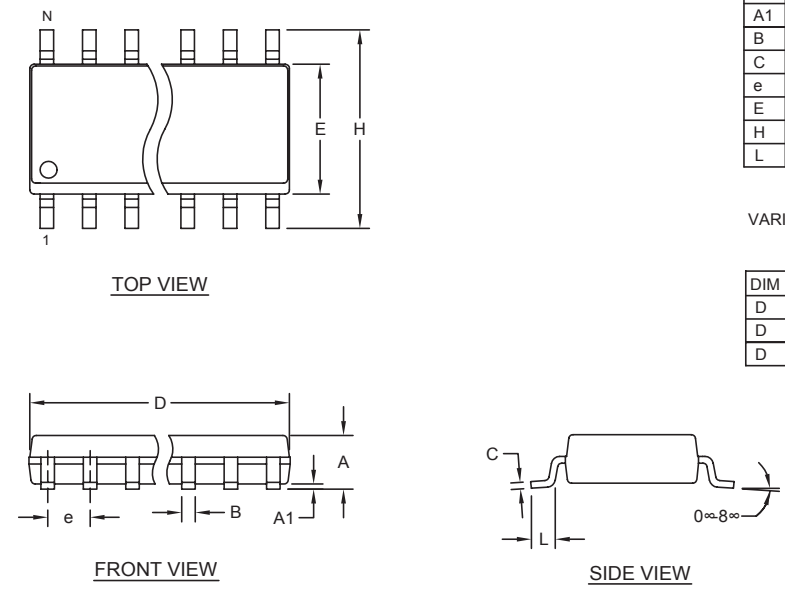

FRONT VIEW



SIDE VIEW

| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | 0.053 | 0.069 | 1.35 | 1.75 |
| A1 | 0.004 | 0.010 | 0.10 | 0.25 |
| B | 0.014 | 0.019 | 0.35 | 0.49 |
| C | 0.007 | 0.010 | 0.19 | 0.25 |
| e | 0.050 BSC | | 1.27 BSC | |
| E | 0.150 | 0.157 | 3.80 | 4.00 |
| H | 0.228 | 0.244 | 5.80 | 6.20 |
| L | 0.016 | 0.050 | 0.40 | 1.27 |

VARIATIONS:

| DIM | INCHES | | MILLIMETERS | | N | MS012 |
|-----|--------|-------|-------------|-------|----|-------|
| | MIN | MAX | MIN | MAX | | |
| D | 0.189 | 0.197 | 4.80 | 5.00 | 8 | AA |
| D | 0.337 | 0.344 | 8.55 | 8.75 | 14 | AB |
| D | 0.386 | 0.394 | 9.80 | 10.00 | 16 | AC |

NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm (.006").
3. LEADS TO BE COPLANAR WITHIN 0.10mm (.004").
4. CONTROLLING DIMENSION: MILLIMETERS.
5. MEETS JEDEC MS012.
6. N = NUMBER OF PINS.

DALLAS SEMICONDUCTOR **MAXIM**

PROPRIETARY INFORMATION

TITLE:
PACKAGE OUTLINE, .150" SOIC

| | | | |
|----------|---------------------------------|-----------|-----|
| APPROVAL | DOCUMENT CONTROL NO. 21-0041 | REV. B | 1/1 |
|----------|---------------------------------|-----------|-----|

Revision History

Pages changed at Rev 3: 1-12

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MAX873AESA-T on WIN SOURCE](#)

 [Maxim Integrated Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management