

# 2SD1276, 2SD1276A

Silicon NPN triple diffusion planar type darlington

For power amplification

Complementary to 2SB0950 and 2SB0950A

## ■ Features

- High forward current transfer ratio  $h_{FE}$
- High-speed switching
- Full-pack package which can be installed to the heat sink with one screw

## ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector-base voltage (Emitter open)	2SD1276	60	V
	2SD1276A	80	
Collector-emitter voltage (Base open)	2SD1276	60	V
	2SD1276A	80	
Emitter-base voltage (Collector open)	$V_{EBO}$	5	V
Collector current	$I_C$	4	A
Peak collector current	$I_{CP}$	8	A
Collector power dissipation	$T_C = 25^\circ\text{C}$	$P_C$	40
			2.0
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$


## ■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-emitter voltage (Base open)	2SD1276	$I_C = 30\text{ mA}, I_B = 0$	60			V
	2SD1276A		80			
Base-emitter voltage	$V_{BE}$	$V_{CE} = 3\text{ V}, I_C = 3\text{ A}$			2.5	V
Collector-base cutoff current (Emitter open)	2SD1276	$V_{CB} = 60\text{ V}, I_E = 0$			200	$\mu\text{A}$
	2SD1276A	$V_{CB} = 80\text{ V}, I_E = 0$			200	
Collector-emitter cutoff current (Base open)	2SD1276	$V_{CE} = 30\text{ V}, I_B = 0$			500	$\mu\text{A}$
	2SD1276A	$V_{CE} = 40\text{ V}, I_B = 0$			500	
Emitter-base cutoff current (Collector open)	$I_{EBO}$	$V_{EB} = 5\text{ V}, I_C = 0$			2	mA
Forward current transfer ratio	$h_{FE1}$	$V_{CE} = 3\text{ V}, I_C = 0.5\text{ A}$	1000			—
	$h_{FE2}^*$	$V_{CE} = 3\text{ V}, I_C = 3\text{ A}$	1000		10000	
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C = 3\text{ A}, I_B = 12\text{ mA}$			2.0	V
	$V_{CE(sat)2}$	$I_C = 5\text{ A}, I_B = 20\text{ mA}$			4.0	
Transition frequency	$f_T$	$V_{CE} = 10\text{ V}, I_C = 0.5\text{ A}, f = 1\text{ MHz}$		20		MHz
Turn-on time	$t_{on}$	$I_C = 3\text{ A}, I_{B1} = 12\text{ mA}, I_{B2} = -12\text{ mA}$ ,		0.5		$\mu\text{s}$
Storage time	$t_{stg}$	$V_{CC} = 50\text{ V}$		4.0		$\mu\text{s}$
Fall time	$t_f$			1.0		$\mu\text{s}$


Note) 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.









2. \*: Rank classification

Rank	R	Q	P
$h_{FE2}$	1000 to 2500	2000 to 5000	4000 to 10000

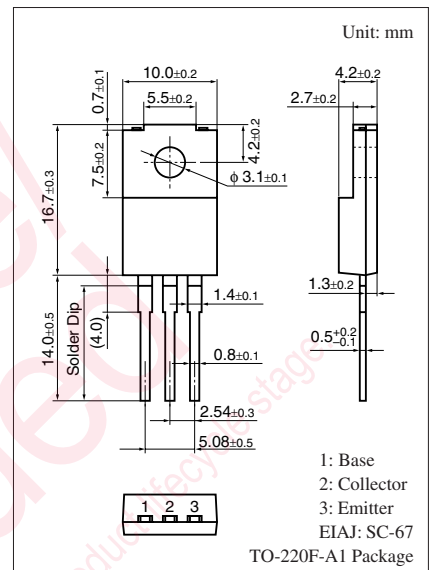

## Internal Connection

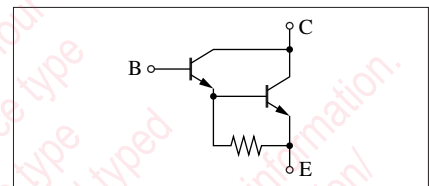

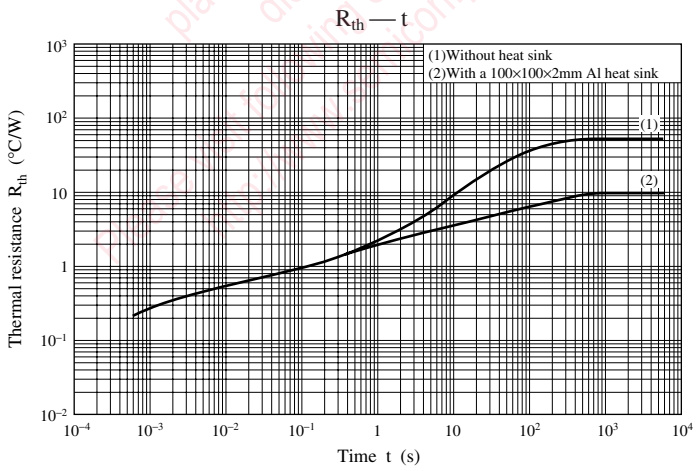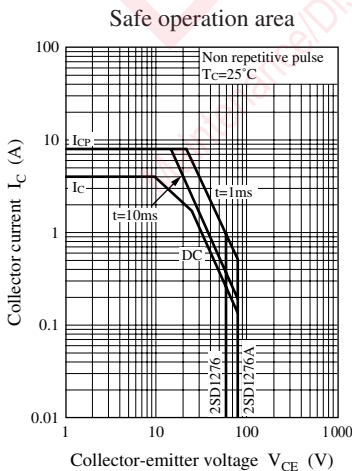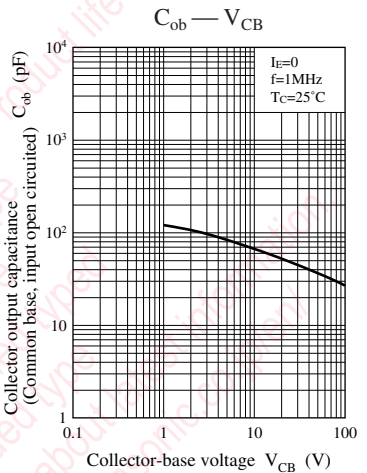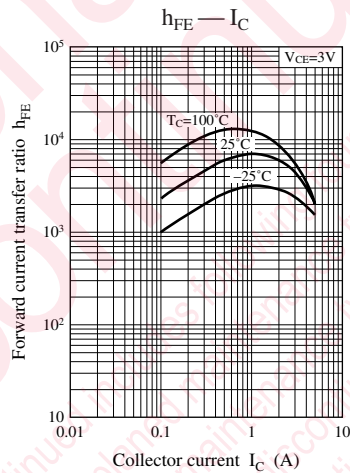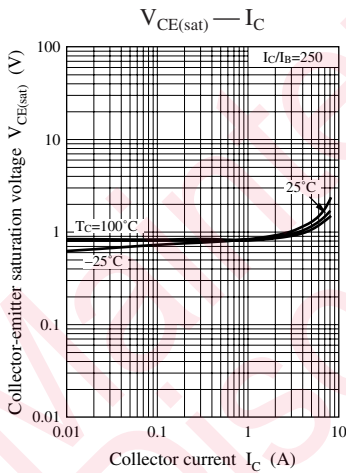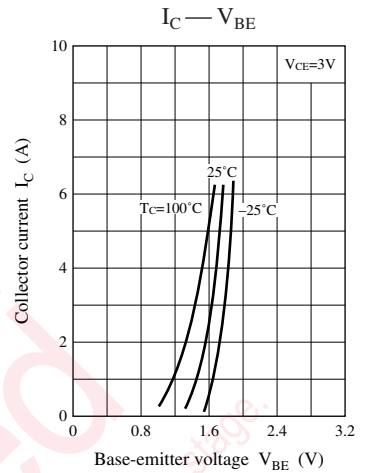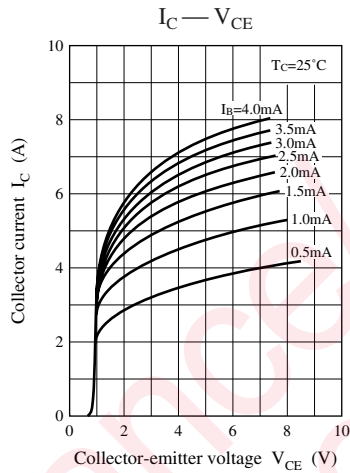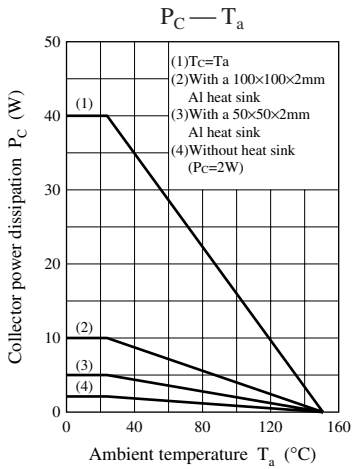

## utions in using the technical information and scribed in this book

s book is to be exported or provided to non-residents, the laws and  
rd to security export control, must be observed.

ly to show the main characteristics and application circuit examples  
l property right or other right owned by our company or any other  
any as to the infringement upon any such right owned by any other  
rmation described in this book.

standard applications or general electronic equipment (such as office  
and household appliances).

ng applications:

biles, traffic control equipment, combustion equipment, life support  
reliability are required, or if the failure or malfunction of the prod-

ck are subject to change without notice for modification and/or im-  
use of the products, therefore, ask for the most up-to-date Product  
atisfy your requirements.

bsolute maximum rating and the guaranteed operating conditions  
(.). Especially, please be careful not to exceed the range of absolute  
er-off and mode-switching. Otherwise, we will not be liable for any

take into the consideration of incidence of break down and failure  
n the systems such as redundant design, arresting the spread of fire  
al injury, fire, social damages, for example, by using the products.

own and characteristics change due to external factors (ESD, EOS,  
mounting or at customer's process. When using products for which  
shelf life and the elapsed time since first opening the packages.

ly or partially, without the prior written permission of Matsushita

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2SD1276 on WIN SOURCE](#)

 [Panasonic Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management