

Surface Mount Power Voltage-Regulating Diodes


SMA (DO-214AC)

 Cathode  Anode

RoHS
 COMPLIANT
 HALOGEN
FREE
Available

FEATURES

- Low profile package
- Ideal for automated placement
- Low Zener impedance
- Low regulation factor
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

LINKS TO ADDITIONAL RESOURCES



3D Models

| PRIMARY CHARACTERISTICS | |
|-----------------------------------|----------------|
| V_Z | 5.6 V to 68 V |
| P_{tot} at $T_L = 75\text{ °C}$ | 1500 mW |
| P_{tot} at $T_A = 25\text{ °C}$ | 500 mW |
| T_J max. | 150 °C |
| V_Z specification | Pulse current |
| Package | SMA (DO-214AC) |
| Circuit configuration | Single |

TYPICAL APPLICATIONS

For general purpose regulation and protection applications.

MECHANICAL DATA

Case: SMA (DO-214AC)

 Molding compound meets UL 94 V-0 flammability rating
 Base P/N-E3 - RoHS-compliant, and industrial grade
 Base P/N-M3 - halogen-free, RoHS-compliant, and industrial grade

Terminals: matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3, M3 suffix meets JESD 201 class 2 whisker test

Polarity: color band denotes cathode end

| MAXIMUM RATINGS ($T_A = 25\text{ °C}$, unless otherwise noted) | | | |
|--|-----------------|-------------|------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Power dissipation at $T_L = 75\text{ °C}$ (fig. 1) | $P_{tot}^{(1)}$ | 1500 | mW |
| Power dissipation at $T_A = 25\text{ °C}$ (fig. 1) | $P_{tot}^{(2)}$ | 500 | |
| Maximum instantaneous forward voltage at 200 mA for all types | $V_F^{(3)}$ | 1.5 | V |
| Operating junction and storage temperature range | T_J, T_{STG} | -65 to +150 | °C |

Notes

- (1) Mounted on PCB with 5.0 mm x 5.0 mm copper pads attached to each terminal
- (2) Mounted on minimum recommended pad layout
- (3) Pulse test: 300 μ s pulse width, 1 % duty cycle

| ELECTRICAL CHARACTERISTICS | |
|----------------------------|-------------------------------------|
| SYMBOL | PARAMETER |
| V_Z | Reverse Zener voltage at I_{ZT} |
| I_{ZT} | Reverse current |
| Z_{ZT} | Maximum Zener impedance at I_{ZT} |
| I_{ZK} | Reverse current |
| Z_{ZK} | Maximum Zener impedance at I_{ZK} |
| I_R | Reverse leakage current at V_R |
| V_R | Reverse voltage |
| I_F | Forward current |
| V_F | Forward voltage at I_F |
| I_{ZM} | Maximum DC Zener current |



Zener Voltage Regulator

| ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | | | | | | | |
|---|---------------------|---------------------|------|-------|--------------|----------|-------------------------|----------------------|-------------------------|------|-----------------------|
| PART NUMBER | DEVICE MARKING CODE | ZENER VOLTAGE RANGE | | | TEST CURRENT | | MAXIMUM ZENER IMPEDANCE | | REVERSE LEAKAGE CURRENT | | MAXIMUM ZENER CURRENT |
| | | V_Z AT I_{ZT} | | | I_{ZT} | I_{ZK} | Z_{ZT} AT I_{ZT} | Z_{ZK} AT I_{ZK} | I_R AT V_R | | I_{ZM} |
| | | V | | | mA | | Ω | | μA | V | mA |
| | | MIN. | NOM. | MAX. | | | MAX. | MAX. | MAX. | | MAX. |
| SMAZ5919B | 19B | 5.32 | 5.6 | 5.88 | 66.9 | 1 | 5 | 700 | 200 | 3 | 268 |
| SMAZ5920B | 20B | 5.89 | 6.2 | 6.51 | 60.5 | 1 | 2 | 700 | 200 | 4 | 242 |
| SMAZ5921B | 21B | 6.46 | 6.8 | 7.14 | 55.1 | 1 | 2.5 | 400 | 200 | 5.2 | 221 |
| SMAZ5923B | 23B | 7.79 | 8.2 | 8.61 | 45.7 | 0.5 | 5.0 | 700 | 10 | 6.5 | 183 |
| SMAZ5924B | 24B | 8.64 | 9.1 | 9.56 | 41.2 | 0.5 | 5.0 | 700 | 10 | 7.0 | 165 |
| SMAZ5925B | 25B | 9.5 | 10 | 10.5 | 37.5 | 0.25 | 5.0 | 700 | 10 | 8.0 | 150 |
| SMAZ5926B | 26B | 10.5 | 11 | 11.6 | 34.1 | 0.25 | 5.5 | 550 | 5 | 8.4 | 136 |
| SMAZ5927B | 27B | 11.4 | 12 | 12.6 | 31.2 | 0.25 | 6.5 | 550 | 1 | 9.1 | 125 |
| SMAZ5928B | 28B | 12.4 | 13 | 13.7 | 28.8 | 0.25 | 7.0 | 550 | 1 | 9.9 | 115 |
| SMAZ5929B | 29B | 14.3 | 15 | 15.8 | 25.0 | 0.25 | 9.0 | 600 | 1 | 11.4 | 100 |
| SMAZ5930B | 30B | 15.2 | 16 | 16.8 | 23.4 | 0.25 | 10.0 | 600 | 1 | 12.2 | 94 |
| SMAZ5931B | 31B | 17.1 | 18 | 18.9 | 20.8 | 0.25 | 12.0 | 650 | 1 | 13.7 | 83 |
| SMAZ5932B | 32B | 19.0 | 20 | 21.0 | 18.7 | 0.25 | 14.0 | 650 | 1 | 15.2 | 75 |
| SMAZ5933B | 33B | 20.9 | 22 | 23.1 | 17.0 | 0.25 | 17.5 | 650 | 1 | 16.7 | 68 |
| SMAZ5934B | 34B | 22.8 | 24 | 25.2 | 15.6 | 0.25 | 19.0 | 700 | 1 | 18.2 | 62 |
| SMAZ5935B | 35B | 25.7 | 27 | 28.4 | 13.9 | 0.25 | 23.0 | 700 | 1 | 20.6 | 56 |
| SMAZ5936B | 36B | 28.5 | 30 | 31.5 | 12.5 | 0.25 | 28.0 | 750 | 1 | 22.8 | 50 |
| SMAZ5937B | 37B | 31.4 | 33 | 34.7 | 11.4 | 0.25 | 33.0 | 800 | 1 | 25.1 | 45 |
| SMAZ5938B | 38B | 34.2 | 36 | 37.8 | 10.4 | 0.25 | 38.0 | 850 | 1 | 27.4 | 42 |
| SMAZ5939B | 39B | 37.1 | 39 | 41.0 | 9.6 | 0.25 | 45.0 | 900 | 1 | 29.7 | 38 |
| SMAZ5940B | 40B | 40.9 | 43 | 45.2 | 8.7 | 0.25 | 53.0 | 950 | 1 | 32.7 | 35 |
| SMAZ5941B | 41B | 44.65 | 47 | 49.35 | 8.0 | 0.25 | 67 | 1000 | 1 | 35.8 | 32 |
| SMAZ5942B | 42B | 48.45 | 51 | 53.55 | 7.3 | 0.25 | 70 | 1100 | 1 | 38.8 | 29 |
| SMAZ5943B | 43B | 53.2 | 56 | 58.8 | 6.7 | 0.25 | 86 | 1300 | 1 | 42.6 | 27 |
| SMAZ5944B | 44B | 58.9 | 62 | 65.1 | 6.0 | 0.25 | 100 | 1500 | 1 | 47.1 | 24 |
| SMAZ5945B | 45B | 64.6 | 68 | 71.4 | 5.5 | 0.25 | 120 | 1700 | 1 | 51.7 | 22 |



| THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | |
|--|--------------------------------|-------|--------------------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Typical thermal resistance, junction to lead | $R_{\theta JL}$ ⁽¹⁾ | 50 | $^\circ\text{C/W}$ |
| Typical thermal resistance, junction to ambient | $R_{\theta JA}$ ⁽²⁾ | 250 | $^\circ\text{C/W}$ |

Notes

- (1) Mounted on PCB with 5.0 mm x 5.0 mm copper pads attached to each terminal
- (2) Mounted on minimum recommended pad layout

| ORDERING INFORMATION (Example) | | | | |
|--------------------------------|-----------------|------------------------|---------------|------------------------------------|
| PREFERRED P/N | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE |
| SMAZ5925B-E3/61 | 0.064 | 61 | 1800 | 7" diameter plastic tape and reel |
| SMAZ5925B-M3/61 | 0.064 | 61 | 1800 | 7" diameter plastic tape and reel |
| SMAZ5925B-E3/5A | 0.064 | 5A | 7500 | 13" diameter plastic tape and reel |
| SMAZ5925B-M3/5A | 0.064 | 5A | 7500 | 13" diameter plastic tape and reel |

RATINGS AND CHARACTERISTICS CURVES ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

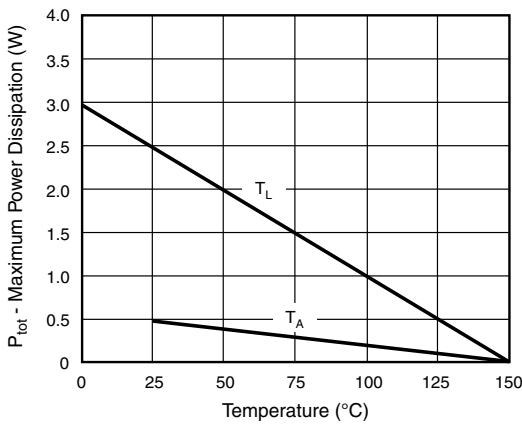


Fig. 1 - Steady State Power During

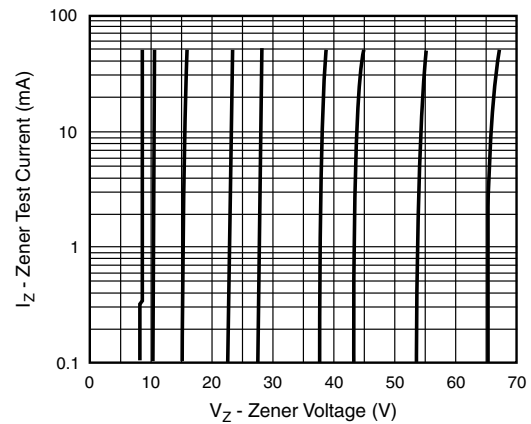


Fig. 3 - Typical Zener Voltage

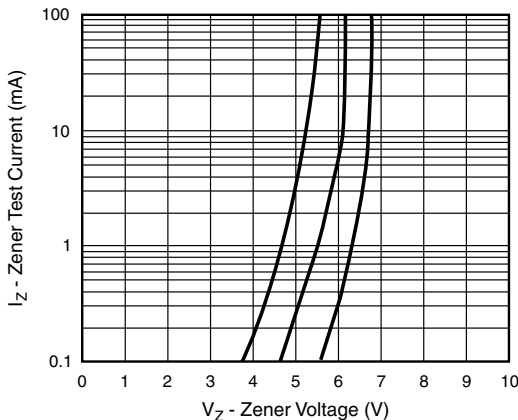


Fig. 2 - Typical Zener Voltage

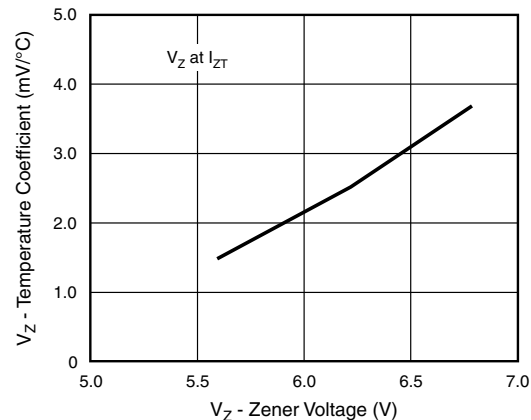


Fig. 4 - Typical Temperature Coefficients

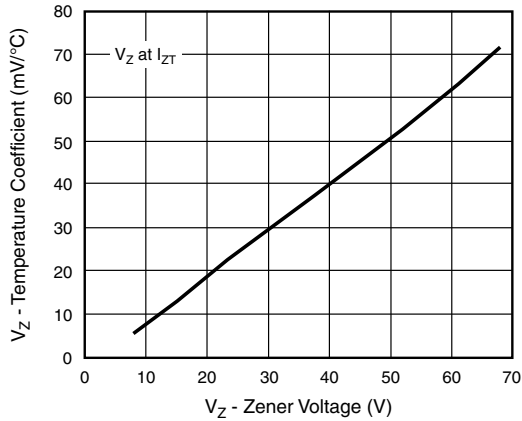


Fig. 5 - Typical Temperature Coefficients

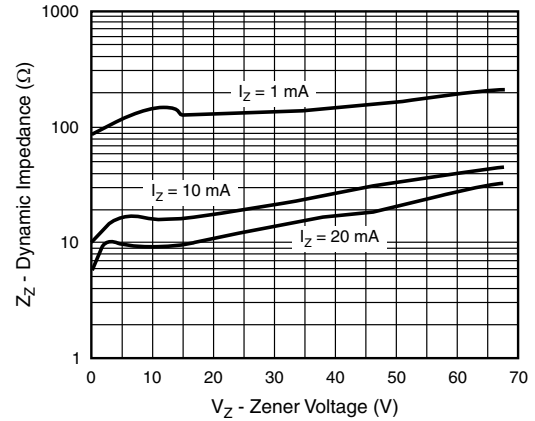



Fig. 7 - Typical Zener Impedance




Fig. 6 - Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

SMA (DO-214AC)

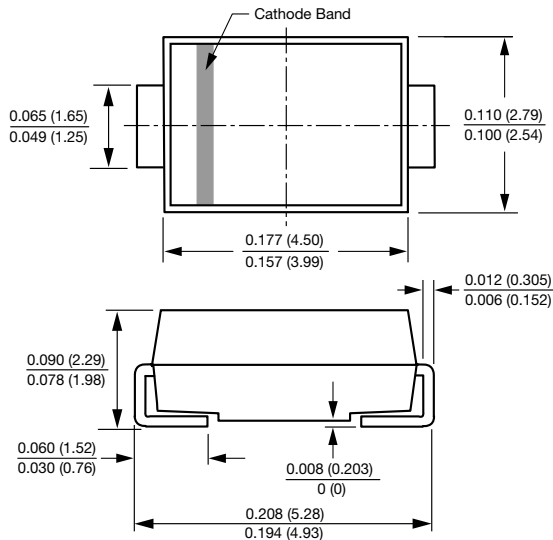

Mounting Pad Layout

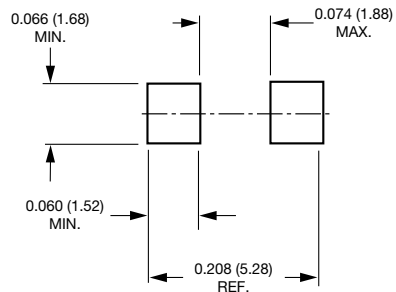



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

⊖ [View SMAZ5937B-M3/5A on WIN SOURCE](#)

⊖ [Vishay Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management