

## Designated client product

This product will be discontinued its production in the near term.  
And it is provided for customers currently in use only, with a time limit.  
It can not be available for your new project. Please select other new or existing products.

For more information, please contact our sales office in your region.

New Japan Radio Co.,Ltd.

[www.njr.com](http://www.njr.com)



# NJM79L00

## ■ ABSOLUTE MAXIMUM RATINGS

(T<sub>a</sub>=25 °C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V <sub>IN</sub>	(79L03A to 79L09A) - 30 (79L12A to 79L15A) - 35 (79L18A to 79L24A) - 40	V
Operating Temperature Range	T <sub>opr</sub>	-40 to +85	°C
Storage Temperature Range	T <sub>stg</sub>	-40 to +125	°C
Power Dissipation	P <sub>D</sub>	(SOT89) 350	mW

## ■ ELECTRICAL CHARACTERISTICS (C<sub>IN</sub>=0.33μF, C<sub>O</sub>=1.0μF, T<sub>J</sub>=25 °C)

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM79L03UA</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-10V, I <sub>O</sub> =40mA	-2.88	-3.0	-3.12	V
Line Regulation	ΔV <sub>O</sub> - V <sub>IN</sub>	V <sub>IN</sub> =-7 to -20V, I <sub>O</sub> =40mA	-	10	60	mV
Load Regulation	ΔV <sub>O</sub> - I <sub>O</sub>	V <sub>IN</sub> =-10V, I <sub>O</sub> =1 to 100mA	-	4	72	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-10V, I <sub>O</sub> =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V <sub>IN</sub> =-8 to -18V, I <sub>O</sub> =40mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	45	72	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-10V, BW=10Hz to 100kHz, I <sub>O</sub> =40mA	-	70	-	μV
<b>NJM79L05UA</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-10V, I <sub>O</sub> =40mA	-4.8	-5.0	-5.2	V
Line Regulation	ΔV <sub>O</sub> - V <sub>IN</sub>	V <sub>IN</sub> =-7 to -20V, I <sub>O</sub> =40mA	-	15	150	mV
Load Regulation	ΔV <sub>O</sub> - I <sub>O</sub>	V <sub>IN</sub> =-10V, I <sub>O</sub> =1 to 100mA	-	7	60	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-10V, I <sub>O</sub> =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V <sub>IN</sub> =-8 to -18V, I <sub>O</sub> =40mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	41	71	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-10V, BW=10Hz to 100kHz, I <sub>O</sub> =40mA	-	120	-	μV
<b>NJM79L06UA</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-12V, I <sub>O</sub> =40mA	-5.76	-6.0	-6.24	V
Line Regulation	ΔV <sub>O</sub> - V <sub>IN</sub>	V <sub>IN</sub> =-8.5 to -20V, I <sub>O</sub> =40mA	-	18	150	mV
Load Regulation	ΔV <sub>O</sub> - I <sub>O</sub>	V <sub>IN</sub> =-12V, I <sub>O</sub> =1 to 100mA	-	8	70	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-12V, I <sub>O</sub> =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V <sub>IN</sub> =-9 to -19V, I <sub>O</sub> =40mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	40	68	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-12V, BW=10Hz to 100kHz, I <sub>O</sub> =40mA	-	140	-	μV

■ **ELECTRICAL CHARACTERISTICS** ( $C_{IN}=0.33\mu F$ ,  $C_O=1.0\mu F$ ,  $T_J=25\text{ }^\circ\text{C}$ )

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM79L07UA</b>						
Output Voltage	$V_O$	$V_{IN}=-13V, I_O=40mA$	-6.72	-7.0	-7.28	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-9.5\sim-22V, I_O=40mA$	-	21	160	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-13V, I_O=1\sim 100mA$	-	9	75	mV
Quiescent Current	$I_Q$	$V_{IN}=-13V, I_O=0mA$	-	3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-10\sim-20V, I_O=40mA, e_{in}=1V_{P-P}, f=120Hz$	40	68	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=-13V, BW=10Hz\sim 100kHz, I_O=40mA$	-	170	-	$\mu V$
<b>NJM79L08UA</b>						
Output Voltage	$V_O$	$V_{IN}=-14V, I_O=40mA$	-7.68	-8.0	-8.32	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-10.5\text{ to }-23V, I_O=40mA$	-	24	175	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-14V, I_O=1\text{ to }100mA$	-	10	80	mV
Quiescent Current	$I_Q$	$V_{IN}=-14V, I_O=0mA$	-	3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-11\text{ to }-21V, I_O=40mA, e_{in}=1V_{P-P}, f=120Hz$	39	68	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=-14V, BW=10Hz\text{ to }100kHz, I_O=40mA$	-	190	-	$\mu V$
<b>NJM79L09UA</b>						
Output Voltage	$V_O$	$V_{IN}=-15V, I_O=40mA$	-8.64	-9.0	-9.36	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-11.5\text{ to }-24V, I_O=40mA$	-	27	200	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-15V, I_O=1\text{ to }100mA$	-	12	90	mV
Quiescent Current	$I_Q$	$V_{IN}=-15V, I_O=0mA$	-	3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-12\text{ to }-22V, I_O=40mA, e_{in}=1V_{P-P}, f=120Hz$	38	67	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=-15V, BW=10Hz\text{ to }100kHz, I_O=40mA$	-	210	-	$\mu V$
<b>NJM79L12UA</b>						
Output Voltage	$V_O$	$V_{IN}=-19V, I_O=40mA$	-11.5	-12.0	-12.5	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-14.5\text{ to }-27V, I_O=40mA$	-	36	250	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-19V, I_O=1\text{ to }100mA$	-	16	100	mV
Quiescent Current	$I_Q$	$V_{IN}=-19V, I_O=0mA$	-	3.5	6.5	mA
Ripple Rejection	RR	$V_{IN}=-15\text{ to }-25V, I_O=40mA, e_{in}=1V_{P-P}, f=120Hz$	37	64	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=-19V, BW=10Hz\text{ to }100kHz, I_O=40mA$	-	210	-	$\mu V$

# NJM79L00


## ■ ELECTRICAL CHARACTERISTICS (C<sub>IN</sub>=0.33μF, C<sub>O</sub>=1.0μF, T<sub>J</sub>=25°C)

Measurement is to be conducted in pulse testing.


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM79L15UA</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-23V, I <sub>O</sub> =40mA	-14.4	-15.0	-15.6	V
Line Regulation	ΔV <sub>O</sub> - V <sub>IN</sub>	V <sub>IN</sub> =-17.5 to -30V, I <sub>O</sub> =40mA	-	45	300	mV
Load Regulation	ΔV <sub>O</sub> - I <sub>O</sub>	V <sub>IN</sub> =-23V, I <sub>O</sub> =1 to 100mA	-	20	150	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-23V, I <sub>O</sub> =0mA	-	3.5	6.5	mA
Ripple Rejection	RR	V <sub>IN</sub> =-18.5 to -28.5V, I <sub>O</sub> =40mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	34	63	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-23V, BW=10Hz to 100kHz, I <sub>O</sub> =40mA	-	340	-	μV
<b>NJM79L18UA</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-27V, I <sub>O</sub> =40mA	-17.3	-18.0	-18.7	V
Line Regulation	ΔV <sub>O</sub> - V <sub>IN</sub>	V <sub>IN</sub> =-20.7 to -33V, I <sub>O</sub> =40mA	-	54	325	mV
Load Regulation	ΔV <sub>O</sub> - I <sub>O</sub>	V <sub>IN</sub> =-27V, I <sub>O</sub> =1 to 100mA	-	23	170	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-27V, I <sub>O</sub> =0mA	-	3.5	6.5	mA
Ripple Rejection	RR	V <sub>IN</sub> =-23 to -33V, I <sub>O</sub> =40mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	33	60	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-27V, BW=10Hz to 100kHz, I <sub>O</sub> =40mA	-	410	-	μV
<b>NJM79L24UA</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-33V, I <sub>O</sub> =40mA	-23.0	-24.0	-25.0	V
Line Regulation	ΔV <sub>O</sub> - V <sub>IN</sub>	V <sub>IN</sub> =-27 to -38V, I <sub>O</sub> =40mA	-	72	350	mV
Load Regulation	ΔV <sub>O</sub> - I <sub>O</sub>	V <sub>IN</sub> =-33V, I <sub>O</sub> =1 to 100mA	-	30	200	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-33V, I <sub>O</sub> =0mA	-	3.5	6.5	mA
Ripple Rejection	RR	V <sub>IN</sub> =-29 to -35V, I <sub>O</sub> =40mA, e <sub>in</sub> =1V <sub>P-P</sub> , f=120Hz	31	55	-	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-33V, BW=10Hz to 100kHz, I <sub>O</sub> =40mA	-	550	-	μV

## ■ TEST CIRCUIT


1. Output Voltage, Output Current, Line Regulation, Load Regulation, Quiescent Current, Output Noise Voltage

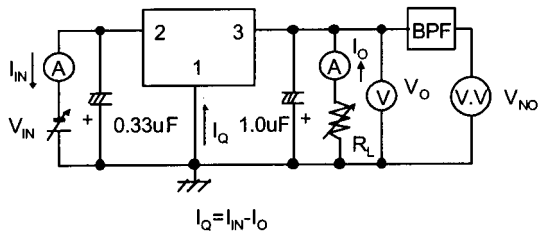

2. Ripple Rejection

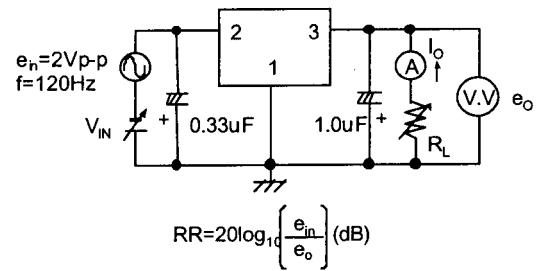

## ■ POWER DISSIPATION VS. AMBIENT TEMPERATURE

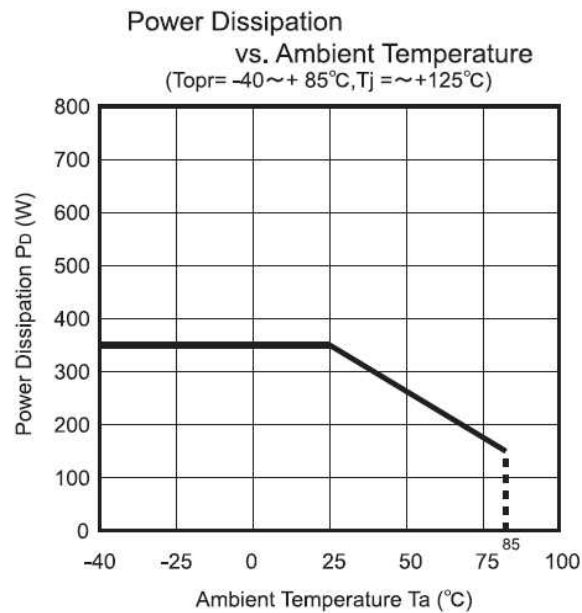


# NJM79L00

## ■ TYPICAL CHARACTERISTICS


**NJM79L00 Input Voltage vs. Output Voltage**

( $I_o = 40\text{mA}$ ,  $T_j = 25^\circ\text{C}$ )

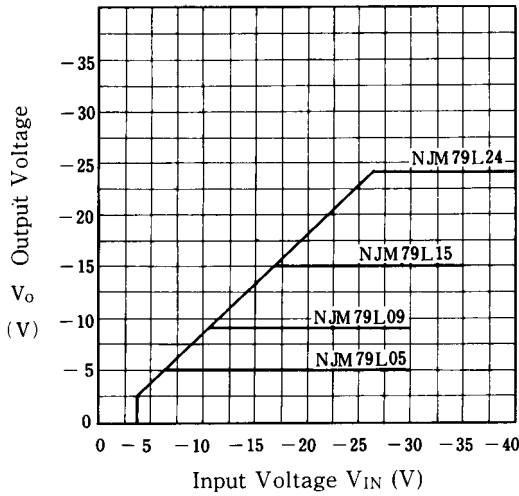


**NJM79L05/15/24 Load Characteristics**

( $T_j = 25^\circ\text{C}$ )

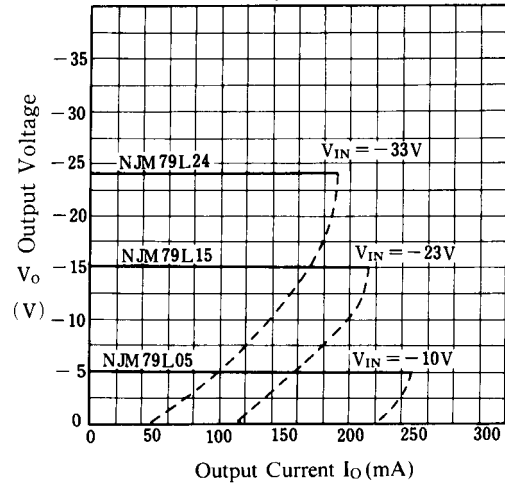


**NJM79L00 Series Short Circuit Current**

( $T_j = 25^\circ\text{C}$ )

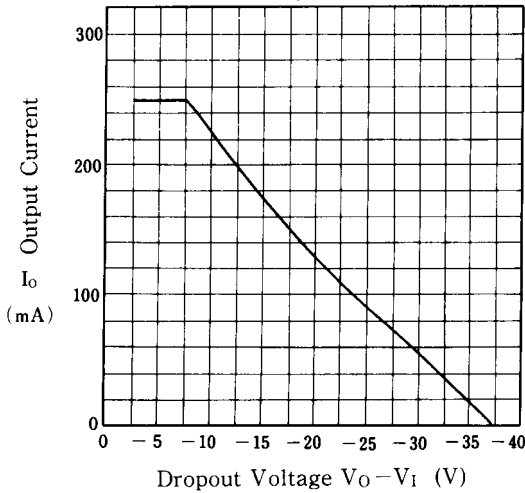


**NJM79L05/12/24 Output Voltage vs. Junction Temperature**

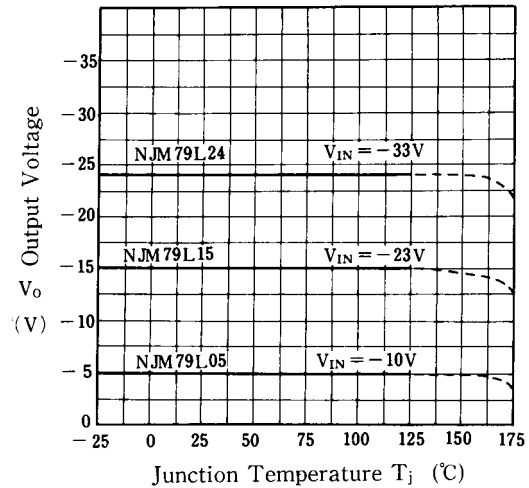


**NJM79L05/15/24 Ripple Rejection vs. Frequency**

( $I_o = 40\text{mA}$ ,  $e_{in} = 2V_{p-p}$ ,  $T_j = 25^\circ\text{C}$ )

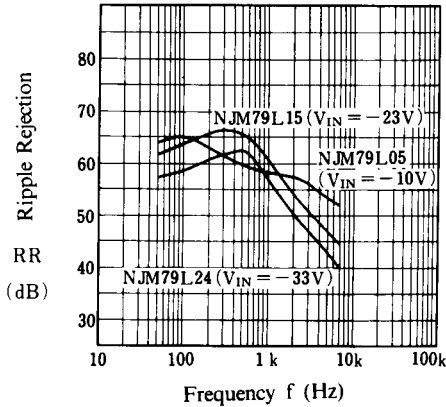

**Quiescent Current vs. Input Voltage**


( $I_o = 0\text{mA}$ ,  $T_j = 25^\circ\text{C}$ )

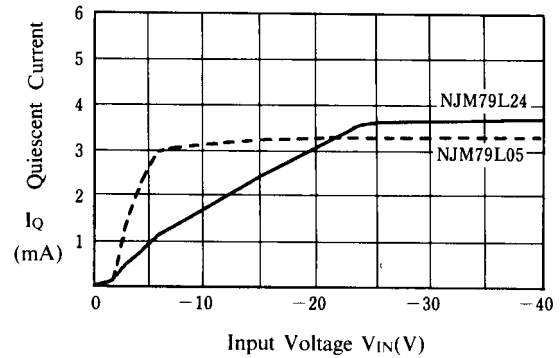

## ■ TYPICAL CHARACTERISTICS


### NJM79L05 Dropout Characteristics

( $T_j = 25^\circ\text{C}$ )

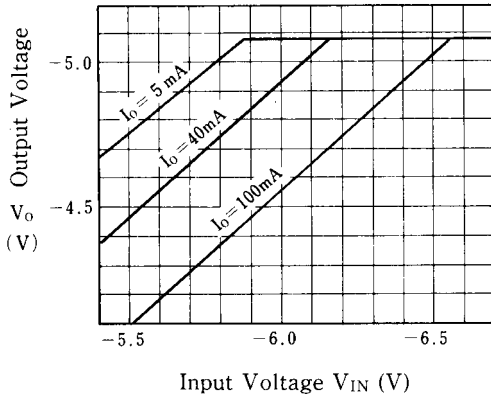


### NJM79L08 Dropout Characteristics


( $T_j = 25^\circ\text{C}$ )

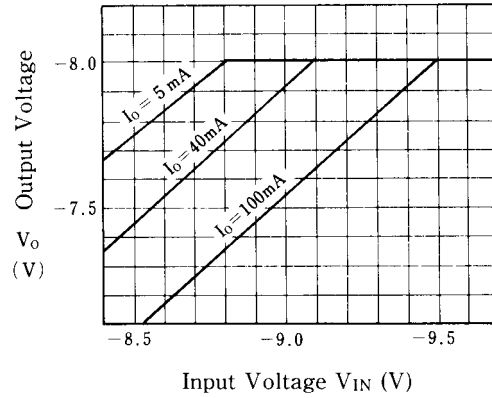

### NJM79L05 Output Voltage vs. Temperature

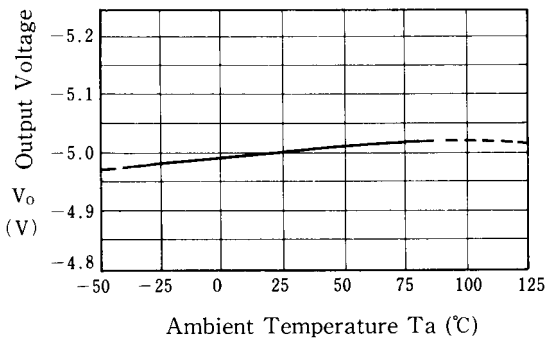


### NJM79L08 Output Voltage vs. Temperature

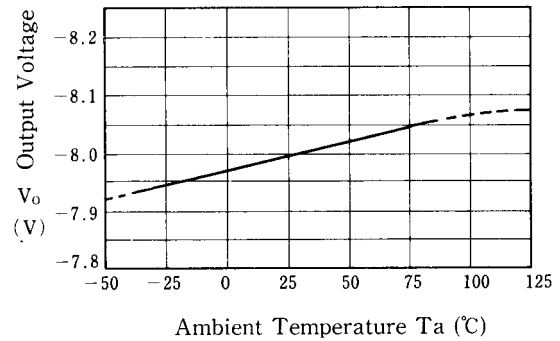

## NJM79L00 Equivalent Series Resistance vs. Output Current

$V_{in}$ =Output voltage of the conditions described in the ELECTRICAL CHARACTERISTICS  
 $T_a=25^\circ\text{C}$ ,  $C_{in}=0.33\mu\text{F}$ ,  $C_o=1.0\mu\text{F}$ (Ceramic capacitor)  
 Recommended Capacitor is Electrolytic Capacitor

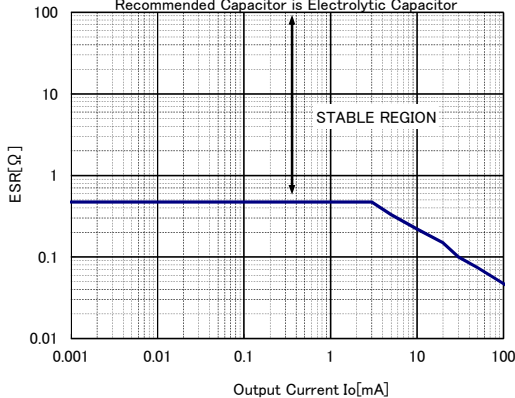



### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View NJM79L15UA-TE1 on WIN SOURCE](#)
-  [NJR Corporation/NJRC Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management