

TPCP8701

Portable Equipment Applications

Switching Applications

Inverter Lighting Applications

- Small footprint due to small and thin package
- High DC current gain : $h_{FE} = 400$ to 1000 ($I_C = 0.3$ A)
- Low collector-emitter saturation : $V_{CE(sat)} = 0.14$ V (max)
- High-speed switching : $t_f = 120$ ns (typ.)

Maximum Ratings ($T_a = 25^\circ\text{C}$)


Characteristics		Symbol	Rating	Unit
Collector-base voltage		V_{CBO}	100	V
Collector-emitter voltage		V_{CEX}	80	V
		V_{CEO}	50	V
Emitter-base voltage		V_{EBO}	7	V
Collector current	DC (Note 1)	I_C	3.0	A
	Pulse (Note 1)	I_{CP}	5.0	
Base current		I_B	300	mA
Collector power dissipation ($t = 10$ s)	Single-device operation	P_c (Note 2)	1.77	W
	Single-device value at dual operation		0.95	
Collector power dissipation (DC)	Single-device operation	P_c (Note 2)	0.94	W
	Single-device value at dual operation		0.54	
Junction temperature		T_j	150	$^\circ\text{C}$
Storage temperature range		T_{stg}	-55 to 150	$^\circ\text{C}$

Note 1: Please use devices on condition that the junction temperature is below 150°C .


Note 2: Mounted on FR4 board (glass epoxy, 1.6 mm thick, Cu area: 645 mm^2)

Note 3: ● on lower left on the marking indicates Pin 1.

※ Weekly code: (Three digits)

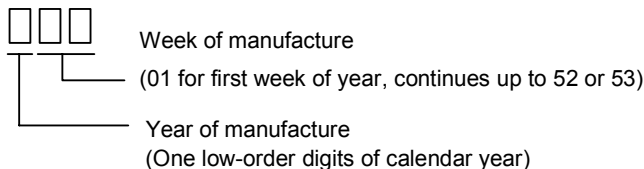

Unit: mm

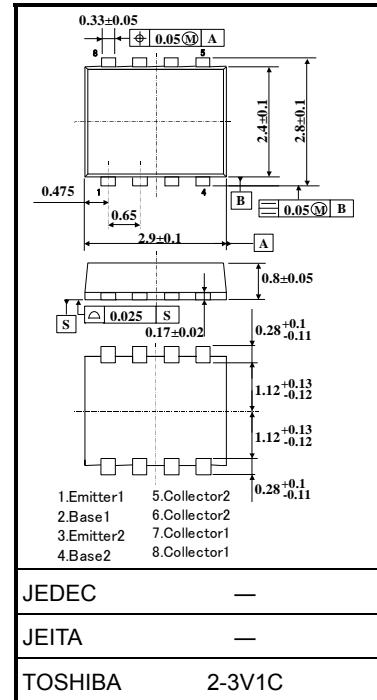

Weight: 0.017 g (typ.)

Figure 1. Circuit configuration (Top View)






Figure 2. Marking (Note 3)









Electrical Characteristics (Ta = 25°C)




Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	I_{CBO}	$V_{CB} = 100\text{ V}, I_E = 0$	—	—	100	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = 7\text{ V}, I_C = 0$	—	—	100	nA
Collector-emitter brakedown voltage	$V_{(BR)CEO}$	$I_C = 10\text{ mA}, I_B = 0$	50	—	—	V
DC current gain	$h_{FE}(1)$	$V_{CE} = 2\text{ V}, I_C = 0.3\text{ A}$	400	—	1000	
	$h_{FE}(2)$	$V_{CE} = 2\text{ V}, I_C = 1\text{ A}$	200	—	—	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 1\text{ A}, I_B = 20\text{ mA}$	—	—	0.14	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 1\text{ A}, I_B = 20\text{ mA}$	—	—	1.10	V
Collector output capacitance	C_{ob}	$V_{CB} = 10\text{ V}, I_E = 0, f = 1\text{ MHz}$	—	13	—	pF
Switching time	Rise time	t_r	—	40	—	ns
	Storage time	t_{stg}	—	500	—	
	Fall time	t_f	—	120	—	

Figure 3. Switching Time Test Circuit & Timing Chart

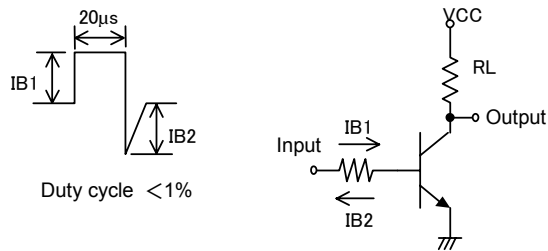

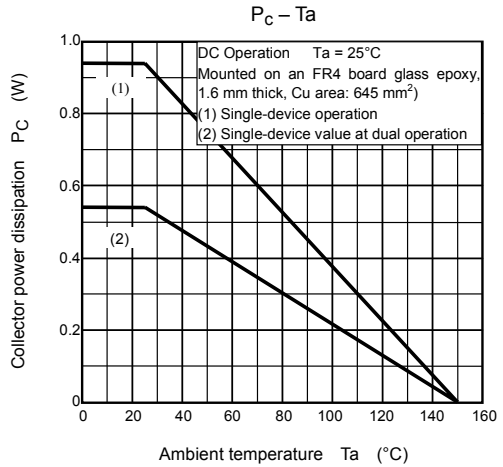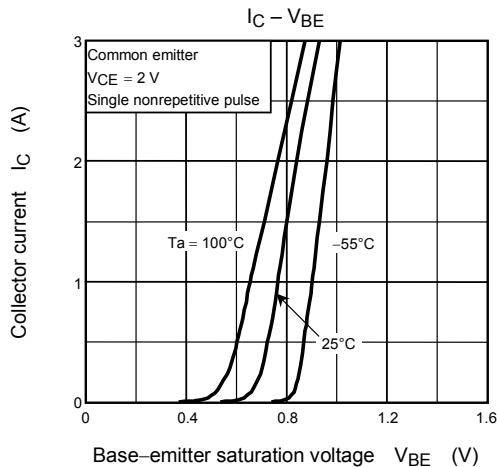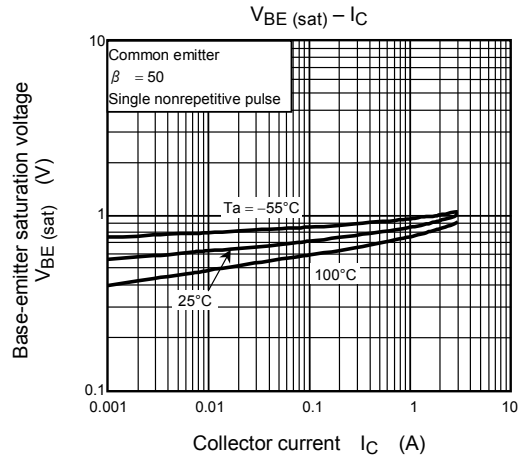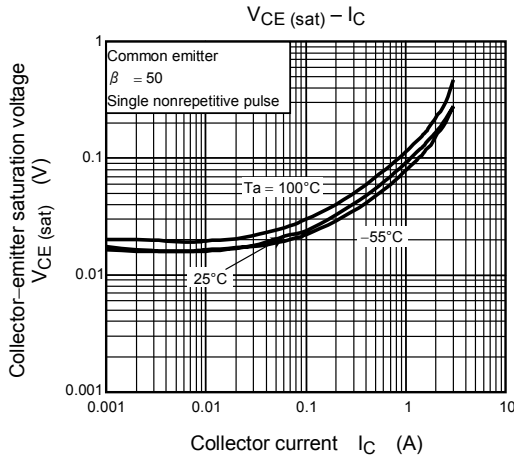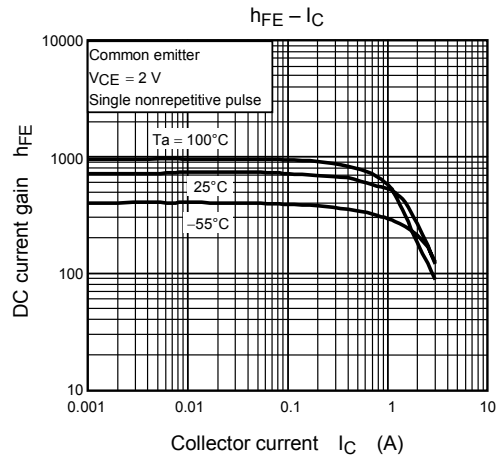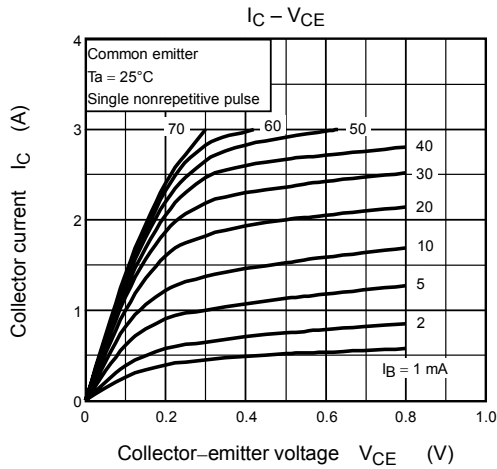

(2)

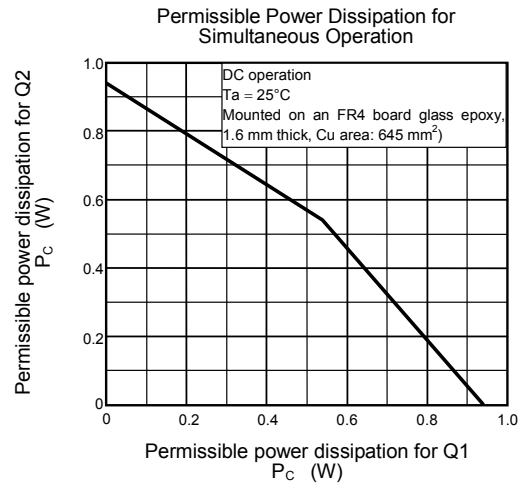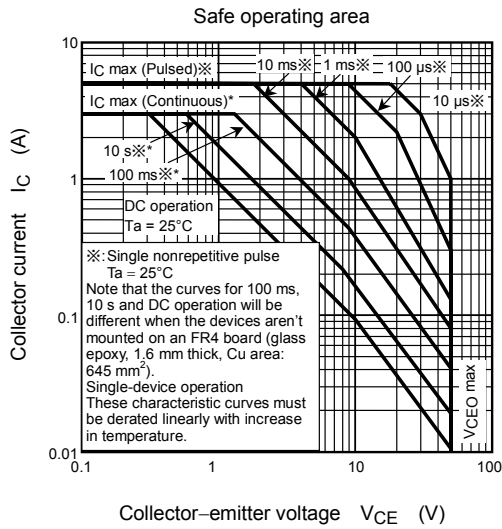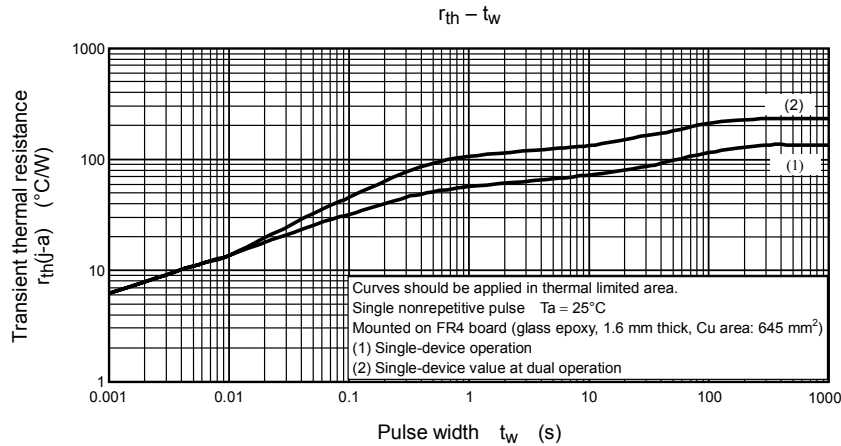

Collector power dissipation at the single-device operation is 0.94W.
 Collector power dissipation at the single-device value at dual operation is 0.54W.
 Collector power dissipation at the dual operation is set to 1.08W.



RESTRICTIONS ON PRODUCT USE

030619EAA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View TPCP8701 on WIN SOURCE](#)
-  [Toshiba Semiconductor and Storage Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management