



**THE DATASHEET OF  
UES1303**



# RECTIFIERS

## High Efficiency, 3.5A

UES1301 BYV28-50  
 UES1302 BYV28-100  
 UES1303 BYV28-150

### FEATURES

- Very Fast Recovery Times
- Very Low Forward Voltage
- Small Size
- Convenient Package

### DESCRIPTION

An axial leaded power rectifier useful in many switching applications. Particularly suited where very fast recovery and low forward voltage are required.

### ABSOLUTE MAXIMUM RATINGS

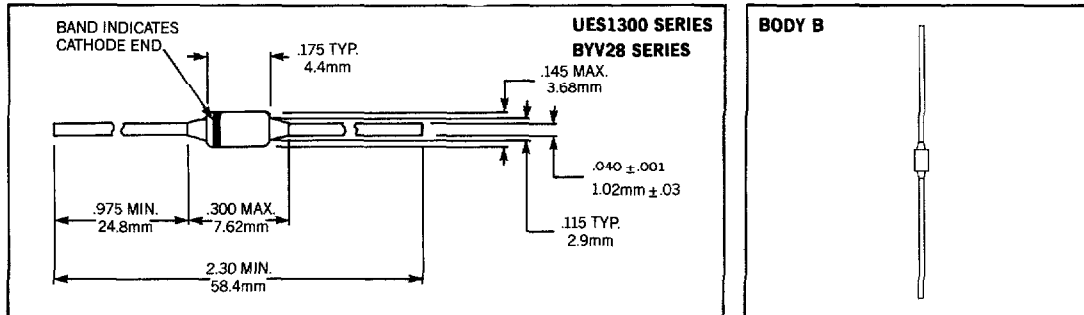
|  | UES1301         | UES1302 | UES1303 | BYV28-50 | BYV28-100 | BYV28-150 |
|--|-----------------|---------|---------|----------|-----------|-----------|
| Peak Inverse Voltage, $V_R$  | 50V             | 100V    | 150V    | 50V      | 100V      | 150V      |
| Maximum Average D.C. Output at $T_L = 75^\circ\text{C}$ , $L = \frac{3}{8}" I_o$ | 6.0A            |         |         | 3.5A     |           |           |
| Non-Repetitive Surge Current at 8.3ms, $I_{FSM}$                                 | 125A            |         |         | 80A      |           |           |
| Thermal Resistance at $L = \frac{3}{8}"$ , $R_{\theta Jc}$                       | 20°C/W          |         |         | 25°C/W   |           |           |
| Junction Operating Temperature, $T_j$  | 175°C           |         |         | 165°C    |           |           |
| Operating and Storage Temperature Range  | -55°C to +175°C |         |         |          |           |           |

### ELECTRICAL SPECIFICATIONS

| Type                               | Maximum Reverse Voltage $V_R$ | Maximum Forward Voltage @ |                           |           | Maximum Reverse Current @ Rated $V_R$ |                           | Maximum Reverse Recovery Time* |
|------------------------------------|-------------------------------|---------------------------|---------------------------|-----------|---------------------------------------|---------------------------|--------------------------------|
|                                    |                               | $T_j = 25^\circ\text{C}$  | $T_j = 100^\circ\text{C}$ |           | $T_j = 25^\circ\text{C}$              | $T_j = 100^\circ\text{C}$ |                                |
| UES1301<br>UES1302<br>UES1303      | 50V<br>100V<br>150V           | .925V @ 6A                | .850V @ 6A                |           | 5 $\mu\text{A}$                       | 150 $\mu\text{A}$         | 30ns                           |
| BYV28-50<br>BYV28-100<br>BYV28-150 | 50V<br>100V<br>150V           | 1.10V @ 5A                | .75V @ 3A                 | .90V @ 5A | 1 $\mu\text{A}$                       | 150 $\mu\text{A}$         | 30ns                           |

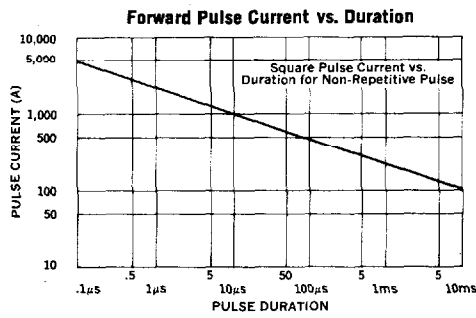
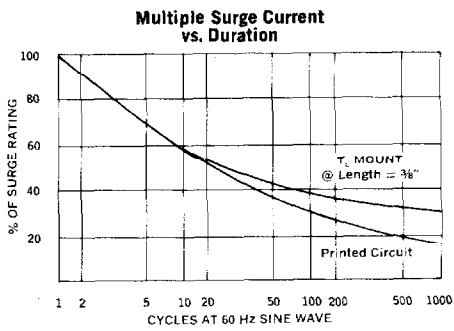
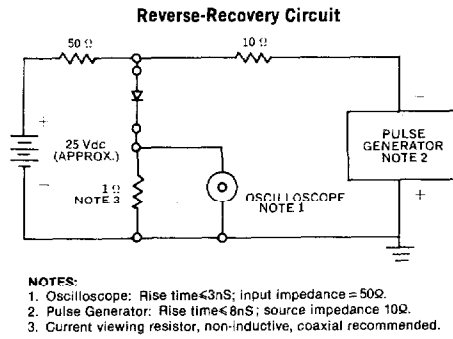
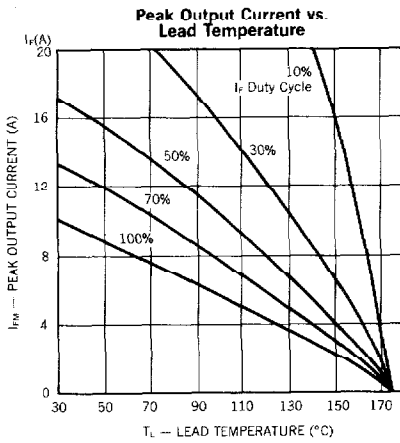
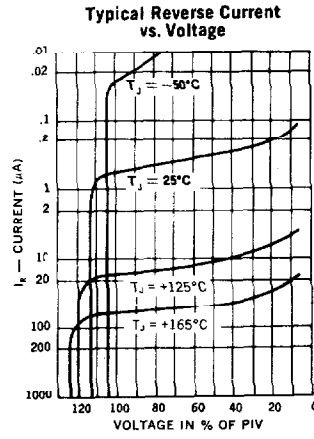
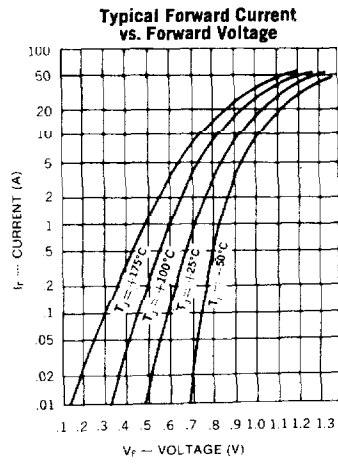
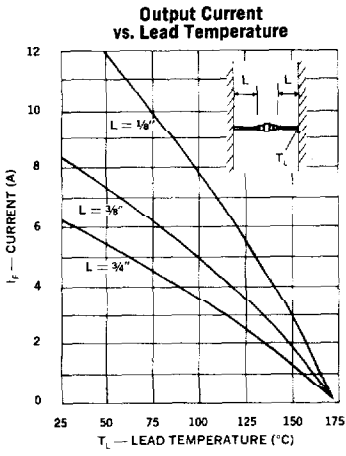
\*Measured in circuit  $I_F = 0.5A$ ,  $I_R = 1.0A$ ,  $I_{REC} = .25A$

### MECHANICAL SPECIFICATIONS





THESE DEVICES ALSO AVAILABLE IN SURFACE MOUNT PACKAGE. SEE SECTION 10

**Microsemi Corp.**  
**Watertown**  
 The diode experts



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View UES1303 on WIN SOURCE](#)
-  [Microsemi Corporation](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management