



# THE DATASHEET OF ZTX751



# ZTX750 ZTX751

## PNP SILICON PLANAR MEDIUM POWER TRANSISTOR

ISSUE 2 – JULY 94

### ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	ZTX750		ZTX751		UNIT	CONDITIONS.
		MIN.	TYP.	MAX.	MIN.		
Transition Frequency	$f_T$	100	140		100	140	MHz $I_C = -100\text{mA}$ , $V_{CE} = -5\text{V}$ $f = 100\text{MHz}$
Switching Times	$t_{on}$		40			40	ns $I_C = -500\text{mA}$ , $V_{CC} = -10\text{V}$ $I_B = I_{Bz} = -50\text{mA}$
	$t_{off}$		450			450	ns
Output Capacitance	$C_{obo}$			30		30	pF $V_{CE} = -10\text{V}$ $f = 1\text{MHz}$

\* Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$


### ABSOLUTE MAXIMUM RATINGS

PARAMETER	MIN.	TYP.	MAX.
Collector-Base Voltage			-60
Collector-Emitter Voltage			-45
Emitter-Base Voltage			-5
Peak Pulse Current			
Continuous Collector Current			
Power Dissipation: at $T_{amb} = 25^{\circ}\text{C}$ derate above $25^{\circ}\text{C}$			
Operating and Storage Temperature Range			

### THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	MAX.	UNIT
Thermal Resistance: Junction to Ambient <sub>1</sub> Junction to Ambient <sub>2</sub> Junction to Case	$R_{\theta(j-amb)1}$	175	$^{\circ}\text{C/W}$
	$R_{\theta(j-amb)2}^{\dagger}$	116	$^{\circ}\text{C/W}$
	$R_{\theta(j-case)}$	70	$^{\circ}\text{C/W}$

$\dagger$  Device mounted on P.C.B. with copper equal to 1 sq. Inch minimum.

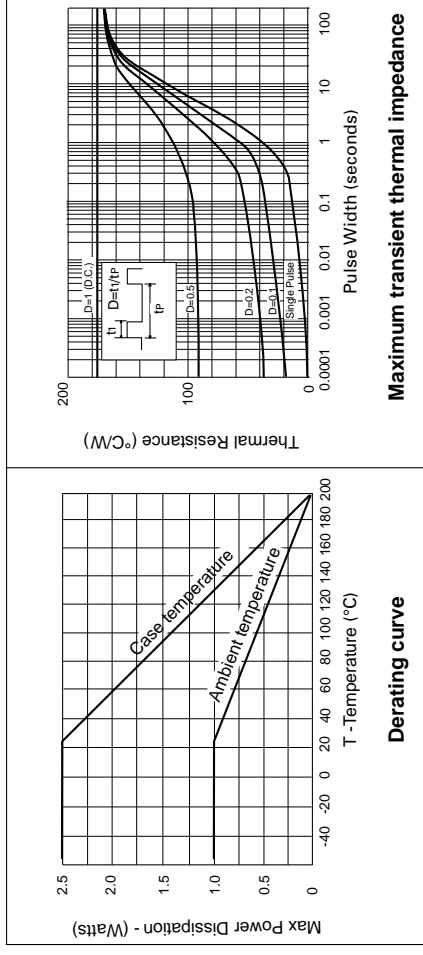

### ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	ZTX	
		MIN.	TYP.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-60	
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-45	
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5	
Collector Cut-Off Current	$I_{CBO}$		
Emitter Cut-Off Current	$I_{EBO}$		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.1
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-0.1

# ZTX750 ZTX751

## PNP SILICON PLANAR MEDIUM POWER TRANSISTOR

ISSUE 2 – JULY 94

### ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	ZTX750		ZTX751		UNIT	CONDITIONS.
		MIN.	TYP.	MAX.	TYP.		
Transition Frequency	$f_T$	100	140	100	140	MHz	$I_C = -100\text{mA}$ , $V_{CE} = -5\text{V}$ $f = 100\text{MHz}$
Switching Times	$t_{on}$	40		40		ns	$I_C = -500\text{mA}$ , $V_{CC} = -10\text{V}$ $I_B = I_{Bz} = -50\text{mA}$
	$t_{off}$	450		450		ns	
Output Capacitance	$C_{obo}$			30		pF	$V_{CE} = -10\text{V}$ $f = 1\text{MHz}$

\* Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$


### ABSOLUTE MAXIMUM RATINGS

PARAMETER	MIN.	TYP.	MAX.
Collector-Base Voltage			-60
Collector-Emitter Voltage			-45
Emitter-Base Voltage			-5
Peak Pulse Current			
Continuous Collector Current			
Power Dissipation: at $T_{amb} = 25^{\circ}\text{C}$ derate above $25^{\circ}\text{C}$			
Operating and Storage Temperature Range			

### THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	MAX.	UNIT
Thermal Resistance: Junction to Ambient <sub>1</sub> Junction to Ambient <sub>2</sub> Junction to Case	$R_{\theta(jc)}$	175	$^{\circ}\text{C/W}$
	$R_{\theta(ja)}$	116	$^{\circ}\text{C/W}$
	$R_{\theta(jc)}$	70	$^{\circ}\text{C/W}$

† Device mounted on P.C.B. with copper equal to 1 sq. Inch minimum.

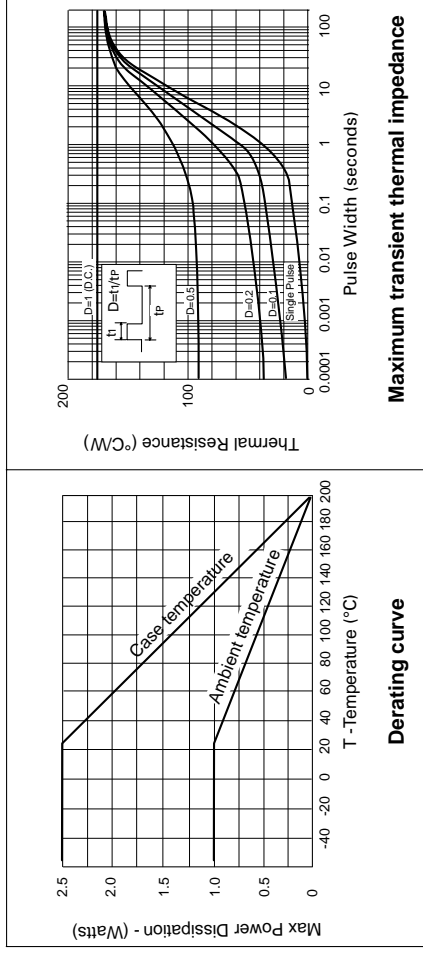


### ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	ZTX	
		MIN.	TYP.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-60	
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-45	
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5	
Collector Cut-Off Current	$I_{CBO}$		
Emitter Cut-Off Current	$I_{EBO}$		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.1
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-0.1



# ZTX750 ZTX751
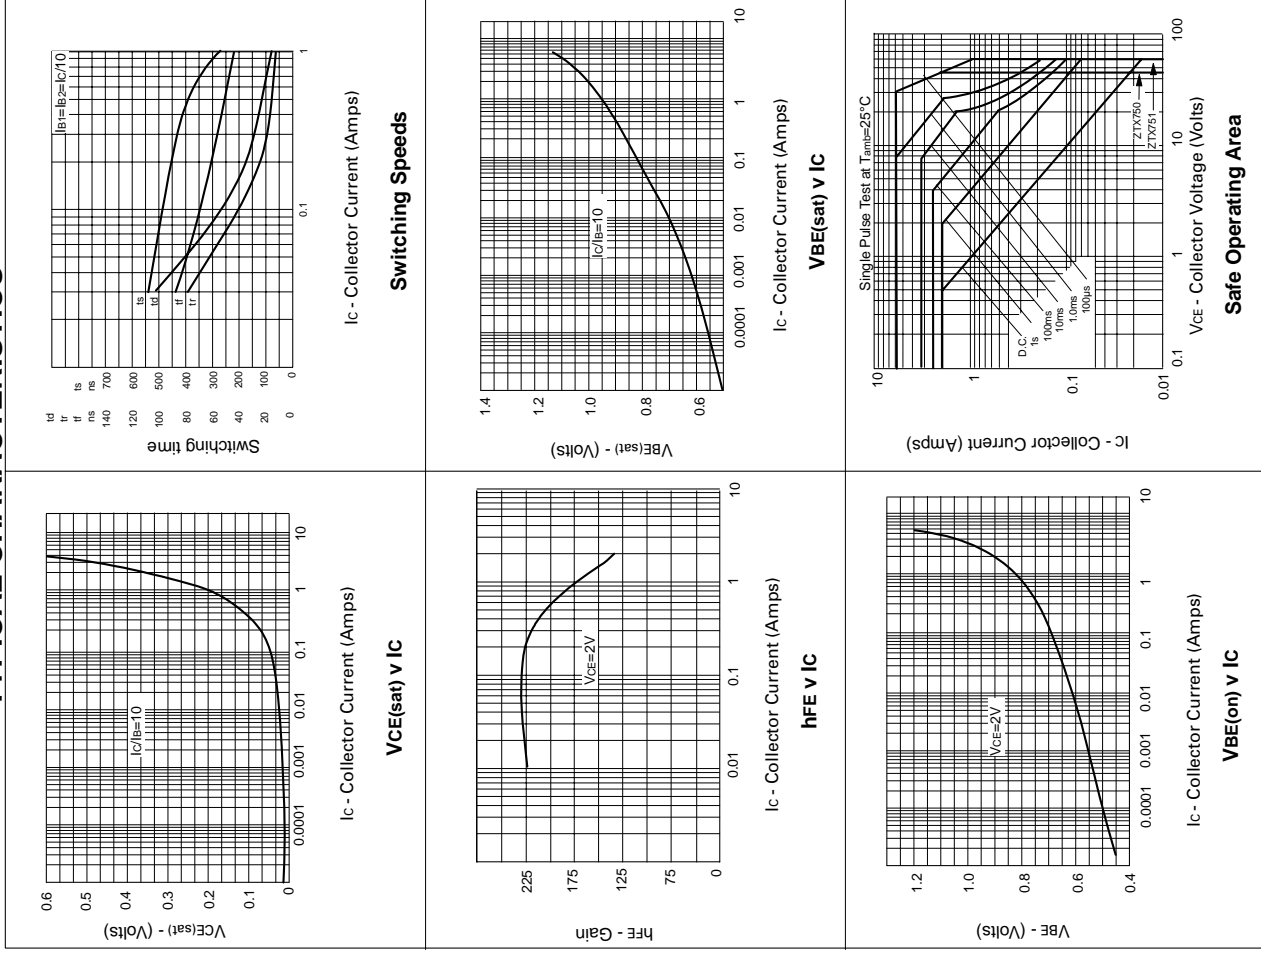
## TYPICAL CHARACTERISTICS



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ZTX751 on WIN SOURCE](#)
-  [Diodes Incorporated Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management