



**THE DATASHEET OF
IMX17T110**



General purpose transistor (dual transistors)

IMX17

●Features

- 1) Two 2SD1484K chips in an SMT package.
- 2) Mounting possible with SMT3 automatic mounting machine.
- 3) Transistor elements are independent, eliminating interference.
- 4) High collector current.
 $I_c = 500\text{mA}$
- 5) Mounting cost and area can be cut in half.

●Structure

Epitaxial planar type
NPN silicon transistor


The following characteristics apply to both Tr_1 and Tr_2 .

●Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CBO}	60	V
Collector-emitter voltage	V_{CEO}	50	V
Emitter-base voltage	V_{EBO}	5	V
Collector current	I_c	500	mA
Power dissipation	P_d	300 (TOTAL)	mW *
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	$-55 \sim +150$	$^\circ\text{C}$

*200 mW per element must not be exceeded.

●External dimensions (Units: mm)

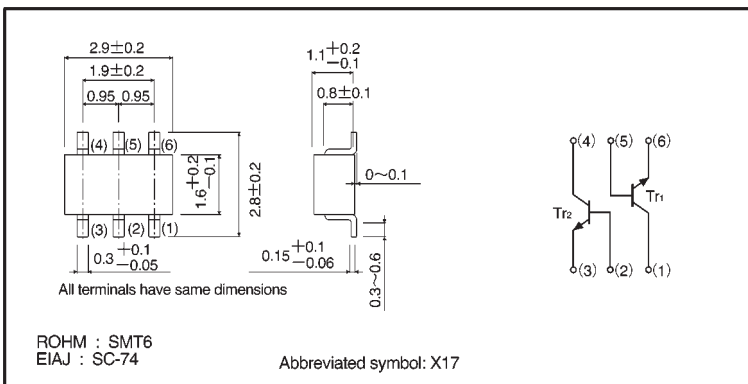

●Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV_{CBO}	60	—	—	V	$I_C=100\ \mu A$
Collector-emitter breakdown voltage	BV_{CEO}	50	—	—	V	$I_C=1mA$
Emitter-base breakdown voltage	BV_{EBO}	5	—	—	V	$I_E=100\ \mu A$
Collector cutoff current	I_{CBO}	—	—	0.1	μA	$V_{CB}=30V$
Emitter cutoff current	I_{EBO}	—	—	0.1	μA	$V_{EB}=4V$
Collector-emitter saturation voltage	$V_{CE(sat)}$	—	—	0.6	V	$I_C/I_B=500mA/50mA$
DC current transfer ratio	h_{FE}	120	—	390	—	$V_{CE}=3V, I_C=100mA$ *
Transition frequency	f_T	—	250	—	MHz	$V_{CE}=5V, I_E=-20mA, f=100MHz$
Output capacitance	C_{ob}	—	7	—	pF	$V_{CB}=10V, I_E=0A, f=1MHz$

* Measured using pulse current.

●Packaging specifications

Part No.	Packaging type	Taping
	Code	T110
	Basic ordering unit (pieces)	3000
IMX17		

●Electrical characteristic curves

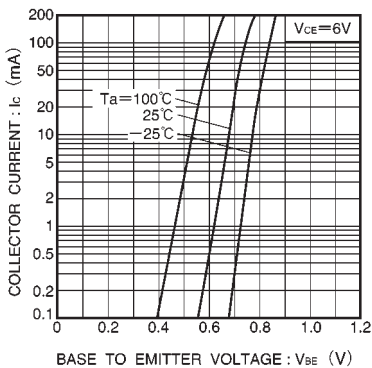


Fig.1 Grounded emitter propagation characteristics

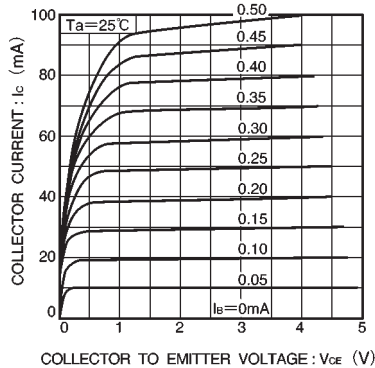


Fig.2 Grounded emitter output characteristics

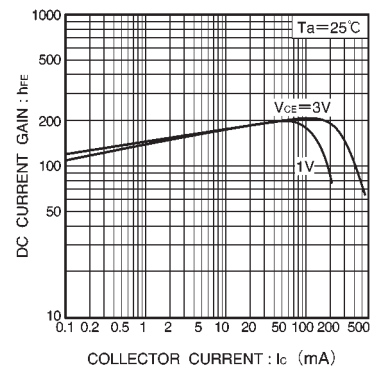


Fig.3 DC current gain vs. collector current (I)

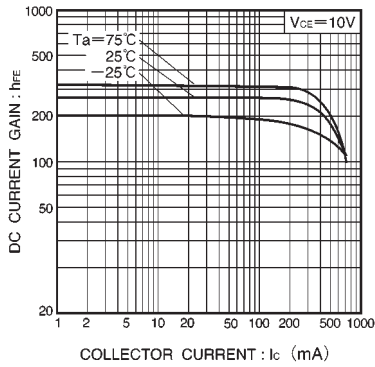


Fig.4 DC current gain vs. collector current (II)

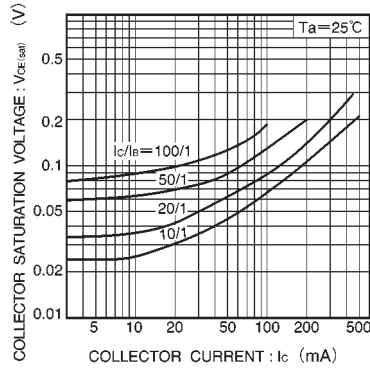


Fig.5 Collector-emitter saturation voltage vs. collector current

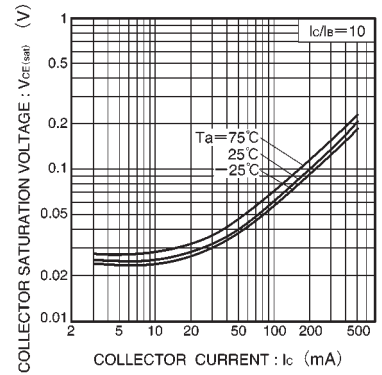


Fig.6 Collector-emitter saturation voltage vs. collector current

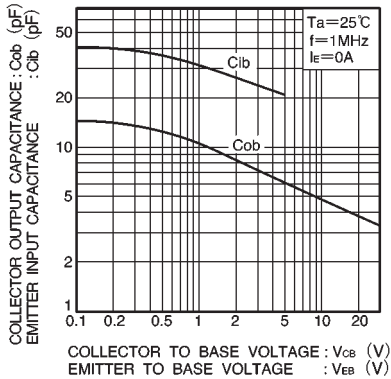


Fig.7 Input/output capacitance vs. voltage

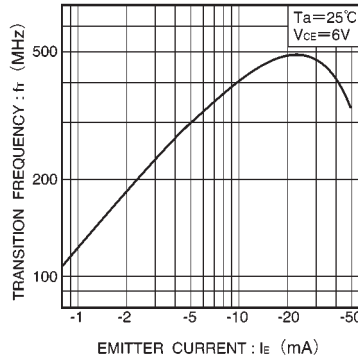





Fig.8 Gain bandwidth product vs. emitter current

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View IMX17T110 on WIN SOURCE](#)
-  [Rohm Semiconductor Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management