




**THE DATASHEET OF
SUF15G-E3/73**



Ultrafast Plastic Rectifier

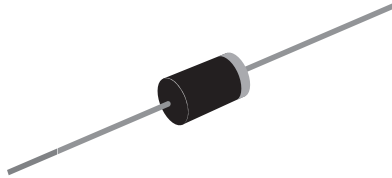

GP20

FEATURES

- Glass passivated chip junction
- Ultrafast reverse recovery time
- Low switching losses, high efficiency
- Low leakage current
- High forward surge capability
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC


RoHS
COMPLIANT

TYPICAL APPLICATIONS

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer and telecommunication.

MECHANICAL DATA

Case: GP20

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix for consumer grade, meets JESD 201 class 1A whisker test

Polarity: Color band denotes cathode end

PRIMARY CHARACTERISTICS

| | |
|--------------------|--------------|
| $I_{F(AV)}$ | 1.5 A |
| V_{RRM} | 400 V, 600 V |
| I_{FSM} | 50 A |
| t_{rr} | 35 ns |
| V_F | 1.8 V |
| $T_J \text{ max.}$ | 150 °C |

MAXIMUM RATINGS ($T_A = 25 \text{ °C}$ unless otherwise noted)

| PARAMETER | SYMBOL | SUF15G | SUF15J | UNIT |
|-------------------------------------------------------------------------------------------------|----------------|---------------|--------|------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 400 | 600 | V |
| Maximum RMS voltage | V_{RMS} | 280 | 420 | V |
| Maximum DC blocking voltage | V_{DC} | 400 | 600 | V |
| Maximum average forward rectified current, 0.375" (9.5 mm) lead length at $T_A = 50 \text{ °C}$ | $I_{F(AV)}$ | 1.5 | | A |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load | I_{FSM} | 50 | | A |
| Operating junction and storage temperature range | T_J, T_{STG} | - 55 to + 150 | | °C |

ELECTRICAL CHARACTERISTICS ($T_A = 25 \text{ °C}$ unless otherwise noted)

| PARAMETER | TEST CONDITIONS | SYMBOL | SUF15G | SUF15J | UNIT |
|------------------------------------------------------------|---------------------------------------------------------------------|----------|-----------|--------|---------------|
| Maximum instantaneous forward voltage (1) | 1.5 A | V_F | 1.8 | | V |
| Maximum peak reverse current at rated peak reverse voltage | $T_A = 25 \text{ °C}$ $T_A = 100 \text{ °C}$ | I_R | 10 100 | | μA |
| Maximum reverse recovery time | $I_F = 0.5 \text{ A}, I_R = 1.0 \text{ A}, I_{rr} = 0.25 \text{ A}$ | t_{rr} | 35 | | ns |
| Typical junction capacitance | 4.0 V, 1 MHz | C_J | 35 | | pF |

Note:

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

| THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | |
|------------------------------------------------------------------------------------|-----------------|--------|--------|--------------------|
| PARAMETER | SYMBOL | SUF15G | SUF15J | UNIT |
| Typical thermal resistance ⁽¹⁾ | $R_{\theta JA}$ | 65 | | $^\circ\text{C/W}$ |
| | $R_{\theta JL}$ | 20 | | |

Note:

(1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, P.C.B. mounted

| ORDERING INFORMATION (Example) | | | | |
|--------------------------------|-----------------|------------------------|---------------|----------------------------------|
| PREFERRED P/N | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE |
| SUF15J-E3/54 | 0.886 | 54 | 1400 | 13" diameter paper tape and reel |
| SUF15J-E3/73 | 0.886 | 73 | 1000 | Ammo pack packaging |

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

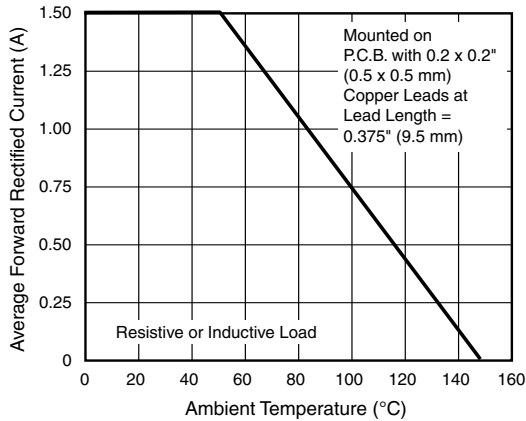


Figure 1. Maximum Forward Current Derating Curve

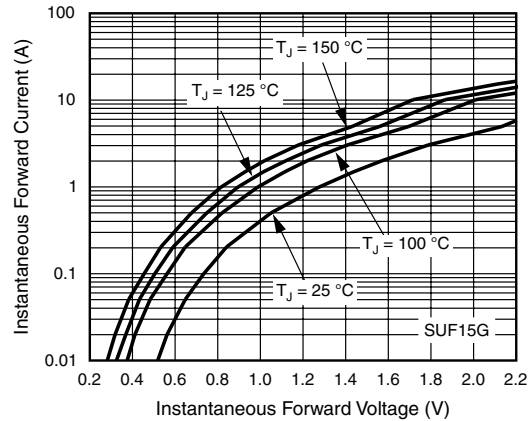


Figure 3. Typical Instantaneous Forward Characteristics

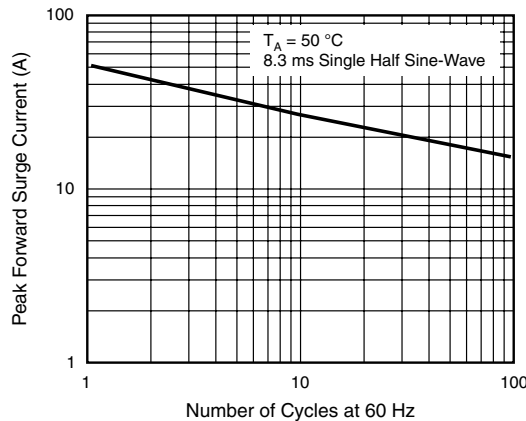


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

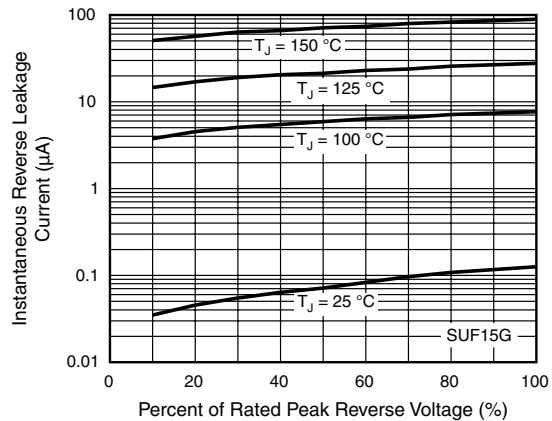


Figure 4. Typical Reverse Leakage Characteristics

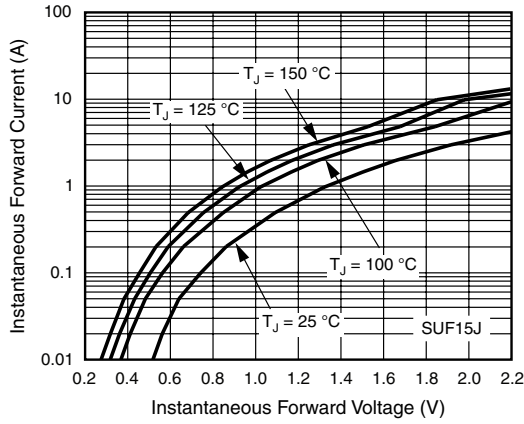


Figure 5. Typical Instantaneous Forward Characteristics

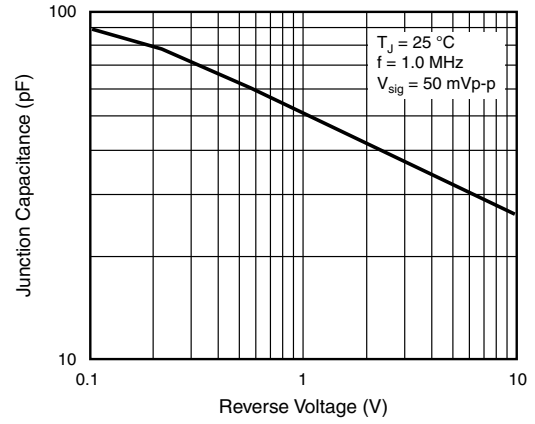


Figure 7. Typical Junction Capacitance

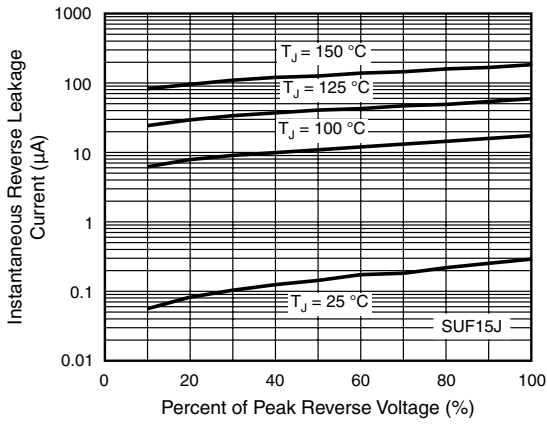


Figure 6. Typical Reverse Leakage Characteristics


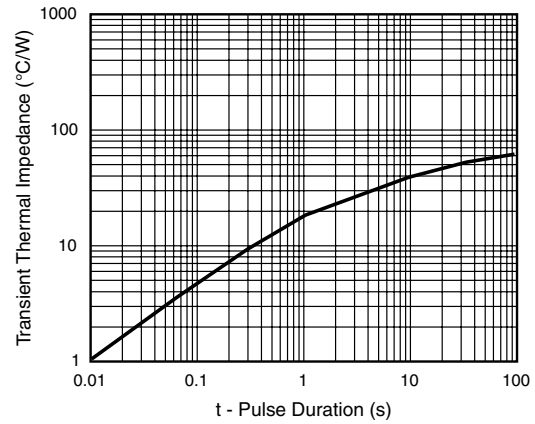


Figure 8. Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)



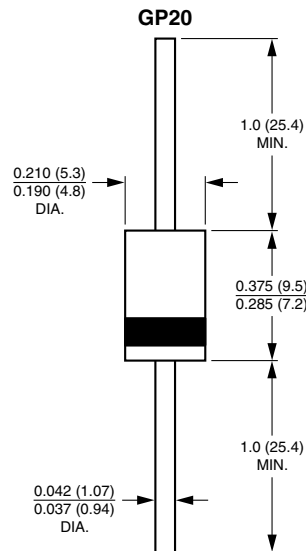

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.


The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SUF15G-E3/73 on WIN SOURCE](#)

 [Vishay Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management