

# UNR911xG Series

## Silicon PNP epitaxial planar type

For digital circuits

### ■ Features

- Costs can be reduced through downsizing of the equipment and reduction of the number of parts.
- SS-Mini type package, allowing automatic insertion through tape packing.


### ■ Resistance by Part Number

	Marking Symbol	(R <sub>1</sub> )	(R <sub>2</sub> )
• UNR9110G	6L	47 kΩ	—
• UNR9111G	6A	10 kΩ	10 kΩ
• UNR9112G	6B	22 kΩ	22 kΩ
• UNR9113G	6C	47 kΩ	47 kΩ
• UNR9114G	6D	10 kΩ	47 kΩ
• UNR9115G	6E	10 kΩ	—
• UNR9116G	6F	4.7 kΩ	—
• UNR9117G	6H	22 kΩ	—
• UNR9118G	6I	0.51 kΩ	5.1 kΩ
• UNR9119G	6K	1 kΩ	10 kΩ
• UNR911AG	6X	100 kΩ	100 kΩ
• UNR911BG	6Y	100 kΩ	—
• UNR911CG	6Z	—	47 kΩ
• UNR911DG	6M	47 kΩ	10 kΩ
• UNR911EG	6N	47 kΩ	22 kΩ
• UNR911FG	6O	4.7 kΩ	10 kΩ
• UNR911HG	6P	2.2 kΩ	10 kΩ
• UNR911LG	6Q	4.7 kΩ	4.7 kΩ
• UNR911MG	EI	2.2 kΩ	47 kΩ
• UNR911NG	EW	4.7 kΩ	47 kΩ
• UNR911TG	EY	22 kΩ	47 kΩ
• UNR911VG	FC	2.2 kΩ	2.2 kΩ

### ■ Package

- Code  
SSMini3-F3
- Pin Name  
1: Base  
2: Emitter  
3: Collector

### ■ Internal Connection



### ■ Absolute Maximum Ratings T<sub>a</sub> = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage (Emitter open)	V <sub>CBO</sub>	-50	V
Collector-emitter voltage (Base open)	V <sub>CEO</sub>	-50	V
Collector current	I <sub>C</sub>	-100	mA
Total power dissipation	P <sub>T</sub>	125	mW
Junction temperature	T <sub>j</sub>	125	°C
Storage temperature	T <sub>stg</sub>	-55 to +125	°C

### ■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$


Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Collector-base voltage (Emitter open)		$V_{CBO}$	$I_C = -10 \mu\text{A}, I_E = 0$	-50			V
Collector-emitter voltage (Base open)		$V_{CEO}$	$I_C = -2 \text{mA}, I_B = 0$	-50			V
Collector-base cutoff current (Emitter open)		$I_{CBO}$	$V_{CB} = -50 \text{V}, I_E = 0$			-0.1	$\mu\text{A}$
Collector-base cutoff current (Emitter open)		$I_{CEO}$	$V_{CE} = -50 \text{V}, I_B = 0$			-0.5	$\mu\text{A}$
Emitter-base cutoff current (Collector open)	UNR9110G/9115G/ 9116G/9117G/911BG	$I_{EBO}$	$V_{EB} = -6 \text{V}, I_C = 0$			-0.01	mA
	UNR9113G/911AG					-0.1	
	UNR9112G/9114G/911DG/ 911EG/911MG/911NG/911TG					-0.2	
	UNR9111G					-0.5	
	UNR911FG/911HG					-1.0	
	UNR9119G					-1.5	
	UNR9118G/911CG/911LG/911VG					-2.0	
	Forward current transfer ratio			UNR911VG	$h_{FE}$	$V_{CE} = -10 \text{V}, I_C = -5 \text{mA}$	
UNR9118G/911LG		20					
UNR9119G/911DG/911FG/911HG		30					
UNR9111G		35					
UNR9112G/911EG		60					
UNR9113G/9114G/ 911AG/911CG/911MG		80					
UNR911NG/911TG		80	400				
UNR9110G/9115G/ 9116G/9117G/911BG		160	460				
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C = -10 \text{mA}, I_B = -0.3 \text{mA}$			-0.25	V
	UNR911VG					$I_C = -10 \text{mA}, I_B = -1.5 \text{mA}$	
Output voltage high-level		$V_{OH}$	$V_{CC} = -5 \text{V}, V_B = -0.5 \text{V}, R_L = 1 \text{k}\Omega$	-4.9			V
Output voltage low-level		$V_{OL}$	$V_{CC} = -5 \text{V}, V_B = -2.5 \text{V}, R_L = 1 \text{k}\Omega$			-0.2	V
			$V_{CC} = -5 \text{V}, V_B = -3.5 \text{V}, R_L = 1 \text{k}\Omega$				
			$V_{CC} = -5 \text{V}, V_B = -10 \text{V}, R_L = 1 \text{k}\Omega$				
			$V_{CC} = -5 \text{V}, V_B = -6 \text{V}, R_L = 1 \text{k}\Omega$				
			$V_{CC} = -5 \text{V}, V_B = -5 \text{V}, R_L = 1 \text{k}\Omega$				
Transition frequency		$f_T$	$V_{CB} = -10 \text{V}, I_E = 1 \text{mA}, f = 200 \text{MHz}$		80		MHz
	UNR9113G		$V_{CB} = -10 \text{V}, I_E = 1 \text{mA}, f = 200 \text{MHz}$		150		
	UNR911AG		$V_{CB} = -10 \text{V}, I_E = 2 \text{mA}, f = 200 \text{MHz}$		80		
	UNR911CG		$V_{CB} = -10 \text{V}, I_E = 2 \text{mA}, f = 200 \text{MHz}$		150		
Input resistance	UNR9118G	$R_i$		-30%	0.51	+30%	k $\Omega$
	UNR9119G				1.0		
	UNR911HG/911MG/911VG				2.2		
	UNR9116G/911FG/911LG/911NG				4.7		
	UNR9111G/9114G/9115G				10		
	UNR9112G/9117G/911TG				22		
	UNR9110G/9113G/911DG/911EG				47		
	UNR911AG/911BG				100		

■ Electrical Characteristics (continued)  $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$




Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Emitter-base resistance	UNR911CG	$R_2$		-30%	47	+30%	k $\Omega$
Resistance ratio	UNR911MG	$R_1/R_2$			0.047		—
	UNR911NG				0.1		
	UNR9118G/9119G			0.08	0.10	0.12	
	UNR9114G			0.17	0.21	0.25	
	UNR911HG			0.17	0.22	0.27	
	UNR911TG				0.47		
	UNR911FG			0.37	0.47	0.57	
	UNR911AG/911VG				1.0		
	UNR9111G/9112G/9113G/911LG			0.8	1.0	1.2	
	UNR911EG			1.70	2.14	2.60	
UNR911DG	3.7	4.7	5.7				




Note) Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

Common characteristics chart






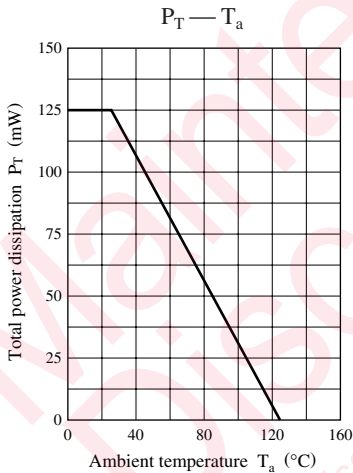


Characteristics charts of UNR9110G




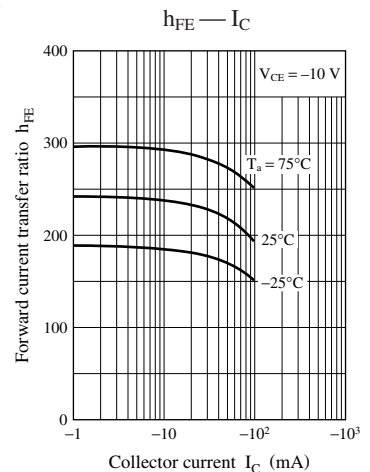
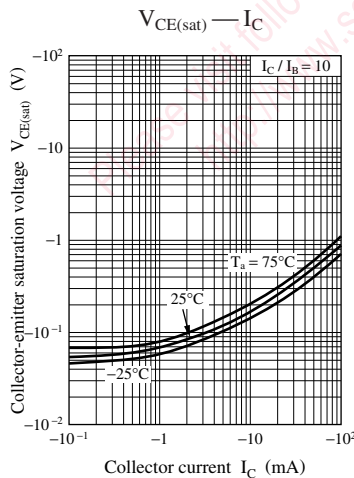
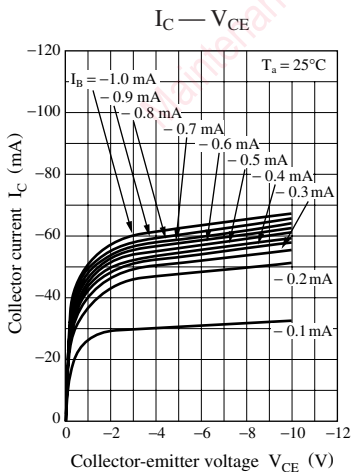


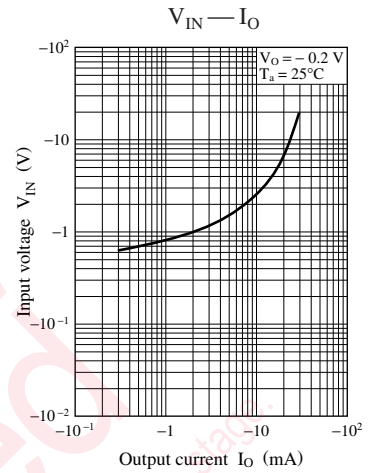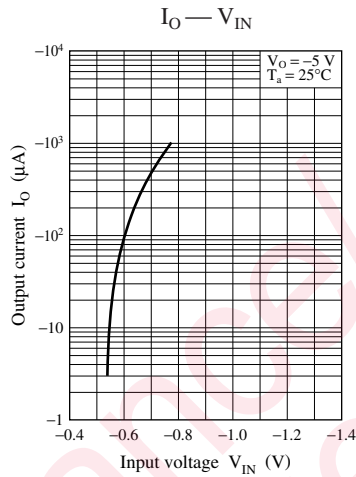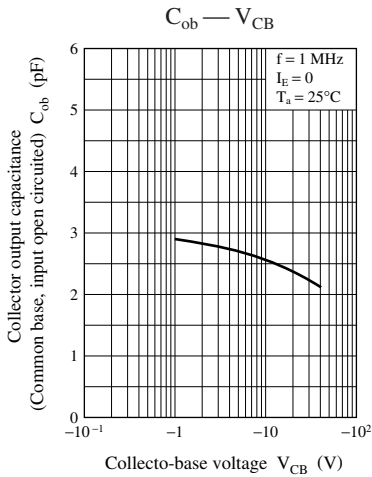




Characteristics charts of UNR9111G

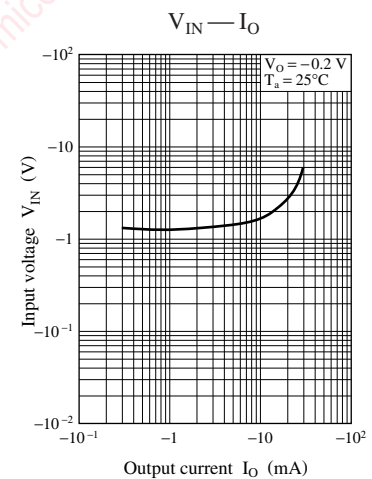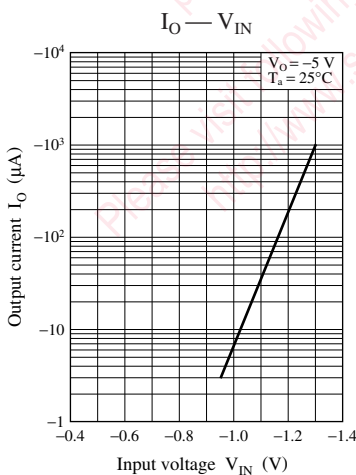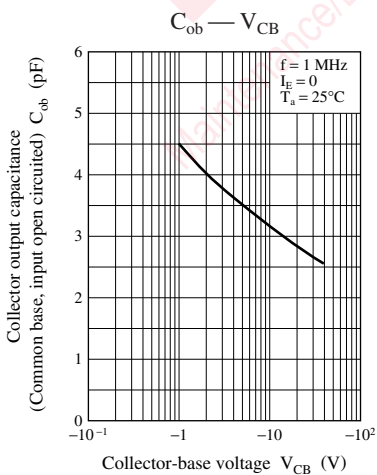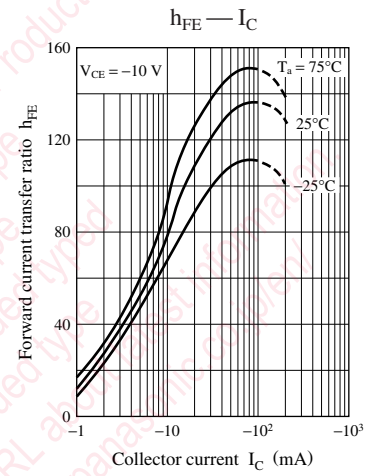
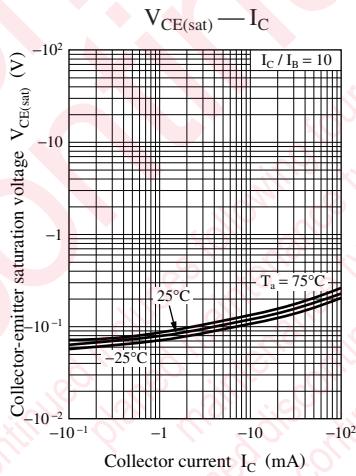
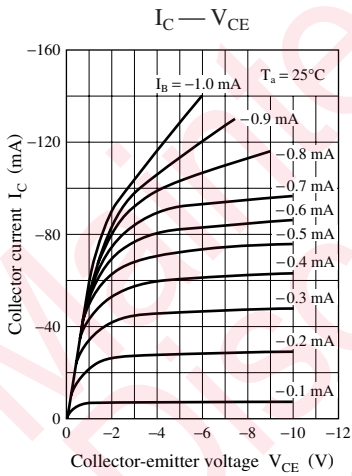


**Characteristics charts of UNR9112G**

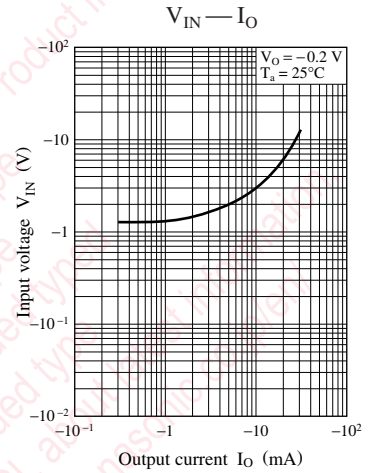
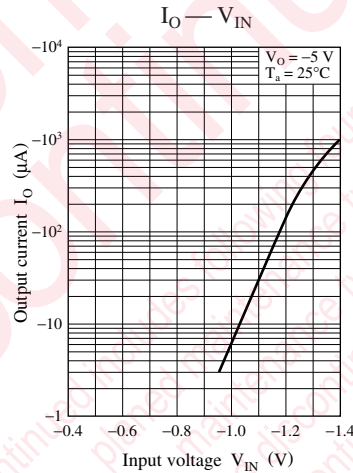
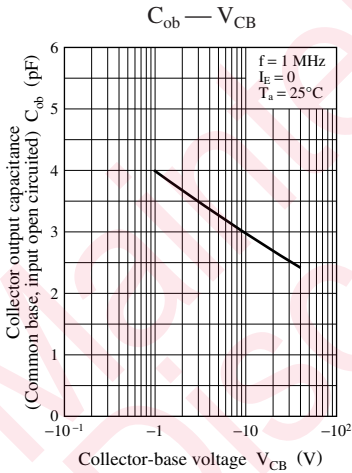
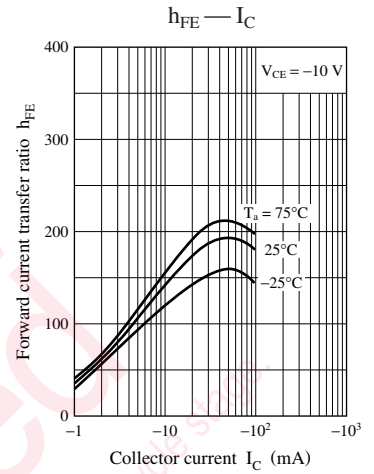
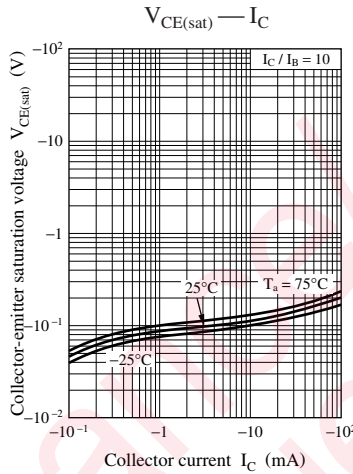
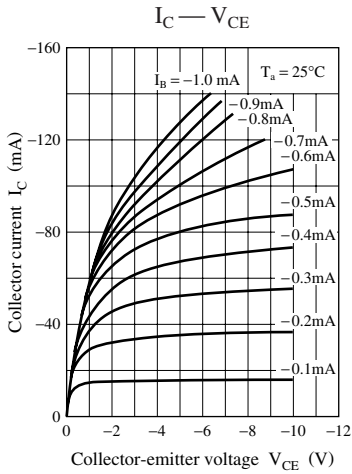


**Characteristics charts of UNR9113G**




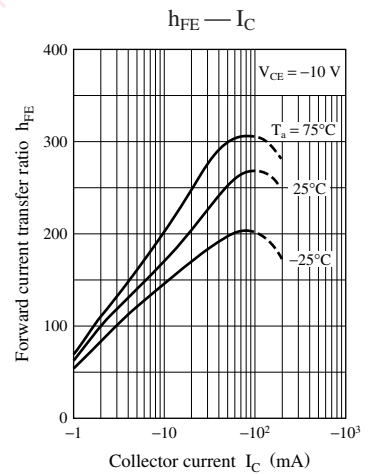
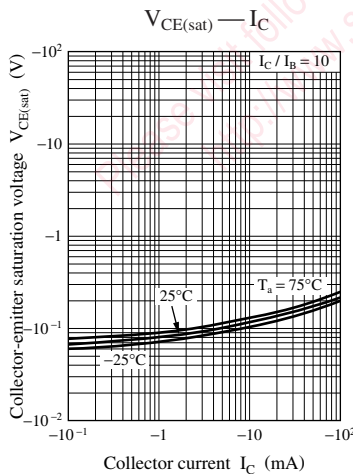
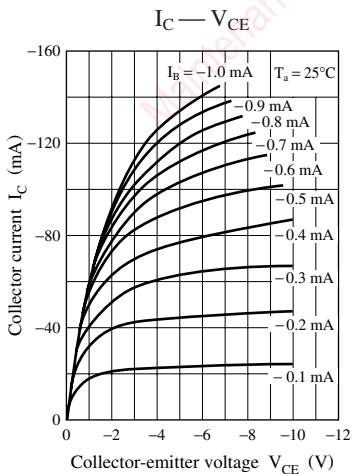


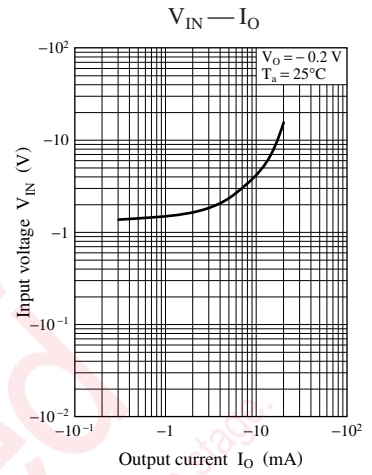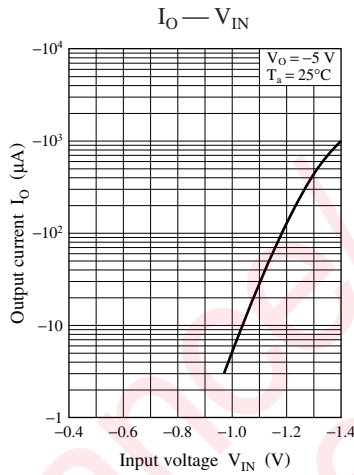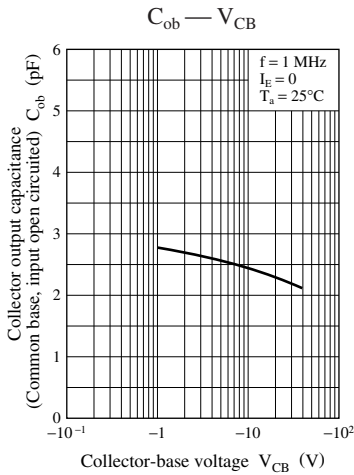




Characteristics charts of UNR9114G

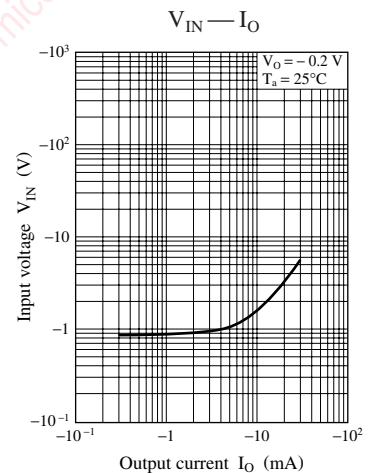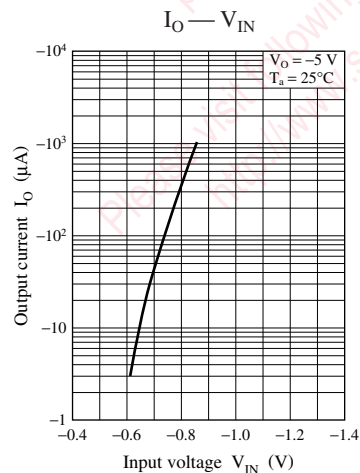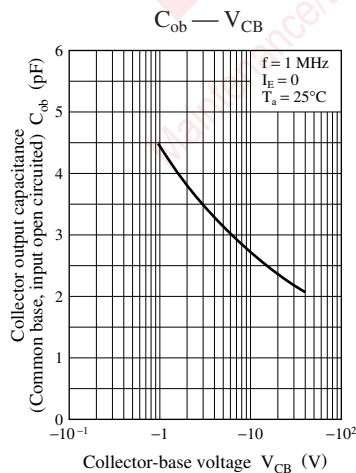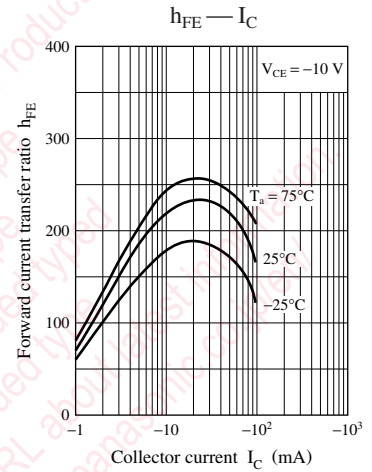
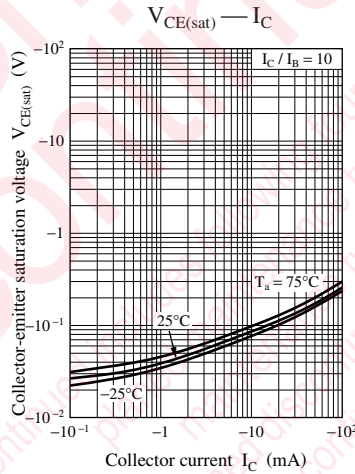
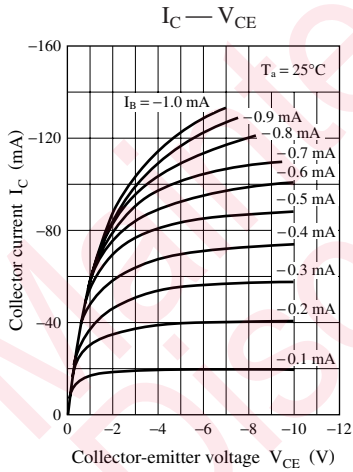


**Characteristics charts of UNR9115G**

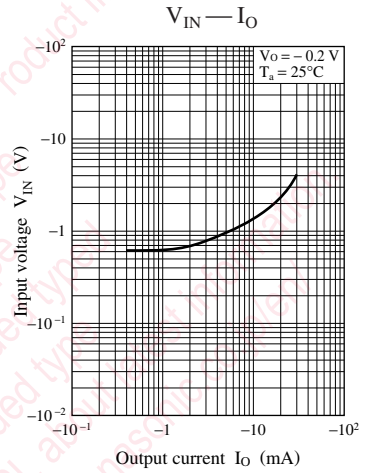
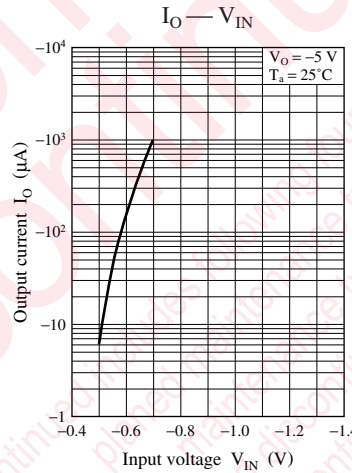
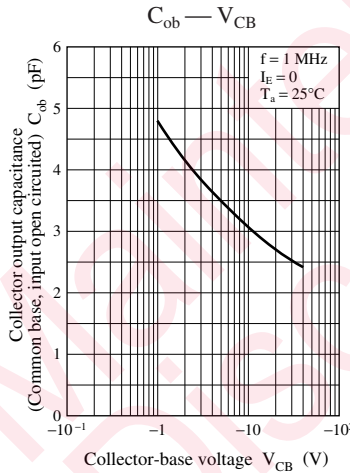
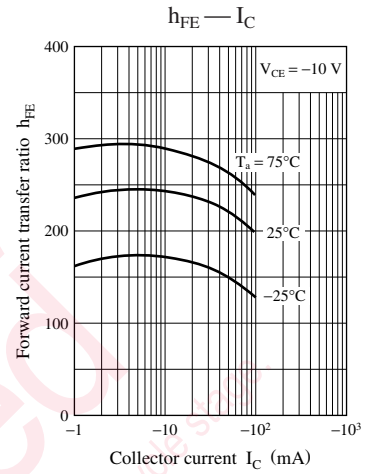
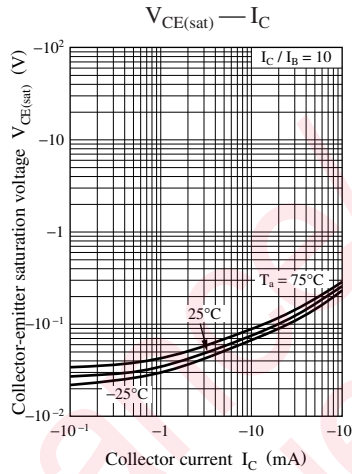
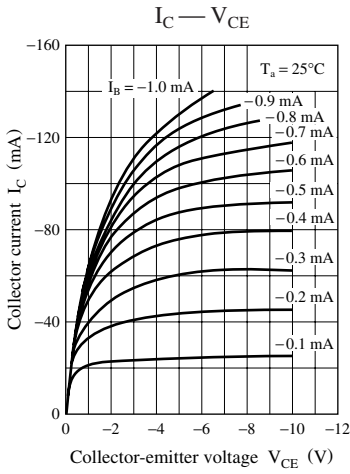


**Characteristics charts of UNR9116G**




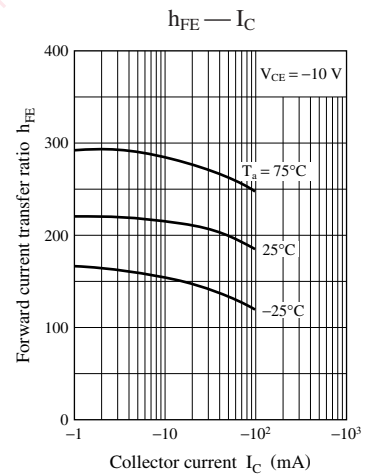
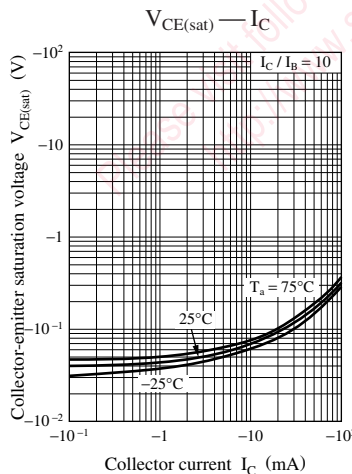
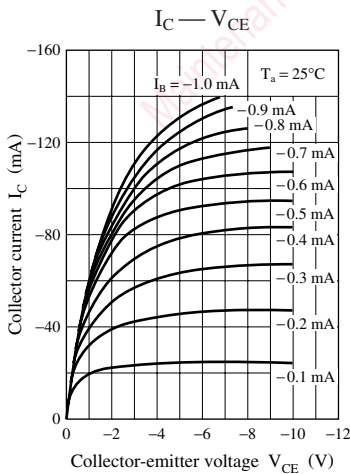


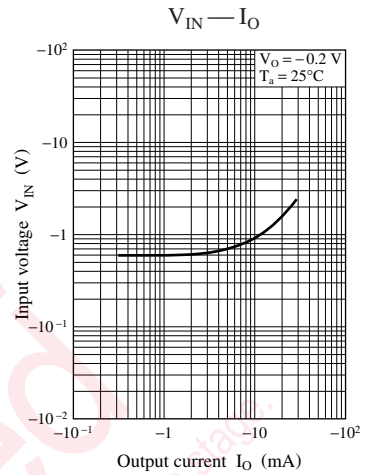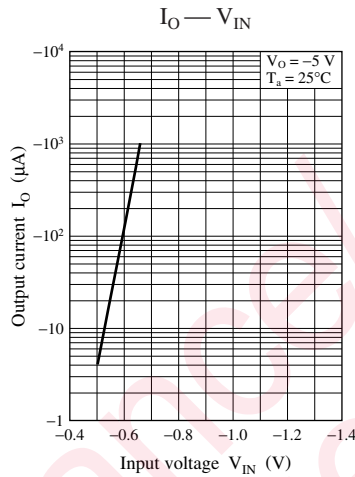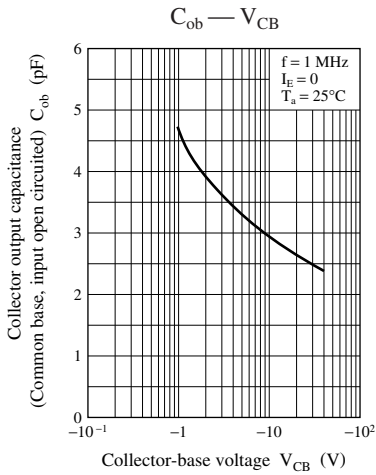




Characteristics charts of UNR9117G

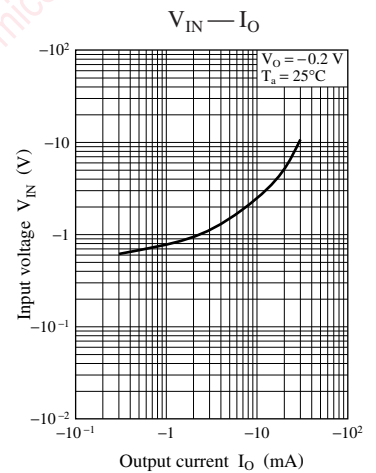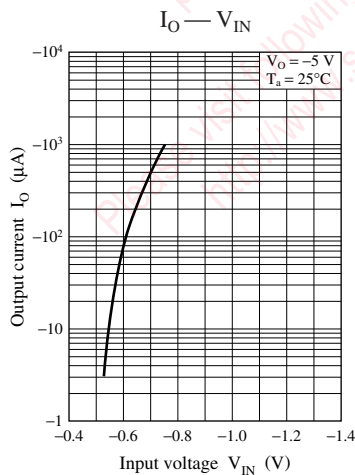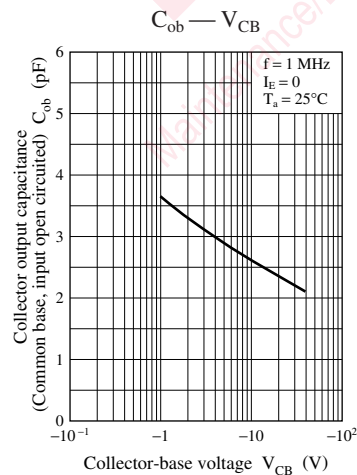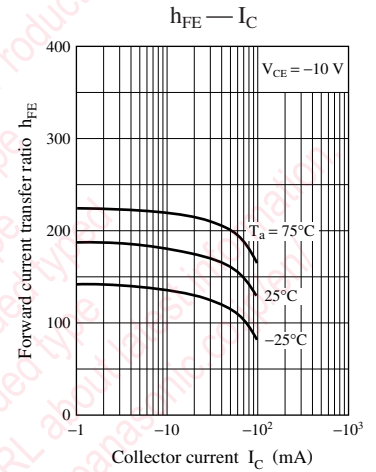
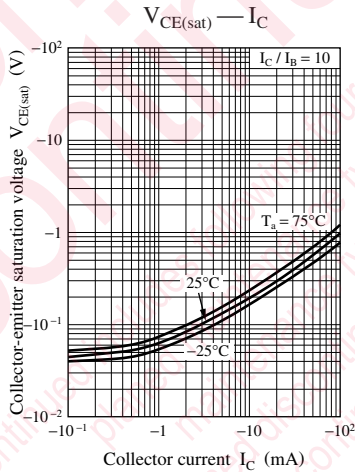
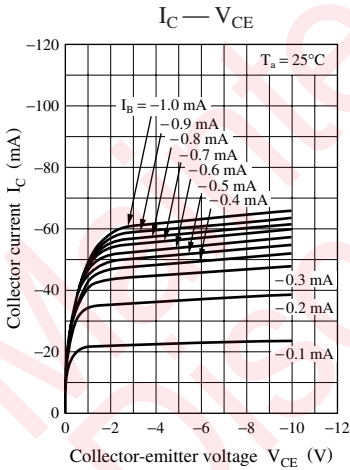


Characteristics charts of UNR9118G

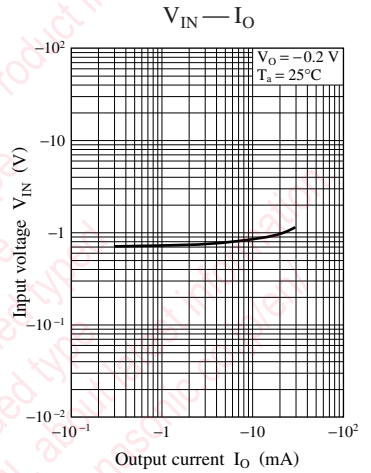
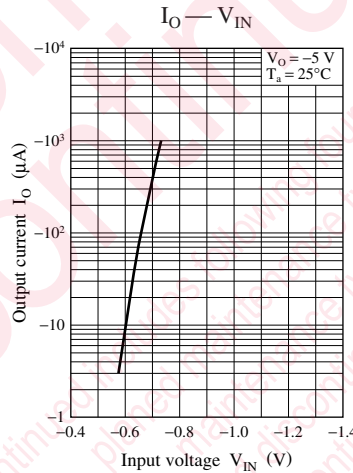
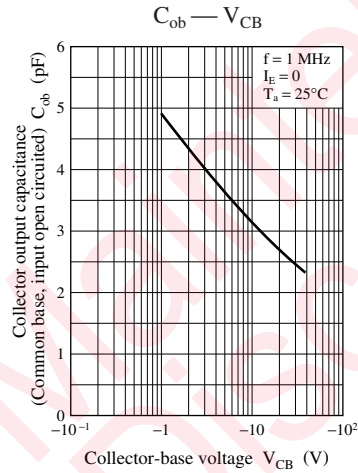
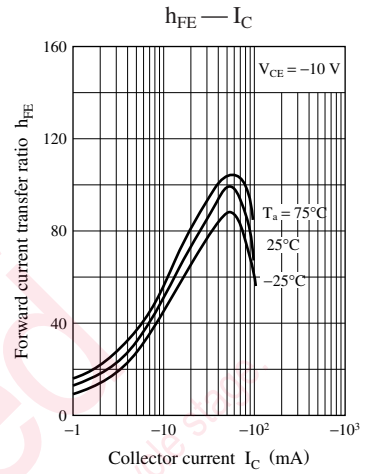
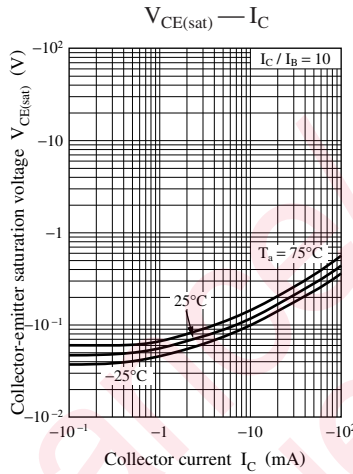
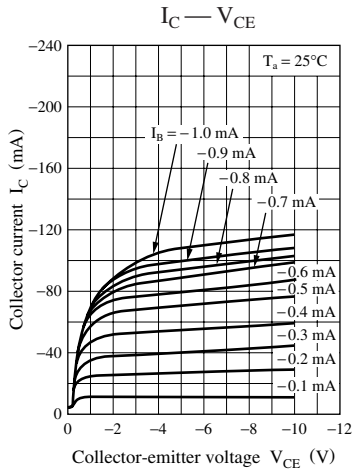


Characteristics charts of UNR9119G




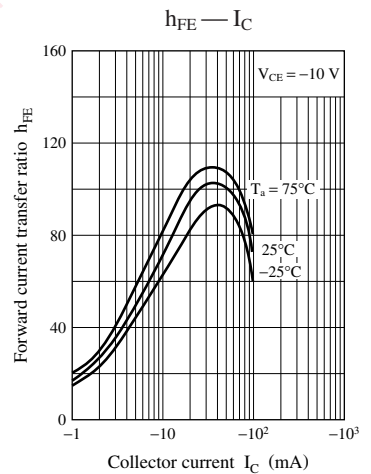
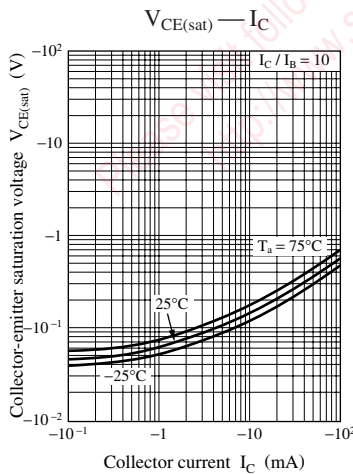
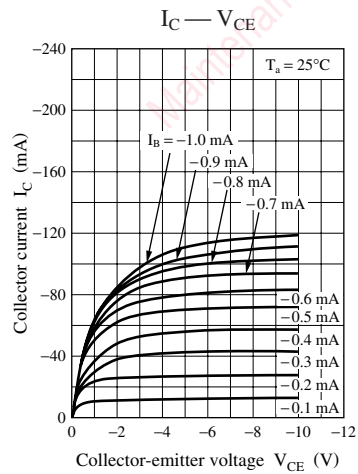


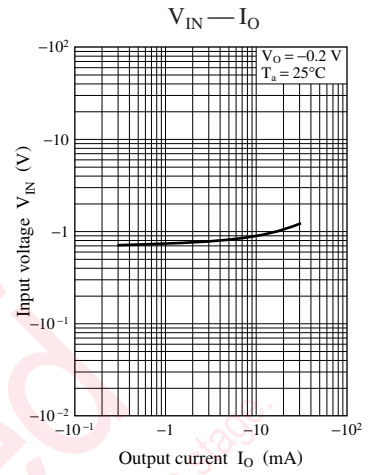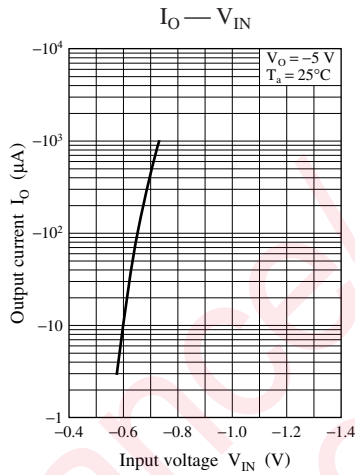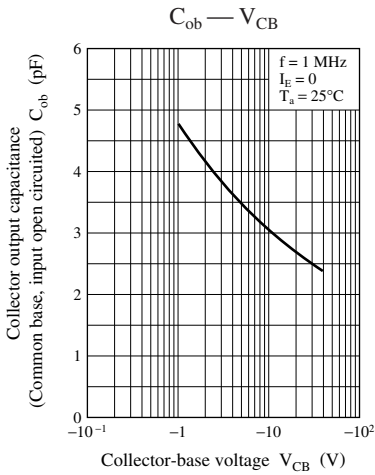




Characteristics charts of UNR911AG

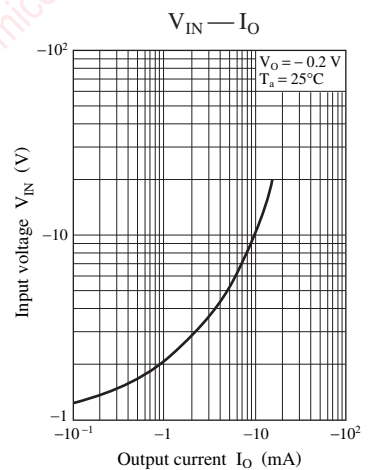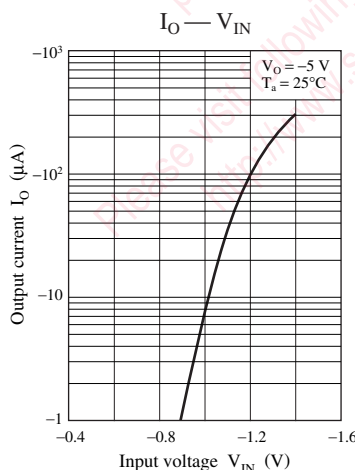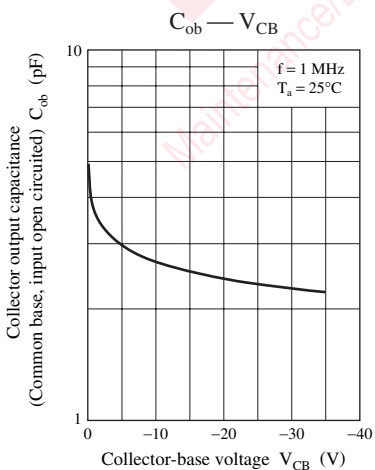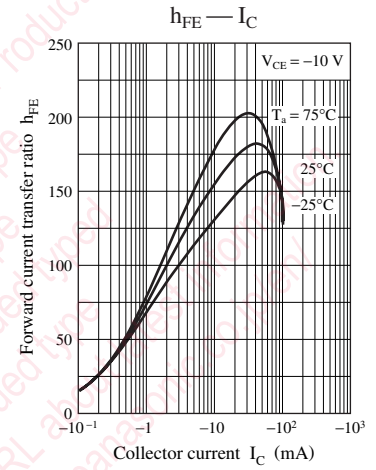
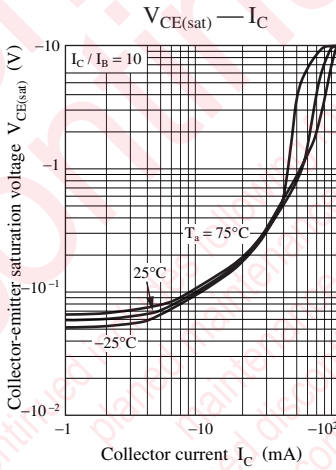
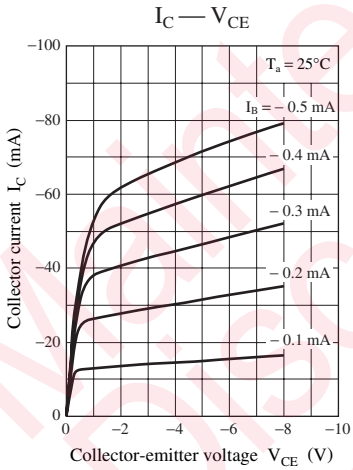


Characteristics charts of UNR911BG

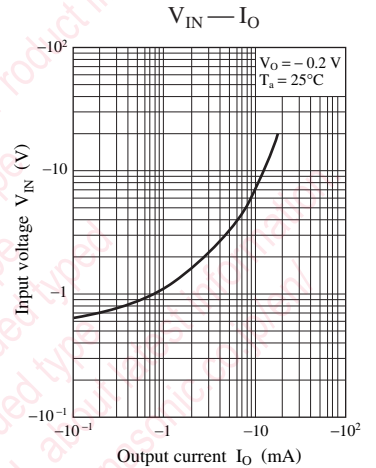
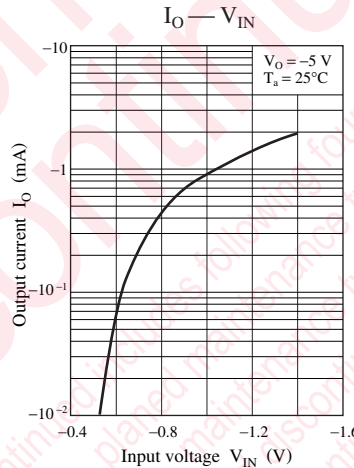
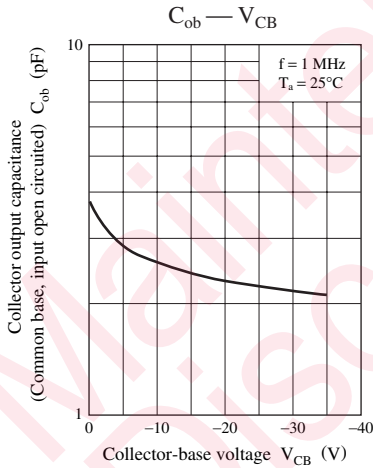
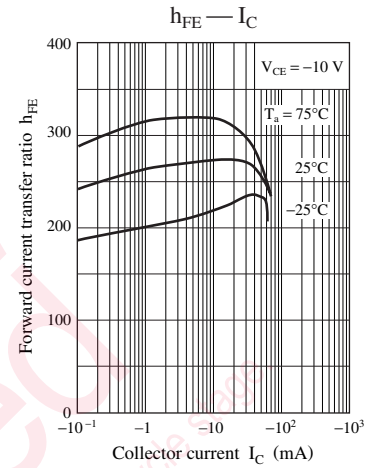
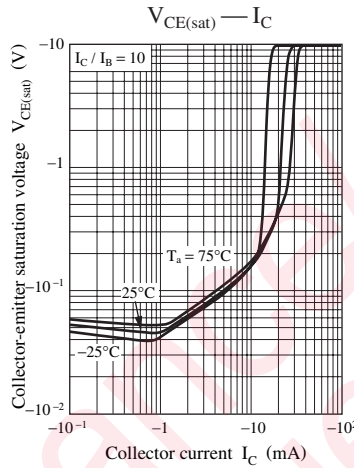
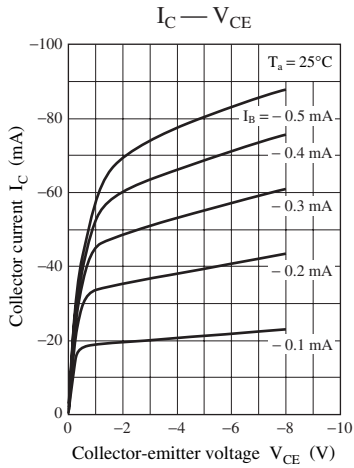


Characteristics charts of UNR911CG




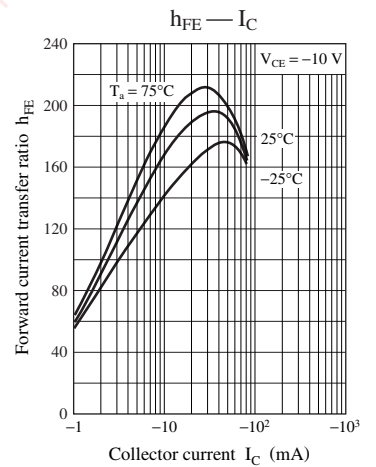
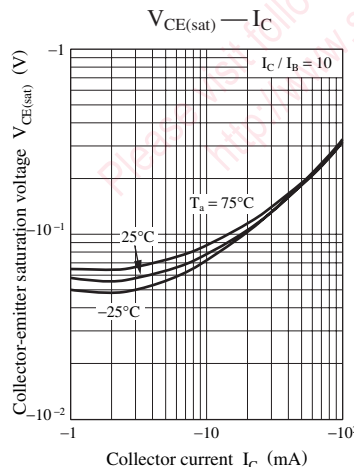
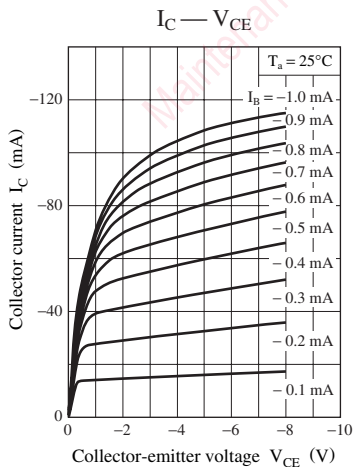


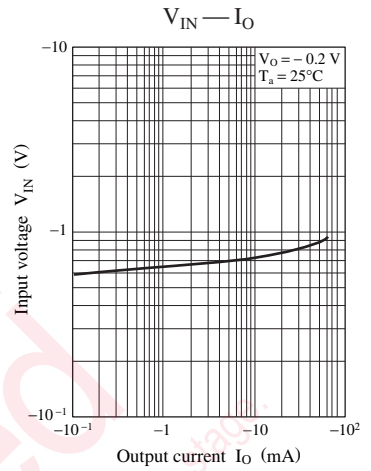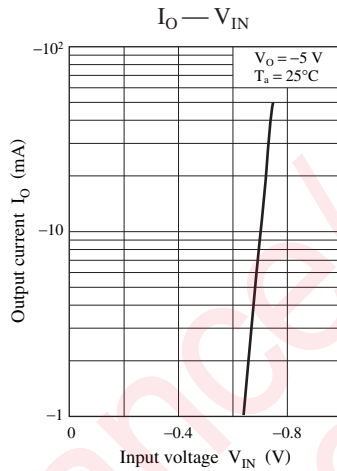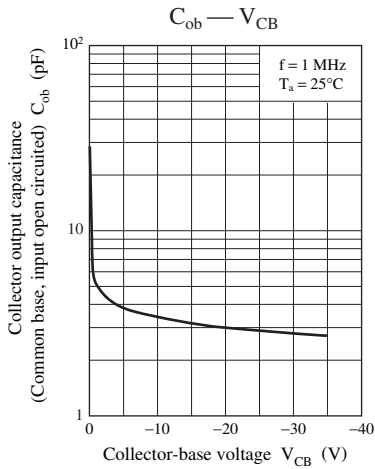




Characteristics charts of UNR911DG

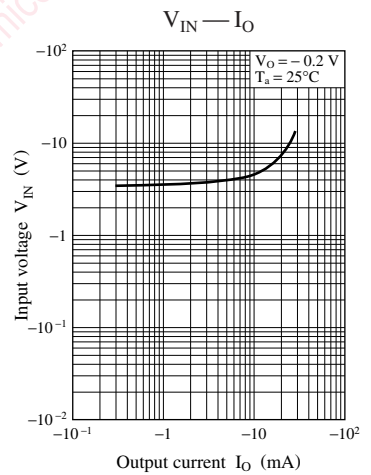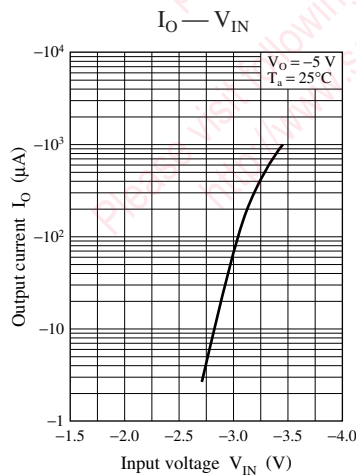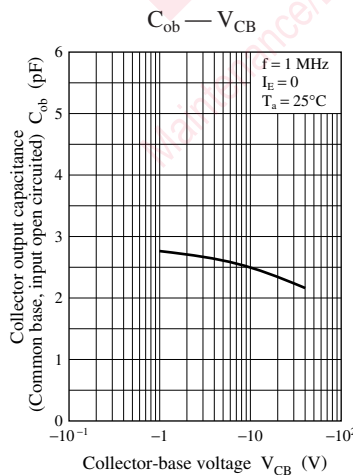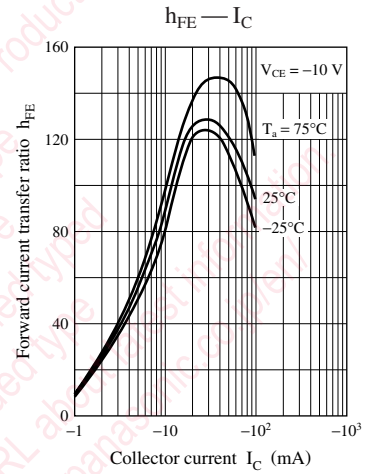
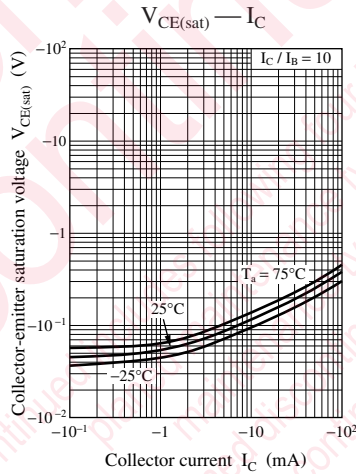
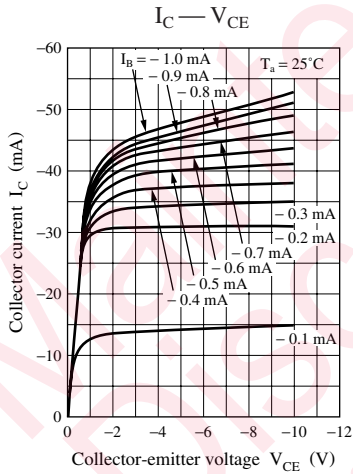


**Characteristics charts of UNR911EG**

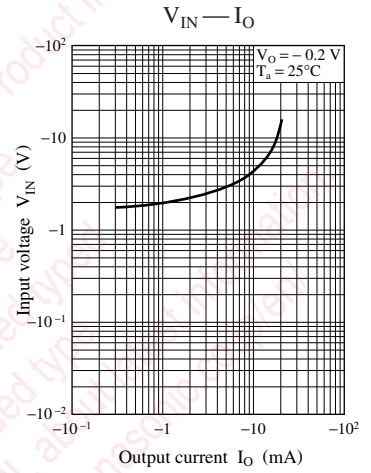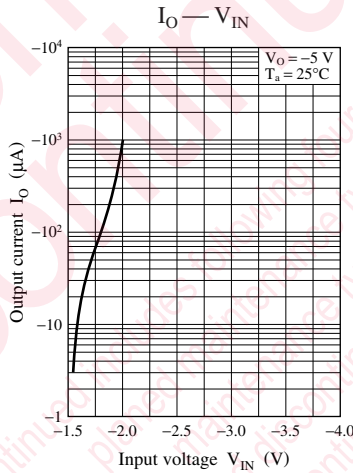
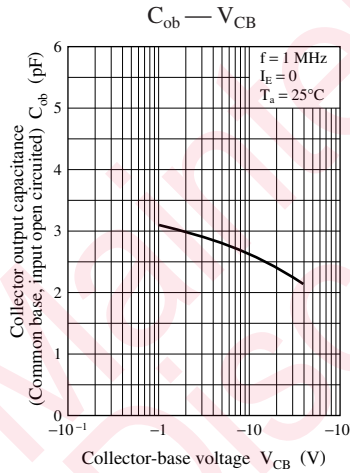
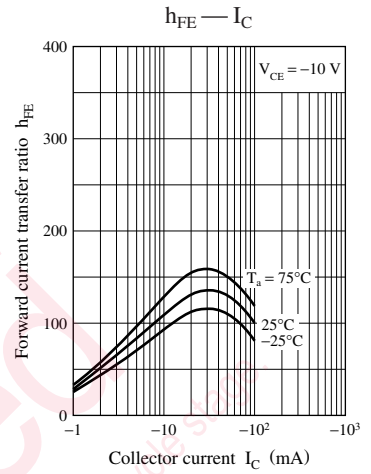
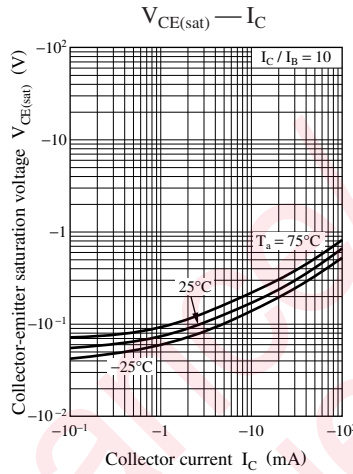
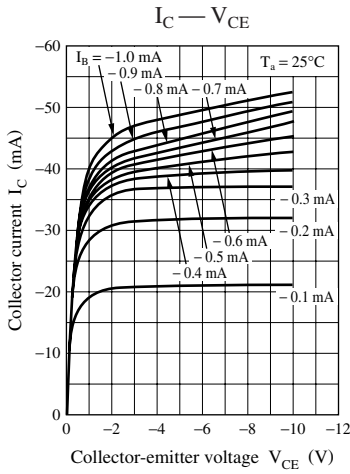


**Characteristics charts of UNR911FG**



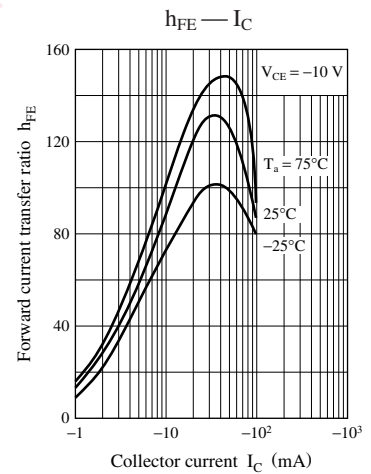
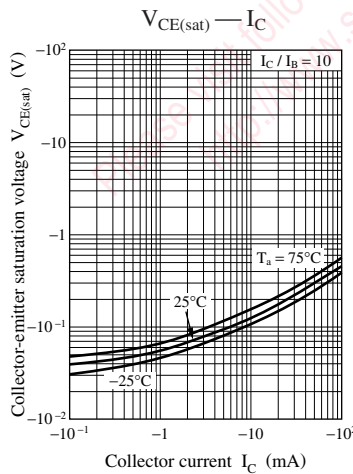
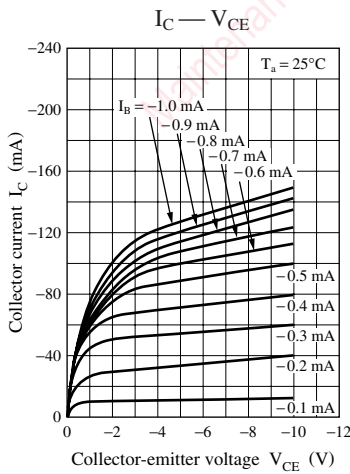


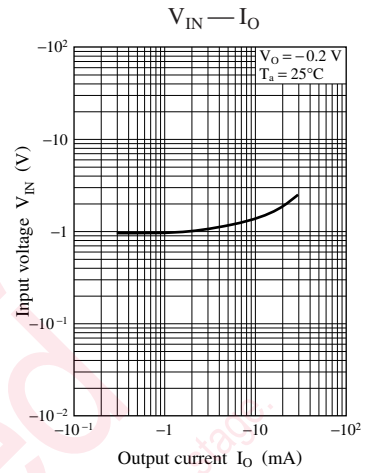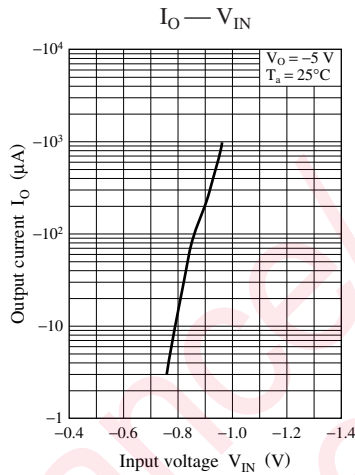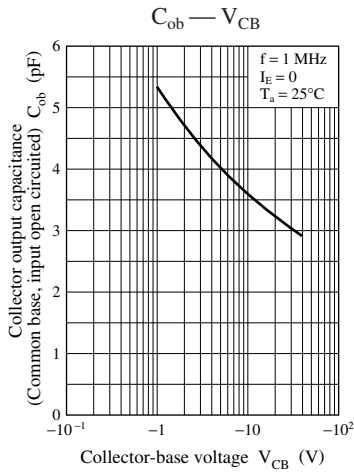




Characteristics charts of UNR911HG

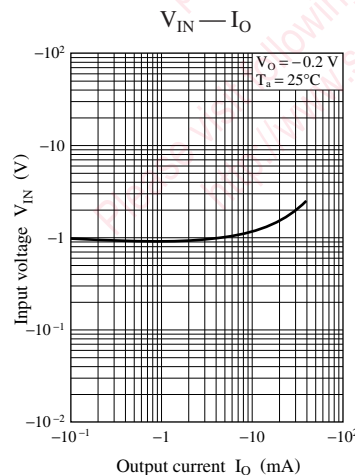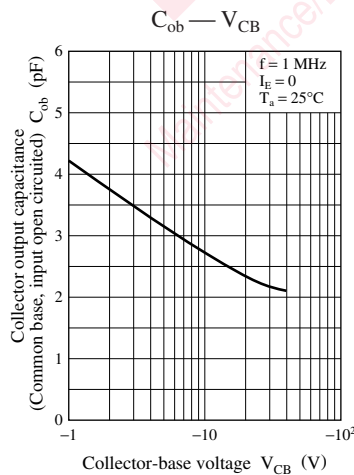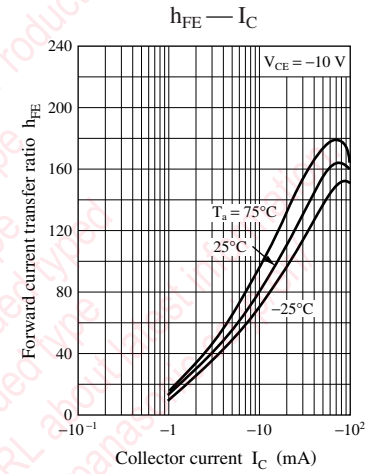
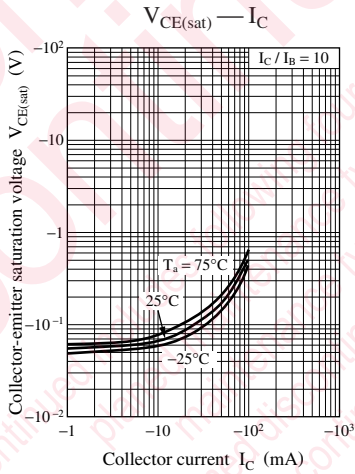
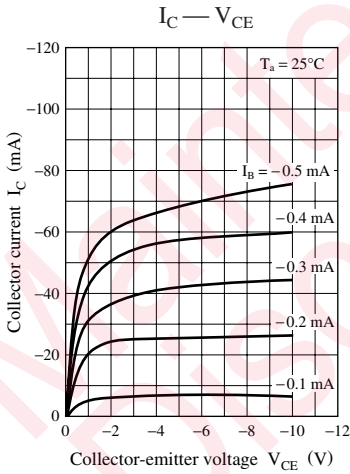


**Characteristics charts of UNR911LG**


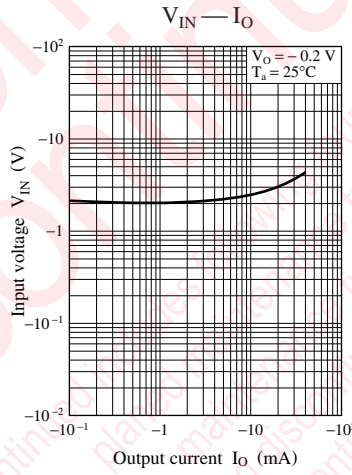
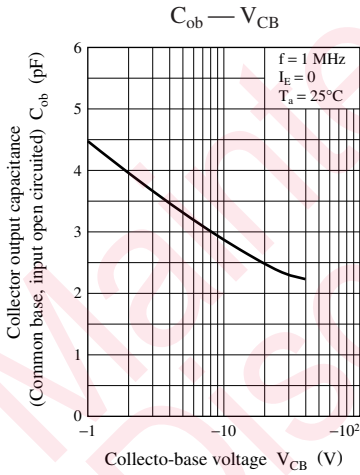
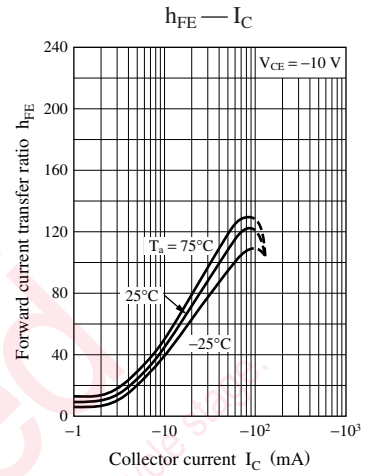
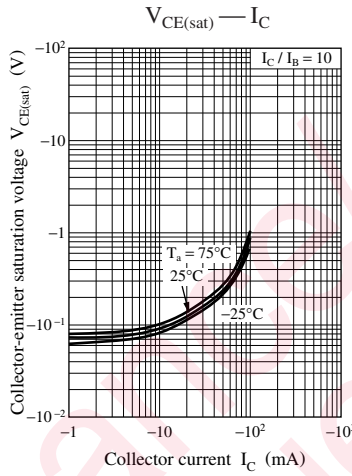
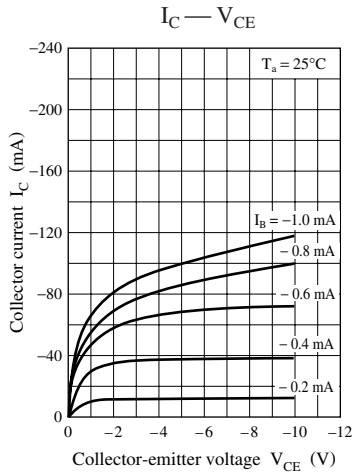


**Characteristics charts of UNR911MG**




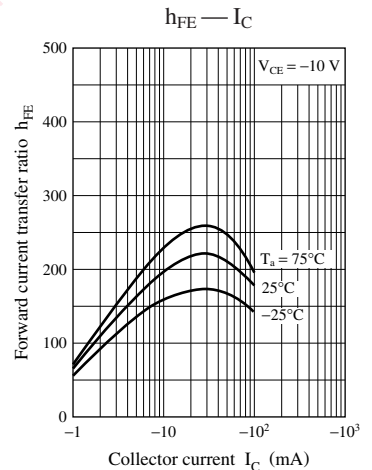
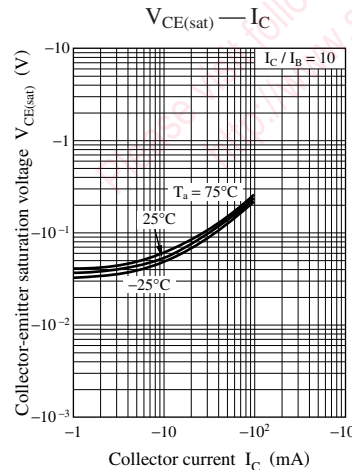
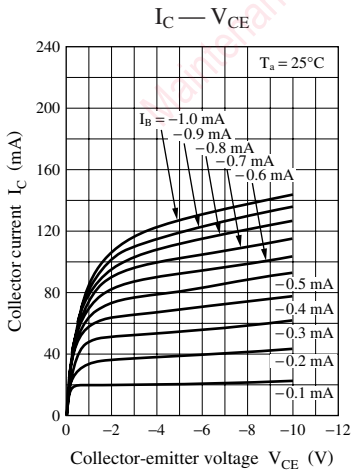


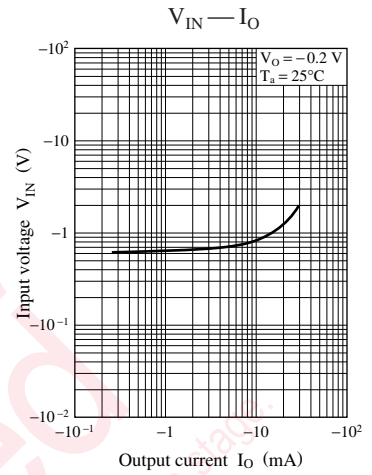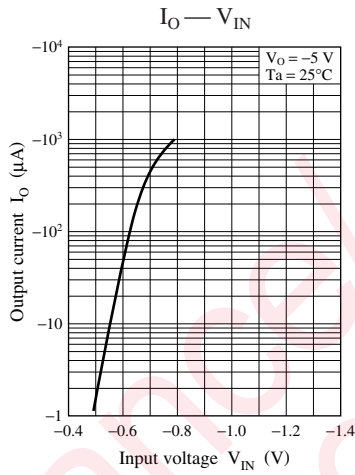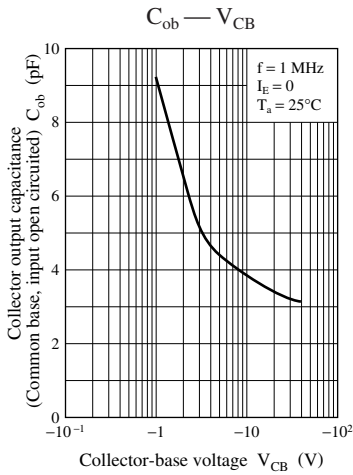




**Characteristics charts of UNR911NG**

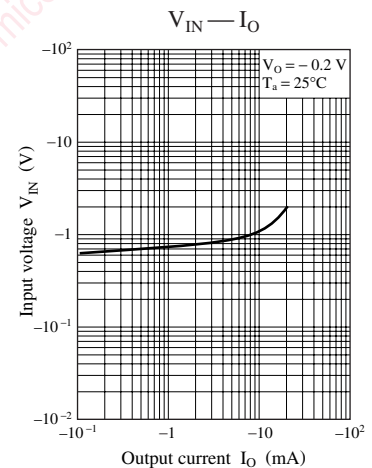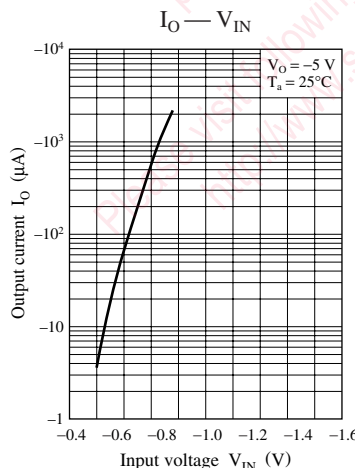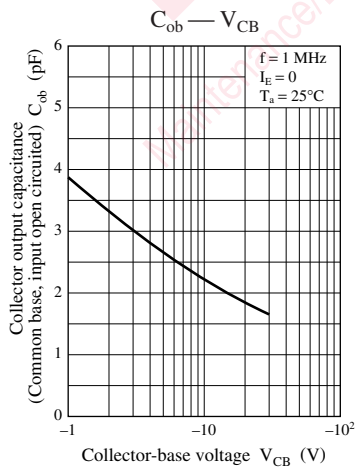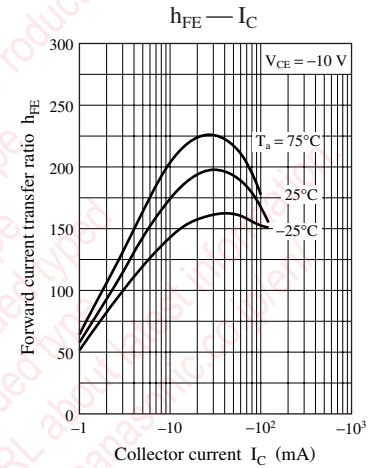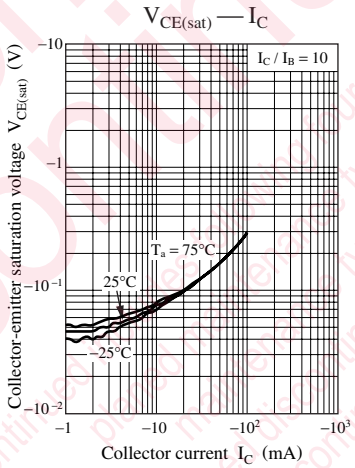
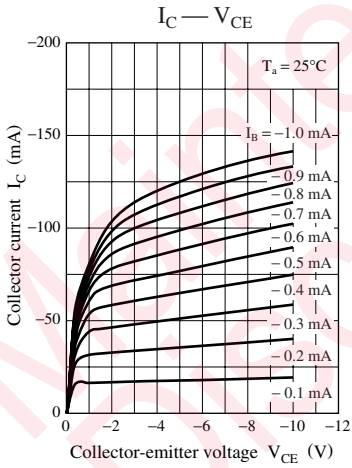


Characteristics charts of UNR911TG

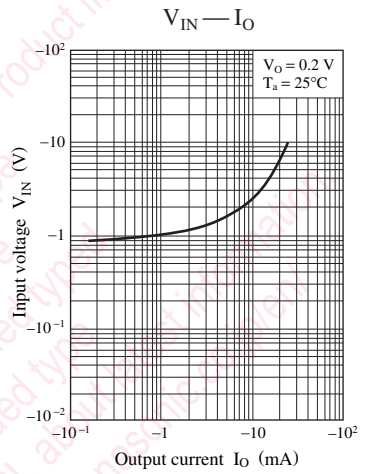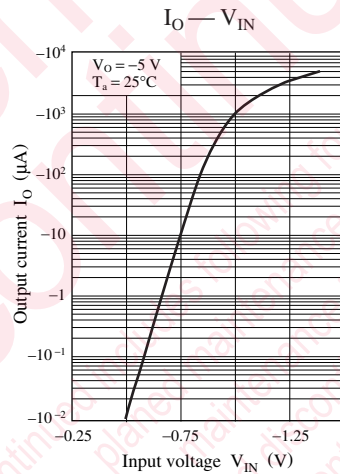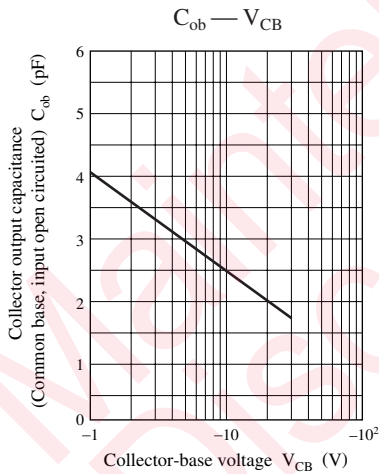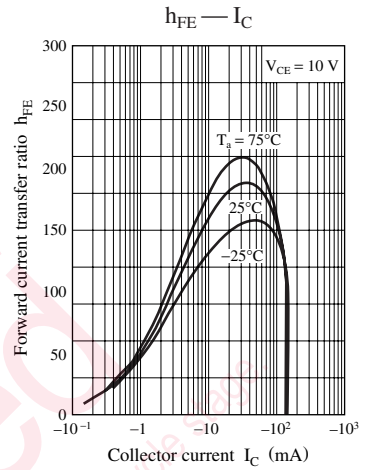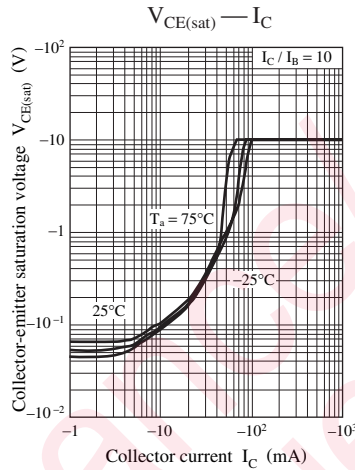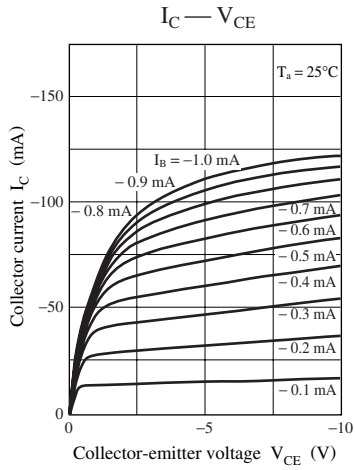

Characteristics charts of UNR911VG

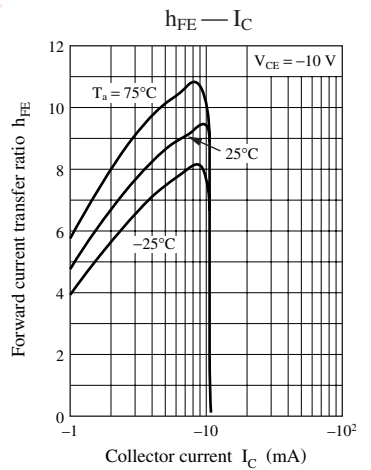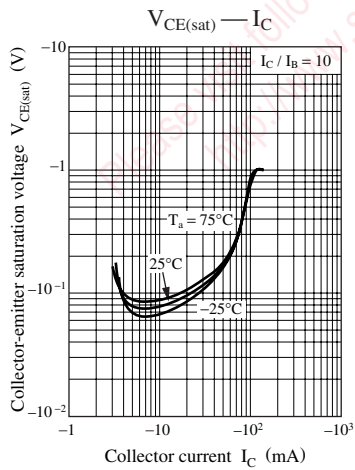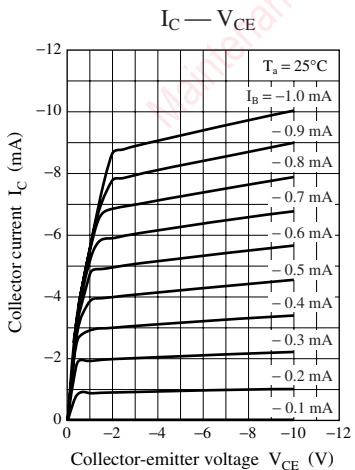

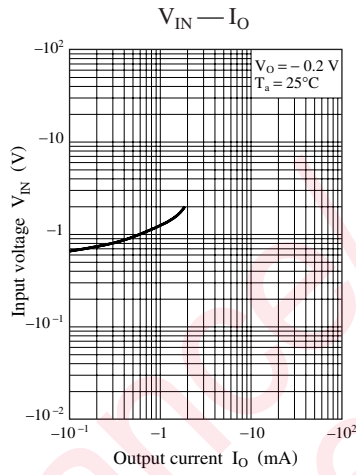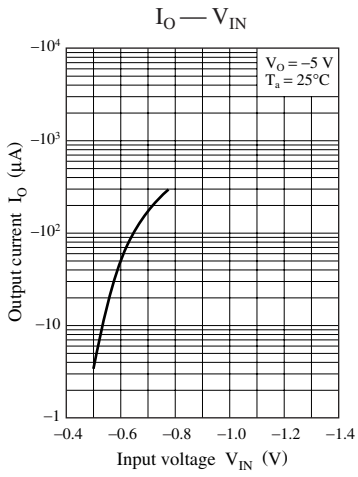


Maintenance/Discontinued

Maintenance/Discontinued includes following four Product lifecycle stage.  
 planned maintenance type  
 maintenance type  
 planned discontinued type  
 discontinued type  
 Please visit following URL about latest information.  
<http://www.semicon.panasonic.co.jp/en/>

**SSMini3-F3**

Unit: mm

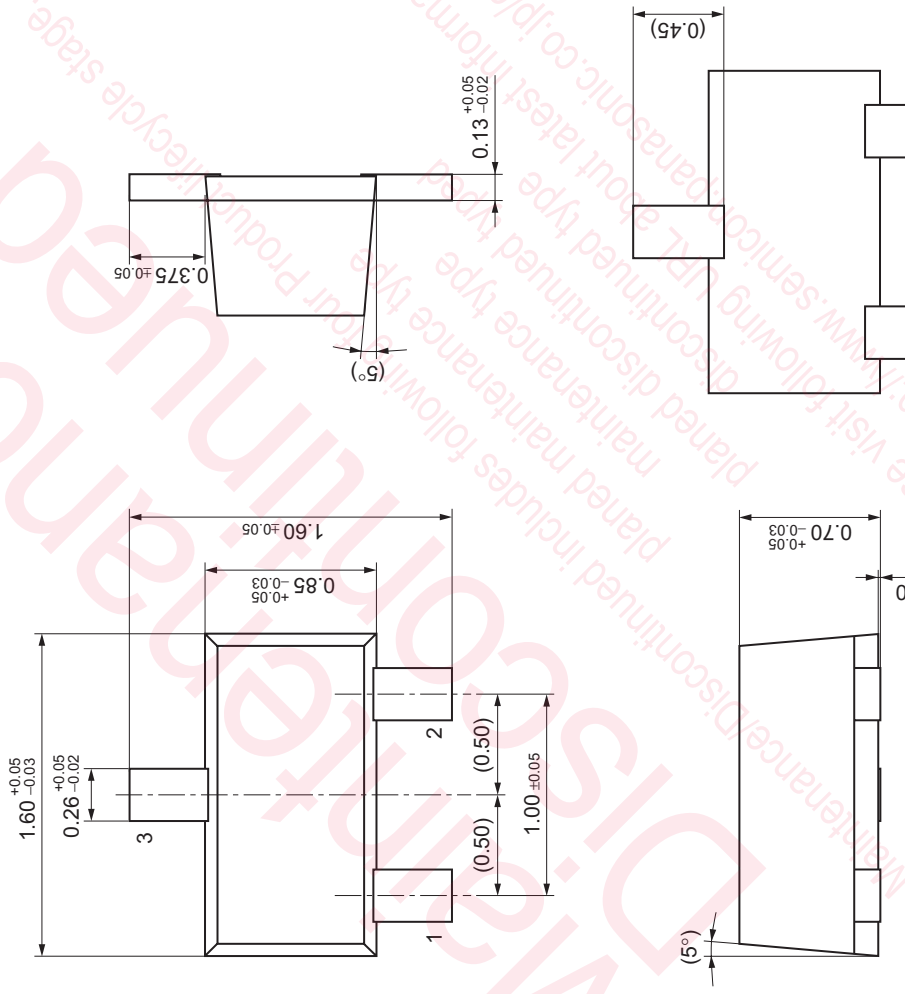

## utions in using the technical information and scribed in this book

s book is to be exported or provided to non-residents, the laws and  
rd to security export control, must be observed.

ly to show the main characteristics and application circuit examples  
l property right or other right owned by our company or any other  
any as to the infringement upon any such right owned by any other  
rmation described in this book.

standard applications or general electronic equipment (such as office  
and household appliances).

ng applications:

biles, traffic control equipment, combustion equipment, life support  
reliability are required, or if the failure or malfunction of the prod-

ck are subject to change without notice for modification and/or im-  
use of the products, therefore, ask for the most up-to-date Product  
atisfy your requirements.

bsolute maximum rating and the guaranteed operating conditions  
(.). Especially, please be careful not to exceed the range of absolute  
r-off and mode-switching. Otherwise, we will not be liable for any

take into the consideration of incidence of break down and failure  
n the systems such as redundant design, arresting the spread of fire  
al injury, fire, social damages, for example, by using the products.

own and characteristics change due to external factors (ESD, EOS,  
mounting or at customer's process. When using products for which  
shelf life and the elapsed time since first opening the packages.

ly or partially, without the prior written permission of Matsushita







## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View UNR911AG0L on WIN SOURCE](#)

 [Panasonic Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management