




**THE DATASHEET OF  
SK310BE3/TR13**



# 3 Amp Schottky Rectifiers SK32B — SK310B

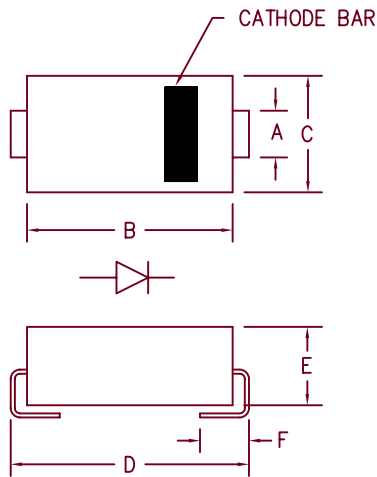

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.068	.087	1.73	2.21	
B	.157	.177	3.99	4.50	
C	.130	.155	3.30	3.94	
D	.194	.228	4.93	5.79	
E	.078	.115	1.98	2.92	
F	.030	.060	.760	1.52	

SMB  
DO-214AA

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SK32B	20V	20V
SK33B	30V	30V
SK34B	40V	40V
SK36B	60V	60V
SK38B	80V	80V
SK310B	100V	100V

- Schottky Barrier Rectifier
- Low Forward Voltage Drop
- 20–100 Volts
- Low switching losses
- Round lead design

## Electrical Characteristics

Average forward current	$I_F(AV)$	3.0A	$T_J = 120^\circ C$
Maximum surge current	$I_{FSM}$	100A	8.3ms half-sine
Max repetitive reverse current	$I_R(OV)$	2A	$f = 1KHZ, 25^\circ C, 1\mu s$ square wave
Max peak forward voltage (SK32B–SK34B)	$V_{FM}$	.50V	$I_{FM} = 3.0A; T_J = 25^\circ C^*$
Max peak forward voltage (SK36B)	$V_{FM}$	.75V	$I_{FM} = 3.0A; T_J = 25^\circ C^*$
Max peak forward voltage (SK38B–SK310B)	$V_{FM}$	.85V	$I_{FM} = 3.0A; T_J = 25^\circ C^*$
Max peak reverse current	$I_{RM}$	.5mA	$V_{RRM}, T_J = 25^\circ C$
Max peak reverse current	$I_{RM}$	20mA	$V_{RRM}, T_J = 100^\circ C^*$
Typical junction capacitance	$C_J$	250pF	$V_R = 5.0V, T_J = 25^\circ C$

\*Pulse test: Pulse width 300  $\mu$ sec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temperature range	$T_{STG}$	$-55^\circ C$ to $150^\circ C$
Operating junction temp range	$T_J$	$-55^\circ C$ to $125^\circ C$
Maximum thermal resistance	$R_{\theta JC}$	$10^\circ C/W$



8700 East Thomas Road, P.O. Box 1390  
Scottsdale, AZ 85252  
PH: (480) 941-6300  
FAX: (480) 947-1503  
[www.microsemi.com](http://www.microsemi.com)

05-30-07 Rev. 2

# SK32B — SK310B

Figure 1  
Typical Forward Characteristics

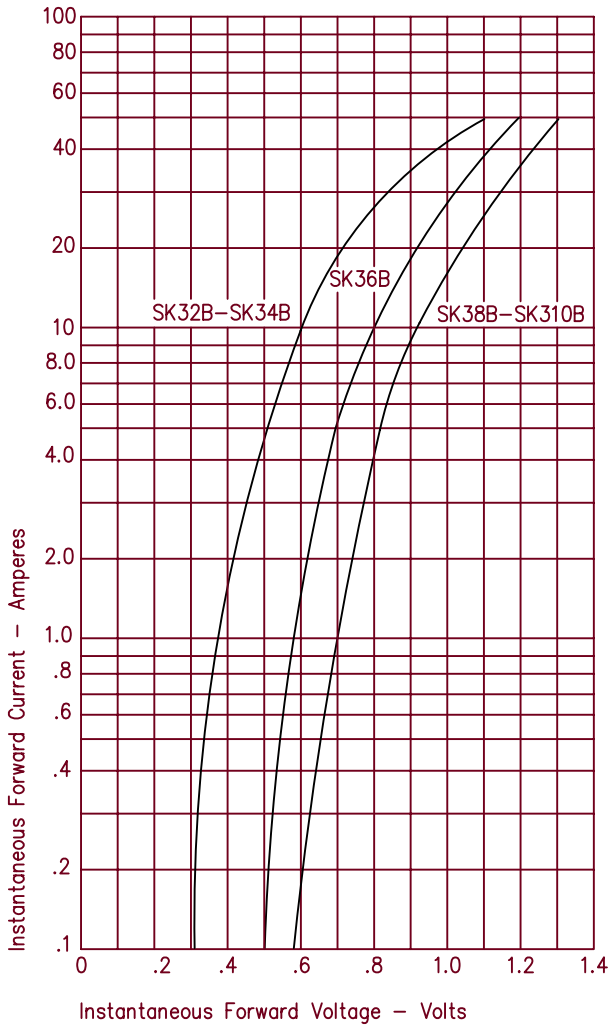


Figure 3  
Typical Junction Capacitance


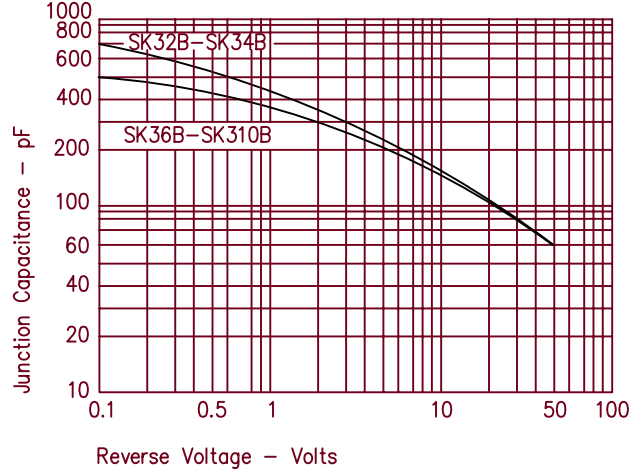



Figure 2  
Typical Reverse Characteristics @ 100°C

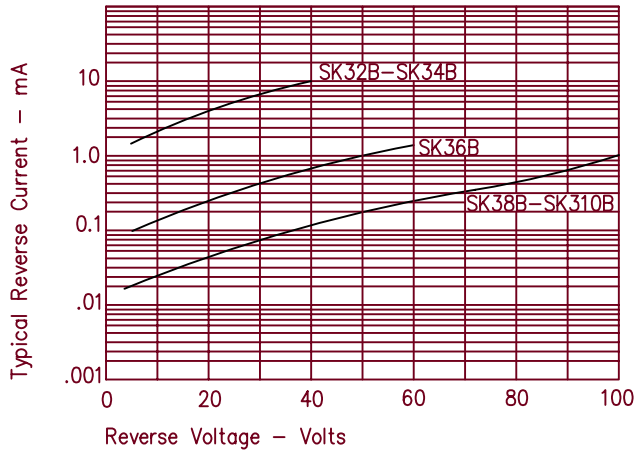

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SK310BE3/TR13 on WIN SOURCE](#)
-  [Microsemi Corporation](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management