THE DATASHEET OF

BCV29H6327XTSA1

www.win-source.net 0086-755-83957316

NPN Silicon Darlington Transistors

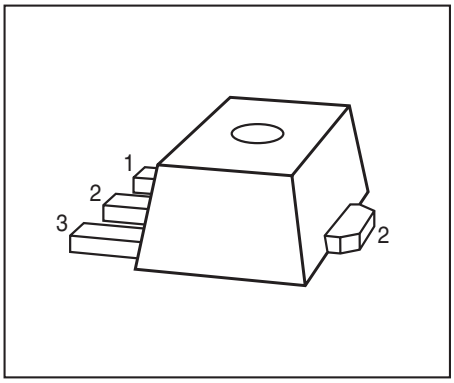

- For general AF applications
- High collector current
- High current gain
- Complementary types: BCV28, BCV48 (PNP)
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101

Type	Marking	Pin Configuration			Package
BCV29	EF	1=B	2=C	3=E	SOT89
BCV49	EG	1=B	2=C	3=E	SOT89

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}		V
BCV29		30	
BCV49		60	
Collector-base voltage	V_{CBO}		
BCV29		40	
BCV49		80	
Emitter-base voltage	V_{EBO}	10	
Collector current	I_C	500	mA
Peak collector current, $t_p \leq 10$ ms	I_{CM}	800	
Base current	I_B	100	
Peak base current	I_{BM}	200	
Total power dissipation- $T_S \leq 130$ °C	P_{tot}	1	W
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point[1)]	R_{thJS}	≤ 20	K/W

[1]For calculation of R_{thJA} please refer to Application Note AN077 (Thermal Resistance Calculation)

Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage	$V_{(BR)CEO}$				V
I_C = 10 mA, I_B = 0 , BCV29		30	-	-	
I_C = 10 mA, I_B = 0 , BCV49		60	-	-	
Collector-base breakdown voltage	$V_{(BR)CBO}$				
I_C = 100 µA, I_E = 0 , BCV29		40	-	-	
I_C = 100 µA, I_E = 0 , BCV49		80	-	-	
Emitter-base breakdown voltage	$V_{(BR)EBO}$	10	-	-	
I_E = 10 µA, I_C = 0					
Collector-base cutoff current	I_{CBO}				µA
V_{CB} = 30 V, I_E = 0 , BCV29		-	-	0.1	
V_{CB} = 60 V, I_E = 0 , BCV49		-	-	0.1	
V_{CB} = 30 V, I_E = 0 , T_A = 150 °C, BCV29		-	-	10	
V_{CB} = 60 V, I_E = 0 , T_A = 150 °C, BCV49		-	-	10	
Emitter-base cutoff current	I_{EBO}	-	-	100	nA
V_{EB} = 4 V, I_C = 0					
DC current gain[1)]	h_{FE}				-
I_C = 100 µA, V_{CE} = 1 V, BCV29		4000	-	-	
I_C = 100 µA, V_{CE} = 1 V, BCV49		2000	-	-	
I_C = 10 mA, V_{CE} = 5 V, BCV29		10000	-	-	
I_C = 10 mA, V_{CE} = 5 V, BCV49		4000	-	-	
I_C = 100 mA, V_{CE} = 5 V, BCV29		20000	-	-	
I_C = 100 mA, V_{CE} = 5 V, BCV49		10000	-	-	
I_C = 0.5 A, V_{CE} = 5 V, BCV29		4000	-	-	
I_C = 0.5 A, V_{CE} = 5 V, BCV49		2000	-	-	
Collector-emitter saturation voltage[1)]	V_{CEsat}	-	-	1	V
I_C = 100 mA, I_B = 0.1 mA					
Base emitter saturation voltage[1)]	V_{BEsat}	-	-	1.5	
I_C = 100 mA, I_B = 0.1 mA					

[1]Pulse test: t < 300µs; D < 2%

Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Transition frequency I_C = 50 mA, V_{CE} = 5 V, f = 100 MHz	f_T	-	150	-	MHz
Collector-base capacitance V_{CB} = 10 V, f = 1 MHz	C_{cb}	-	3	-	pF

DC current gain $h_{FE} = f(I_C)$

V_{CE} = 5 V

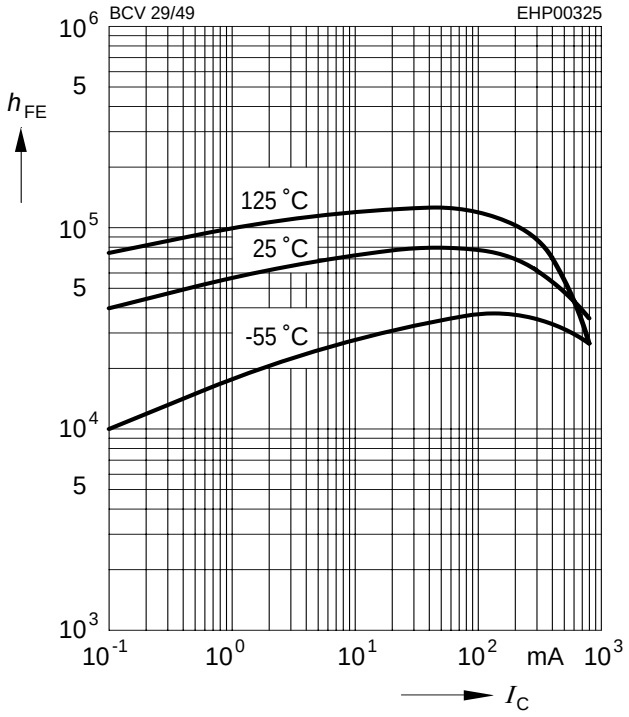

Collector-emitter saturation voltage

$I_C = f(V_{CEsat})$, h_{FE} = 1000

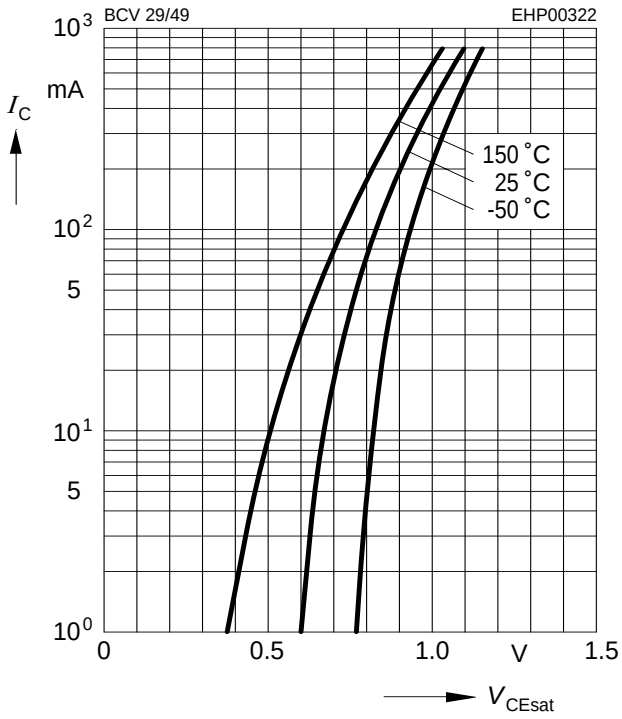

Base-emitter saturation voltage

$I_C = f(V_{BEsat})$, h_{FE} = 1000

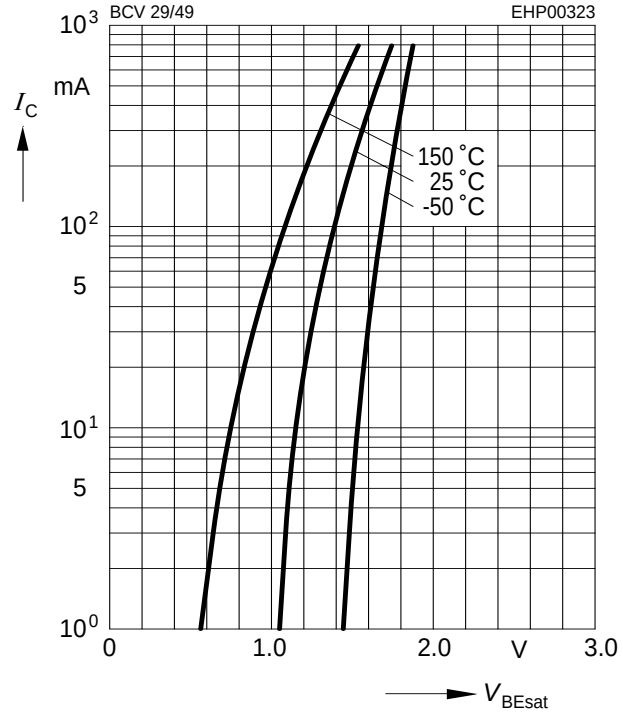

Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = V_{CEmax}$

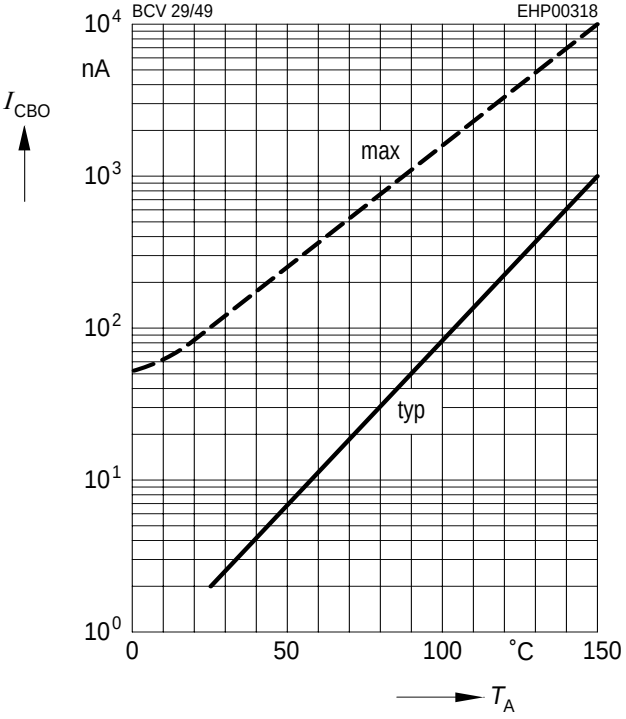

Transition frequency $f_T = f(I_C)$

V_{CE} = 5 V

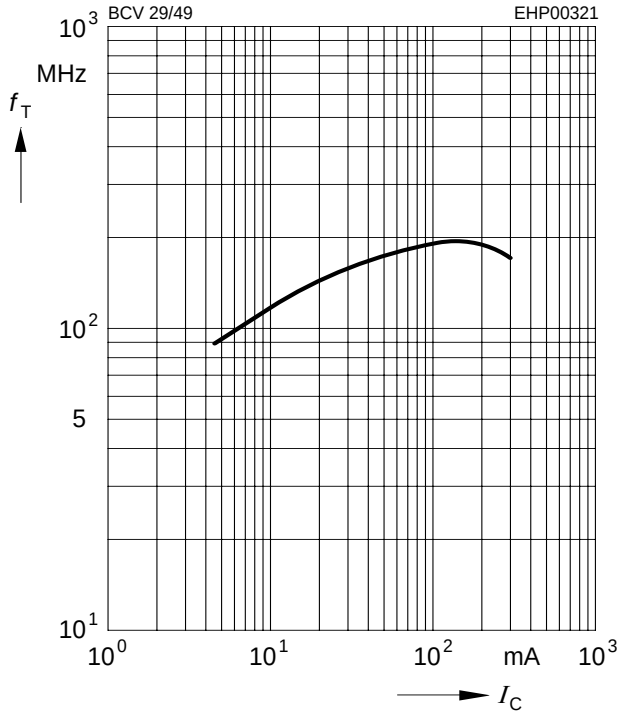

Collector-base capacitance $C_{cb} = f(V_{CB})$

Emitter-base capacitance $C_{eb} = f(V_{EB})$

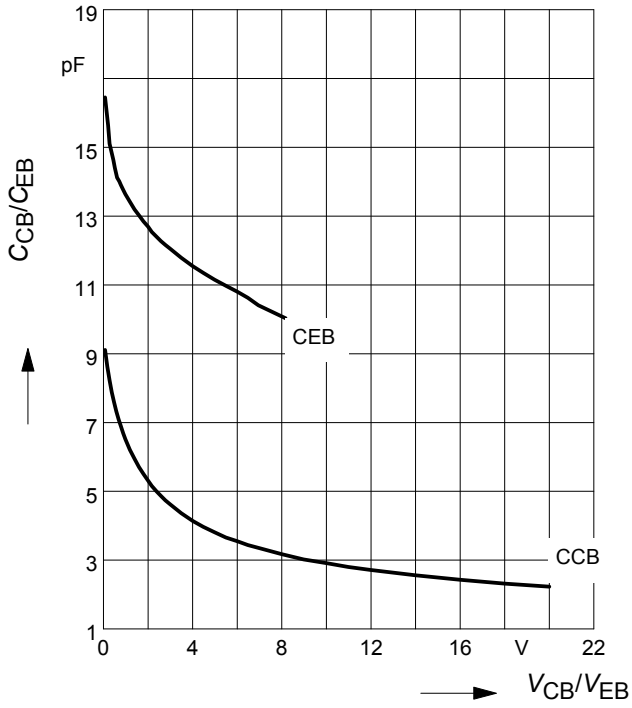

Total power dissipation $P_{tot} = f(T_S)$

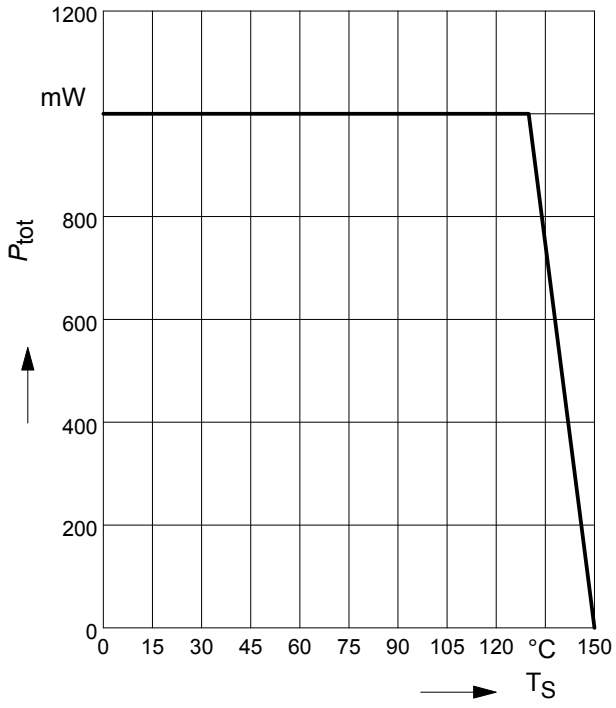

Permissible Pulse Load

$P_{totmax}/P_{totDC} = f(t_p)$

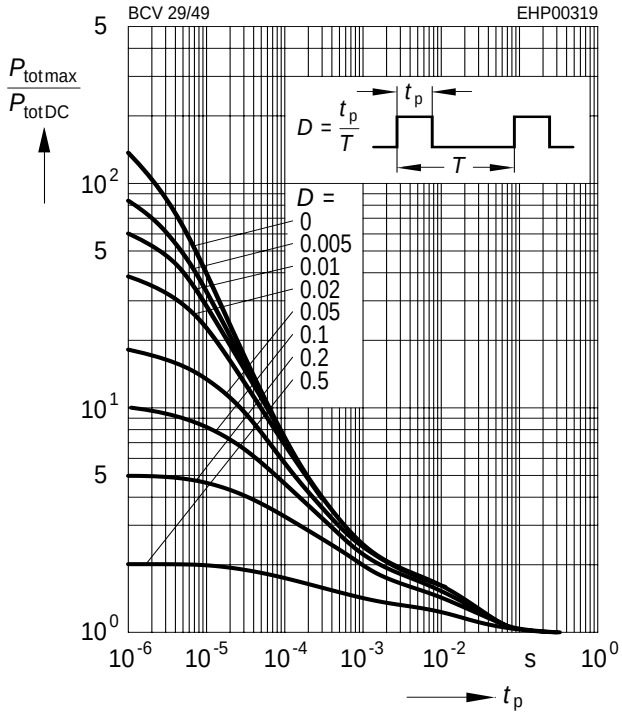

Package Outline

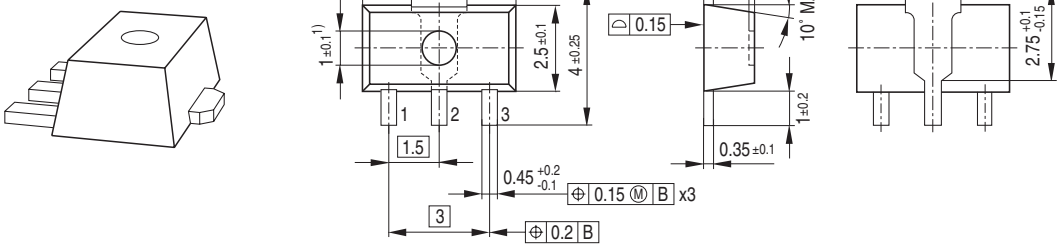

1) Ejector pin markings possible

Foot Print

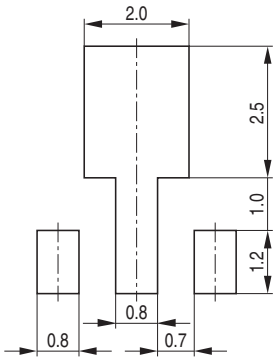

Marking Layout (Example)

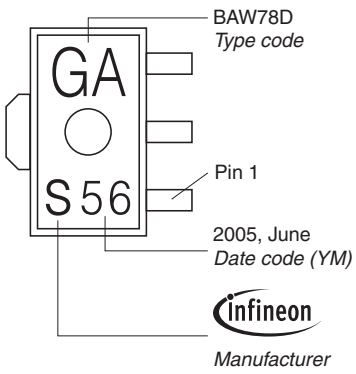

Standard Packing

Reel ø180 mm = 1.000 Pieces/Reel
Reel ø330 mm = 4.000 Pieces/Reel

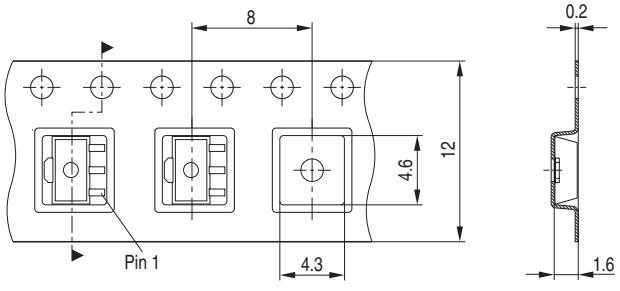

Edition 2009-11-16

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2009 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (<www.infineon.com>).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.
Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View BCV29H6327XTSA1 on WIN SOURCE
- Infineon Technologies Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management