




**THE DATASHEET OF
SPB160100E3**




2 X 160A Schottky Barrier Rectifier

SPB16080 — SPB160100

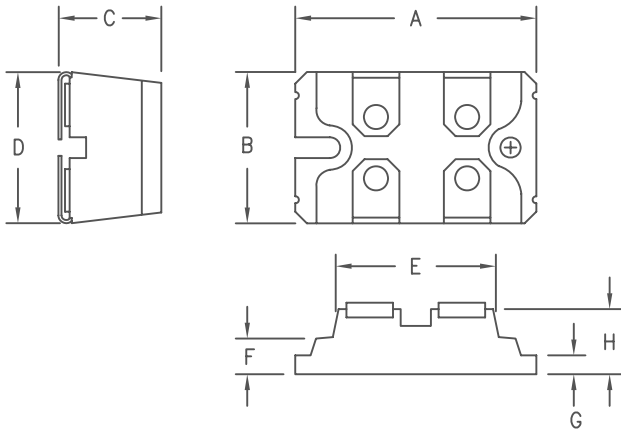

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.494	1.504	37.95	38.20	
B	0.976	0.986	24.79	25.04	
C	0.472	0.480	12.00	12.24	
D	0.990	1.000	25.15	25.40	
E	1.049	1.059	26.67	26.90	
F	0.164	0.174	4.16	4.42	
G	0.080	0.084	2.03	2.13	
H	0.372	0.378	9.45	9.60	

SOT-227



Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SPB16080	DSS2x110-080A	80V	80V
SPB16090		90V	90V
SPB160100		100V	100V

- 2500V isolation – Terminals to Base
- Low Forward Voltage Drop
- 2 Schottky Rectifiers in one pkg.
- 80-100V @ 160A/leg
- Low Switching losses

Electrical Characteristics		
Average forward current per leg	$I_{F(AV)}$ 160 Amps	$T_C = 101^\circ\text{C}$
Average forward current per package	$I_{F(AV)}$ 320 Amps	$T_C = 101^\circ\text{C}$
Maximum surge current per leg	I_{FSM} 2500 Amps	8.3ms, half sine, $T_J = 175^\circ\text{C}$
Maximum repetitive reverse current per leg	$I_{R(OV)}$ 2 Amps	$f = 1 \text{ KHz}, 25^\circ\text{C}, 1 \mu\text{sec square wave}$
Max peak forward voltage per leg	V_{FM} 0.92 Volts	$I_{FM} = 160\text{A}; T_J = 25^\circ\text{C}^*$
Max peak reverse current per leg	I_{RM} 5 mA	$V_{RRM}, T_J = 25^\circ\text{C}^*$
Max peak reverse voltage per leg	V_{ISOL} 2500 VDC	any terminal to base
Typical junction capacitance per leg	C_J 4800 pF	$V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics		
Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	0.35°C/W
Max thermal resistance per pkg	$R_{\theta JC}$	0.18°C/W
Mounting Torque		9-13 inch pounds
Weight		1.1 ounces (30 grams) typical

SPB16080 — SPB160100

Figure 1
Typical Forward Characteristics — Per Leg

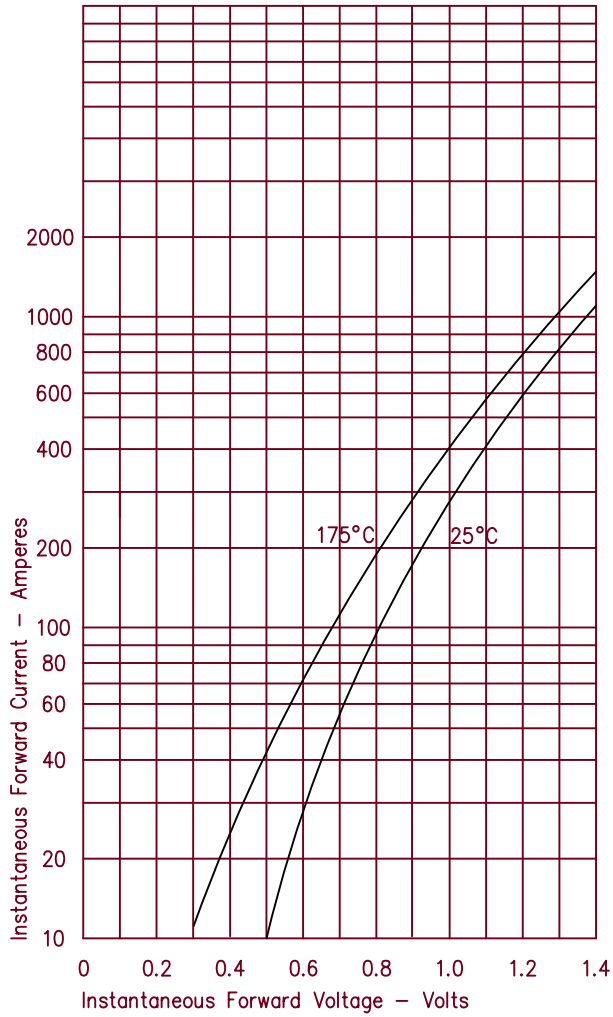


Figure 3
Typical Junction Capacitance — Per Leg

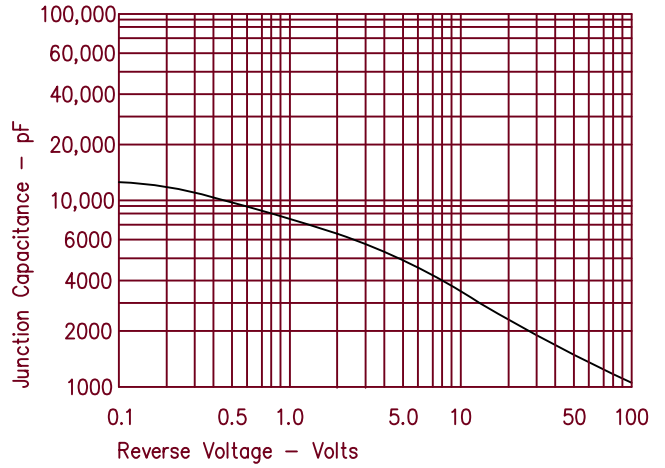


Figure 4
Forward Current Derating — Per Leg

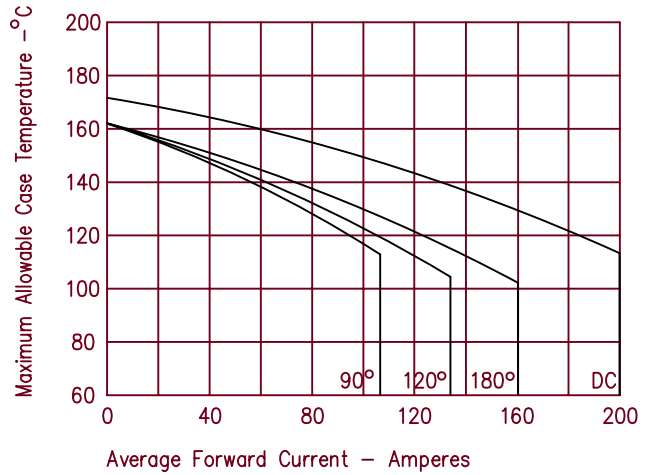


Figure 2
Typical Reverse Characteristics — Per Leg


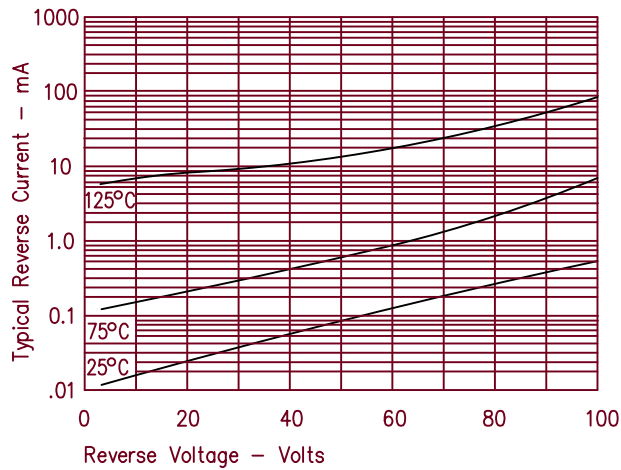


Figure 5
Maximum Forward Power Dissipation — Per Leg

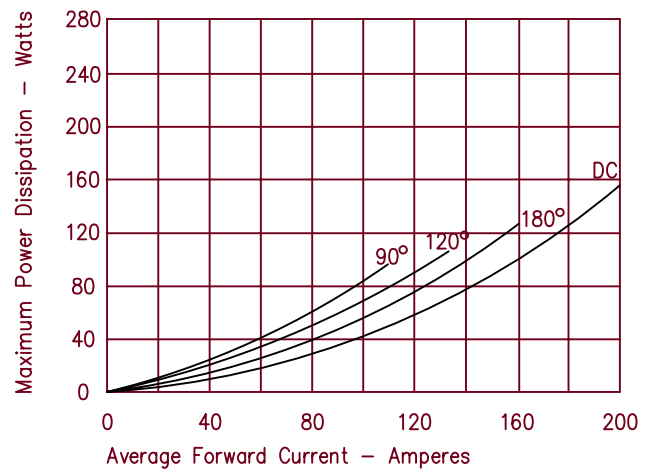

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SPB160100E3 on WIN SOURCE](#)
-  [Microsemi Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management