

# UNR911xJ Series (UN911xJ Series)

## Silicon PNP epitaxial planar type

For digital circuits

### ■ Features


- Costs can be reduced through downsizing of the equipment and reduction of the number of parts.
- SS-Mini type package, allowing automatic insertion through tape packing.

### ■ Resistance by Part Number


	Marking Symbol	(R <sub>1</sub> )	(R <sub>2</sub> )
• UNR9110J (UN9110J)	6L	47 kΩ	—
• UNR9111J (UN9111J)	6A	10 kΩ	10 kΩ
• UNR9112J (UN9112J)	6B	22 kΩ	22 kΩ
• UNR9113J (UN9113J)	6C	47 kΩ	47 kΩ
• UNR9114J (UN9114J)	6D	10 kΩ	47 kΩ
• UNR9115J (UN9115J)	6E	10 kΩ	—
• UNR9116J (UN9116J)	6F	4.7 kΩ	—
• UNR9117J (UN9117J)	6H	22 kΩ	—
• UNR9118J (UN9118J)	6I	0.51 kΩ	5.1 kΩ
• UNR9119J (UN9119J)	6K	1 kΩ	10 kΩ
• UNR911AJ	6X	100 kΩ	100 kΩ
• UNR911BJ	6Y	100 kΩ	—
• UNR911CJ	6Z	—	47 kΩ
• UNR911DJ (UN911DJ)	6M	47 kΩ	10 kΩ
• UNR911EJ (UN911EJ)	6N	47 kΩ	22 kΩ
• UNR911FJ (UN911FJ)	6O	4.7 kΩ	10 kΩ
• UNR911HJ (UN911HJ)	6P	2.2 kΩ	10 kΩ
• UNR911LJ (UN911LJ)	6Q	4.7 kΩ	4.7 kΩ
• UNR911MJ	EI	2.2 kΩ	47 kΩ
• UNR911NJ	EW	4.7 kΩ	47 kΩ
• UNR911TJ (UN911TJ)	EY	22 kΩ	47 kΩ
• UNR911VJ	FC	2.2 kΩ	2.2 kΩ

### ■ Absolute Maximum Ratings T<sub>a</sub> = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage (Emitter open)	V <sub>CBO</sub>	-50	V
Collector-emitter voltage (Base open)	V <sub>CEO</sub>	-50	V
Collector current	I <sub>C</sub>	-100	mA
Total power dissipation	P <sub>T</sub>	125	mW
Junction temperature	T <sub>j</sub>	125	°C
Storage temperature	T <sub>stg</sub>	-55 to +125	°C

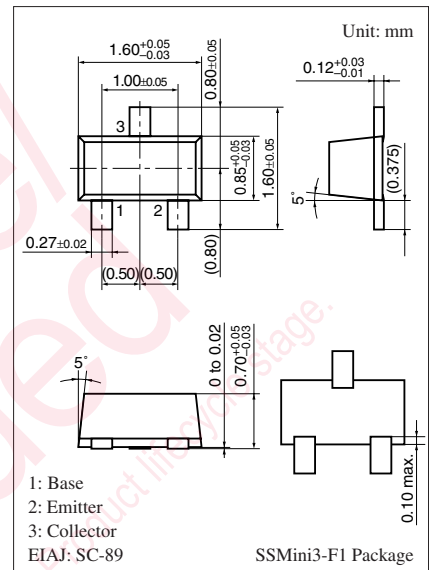

### Internal Connection

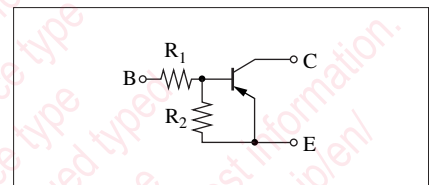

(Note) The part numbers in the parenthesis show conventional part number.

**■ Electrical Characteristics**  $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$ 


Parameter	Symbol	Conditions	Min	Typ	Max	Unit			
Collector-base voltage (Emitter open)	$V_{CBO}$	$I_C = -10 \mu\text{A}$ , $I_E = 0$	-50			V			
Collector-emitter voltage (Base open)	$V_{CEO}$	$I_C = -2 \text{ mA}$ , $I_B = 0$	-50			V			
Collector-base cutoff current (Emitter open)	$I_{CBO}$	$V_{CB} = -50 \text{ V}$ , $I_E = 0$			-0.1	$\mu\text{A}$			
Collector-base cutoff current (Emitter open)	$I_{CEO}$	$V_{CE} = -50 \text{ V}$ , $I_B = 0$			-0.5	$\mu\text{A}$			
Emitter-base cutoff current (Collector open)	UNR9115J/9116J/9117J/911BJ	$I_{EBO}$				-0.01			
	UNR9110J/9113J/911AJ					-0.1			
	UNR9112J/9114J/911DJ/ 911EJ/911MJ/911NJ/911TJ					-0.2			
	UNR9111J					-0.5			
	UNR911FJ/911HJ					-1.0			
	UNR9119J					-1.5			
	UNR9118J/911CJ/911LJ/911VJ					-2.0			
Forward current transfer ratio	UNR911VJ	$h_{FE}$	$V_{CE} = -10 \text{ V}$ , $I_C = -5 \text{ mA}$	6		20	—		
	UNR9118J/911LJ			20					
	UNR9119J/911DJ/911FJ/911HJ			30					
	UNR9111J			35					
	UNR9112J/911EJ			60					
	UNR9113J/9114J/911AJ/ 911CJ/911MJ			80					
	UNR911NJ/911TJ			80	400				
	UNR9110J/9115J/9116J/ 9117J/911BJ			160	460				
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -10 \text{ mA}$ , $I_B = -0.3 \text{ mA}$				-0.25	V		
								$I_C = -10 \text{ mA}$ , $I_B = -1.5 \text{ mA}$	
Output voltage high-level	$V_{OH}$	$V_{CC} = -5 \text{ V}$ , $V_B = -0.5 \text{ V}$ , $R_L = 1 \text{ k}\Omega$	-4.9			V			
Output voltage low-level	$V_{OL}$	$V_{CC} = -5 \text{ V}$ , $V_B = -2.5 \text{ V}$ , $R_L = 1 \text{ k}\Omega$				-0.2	V		
								UNR9113J/911BJ	$V_{CC} = -5 \text{ V}$ , $V_B = -3.5 \text{ V}$ , $R_L = 1 \text{ k}\Omega$
								UNR911DJ	$V_{CC} = -5 \text{ V}$ , $V_B = -10 \text{ V}$ , $R_L = 1 \text{ k}\Omega$
								UNR911EJ	$V_{CC} = -5 \text{ V}$ , $V_B = -6 \text{ V}$ , $R_L = 1 \text{ k}\Omega$
								UNR911AJ	$V_{CC} = -5 \text{ V}$ , $V_B = -5 \text{ V}$ , $R_L = 1 \text{ k}\Omega$
Transition frequency	$f_T$	$V_{CB} = -10 \text{ V}$ , $I_E = 1 \text{ mA}$ , $f = 200 \text{ MHz}$					80	MHz	
							UNR9113J		150
							UNR911AJ		80
							UNR911CJ		150
Input resistance	$R_i$			-30%	0.51	+30%	k $\Omega$		
								UNR9118J	
								UNR9119J	1.0
								UNR911HJ/911MJ/911VJ	2.2
								UNR9116J/911FJ/911LJ/911NJ	4.7
								UNR9111J/9114J/9115J	10
								UNR9112J/9117J/911TJ	22
								UNR9110J/9113J/911DJ/911EJ	47
UNR911AJ/911BJ	100								

■ Electrical Characteristics (continued)  $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$




Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Emitter-base resistance	UNR911CJ	$R_2$		-30%	47	+30%	k $\Omega$
Resistance ratio	UNR911MJ	$R_1/R_2$			0.047		—
	UNR911NJ				0.1		
	UNR9118J/9119J			0.08	0.10	0.12	
	UNR9114J			0.17	0.21	0.25	
	UNR911HJ			0.17	0.22	0.27	
	UNR911TJ				0.47		
	UNR911FJ			0.37	0.47	0.57	
	UNR911AJ/911VJ				1.0		
	UNR9111J/9112J/9113J/911LJ			0.8	1.0	1.2	
	UNR911EJ			1.70	2.14	2.60	
	UNR911DJ			3.7	4.7	5.7	




Note) Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

Common characteristics chart






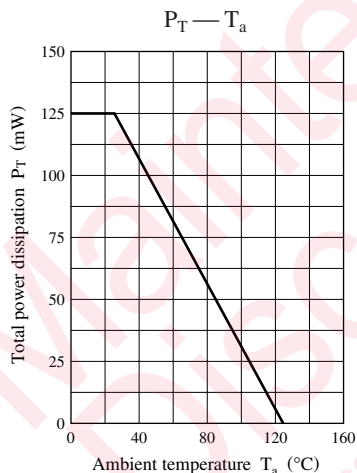


Characteristics charts of UNR9110J




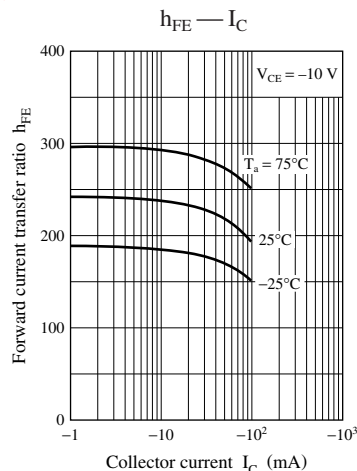
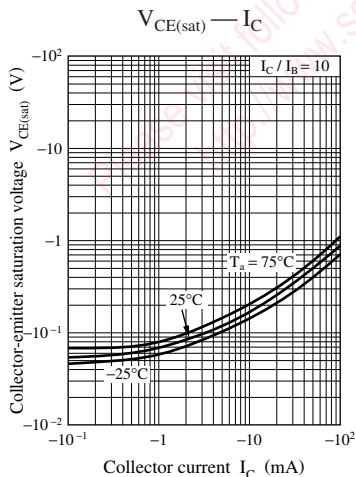
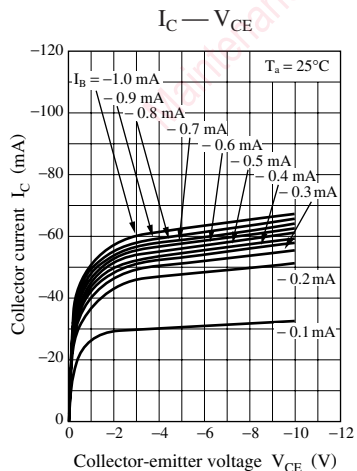


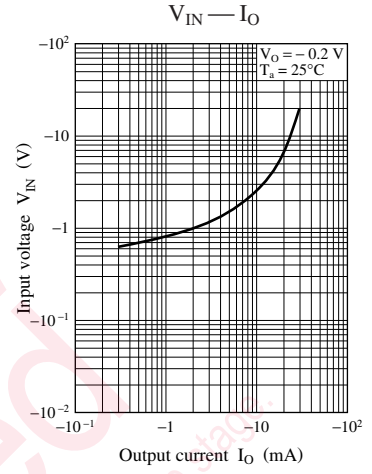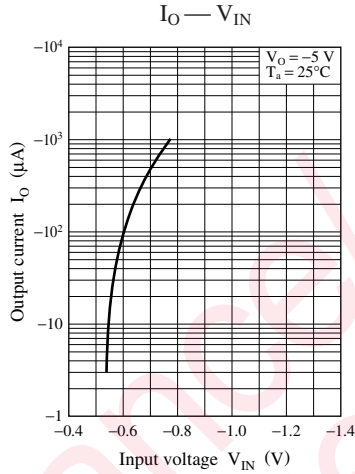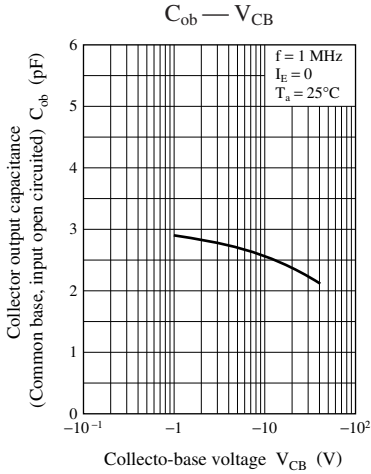




**Characteristics charts of UNR9111J**

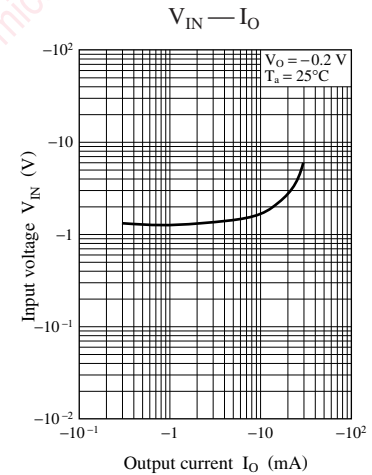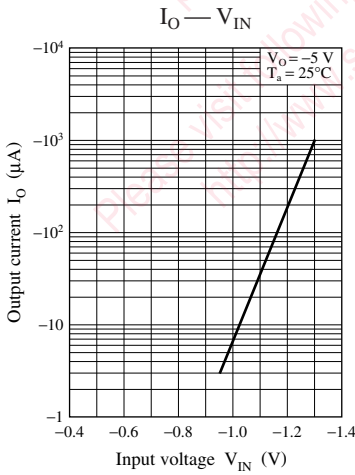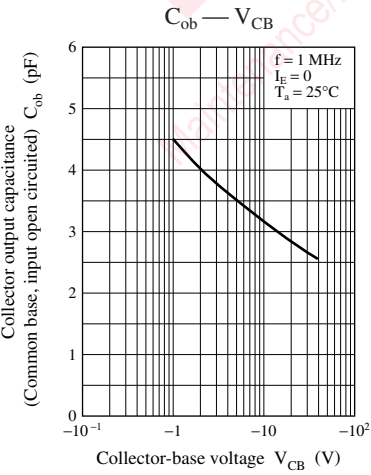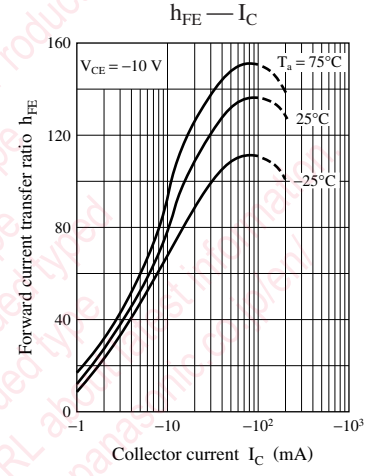
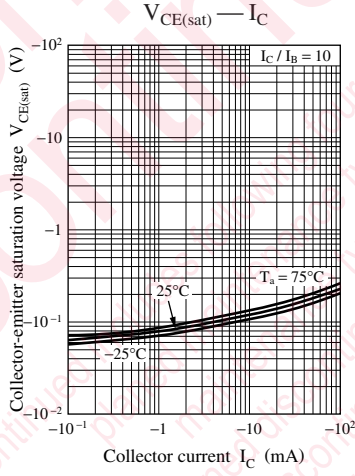
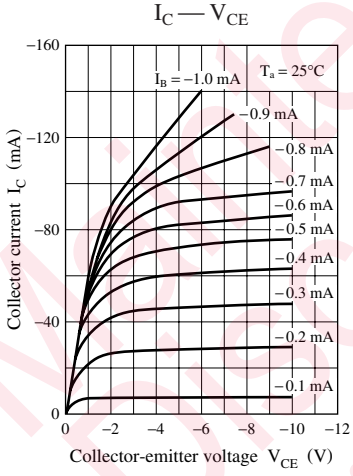


Characteristics charts of UNR9112J

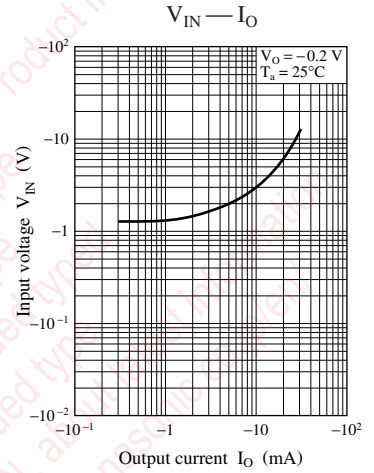
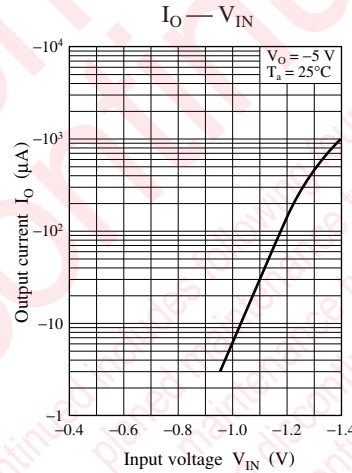
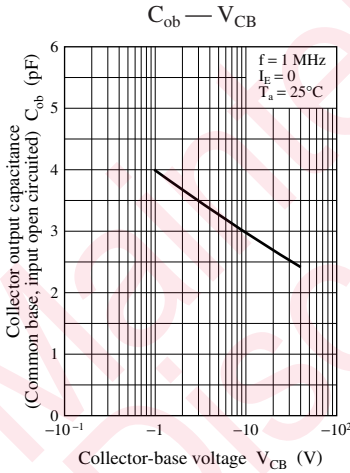
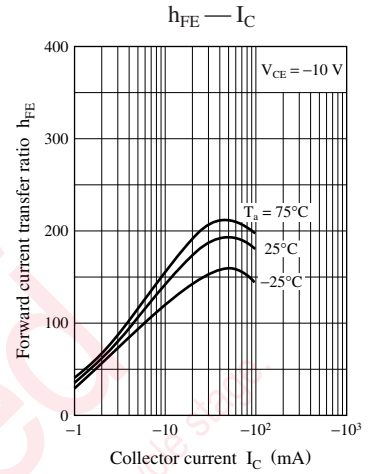
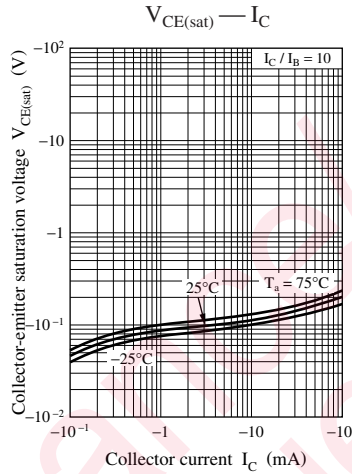
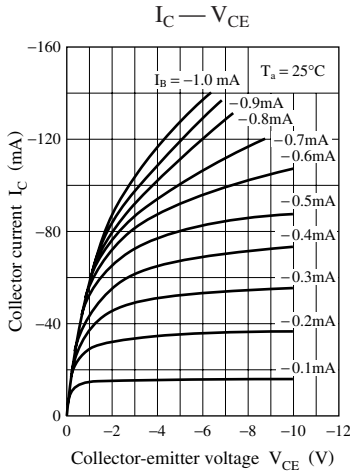


Characteristics charts of UNR9113J




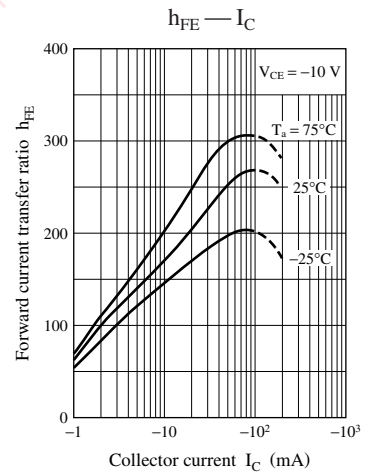
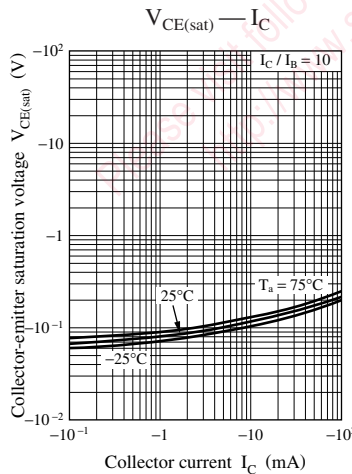
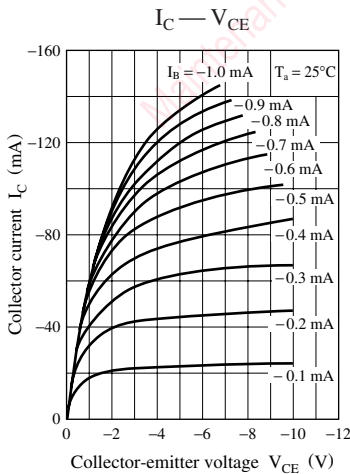


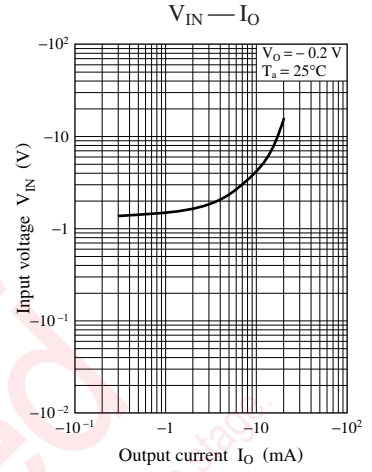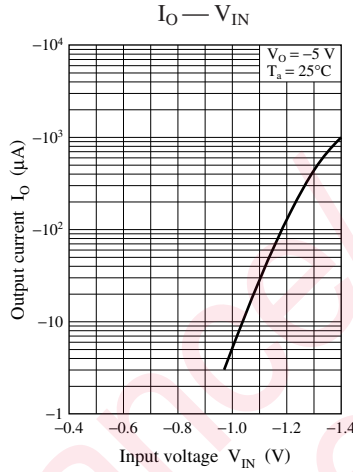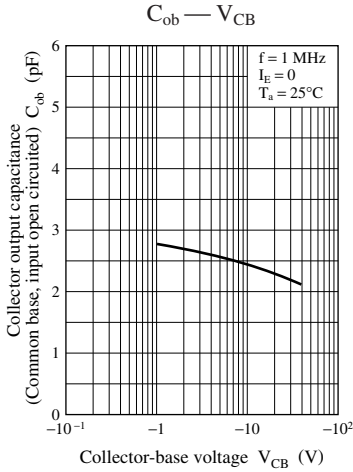




Characteristics charts of UNR9114J

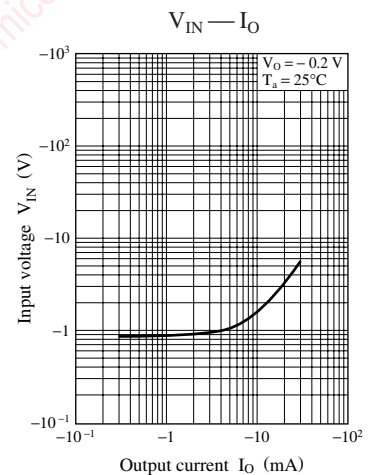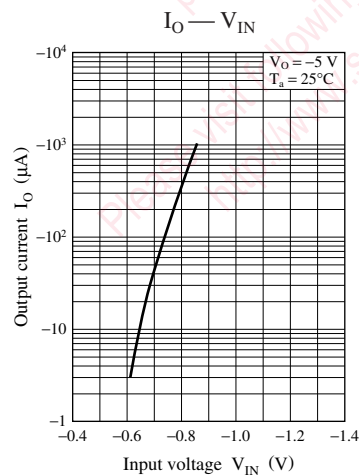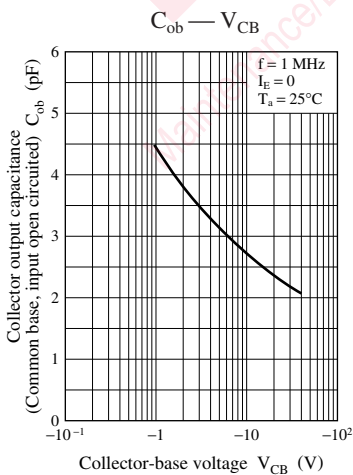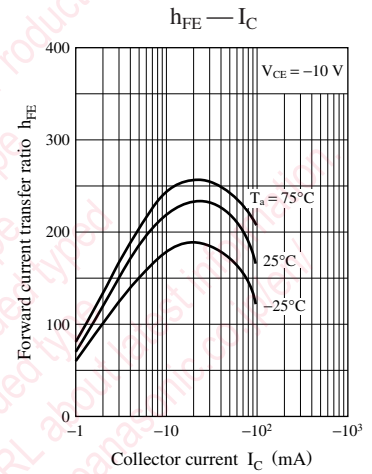
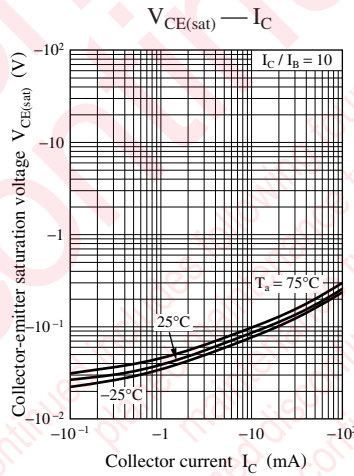
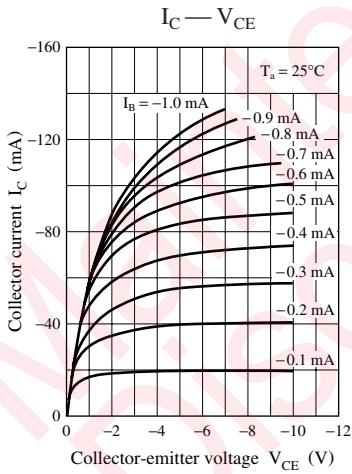


Characteristics charts of UNR9115J

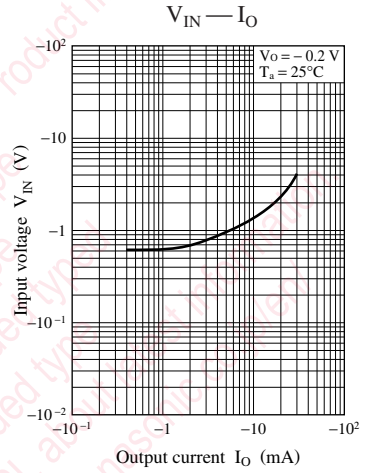
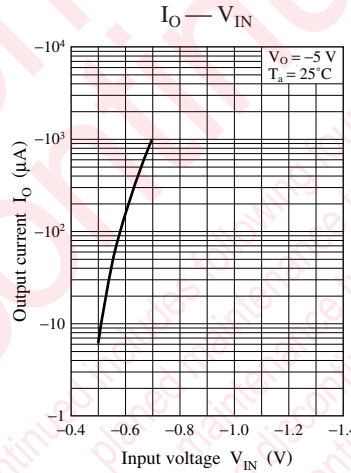
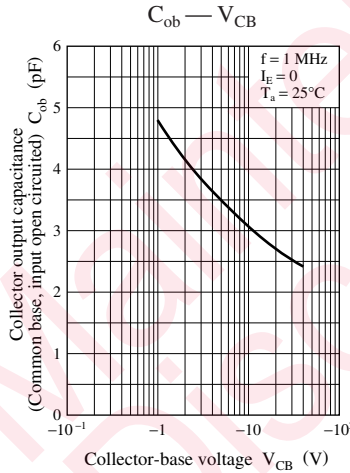
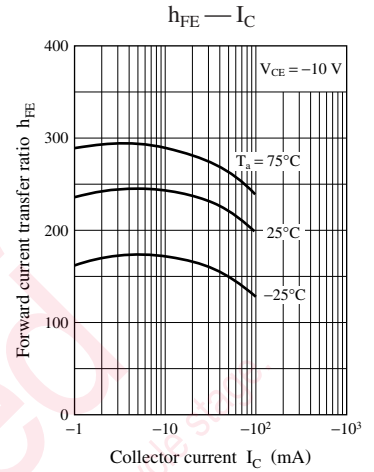
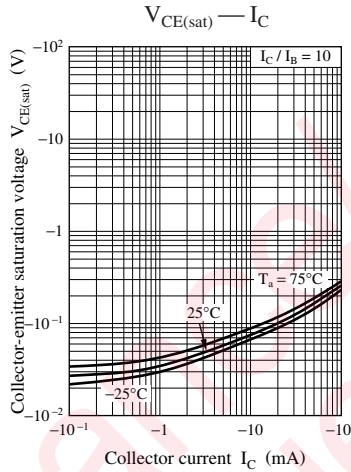
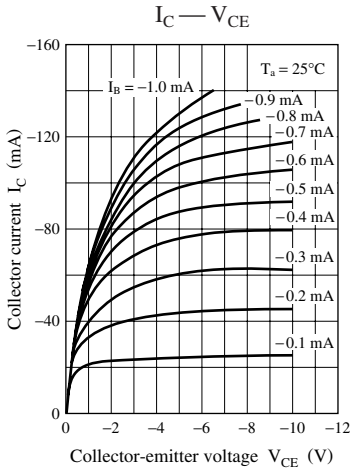


Characteristics charts of UNR9116J




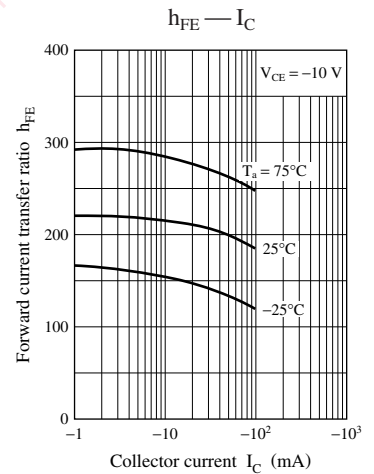
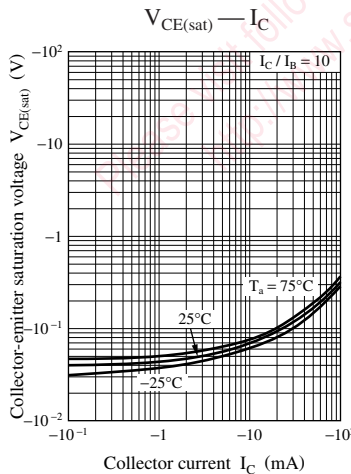
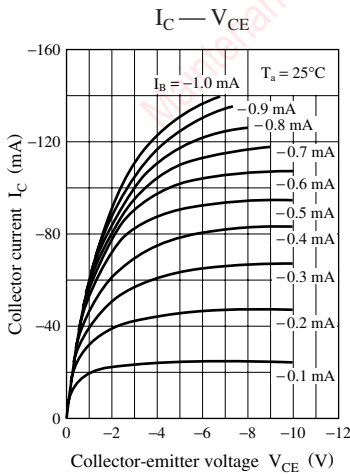


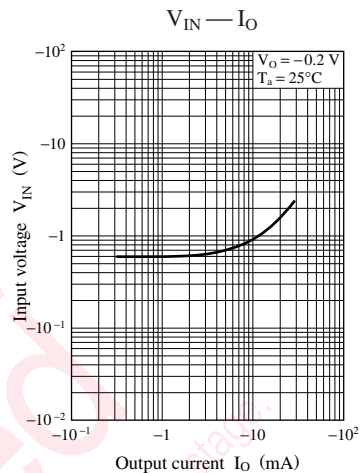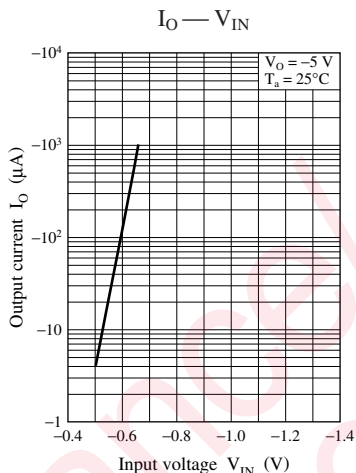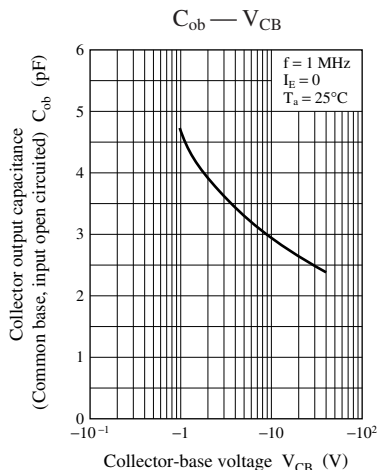




Characteristics charts of UNR9117J

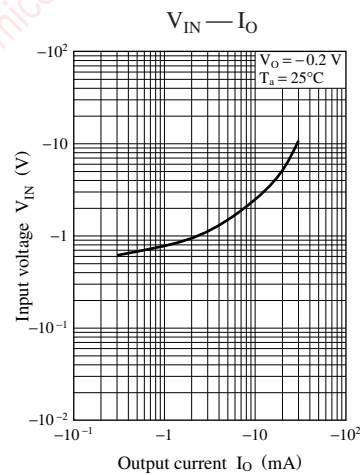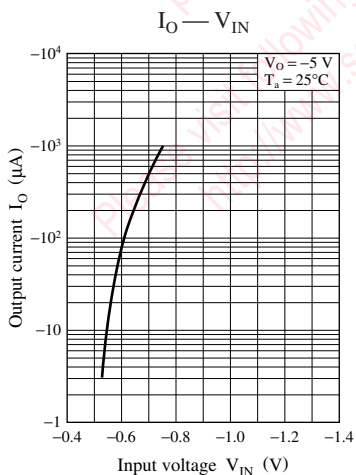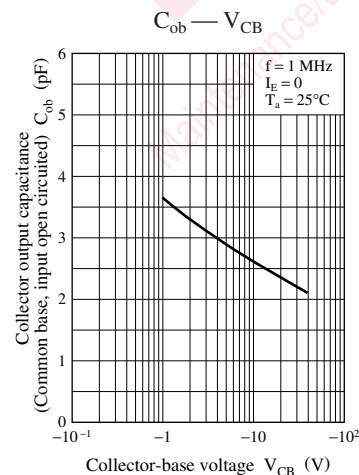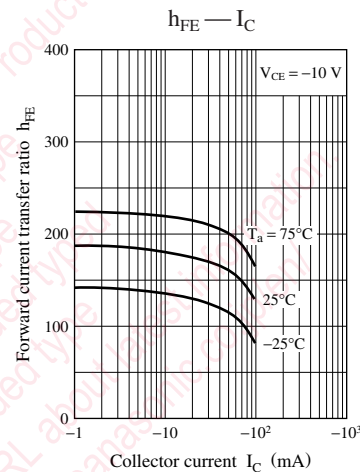
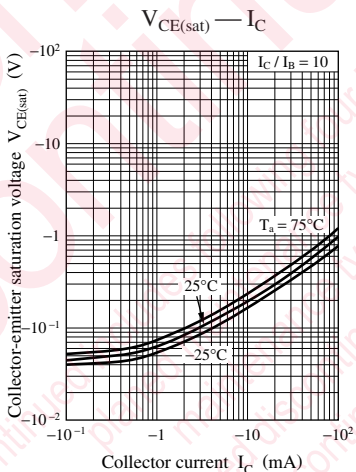
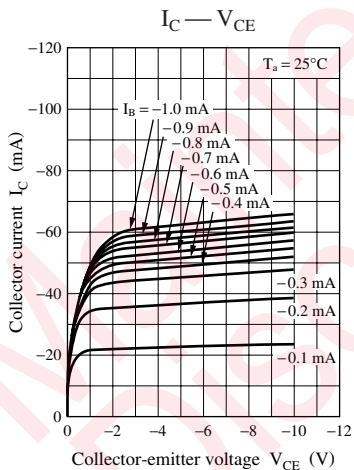


Characteristics charts of UNR9118J

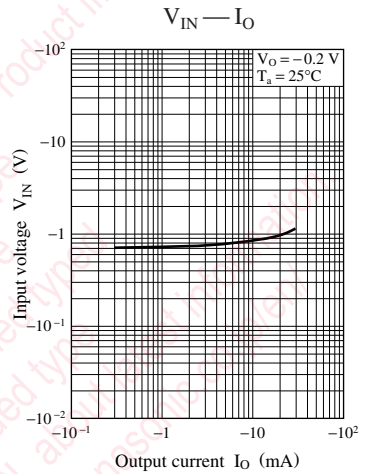
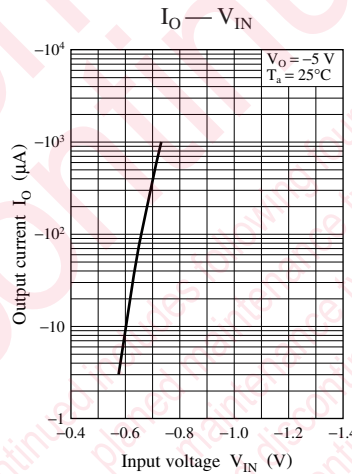
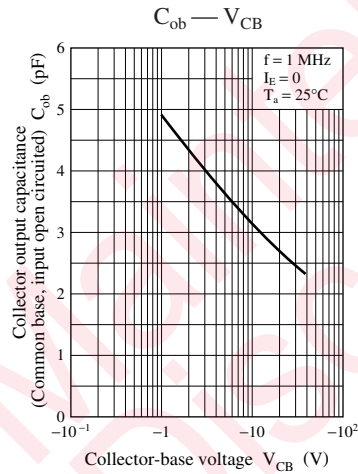
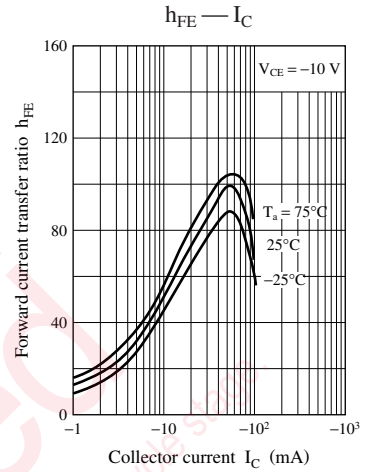
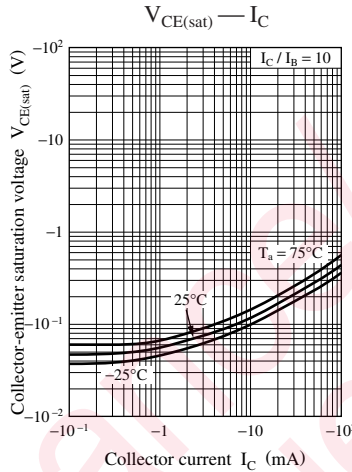
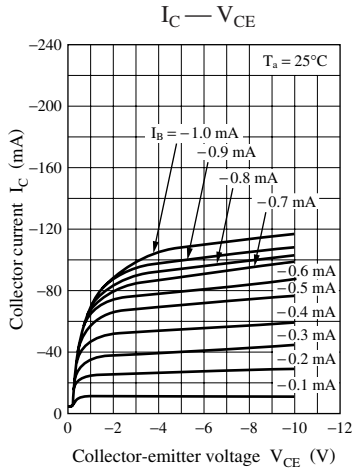


Characteristics charts of UNR9119J

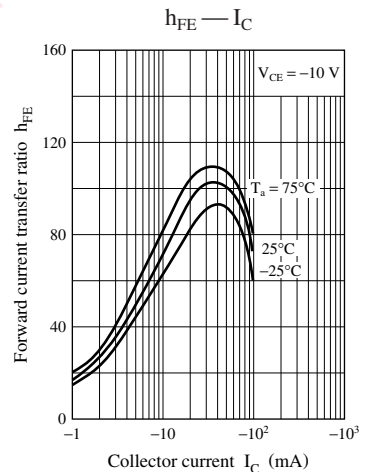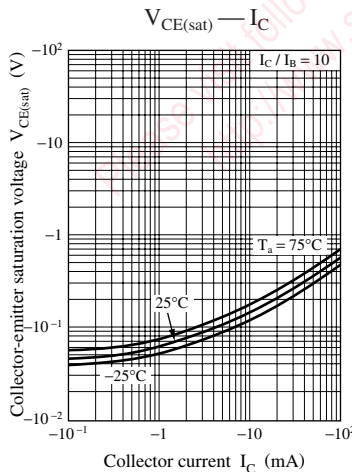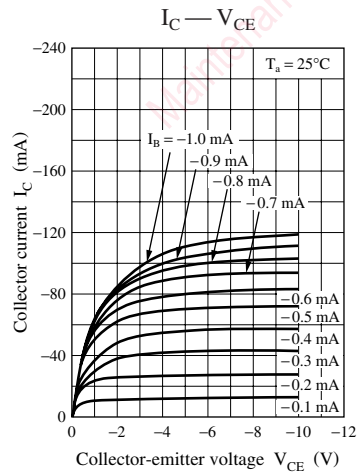


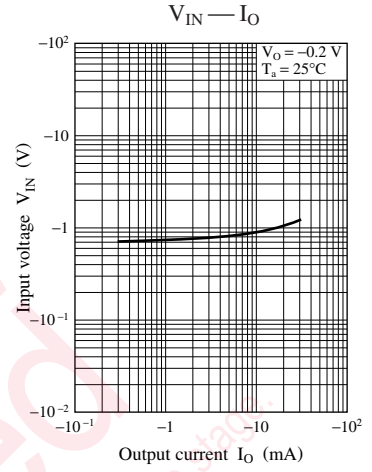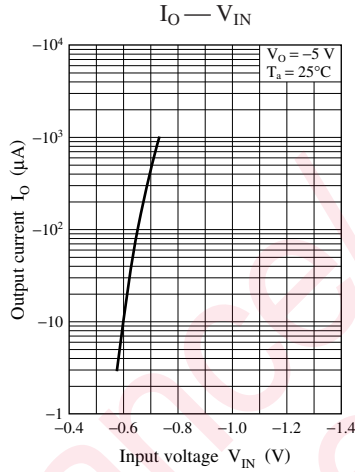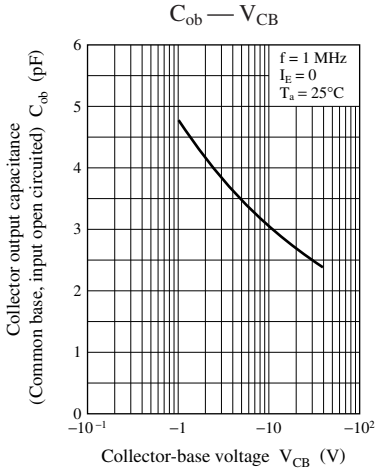


Characteristics charts of UNR911AJ

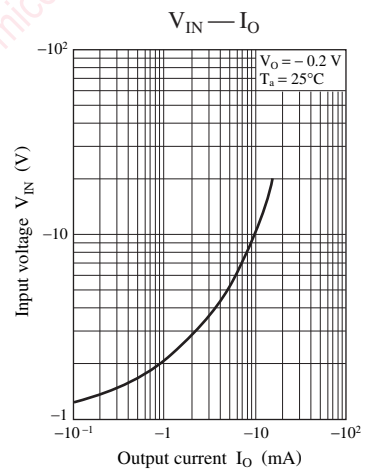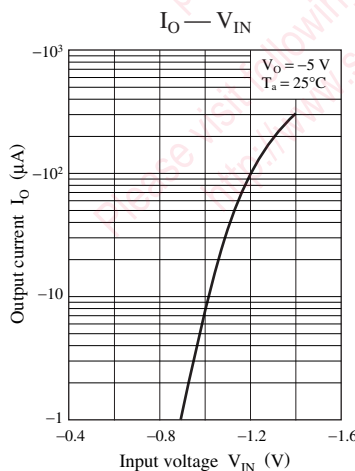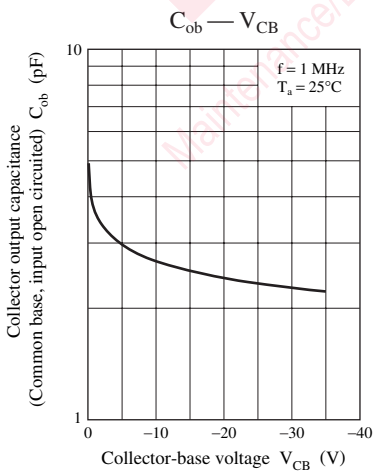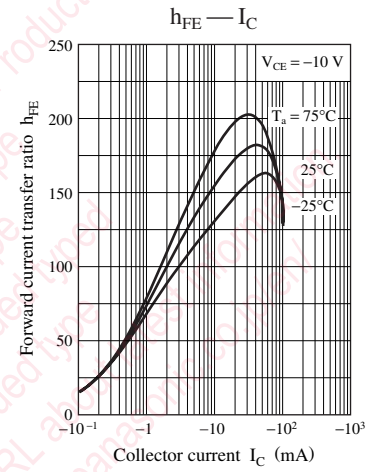
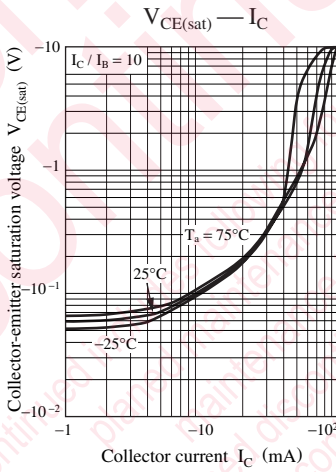
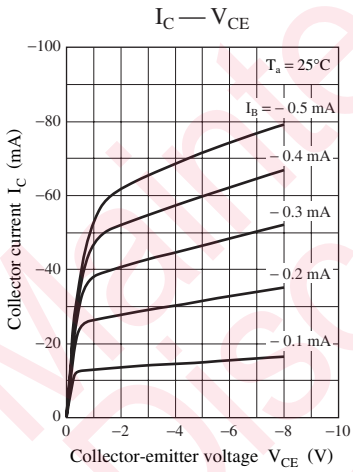


Characteristics charts of UNR911BJ






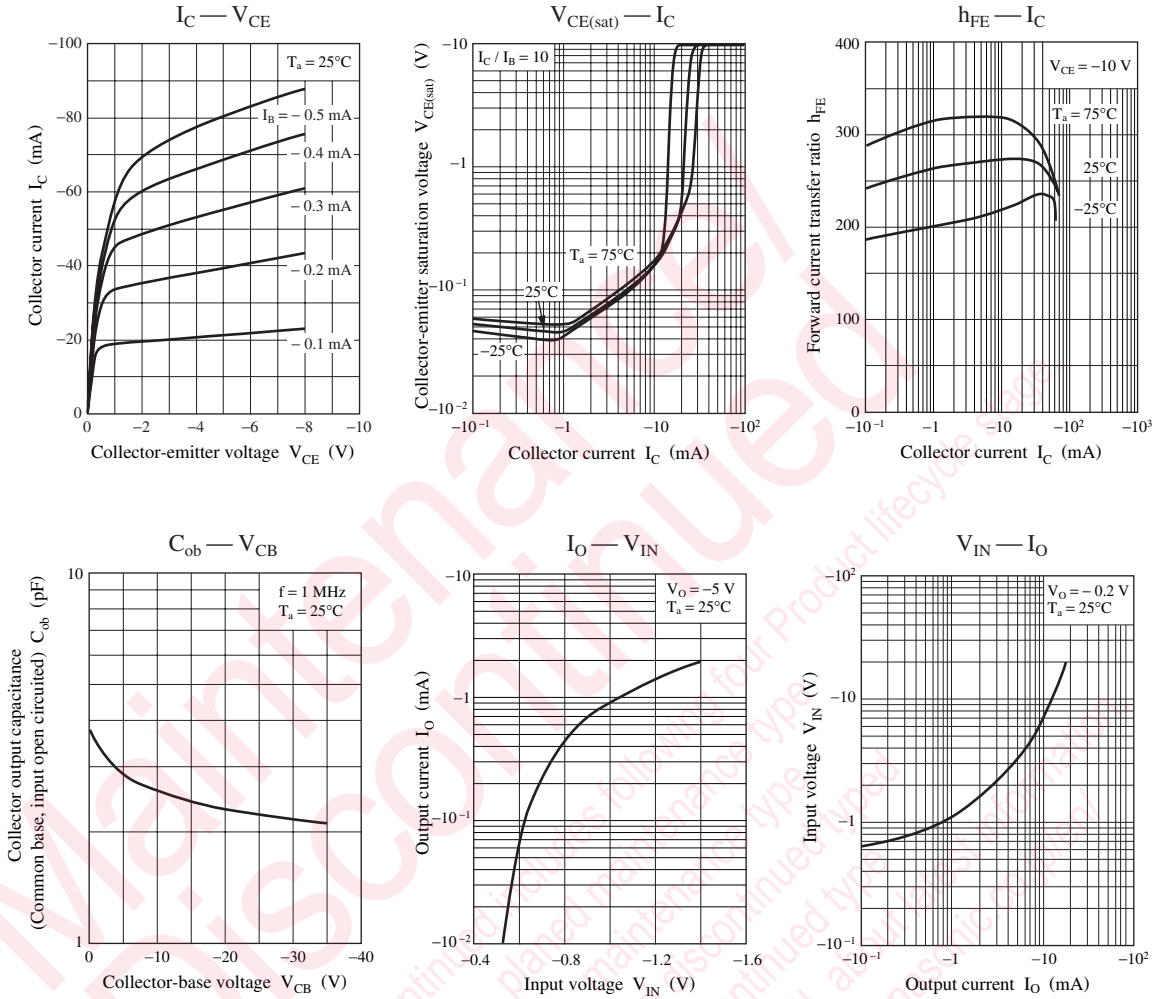


Characteristics charts of UNR911CJ






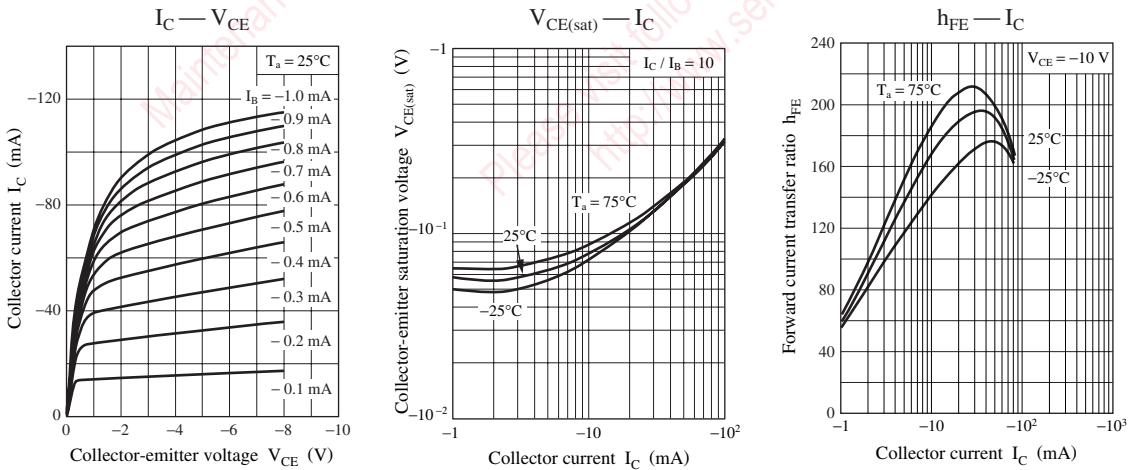


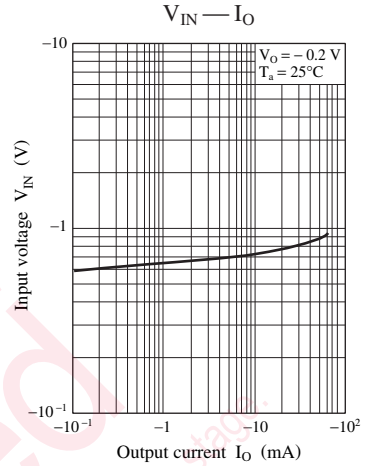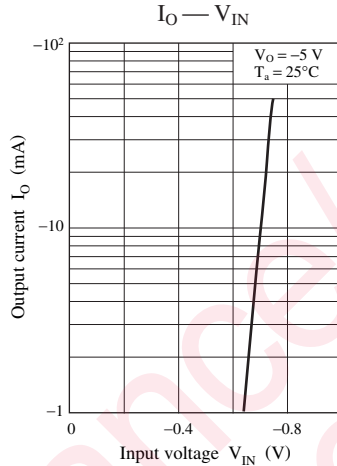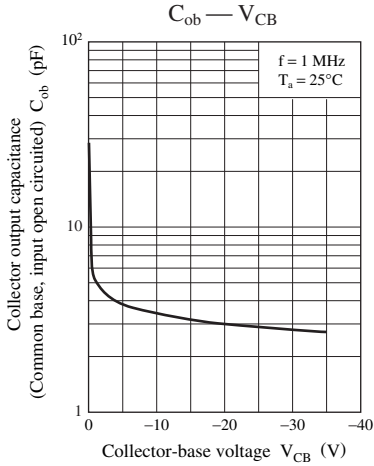




Characteristics charts of UNR911DJ

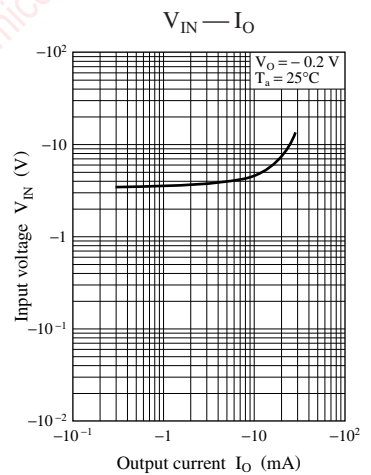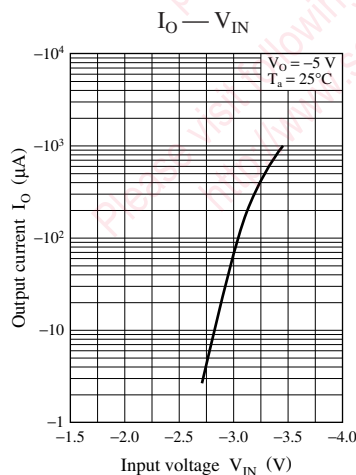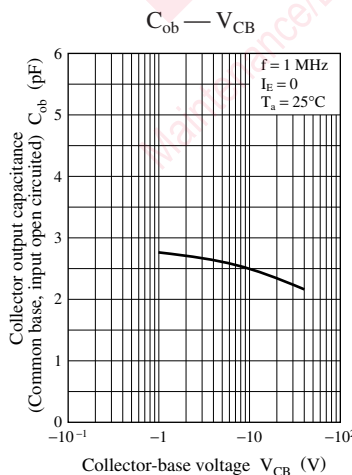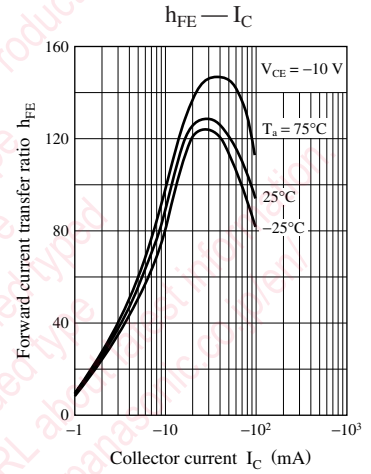
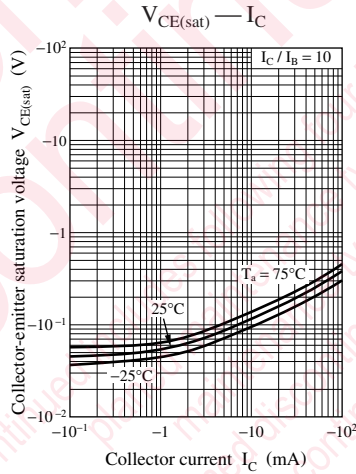
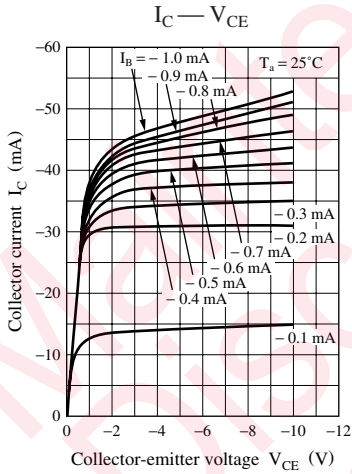


Characteristics charts of UNR911EJ

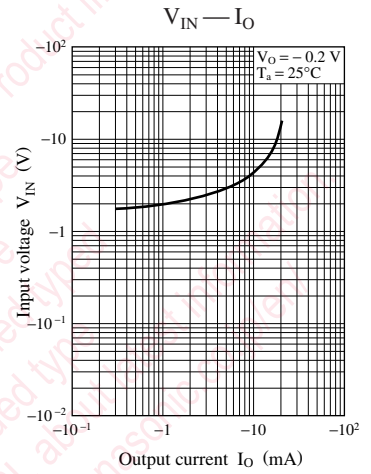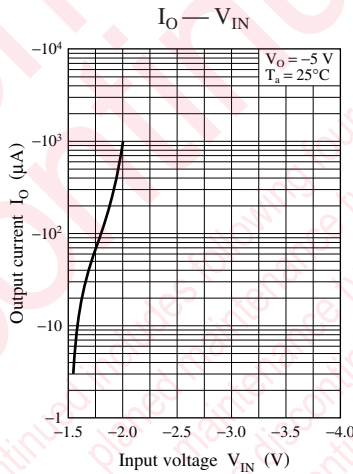
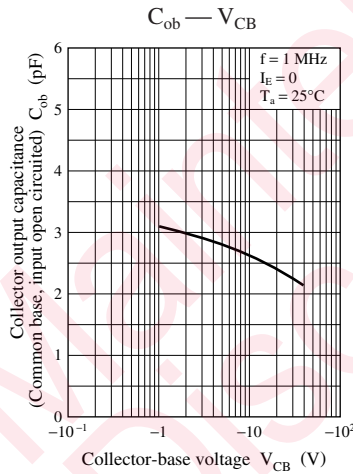
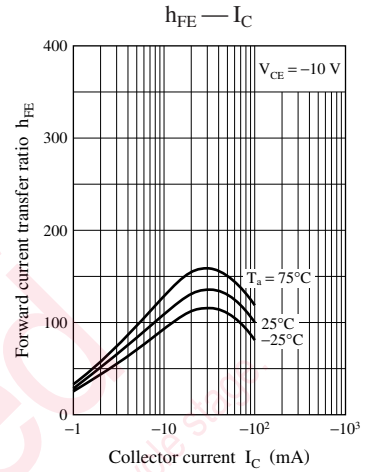
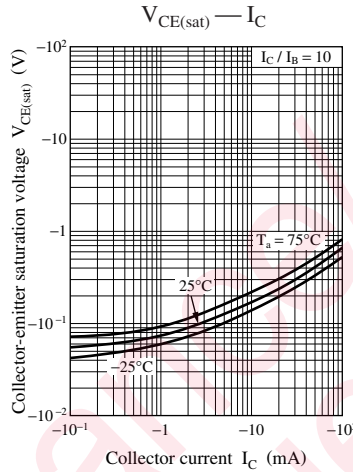
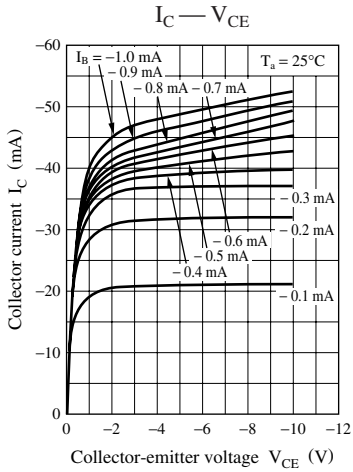


Characteristics charts of UNR911FJ



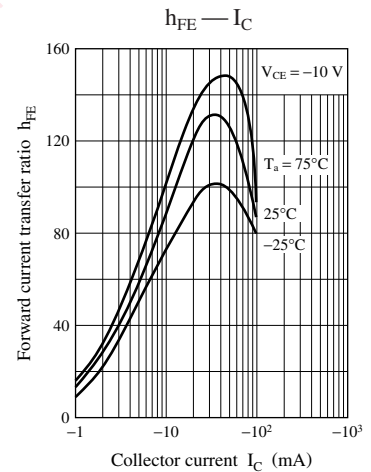
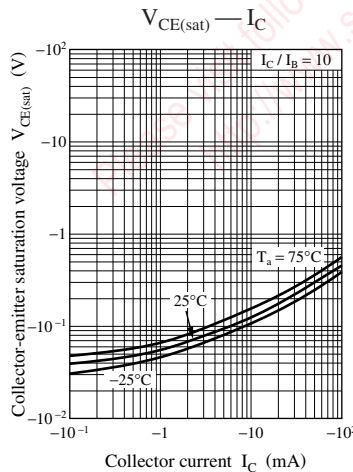
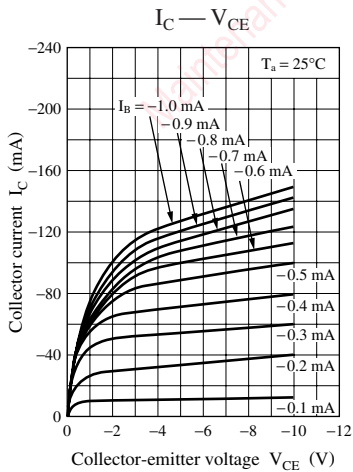


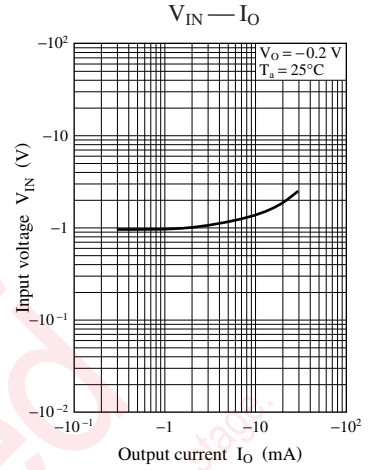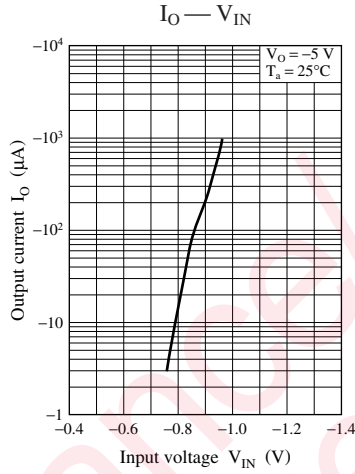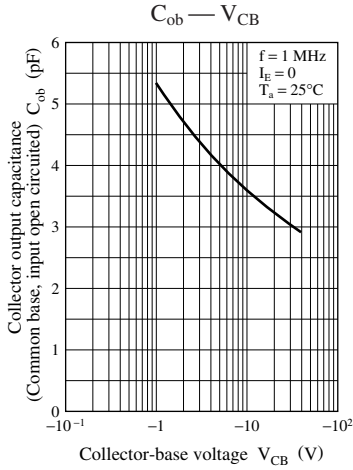




Characteristics charts of UNR911HJ

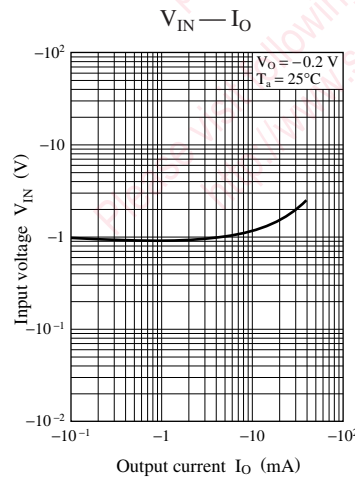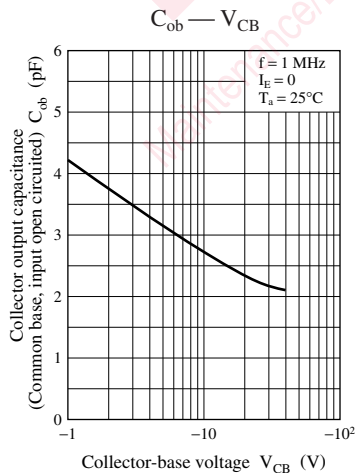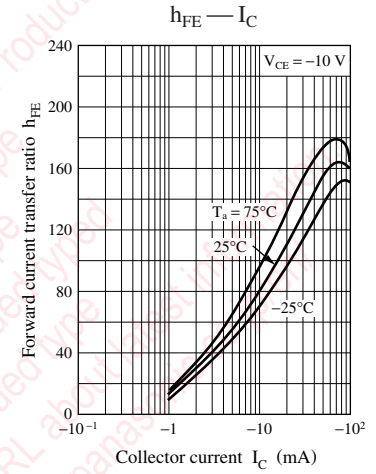
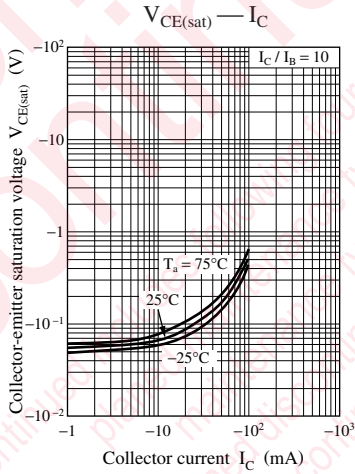
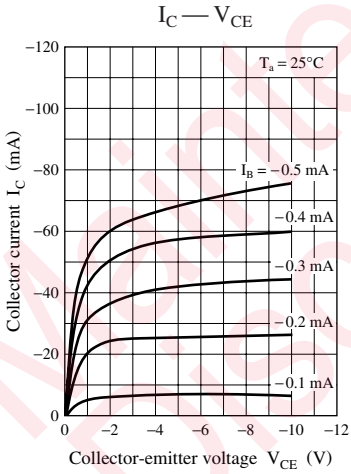


Characteristics charts of UNR911LJ


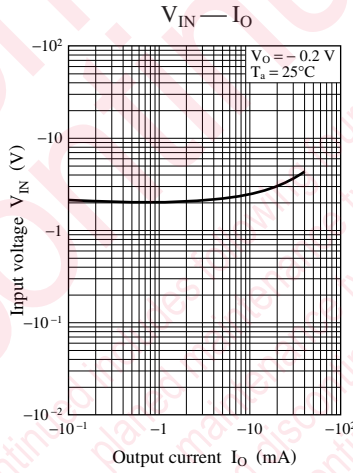
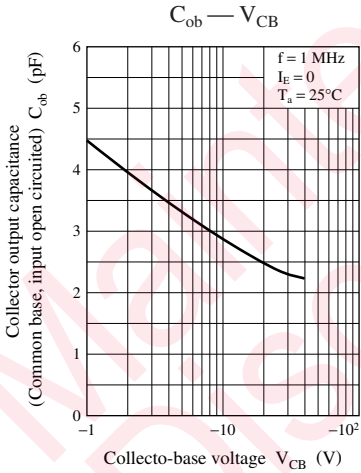
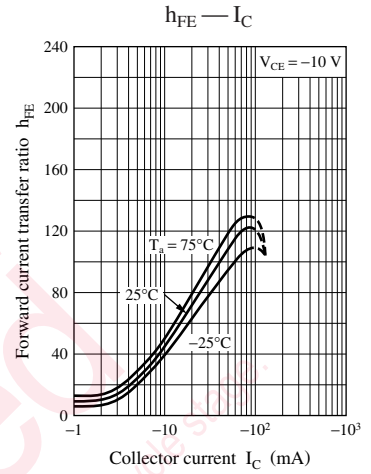
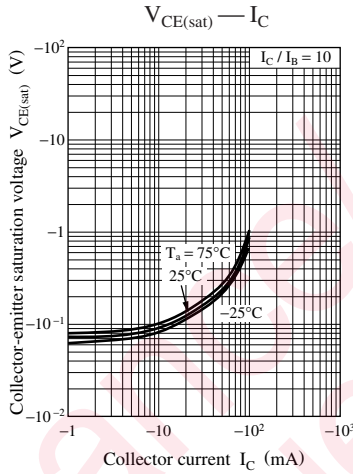
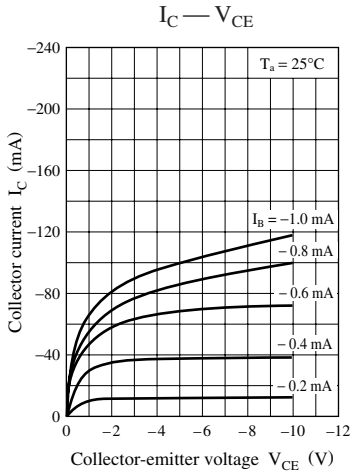


Characteristics charts of UNR911MJ




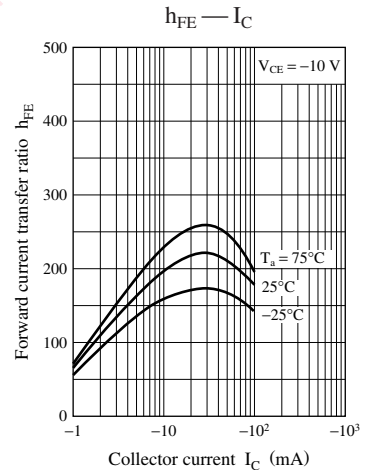
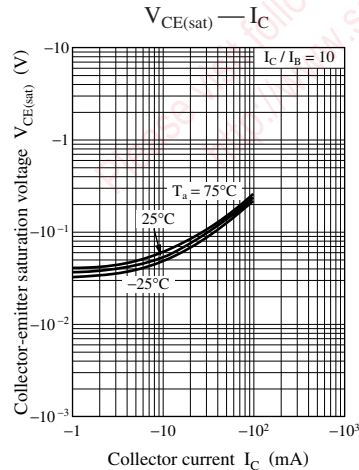
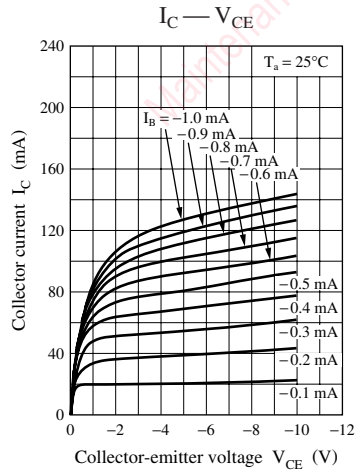


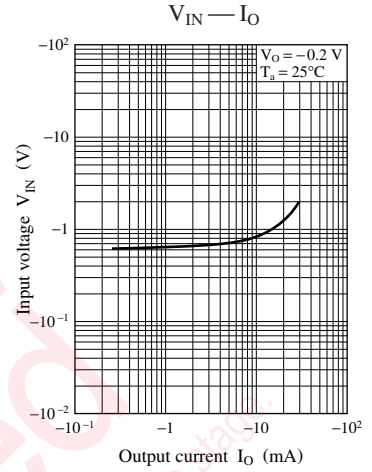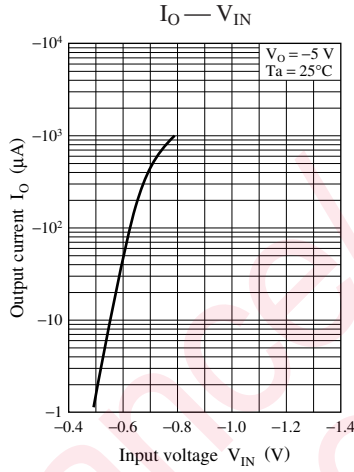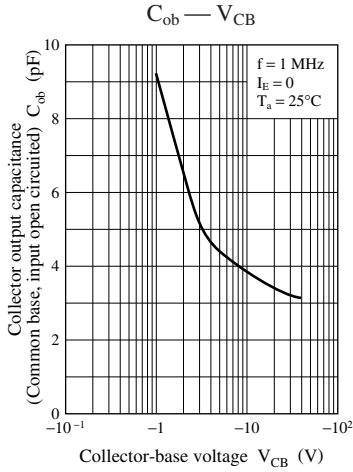




Characteristics charts of UNR911NJ

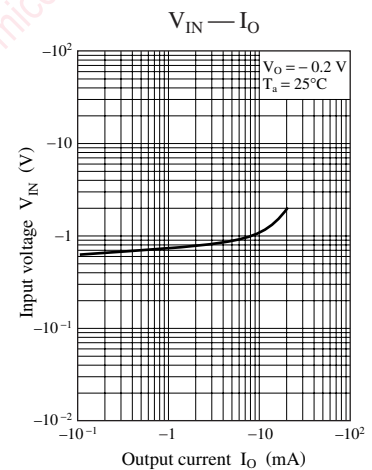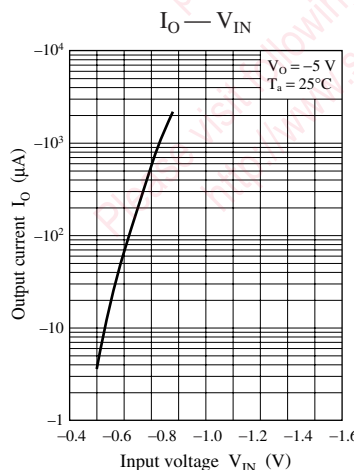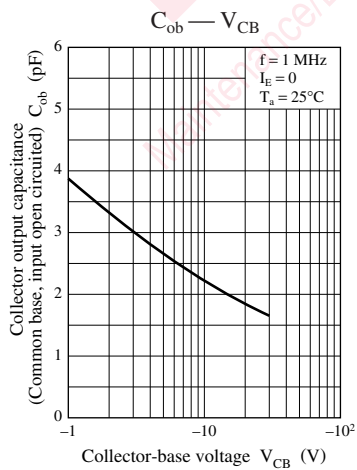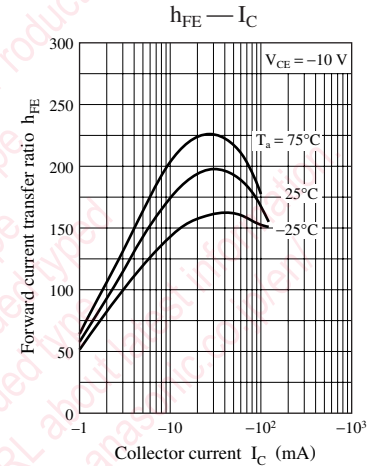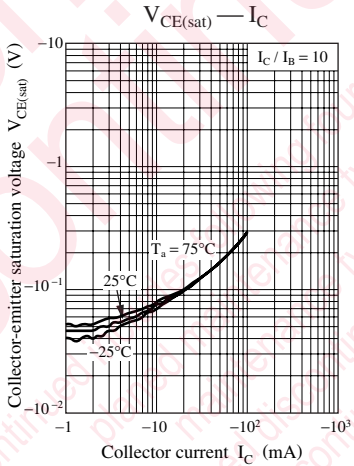
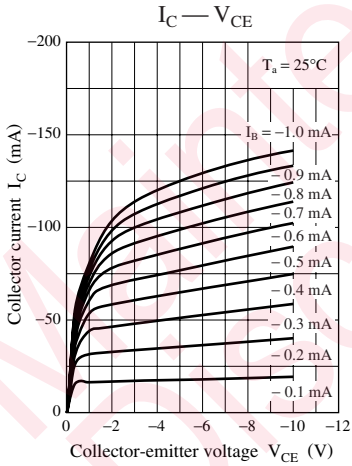


Characteristics charts of UNR911TJ

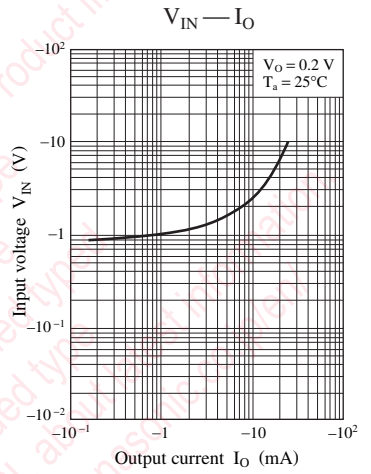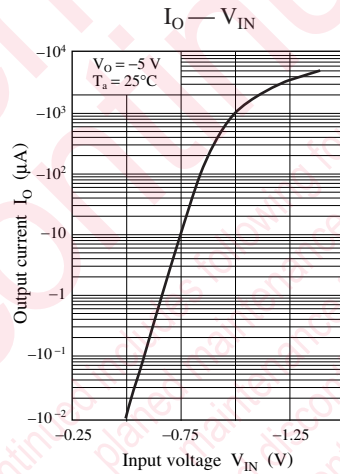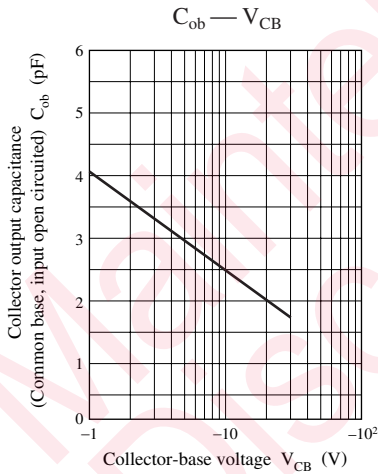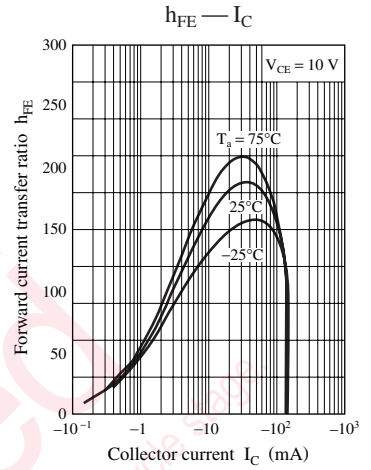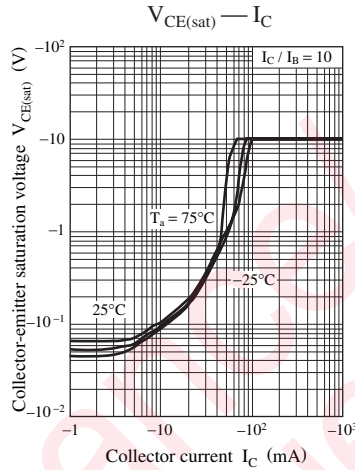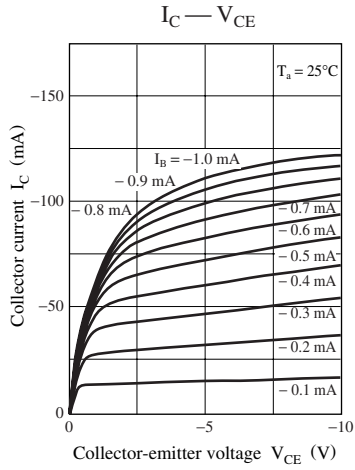

Characteristics charts of UNR911VJ

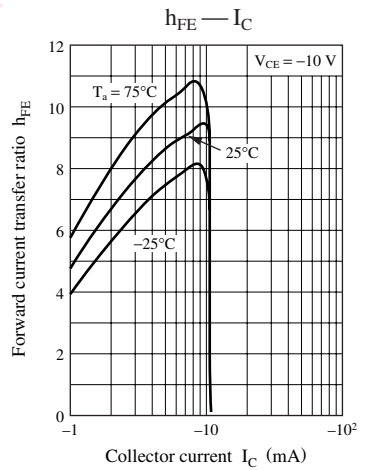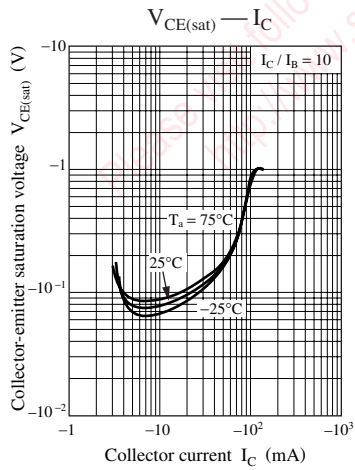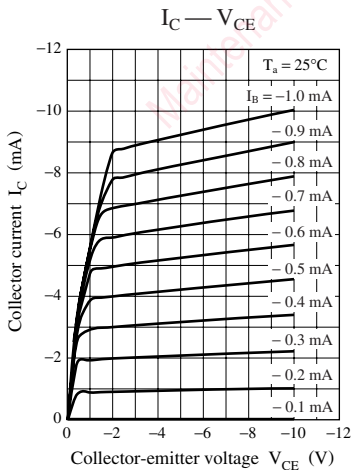

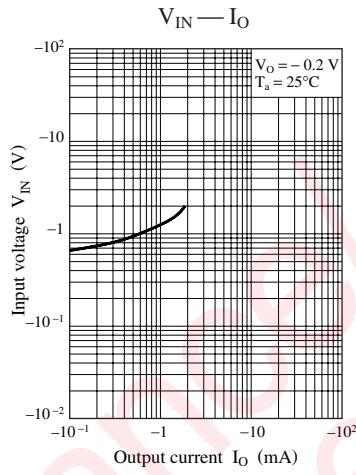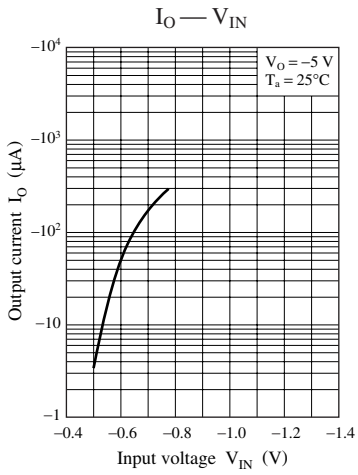

Maintenance/Discontinued includes following four Product lifecycle stage.  
planned maintenance type  
maintenance type  
planned discontinued type  
discontinued type  
Please visit following URL about latest information.  
<http://www.semicon.panasonic.co.jp/en/>

## utions in using the technical information and scribed in this book

s book is to be exported or provided to non-residents, the laws and  
rd to security export control, must be observed.

ly to show the main characteristics and application circuit examples  
l property right or other right owned by our company or any other  
any as to the infringement upon any such right owned by any other  
rmation described in this book.

standard applications or general electronic equipment (such as office  
and household appliances).

ng applications:

biles, traffic control equipment, combustion equipment, life support  
reliability are required, or if the failure or malfunction of the prod-

ck are subject to change without notice for modification and/or im-  
use of the products, therefore, ask for the most up-to-date Product  
atisfy your requirements.

bsolute maximum rating and the guaranteed operating conditions  
(.). Especially, please be careful not to exceed the range of absolute  
er-off and mode-switching. Otherwise, we will not be liable for any

take into the consideration of incidence of break down and failure  
n the systems such as redundant design, arresting the spread of fire  
al injury, fire, social damages, for example, by using the products.

own and characteristics change due to external factors (ESD, EOS,  
mounting or at customer's process. When using products for which  
shelf life and the elapsed time since first opening the packages.

ly or partially, without the prior written permission of Matsushita







## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View UNR9111J0L on WIN SOURCE](#)

 [Panasonic Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management