




**THE DATASHEET OF
PT5101N**



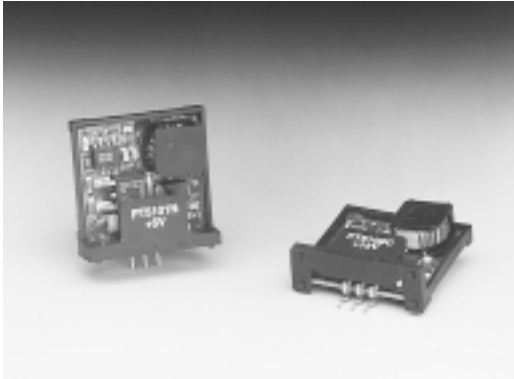

Features

- 90%+ Efficiency
- Internal Short-Circuit Protection
- Pin-Compatible with 3-Terminal Linear Regulators
- Laser-Trimmed Output Voltage
- Over-Temperature Protection
- Small Footprint
- Wide Input Range
- 5-Pin Mount Option (Suffixes L & M)

Description

The PT5100 modules are a series of economical, easy-to-use 1-A positive step-down, Integrated Switching Regulators (ISRs). These ISRs are compatible with most TO-220 style linear regulators, and when employed as a linear replacement, provide significant benefits in both efficiency and power dissipation. They are recommended for use in a wide variety of on-board power regulation applications. These include computer, data storage, industrial controls, and battery powered equipment. Modules are laser-trimmed for optimal output voltage accuracy, and exhibit excellent line and load regulation. The PT5100 also features output current limiting and thermal shutdown protection.


Ordering Information

| | |
|-----------------|---------------|
| PT5101 □ | = +5.0 Volts |
| PT5102 □ | = +12.0 Volts |
| PT5103 □ | = +3.3 Volts |
| PT5105 □ | = +6.5 Volts |
| PT5107 □ | = +15.0 Volts |
| PT5109 □ | = +5.6 Volts |
| PT5110 □ | = +9.0 Volts |
| PT5111 □ | = +10.0 Volts |
| PT5112 □ | = +8.0 Volts |

PT Series Suffix (PT1234x)

| Case/Pin Configuration | Order Suffix | Package Code |
|------------------------|--------------|--------------|
| Vertical | N | (EAD) |
| Horizontal | A | (EAA) |
| SMD | C | (EAC) |
| Horizontal, 2-pin Tab | M | (EAM) |
| SMD, 2-Pin Tab | L | (EAL) |


(Reference the applicable package code drawing for the dimensions and PC board layout)



Pin-Out Information

| Pin | Function |
|-----|------------------|
| 1 | V _{in} |
| 2 | GND |
| 3 | V _{out} |

Standard Application

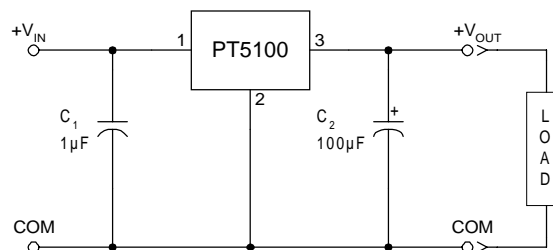

C₁ = Optional 1µF ceramic capacitor
C₂ = Required 100µF electrolytic

PT5100 Series

1-A Positive Step-down Integrated Switching Regulator

Specifications (Unless otherwise stated, $T_a = 25^\circ\text{C}$, $V_{in} = V_{in\text{min}}$, $C_{out} = 100\mu\text{F}$, and $I_o = I_{o\text{max}}$)

| Characteristic | Symbol | Conditions | PT5100 SERIES | | | Units | |
|--------------------------------|----------------------------|--|------------------------|------------------|----------------------|------------------|---------------------------|
| | | | Min | Typ | Max | | |
| Output Current | I_o | Over V_{in} range | 0.1 ⁽¹⁾ | — | 1.0 | A | |
| Input Voltage Range | V_{in} | Over I_o Range | $V_o = 3.3\text{V}$ | 9 | — | 26 | VDC |
| | | | $V_o = 5.0\text{V}$ | 9 | — | 38 | |
| | | | $V_o > 5.0\text{V}$ | $V_o + 4$ | — | 38 | |
| Set Point Voltage Tolerance | $V_o\text{tol}$ | | — | ± 1 | ± 2 | $\%V_o$ | |
| Temperature Variation | Reg_{temp} | $0^\circ \leq T_a \leq +60^\circ\text{C}$, $I_o = I_{o\text{min}}$ | — | ± 0.5 | — | $\%V_o$ | |
| Line Regulation | Reg_{line} | Over V_{in} range | — | ± 5 | ± 10 | mV | |
| Load Regulation | Reg_{load} | Over I_o range | — | ± 5 | ± 10 | mV | |
| Total Output Voltage Variation | $\Delta V_{o\text{tot}}$ | Includes set-point, line, load, $0^\circ \leq T_a \leq +60^\circ\text{C}$ | — | ± 1.5 | ± 3 | $\%V_o$ | |
| Efficiency | η | | $V_o = 15\text{V}$ | — | 95 | — | % |
| | | | $V_o = 12\text{V}$ | — | 94 | — | |
| | | | $V_o = 10\text{V}$ | — | 92 | — | |
| | | | $V_o = 5.0\text{V}$ | — | 90 | — | |
| | | | $V_o = 3.3\text{V}$ | — | 82 | — | |
| V_o Ripple (pk-pk) | V_r | 20MHz bandwidth | — | 2 | — | $\%V_o$ | |
| Transient Response | t_{tr} | 1A/ μs load step, 50% to 100% $I_{o\text{max}}$ | — | 100 | 200 | μs | |
| | ΔV_{tr} | V_o over/undershoot | — | ± 5.0 | — | $\%V_o$ | |
| Current Limit | I_{lim} | $\Delta V_o = -1\%$ | 1.2 | 2.6 | — | A | |
| Switching Frequency | f_s | Over V_{in} range | $V_o \geq 5.0\text{V}$ | 500 | 650 | 800 | kHz |
| | | | $V_o \leq 3.3\text{V}$ | 575 | 725 | 875 | |
| External Output Capacitance | C_{out} | | 100 | — | — | μF | |
| Operating Temperature Range | T_a | Over V_{in} range | -40 ⁽²⁾ | — | $+85$ ⁽³⁾ | $^\circ\text{C}$ | |
| Thermal Resistance | θ_{ja} | Free-air convection (40-60LFM) | $V_o = 3.3\text{V}$ | — | 45 | — | $^\circ\text{C}/\text{W}$ |
| | | | $V_o = 5.0\text{V}$ | — | 50 | — | |
| | | | $V_o \geq 12\text{V}$ | — | 60 | — | |
| Storage Temperature | T_s | — | -40 | — | $+125$ | $^\circ\text{C}$ | |
| Reliability | MTBF | Per Bellcore TR-332 50% stress, $T_a = 40^\circ\text{C}$, ground benign | 11.3 | — | — | 10^6 Hrs | |
| Mechanical Shock | — | Per Mil-Std-883D, method 2002.3, 1mS, half-sine, mounted to a fixture | — | 500 | — | G's | |
| Mechanical Vibration | — | Per Mil-Std-883D, Method 2007.2 20-2000Hz, soldered in PC board | — | 5 ⁽⁴⁾ | — | G's | |
| Weight | — | Suffixes N, A, & C | — | 4.5 | — | grams | |
| | | Suffixes L & M | — | 6.5 | — | | |
| Flammability | — | Materials meet UL 94V-0 | — | — | — | — | |

Notes: (1) The ISR will operate at no load with reduced specifications.

(2) For operation below 0°C , use a tantalum type capacitor for C_2 .


(3) See Thermal Derating curves.

(4) The tab pins on the 5-pin mount package types (suffixes L & M) must be soldered. For more information see the applicable package outline drawing.


1-A Positive Step-down
Integrated Switching Regulator

PT5103, 3.3 VDC (See Note A)


Efficiency vs Output Current

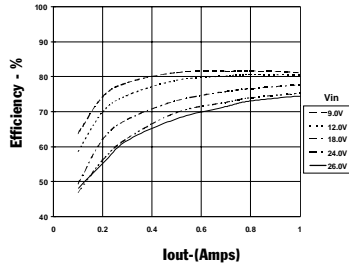


Ripple vs Output Current

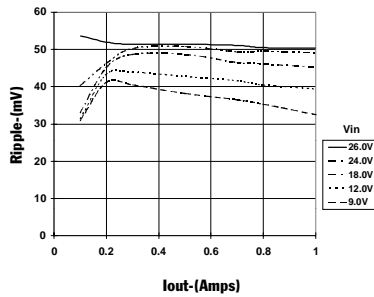

Thermal Derating (T_A) (See Note B)

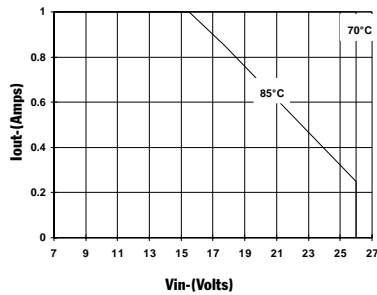


Power Dissipation vs Output Current

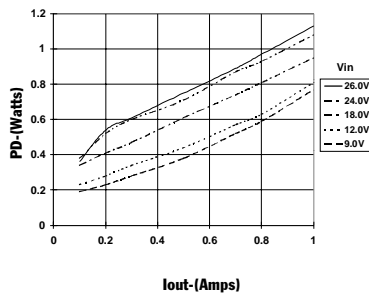


PT5101, 5.0 VDC (See Note A)


Efficiency vs Output Current

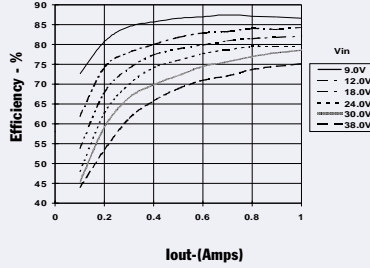


Ripple vs Output Current

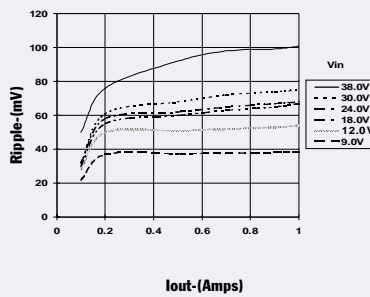

Thermal Derating (T_A) (See Note B)

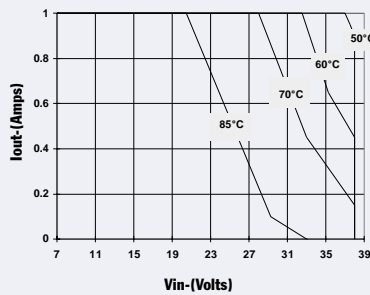


Power Dissipation vs Output Current

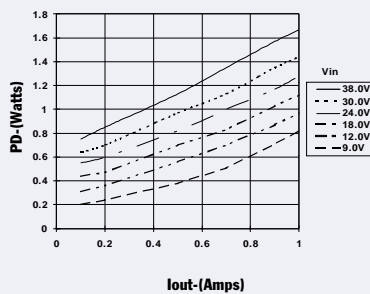


PT5102, 12.0 VDC (See Note A)


Efficiency vs Output Current

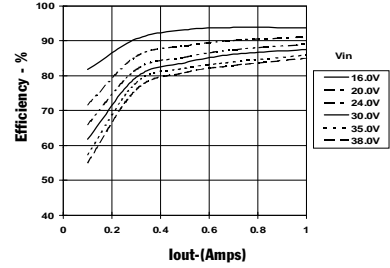


Ripple vs Output Current

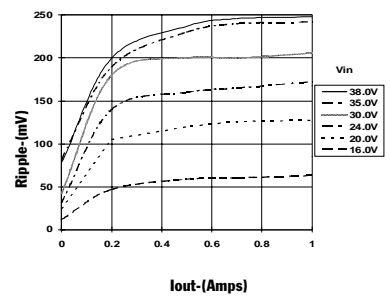

Thermal Derating (T_A) (See Note B)

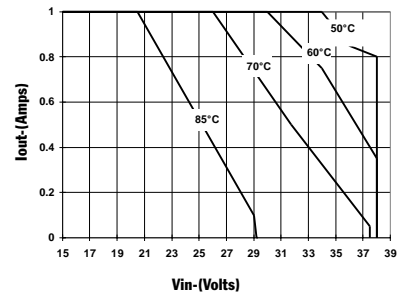

Power Dissipation vs Output Current

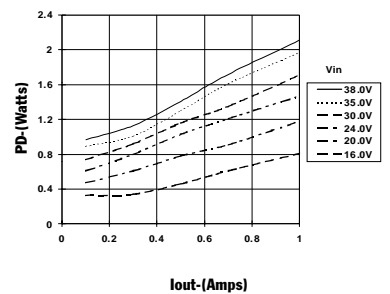

Note A: Characteristic data has been developed from actual products tested at 25°C. This data is considered typical data for the Converter.
Note B: Thermal derating graphs are developed in free-air convection cooling, which corresponds to approximately 40-60LFM of airflow.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PT5101N on WIN SOURCE](#)

 [Texas Instruments](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management