



**THE DATASHEET OF  
PTD08A015WAD**



## 15-A, 4.75-V to 14-V INPUT, NON-ISOLATED, WIDE-OUTPUT, DIGITAL POWERTRAIN™ MODULE


Check for Samples: [PTD08A015W](#)

### FEATURES

- Up to 15-A Output Current
- 4.75-V to 14-V Input Voltage
- Programmable Wide-Output Voltage (0.7 V to 3.6 V)
- Efficiencies up to 96%
- Digital I/O
  - PWM signal
  - INHIBIT
  - Current limit flag (FAULT)
  - Synchronous Rectifier Enable (SRE)
- Analog I/O
  - Temperature
  - Output current
- Safety Agency Approvals: (Pending)
  - UL/IEC/CSA-C22.2 60950-1
- Operating Temperature: –40°C to 85°C

### APPLICATIONS

- Digital Power Systems using UCD9XXX Digital Controllers

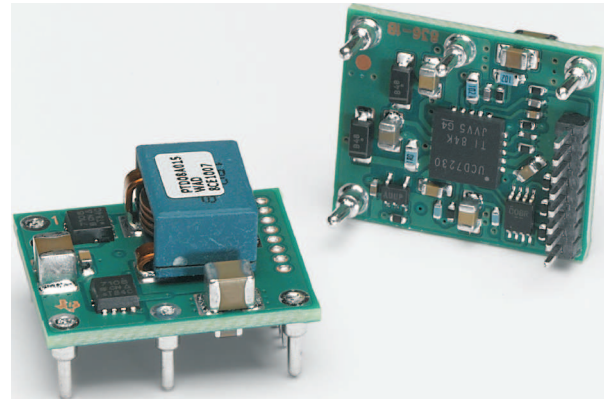

### DESCRIPTION

The PTD08A015W is a high-performance 15-A rated, non-isolated digital PowerTrain module. This module is the power conversion section of a digital power system which incorporates TI's UCD7230 MOSFET driver IC. The PTD08A015W must be used in conjunction with a digital power controller such as the UCD9240 or UCD9110 family. The PTD08A015W receives control signals from the digital controller and provides parametric and status information back to the digital controller. Together, PowerTrain modules and a digital power controller form a sophisticated, robust, and easily configured power management solution.

Operating from an input voltage range of 4.75 V to 14 V, the PTD08A015W provides step-down power conversion to a wide range of output voltages from 0.7 V to 3.6 V. The wide input voltage range makes the PTD08A015W particularly suitable for advanced computing and server applications that utilize a loosely regulated 8-V, 9.6-V or 12-V intermediate distribution bus. Additionally, the wide input voltage range increases design flexibility by supporting operation with tightly regulated 5-V or 12-V intermediate bus architectures.

The module incorporates output over-current and temperature monitoring which protects against most load faults. Output current and module temperature signals are provided for the digital controller to permit user defined over-current and over-temperature warning and fault scenarios.

The module uses double-sided surface mount construction to provide a low profile and compact footprint. The PTD08A015W is constructed using through-hole pins and is lead (Pb) - free and RoHS compatible.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


POWERTRAIN is a trademark of Texas Instruments.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### Standard PTD08A015W Application

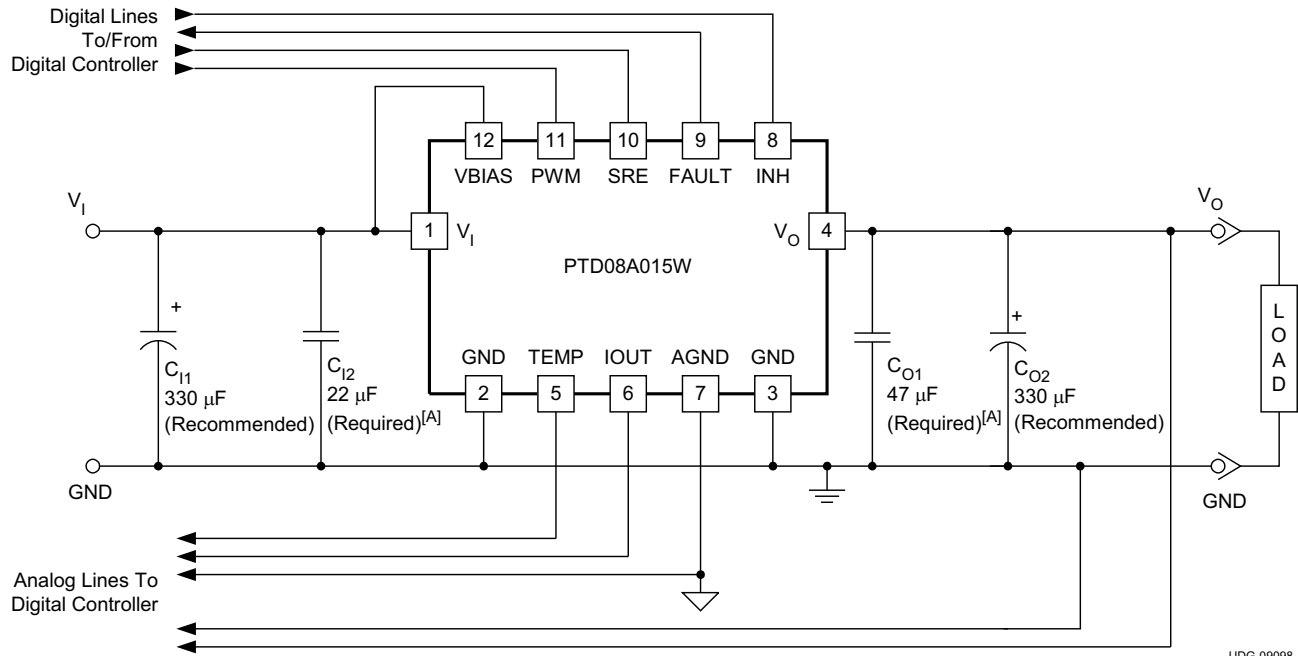

UDG-09098

A. [A]  $C_{12}$  and  $C_{O1}$  are optional when the operating frequency is greater than 500 kHz.

### ORDERING INFORMATION

For the most current package and ordering information, see the Package Option Addendum at the end of this datasheet, or see the TI website at [www.ti.com](http://www.ti.com).

### DATASHEET TABLE OF CONTENTS

DATASHEET SECTION	PAGE NUMBER
ENVIRONMENTAL AND ABSOLUTE MAXIMUM RATINGS	3
ELECTRICAL CHARACTERISTICS TABLE	4
TERMINAL FUNCTIONS	5
TYPICAL CHARACTERISTICS ( $V_I = 12V$ )	6
TYPICAL CHARACTERISTICS ( $V_I = 5V$ )	8
TYPICAL APPLICATION SCHEMATIC	10
GRAPHICAL USER INTERFACE VALUES	11
TRAY DRAWINGS	12

### ENVIRONMENTAL AND ABSOLUTE MAXIMUM RATINGS

(Voltages are with respect to GND)

				UNIT
$V_I$	Input voltage		16	V
$V_B$	Bias voltage		16	V
$T_A$	Operating temperature range	Over $V_I$ range	-40 to 85	°C
$T_{wave}$	Wave soldering temperature	Surface temperature of module body or pins for 5 seconds maximum	260	
$T_{stg}$	Storage temperature		-55 to 125 <sup>(1)</sup>	G
	Mechanical shock	Per Mil-STD-883D, Method 2002.3, 1 msec, 1/2 sine, mounted	200	
	Mechanical vibration	Mil-STD-883D, Method 2007.2, 20-2000 Hz	15	
	Weight		3.9	grams
MTBF	Reliability	Per Telcordia SR-332, 50% stress, $T_A = 40^\circ\text{C}$ , ground benign	9.4	$10^6$ Hr
	Flammability	Meets UL94V-O		

(1) The shipping tray or tape and reel cannot be used to bake parts at temperatures higher than 65°C.

## ELECTRICAL CHARACTERISTICS

### PTD08A015W

$T_A = 25^\circ\text{C}$ ,  $F_{\text{SW}} = 350\text{kHz}$ ,  $V_I = 12\text{ V}$ ,  $V_O = 3.3\text{ V}$ ,  $V_B = V_I$ ,  $C_{I1} = 330\ \mu\text{F}$ ,  $C_{I2} = 22\ \mu\text{F}$  ceramic,  $C_{O1} = 47\ \mu\text{F}$  ceramic,  $C_{O2} = 330\ \mu\text{F}$ , and  $I_O = I_{O(\text{max})}$  (unless otherwise stated)


PARAMETER		TEST CONDITIONS		PTD08A015W			UNIT	
				MIN	TYP	MAX		
$I_O$	Output current	Over $V_O$ range	25°C, natural convection		0	15	A	
$V_I$	Input voltage range	Over $I_O$ range		4.75	14 <sup>(1)</sup>		V	
$V_{\text{OAdj}}$	Output voltage adjust range	Over $I_O$ range		0.7 <sup>(1)</sup>	3.6		V	
$\eta$	Efficiency	$V_I = V_B = 5\text{ V}$ $I_O = 15\text{ A}$ , $f_s = 350\text{ kHz}$	$V_O = 3.3\text{ V}$	94%				
			$V_O = 2.5\text{ V}$	92%				
			$V_O = 1.8\text{ V}$	89%				
			$V_O = 1.5\text{ V}$	87%				
			$V_O = 1.2\text{ V}$	85%				
		$V_O = 1.0\text{ V}$	82%					
$V_{\text{OPP}}$	$V_O$ Ripple (peak-to-peak)	20-MHz bandwidth		20		mV <sub>PP</sub>		
$V_B$	Bias voltage			4.75	14	V		
$V_B$ $UVLO$	Bias voltage under voltage lockout	$V_B$ increasing		4.25	4.5	4.75	V	
		$V_B$ decreasing		4.0	4.25	4.5		
$I_B$	Bias current	Inhibit (pin 8) to AGND		Standby		4	mA	
				Switching		34		
$V_{\text{IH}}$	High-level input voltage	SRE, INH, & PWM input levels		2.0	5.5		V	
$V_{\text{IL}}$	Low-level input voltage			0.8				
	PWM input	Frequency range		300	1000		kHz	
		Pulse width limits		130				ns
	TEMP output	Range		-40	125		°C	
		Accuracy, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$		-4	6		°C	
		Slope		10				mV/°C
		Offset, $T_A = 0^\circ\text{C}$		500				mV
$V_{\text{OH}}$	FAULT output	High-level output voltage, $I_{\text{FAULT}} = 4\text{ mA}$		2.7	3.3		V	
$V_{\text{OL}}$		Low-level output voltage, $I_{\text{FAULT}} = 4\text{ mA}$		0	0.6			
$I_{\text{LIM}}$		Overcurrent threshold; Reset, followed by auto-recovery		25		A		
	IOUT output	Range		0.15	3.5		V	
		Gain		60	85	110	mV/A	
		Offset, $I_O = 0\text{ A}$ , $V_O = 1.2\text{ V}$		0.44	0.6	0.76	V	
		Output Impedance		10	15	21	kΩ	
$C_I$	External input capacitance	Nonceramic		330 <sup>(2)</sup>		μF		
		Ceramic		22 <sup>(2)</sup>				
$C_O$	External output capacitance	Capacitance Value		Nonceramic	330 <sup>(3)</sup>	5000 <sup>(4)</sup>	μF	
				Ceramic		47 <sup>(3)</sup>		(3)
		Equivalent series resistance (non-ceramic)		1 <sup>(5)</sup>				mΩ

- (1) The maximum input voltage is duty cycle limited to  $(V_O / (130\text{ns} \times F_{\text{SW}}))$  or 14 V, whichever is less. The maximum allowable input voltage is a function of switching frequency.
- (2) A 22 μF ceramic input capacitor is required for proper operation. An additional 330 μF bulk capacitor rated for a minimum of 500mA rms of ripple current is recommended. When operating at frequencies > 500kHz the 22 μF ceramic capacitor is only recommended. Refer to the UCD9240 controller datasheet and user interface for application specific capacitor specifications.
- (3) A 47 μF ceramic output capacitor is required for basic operation. An additional 330 μF bulk capacitor is recommended for improved transient response. When operating at frequencies > 500kHz the 47 μF ceramic capacitor is only recommended. Refer to the UCD9240 controller datasheet and user interface for application specific capacitor specifications.
- (4) 5,000 μF is the calculated maximum output capacitance given a 1V/msec output voltage rise time. Additional capacitance or increasing the output voltage rise rate may trigger the overcurrent threshold at start-up. Refer to the UCD9240 controller datasheet and user interface for application specific capacitor specifications.
- (5) This is the minimum ESR for all non-ceramic output capacitance. Refer to the UCD9240 controller datasheet and user interface for application specific capacitor specifications.

**TERMINAL FUNCTIONS**

TERMINAL		DESCRIPTION
NAME	NO.	
V <sub>I</sub>	1	The positive input voltage power node to the module, which is referenced to common GND.
GND	2	This is the common ground connection for the V <sub>I</sub> and V <sub>O</sub> power connections.
	3	
V <sub>O</sub>	4	The regulated positive power output with respect to GND.
TEMP	5	Temperature sense output. The voltage level on this pin represents the temperature of the module.
IOUT	6	Current sense output. The voltage level on this pin represents the average output current of the module.
AGND	7	Analog ground return. It is the 0 V <sub>dc</sub> reference for the control inputs.
INH <sup>(1)</sup>	8	The inhibit pin is a negative logic input that is referenced to AGND. Applying a low-level signal to this pin disables the module and turns off the output voltage. A 10 kΩ pull-up to 3.3 V or 5 V is required if the INH signal is not used.
FAULT	9	Current limit flag. The Fault signal is a 3.3 V digital output which is latched high after an over-current condition. The Fault is reset after two complete PWM cycles without an over-current condition (third rising edge of the PWM).
SRE	10	Synchronous Rectifier Enable. This pin is a high impedance digital input. A 3.3 V or 5 V logic level signals is used to enable the synchronous rectifier switch. When this signal is high, the module will source and sink output current. When this signal is low, the module will only source current.
PWM	11	This is the PWM input pin. It is a high impedance digital input that accepts 3.3 V or 5 V logic level signals up to 1 MHz.
VBIAS	12	Bias voltage supply required to power internal circuitry. For optimal performance connect VBIAS to V <sub>I</sub> .

(1) Denotes negative logic: High = Normal operation, Low = Function active

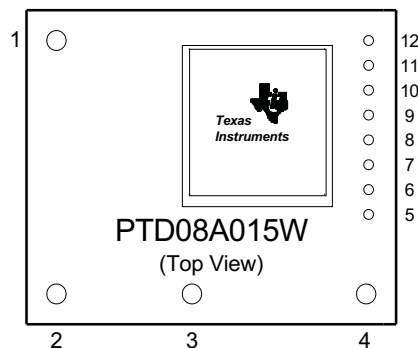

TYPICAL CHARACTERISTICS ( $V_I = 12\text{ V}$ ) <sup>(1)</sup>

EFFICIENCY vs LOAD CURRENT

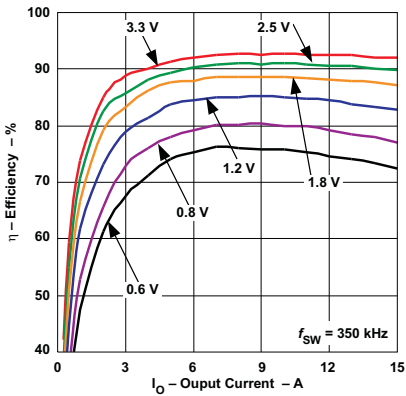


Figure 1.

EFFICIENCY vs LOAD CURRENT

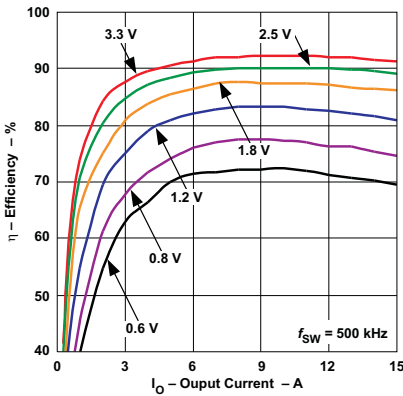


Figure 2.

EFFICIENCY vs LOAD CURRENT

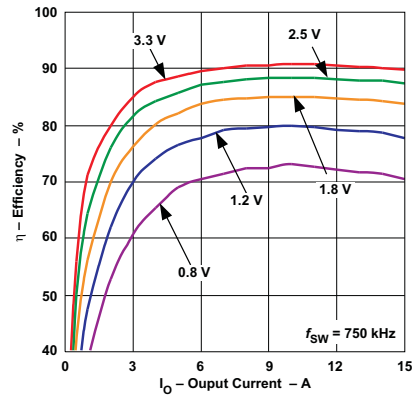


Figure 3.

EFFICIENCY vs LOAD CURRENT

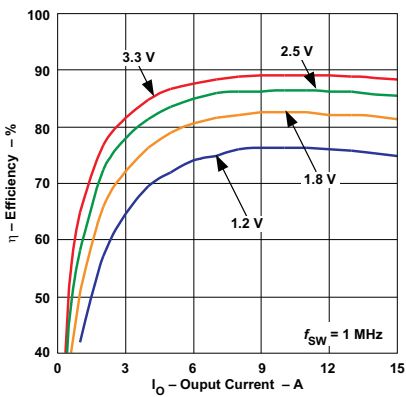


Figure 4.

POWER DISSIPATION vs LOAD CURRENT

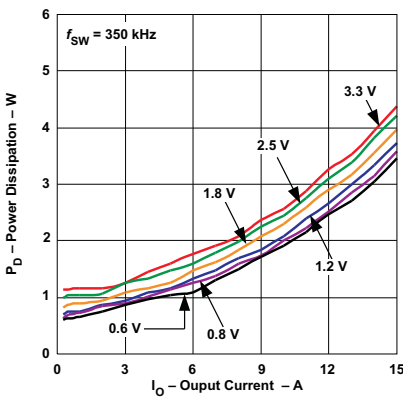


Figure 5.

POWER DISSIPATION vs LOAD CURRENT

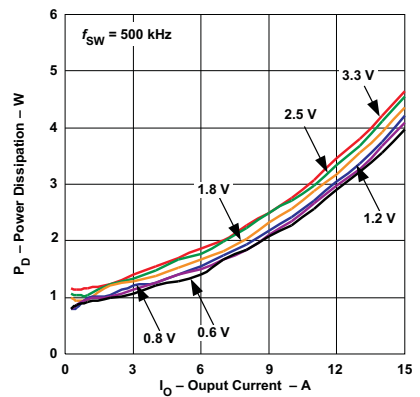


Figure 6.

POWER DISSIPATION vs LOAD CURRENT

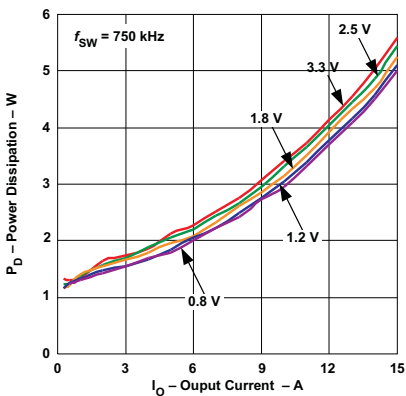


Figure 7.

POWER DISSIPATION vs LOAD CURRENT

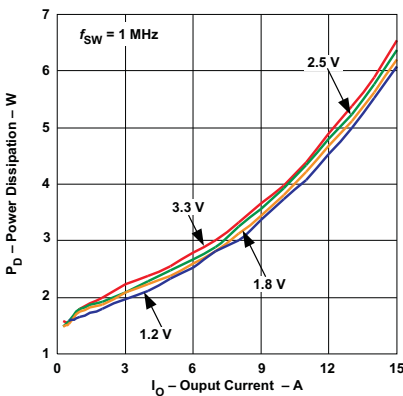


Figure 8.

INPUT BIAS CURRENT vs SWITCHING FREQUENCY

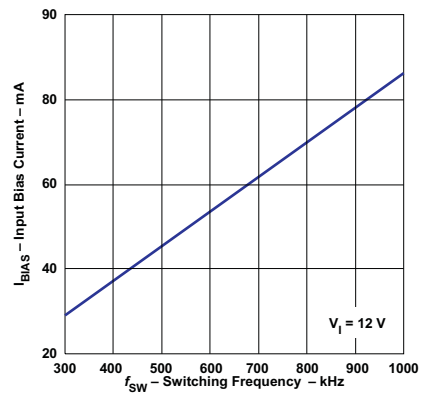


Figure 9.

(1) The electrical characteristic data has been developed from actual products tested at 25°C. This data is considered typical for the converter.

TYPICAL CHARACTERISTICS ( $V_I = 12\text{ V}$ )  
Safe Operating Area <sup>(1)</sup>

AMBIENT TEMPERATURE vs LOAD CURRENT

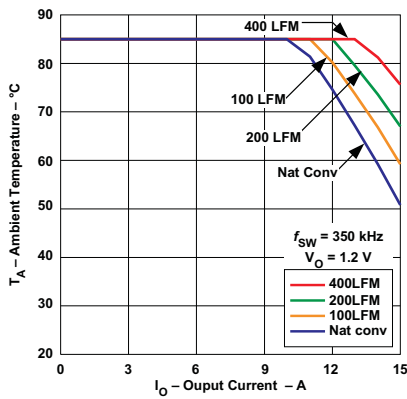


Figure 10.

AMBIENT TEMPERATURE vs LOAD CURRENT

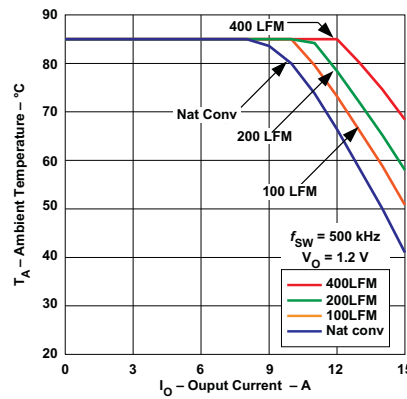


Figure 11.

AMBIENT TEMPERATURE vs LOAD CURRENT

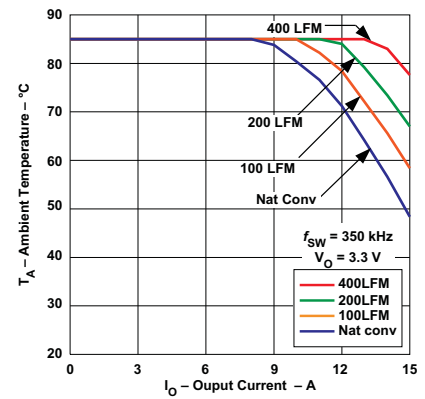


Figure 12.

AMBIENT TEMPERATURE vs LOAD CURRENT

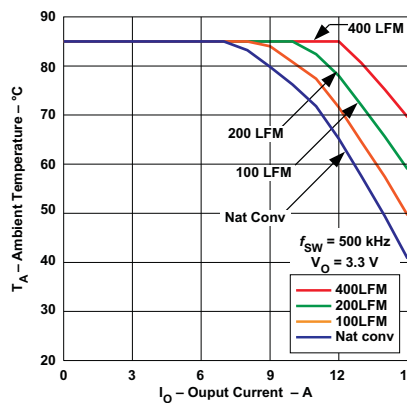


Figure 13.

(1) The temperature derating curves represent the conditions at which internal components are at or below the manufacturer's maximum operating temperatures. Derating limits apply to modules soldered directly to a 100 mm x 100 mm double-sided PCB with 2 oz. copper. Please refer to the mechanical specification for more information.

TYPICAL CHARACTERISTICS ( $V_I = 5\text{ V}$ ) <sup>(1)</sup>

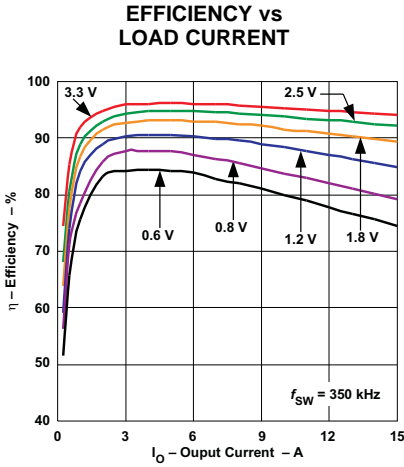


Figure 14.

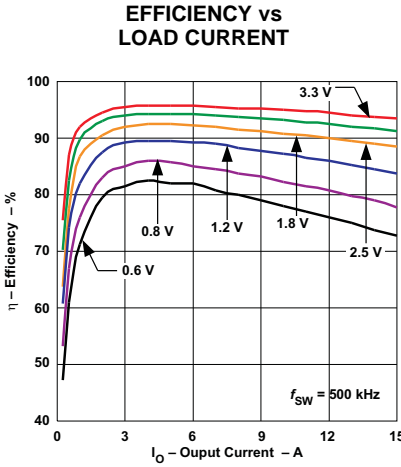


Figure 15.

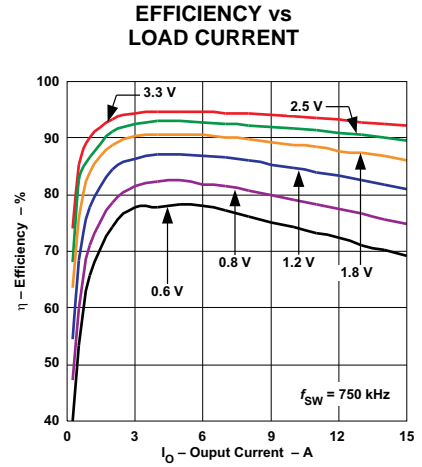


Figure 16.

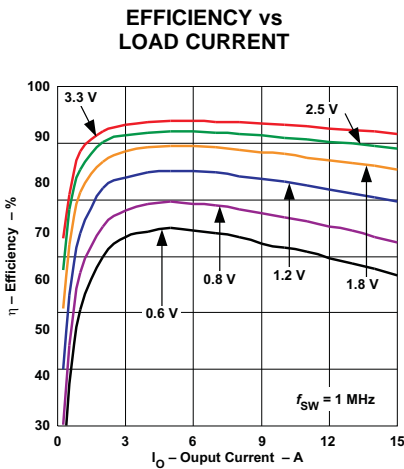


Figure 17.

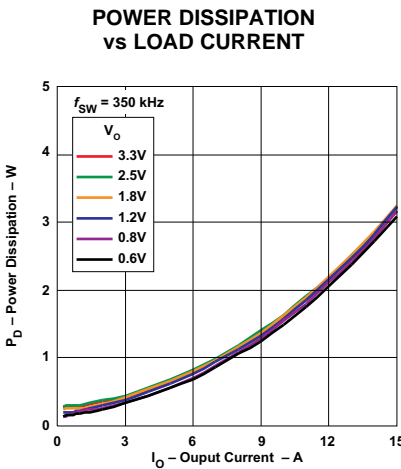


Figure 18.

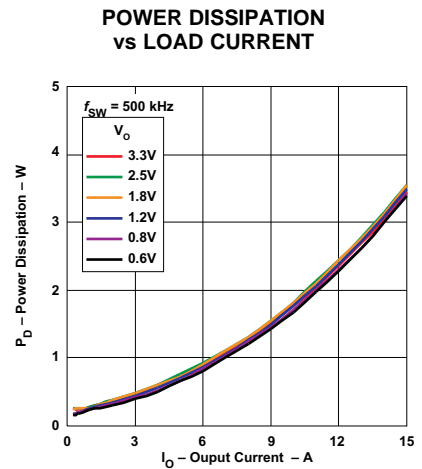


Figure 19.

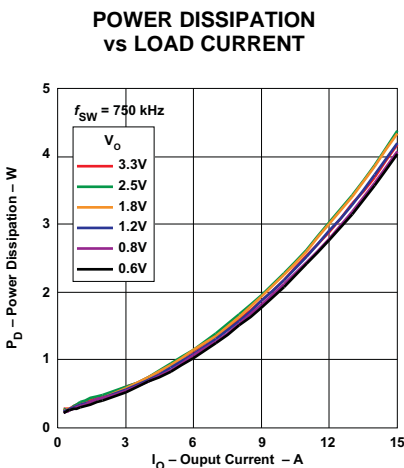


Figure 20.

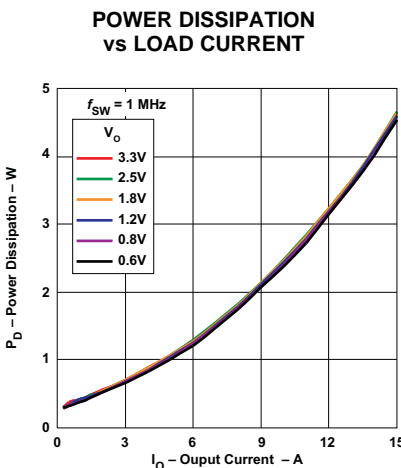


Figure 21.

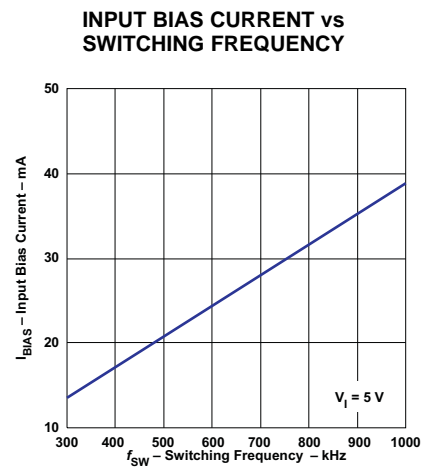


Figure 22.

(1) The electrical characteristic data has been developed from actual products tested at 25°C. This data is considered typical for the converter.

TYPICAL CHARACTERISTICS ( $V_I = 5\text{ V}$ )  
Safe Operating Area <sup>(1)</sup>

AMBIENT TEMPERATURE vs LOAD CURRENT

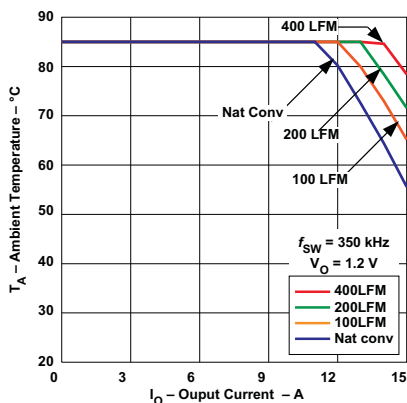


Figure 23.

AMBIENT TEMPERATURE vs LOAD CURRENT

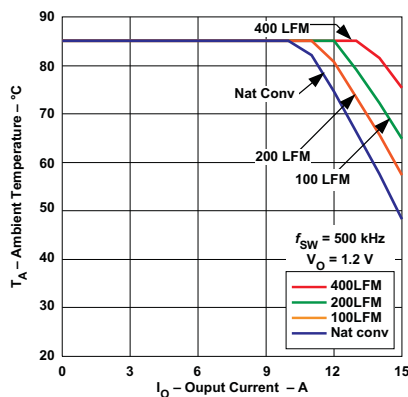


Figure 24.

AMBIENT TEMPERATURE vs LOAD CURRENT

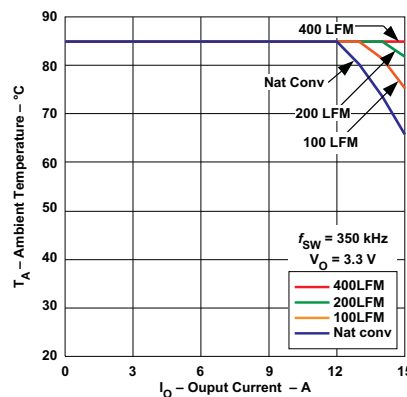


Figure 25.

AMBIENT TEMPERATURE vs LOAD CURRENT

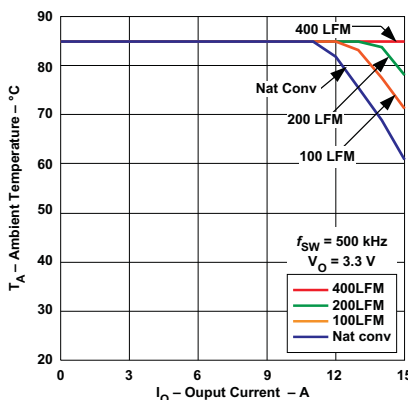
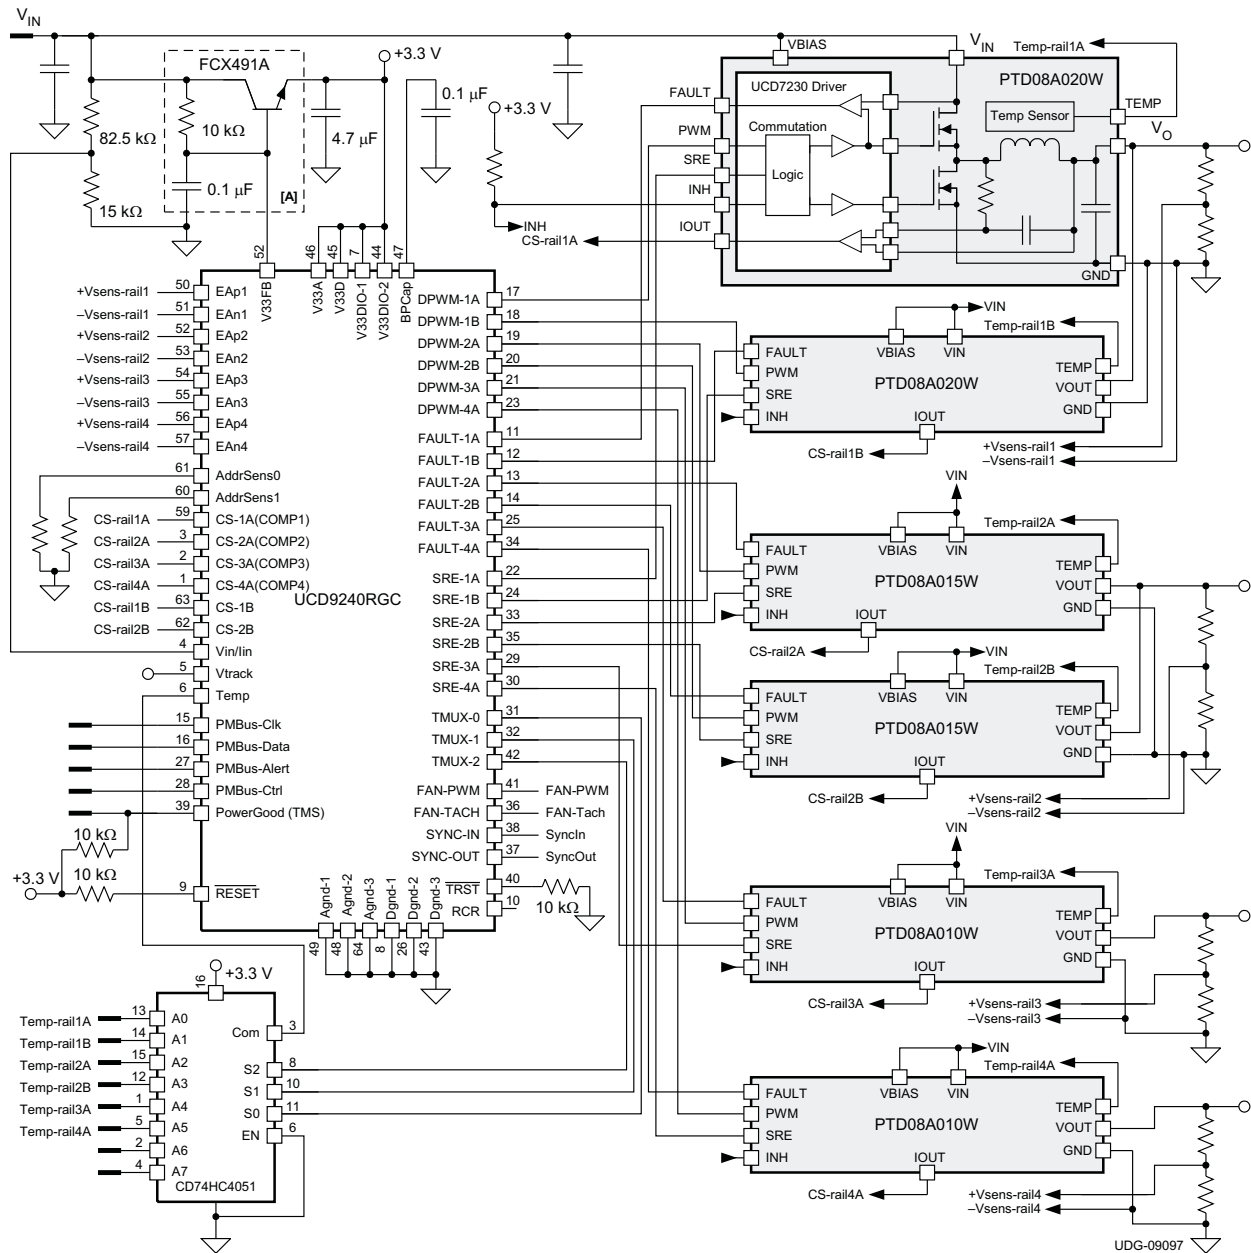


Figure 26.

(1) The temperature derating curves represent the conditions at which internal components are at or below the manufacturer's maximum operating temperatures. Derating limits apply to modules soldered directly to a 100 mm x 100 mm double-sided PCB with 2 oz. copper. Please refer to the mechanical specification for more information.

### APPLICATION INFORMATION

#### Digital Power



**Figure 27. Typical Application Schematic**

A. This discrete bias power circuit may be substituted with a low dropout regulator (LDO). For example, [TPS715A33](#) can provide bias power to the UCD9240.

Figure 27 shows the UCD9240 power supply controller working in a system which requires the regulation of four independent power supplies. The loop for each power supply is created by the respective voltage outputs feeding into the Error ADC differential inputs, and completed by DPWM outputs feeding into the UCD7230 drivers which are shown on the PTD08A0x0W modules.

## UCD9240 Graphical User Interface (GUI)

When using the UCD9240 digital controller along with digital PowerTrain modules to design a digital power system, several internal parameters of the modules are required to run the Fusion Digital Power Designer GUI. See the plant parameters below for the PTD08A015W digital PowerTrain modules.

**Table 1. PTD08A015W Plant Parameters**



PTD08A015W Plant Parameters			
L ( $\mu\text{H}$ )	DCR ( $\text{m}\Omega$ )	Rds-on-hi ( $\text{m}\Omega$ )	Rds-on-lo ( $\text{m}\Omega$ )
0.90	2.2	3.6	3.6

Internal output capacitance is present on the digital PowerTrain modules themselves. When using the GUI interface this capacitance information must be included along with any additional external capacitance. See the capacitor parameters below for the PTD08A015W digital PowerTrain modules.

**Table 2. PTD08A015W Capacitor Parameters**

PTD08A015W Capacitor Parameters			
C ( $\mu\text{F}$ )	ESR ( $\text{m}\Omega$ )	ESL ( $\text{nH}$ )	Quantity
47	1.5	2.5	1

TRAY

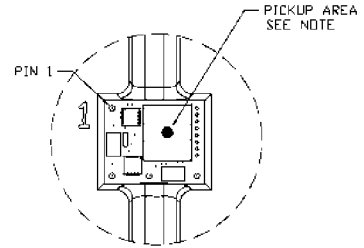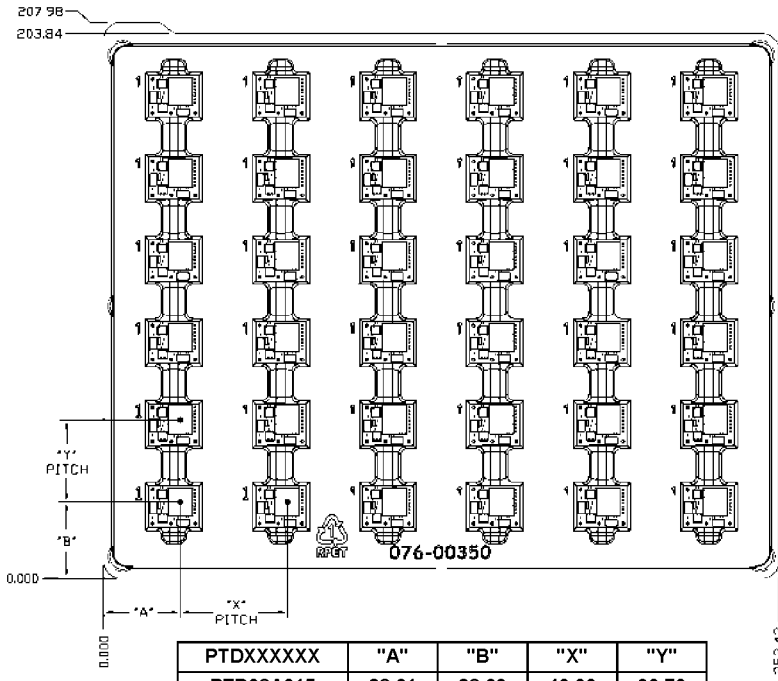

NOTE: THE INDUCTOR IS USED TO PICK AND PLACE THE MODULE. IT'S LOCATION MAY VARY FROM PACKAGE STYLE. SEE PRODUCT TABLE

DEVICES/TRAY	36
--------------	----

PTDXXXXX	"A"	"B"	"X"	"Y"
PTD08A015	28.61	28.63	40.00	30.70
All dimensions are in millimeters.				

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
PTD08A015WAD	ACTIVE	Through-Hole Module	EGS	12	36	RoHS Exempt & Green	SN	Level-1-235C-UNLIM/ Level-3-260C-168HRS	-40 to 85		<b>Samples</b>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.


**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# MECHANICAL DATA

EGS (R-PDSS-T12)

DOUBLE SIDED MODULE

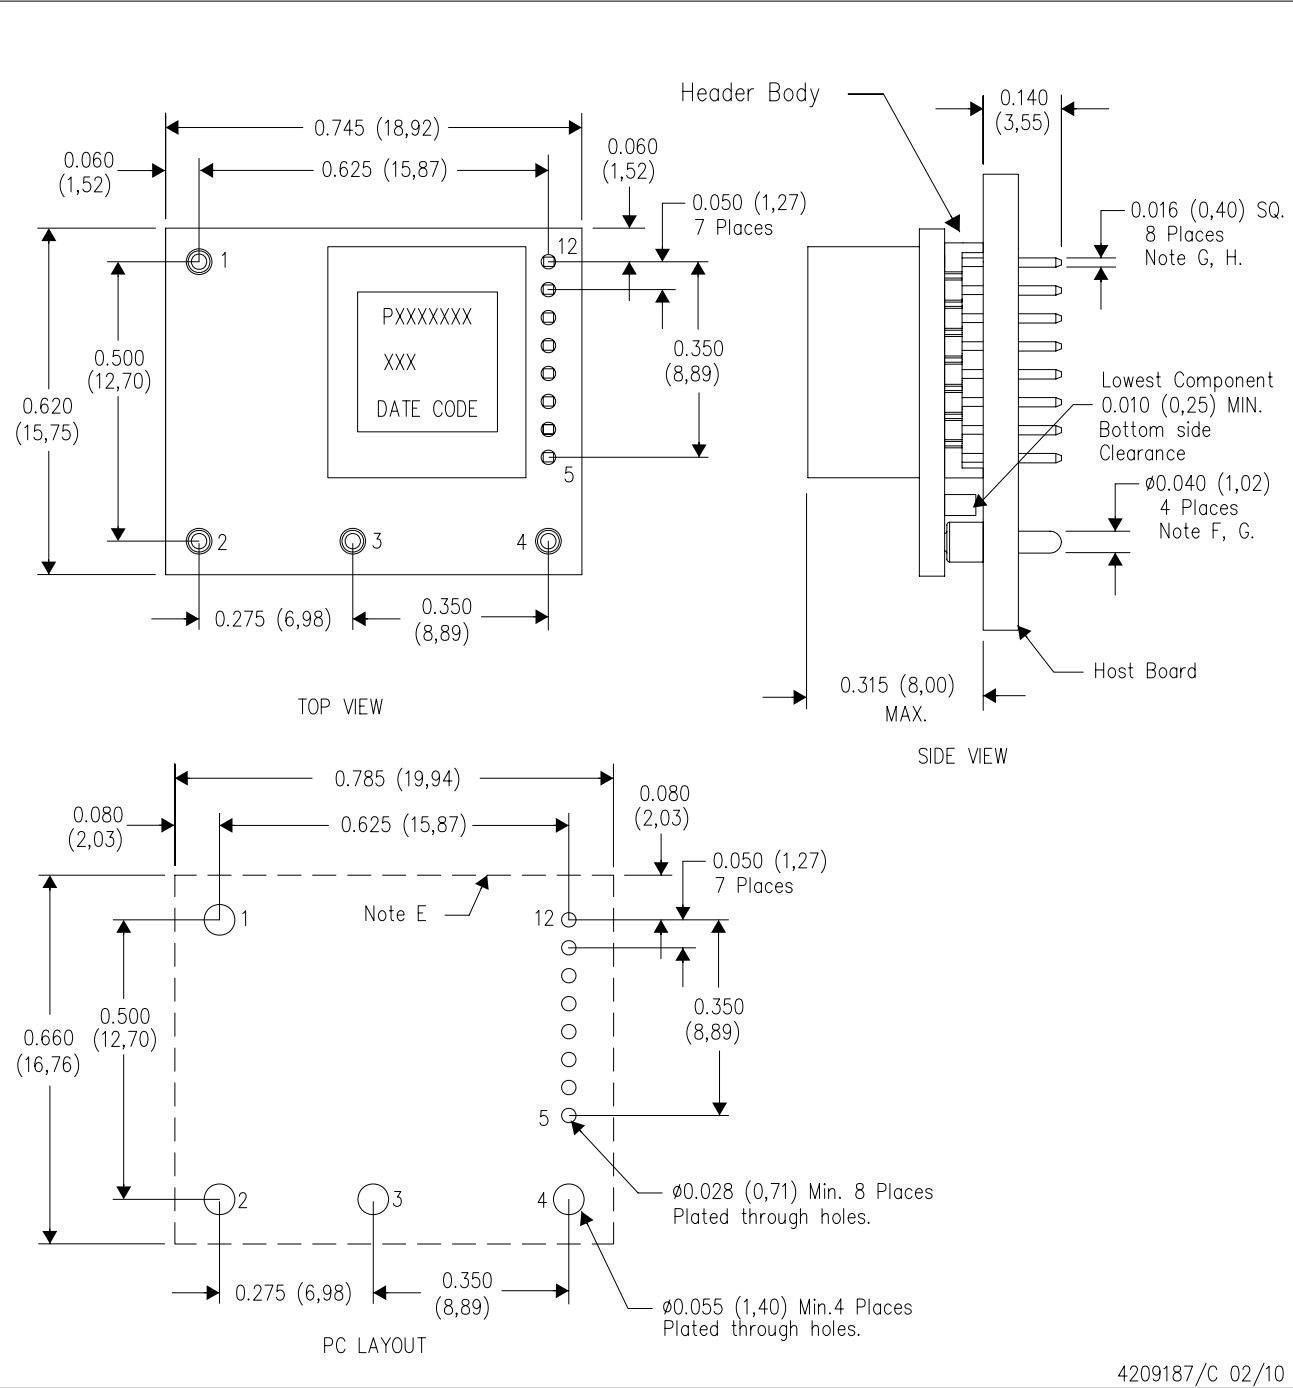

4209187/C 02/10

- NOTES:
- A. All linear dimensions are in inches (mm).
  - B. This drawing is subject to change without notice.
  - C. 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - D. 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - E. Recommended keep out area for user components.
  - F. Pins are 0.040" (1,02) diameter with 0.070" (1,78) diameter standoff shoulder.
  - G. Header pins are 0.016 (0,40) SQ.
  - H. All pins: Material - Copper Alloy  
Finish - Tin (100%) over Nickel plate

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2019, Texas Instruments Incorporated

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PTD08A015WAD](#) on WIN SOURCE

 [Texas Instruments](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management