



# THE DATASHEET OF AO4806



### General Description

The AO4806 uses advanced trench technology to provide excellent  $R_{DS(ON)}$  and low gate charge. They offer operation over a wide gate drive range from 1.8V to 12V. It is ESD protected. This device is suitable for use as a uni-directional or bi-directional load switch, facilitated by its common-drain configuration.

### Product Summary

$V_{DS}$  (V) = 20V  
 $I_D$  = 9.4A ( $V_{GS}$  = 10V)  
 $R_{DS(ON)}$  < 14m $\Omega$  ( $V_{GS}$  = 10V)  
 $R_{DS(ON)}$  < 15m $\Omega$  ( $V_{GS}$  = 4.5V)  
 $R_{DS(ON)}$  < 21m $\Omega$  ( $V_{GS}$  = 2.5V)  
 $R_{DS(ON)}$  < 30m $\Omega$  ( $V_{GS}$  = 1.8V)


ESD Rating: 2000V HBM  
 100% UIS Tested  
 100% Rg Tested





SOIC-8

Top View

Bottom View

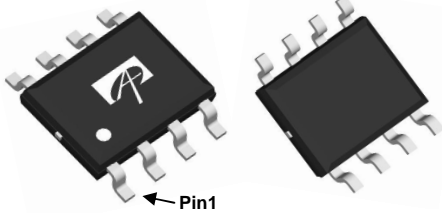

Top View



### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	$V_{DS}$	20	V
Gate-Source Voltage	$V_{GS}$	$\pm 12$	V
Continuous Drain Current <sup>A</sup>	$I_D$	$T_A=25^\circ\text{C}$	9.4
		$T_A=70^\circ\text{C}$	7.5
Pulsed Drain Current <sup>B</sup>	$I_{DM}$	40	A
Power Dissipation	$P_D$	$T_A=25^\circ\text{C}$	2
		$T_A=70^\circ\text{C}$	1.28
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	$^\circ\text{C}$

### Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient <sup>A</sup>	$R_{\theta JA}$	$t \leq 10\text{s}$	45	$^\circ\text{C/W}$
Maximum Junction-to-Ambient <sup>A</sup>		Steady-State	72	$^\circ\text{C/W}$
Maximum Junction-to-Lead <sup>C</sup>	$R_{\theta JL}$	34	40	$^\circ\text{C/W}$

Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
$BV_{DSS}$	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}$ , $V_{GS}=0\text{V}$	20			V
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=16\text{V}$ , $V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			10 25	$\mu\text{A}$
$I_{GSS}$	Gate-Source leakage current	$V_{DS}=0\text{V}$ , $V_{GS}=\pm 10\text{V}$			$\pm 10$	$\mu\text{A}$
$BV_{GSO}$	Gate-Source Breakdown Voltage	$V_{DS}=0\text{V}$ , $I_G=\pm 250\mu\text{A}$	$\pm 12$			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}$ , $I_D=250\mu\text{A}$	0.5	0.75	1	V
$I_{D(ON)}$	On state drain current	$V_{GS}=4.5\text{V}$ , $V_{DS}=5\text{V}$	30			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}$ , $I_D=9.4\text{A}$ $T_J=125^\circ\text{C}$		11 14.3	14 17	$\text{m}\Omega$
		$V_{GS}=4.5\text{V}$ , $I_D=8\text{A}$		12.6	16	$\text{m}\Omega$
		$V_{GS}=2.5\text{V}$ , $I_D=6\text{A}$		16.5	22	$\text{m}\Omega$
		$V_{GS}=1.8\text{V}$ , $I_D=4\text{A}$		23.4	30	$\text{m}\Omega$
$g_{FS}$	Forward Transconductance	$V_{DS}=5\text{V}$ , $I_D=9.4\text{A}$		37		S
$V_{SD}$	Diode Forward Voltage	$I_S=1\text{A}$		0.72	1	V
$I_S$	Maximum Body-Diode Continuous Current				3	A
<b>DYNAMIC PARAMETERS</b>						
$C_{iss}$	Input Capacitance	$V_{GS}=0\text{V}$ , $V_{DS}=10\text{V}$ , $f=1\text{MHz}$		1810		pF
$C_{oss}$	Output Capacitance			232		pF
$C_{rss}$	Reverse Transfer Capacitance			200		pF
$R_g$	Gate resistance	$V_{GS}=0\text{V}$ , $V_{DS}=0\text{V}$ , $f=1\text{MHz}$		1.6		$\Omega$
<b>SWITCHING PARAMETERS</b>						
$Q_g$	Total Gate Charge	$V_{GS}=4.5\text{V}$ , $V_{DS}=10\text{V}$ , $I_D=9.4\text{A}$		17.9		nC
$Q_{gs}$	Gate Source Charge			1.5		nC
$Q_{gd}$	Gate Drain Charge			4.7		nC
$t_{D(on)}$	Turn-On DelayTime	$V_{GS}=10\text{V}$ , $V_{DS}=10\text{V}$ , $R_L=1.1\Omega$ , $R_{GEN}=3\Omega$		3.3		ns
$t_r$	Turn-On Rise Time			5.9		ns
$t_{D(off)}$	Turn-Off DelayTime			44		ns
$t_f$	Turn-Off Fall Time			7.7		ns
$t_{rr}$	Body Diode Reverse Recovery Time	$I_F=9.4\text{A}$ , $dI/dt=100\text{A}/\mu\text{s}$		22		ns
$Q_{rr}$	Body Diode Reverse Recovery Charge	$I_F=9.4\text{A}$ , $dI/dt=100\text{A}/\mu\text{s}$		8.6		nC

A: The value of  $R_{\theta JA}$  is measured with the device mounted on  $1\text{in}^2$  FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ . The value in any a given application depends on the user's specific board design. The current rating is based on the  $t \leq 10\text{s}$  thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C: The  $R_{\theta JA}$  is the sum of the thermal impedance from junction to lead  $R_{\theta JL}$  and lead to ambient.

D: The static characteristics in Figures 1 to 6 are obtained using  $80\mu\text{s}$  pulses, duty cycle 0.5% max.

E: These tests are performed with the device mounted on  $1\text{in}^2$  FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ . The SOA curve provides a single pulse rating.

Rev4: Nov. 2010

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

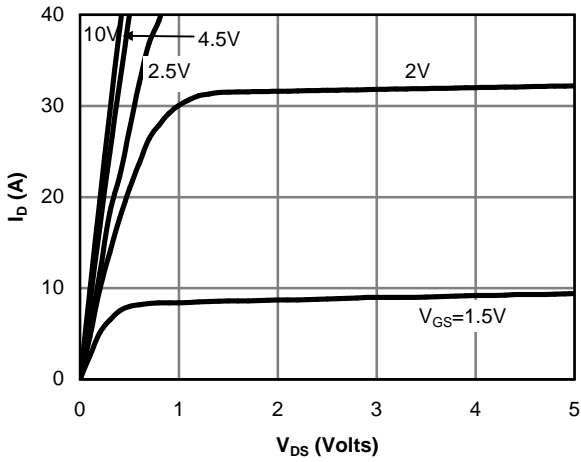


Fig 1: On-Region Characteristics

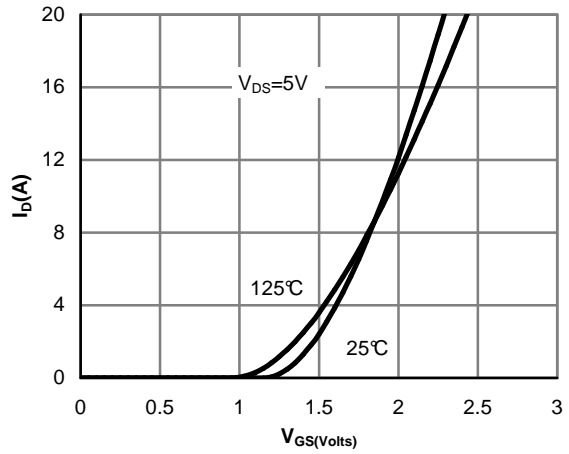


Figure 2: Transfer Characteristics

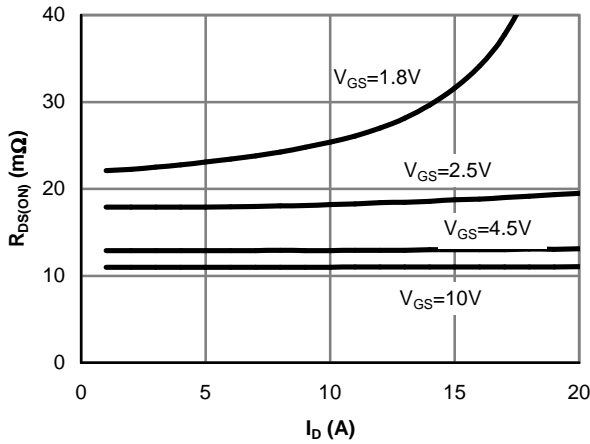


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

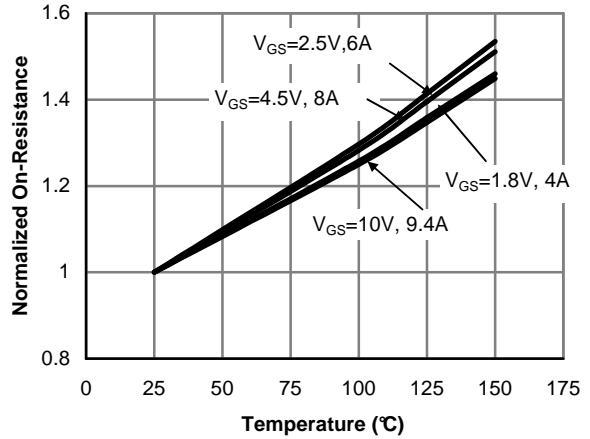


Figure 4: On-Resistance vs. Junction Temperature

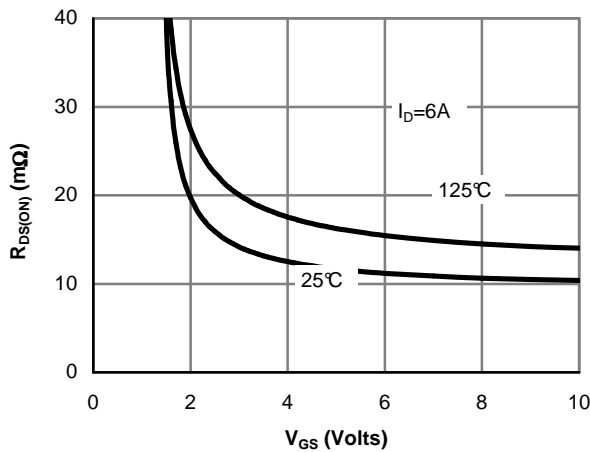


Figure 5: On-Resistance vs. Gate-Source Voltage

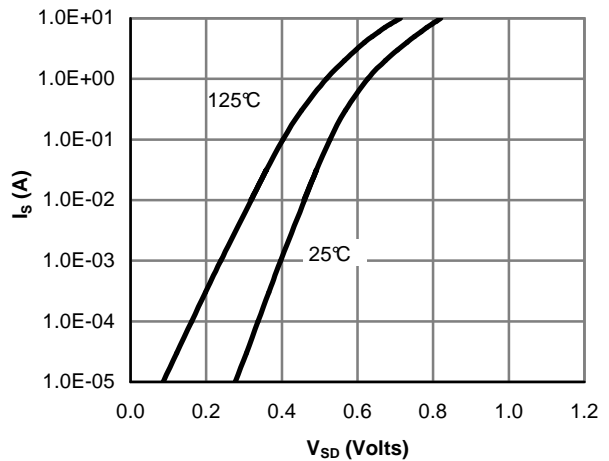


Figure 6: Body-Diode Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

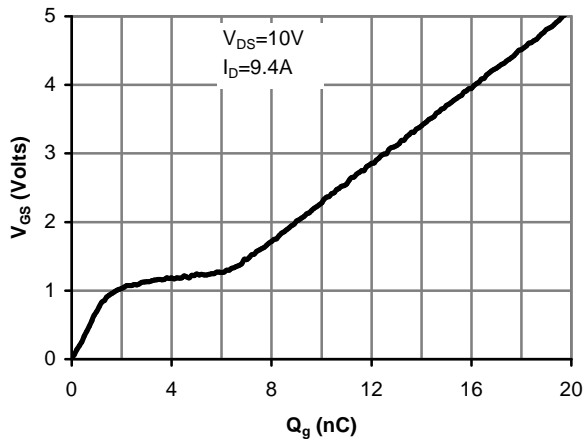


Figure 7: Gate-Charge Characteristics

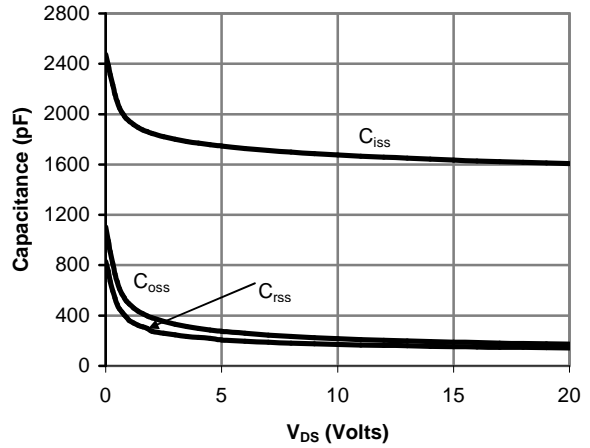


Figure 8: Capacitance Characteristics

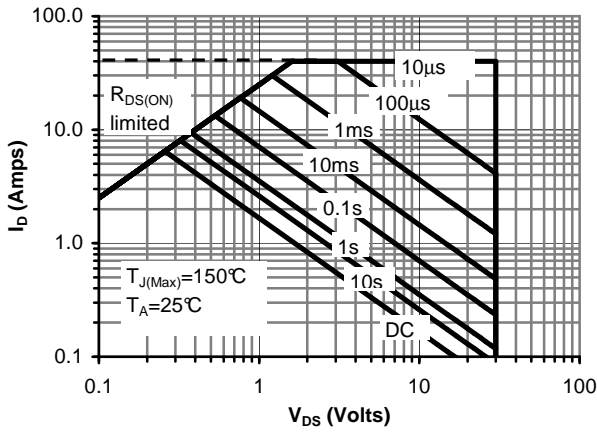


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

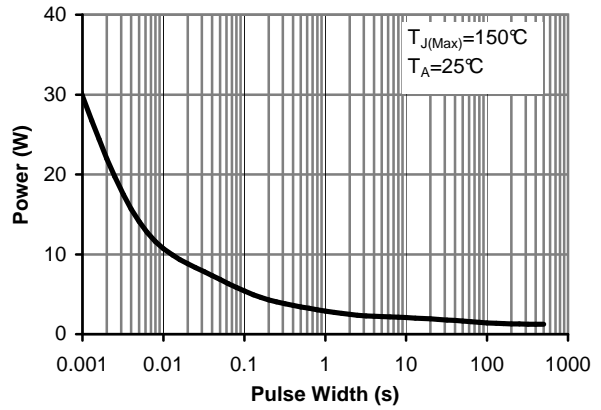


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

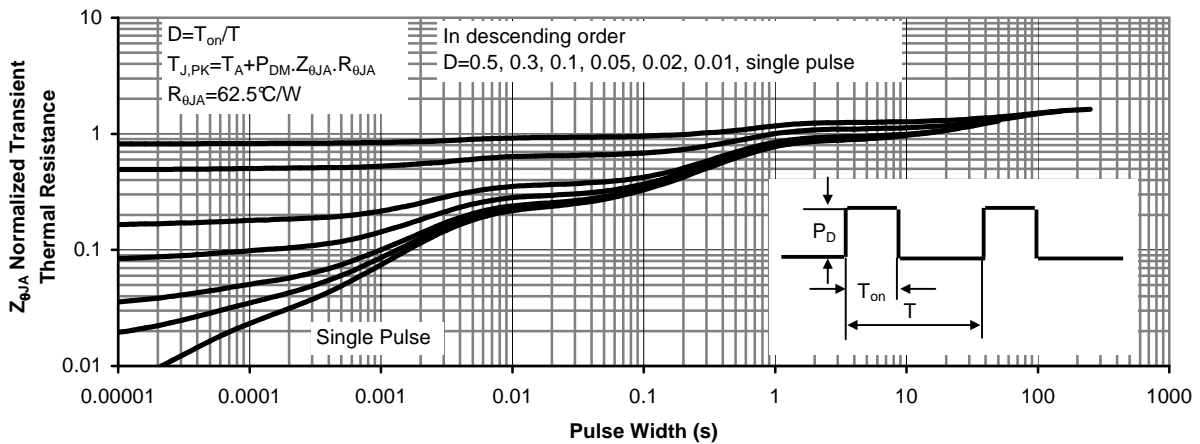


Figure 11: Normalized Maximum Transient Thermal Impedance

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AO4806 on WIN SOURCE](#)
- ⊖ [Alpha & Omega Semiconductor Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management