









**THE DATASHEET OF  
0314015.MXP**



### 314/324 Series Lead-free 3AB, Fast-Acting Fuse



#### Agency Approvals

| Agency  | Agency File Number   | Ampere Range   |
|---|--|--|
|    | E10480   | 0.375A - 15A   |
|    | 29862  | 0.375A - 20A   |
|    | E10480   | 20A - 40A  |
|  | 314 Series:<br>NBK030805-E10480A<br>NBK030805-E10480C<br>NBK030805-E10480E<br>NBK260106-JP1021A<br>324 Series:<br>NBK030805-E10480B<br>NBK030805-E10480D<br>NBK030805-E10480F<br>NBK260106-JP1021B | 1A - 3.5A<br>4A - 5A<br>6A - 15A<br>20A - 30A<br><br>1A - 3.5A<br>4A - 5A<br>6A - 15A<br>20A - 30A |
|  | SU05001-6003<br>SU05001-6001<br>SU05001-7006<br>SU05001-8002<br>SU05001-8003<br>SU05001-6002   | 3A<br>4-6A<br>7-10A<br>12-15A<br>20A<br>25-30A   |
|  | N/A  | 0.375A - 30A   |

#### Description

The 3AB Fast-Acting Fuse with ceramic body construction permits higher interrupting ratings and voltage ratings. Ideal for applications where high current loads are expected.

#### Features

- In accordance with UL Standard 248-14
- Available in cartridge and axial lead format and with various forming dimensions
- RoHS compliant and Lead-free

#### Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

#### Electrical Characteristics for Series

| % of Ampere Rating | Ampere Rating | Opening Time      |
|--------------------|---------------|-------------------|
| 100%               | 0.375 - 40    | 4 hours, Minimum  |
| 135%               | 0.375 - 30    | 1 hour, Maximum   |
| 200%               | 0.375 - 12    | 15 secs., Maximum |
|                    | 15 - 30       | 30 secs., Maximum |
| 250%               | 40            | 30 secs., Maximum |

#### Additional Information



**Datasheet**  
314 Series



**Resources**  
314 Series



**Samples**  
314 Series



**Accessories**  
314 & 324 Series



**Datasheet**  
324 Series



**Resources**  
324 Series



**Samples**  
324 Series


For recommended fuse accessories for this product series, see '[Recommended Accessories](#)' section.

### Electrical Specification by Item

| Amp Code | Ampere Rating (A) | Voltage Rating (V) | Interrupting Rating  | Nominal Cold Resistance (Ohms)  | Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec)*** | Agency Approvals |    |     |       |      |    |   |
|----------|-------------------|--------------------|--|---|--|------------------|----|-----|-------|------|----|---|
|          |                   |                    |  |   |  | UL               | SP | CCC | CULUS | PS E | CE |   |
| .375     | 0.375             | 250                | 35 A @ 250 VAC<br>10 kA @ 125 VAC<br>10 kA @ 125 VDC                     | 0.820   | 0.210  | x                | x  |     |       |      | x  |   |
| .500     | 0.5               | 250                |  | 0.500   | 0.639  | x                | x  |     |       |      | x  |   |
| .750     | 0.75              | 250                |  | 0.250   | 2.061  | x                | x  |     |       |      | x  |   |
| 001.     | 1                 | 250                | 100 A @ 250 VAC<br>10 kA @ 125 VAC<br>10 kA @ 125 VDC                    | 0.189   | 0.690  | x                | x  |     |       |      | x  | x |
| 002.     | 2                 | 250                |  | 0.0700  | 5.700  | x                | x  |     |       |      | x  | x |
| 003.     | 3                 | 250                |  | 0.0432  | 14.6   | x                | x  | x   |       |      | x  | x |
| 004.     | 4                 | 250                |  | 0.0470  | 10.4   | x                | x  | x   |       |      | x  | x |
| 005.     | 5                 | 250                |  | 0.0300  | 26.0   | x                | x  | x   |       |      | x  | x |
| 006.     | 6                 | 250                |  | 0.0240  | 45.0   | x                | x  | x   |       |      | x  | x |
| 007.     | 7                 | 250                |  | 0.0187  | 71.0   | x                | x  | x   |       |      | x  | x |
| 008.     | 8                 | 250                |  | 0.0153  | 105  | x                | x  | x   |       |      | x  | x |
| 010.     | 10                | 250                |  | 0.0105  | 206  | x                | x  | x   |       |      | x  | x |
| 010.*    | 10                | 280                |  | 0.0105  | 206  |                  |    |     | x     |      |    | x |
| 012.     | 12                | 250                |  | 0.00760   | 570  | x                | x  | x   |       |      | x  | x |
| 015.     | 15                | 250                |  | 0.00505   | 292  | x                | x  | x   |       |      | x  | x |
| 015.*    | 15                | 280                |  | 0.00505   | 292  |                  |    |     | x     |      |    | x |
| 020.     | 20                | 250                |  | 1000 A @ 250 VAC<br>200 A @ 300 VAC<br>10 kA @ 125 VAC<br>10 kA @ 125 VDC | 0.00355  | 631              |    | x   | x     | x    | x  | x |
| 020.*    | 20                | 280                |  |   | 0.00355  | 631              |    |     |       | x    |    |   |
| 025.     | 25                | 250                | 100 A @ 250 VAC<br>1000 A @ 75 VDC<br>400 A @ 125 VAC<br>400 A @ 125 VDC | 0.00235   | 1450   |                  |    | x   | x     | x    | x  |   |
| 025.**   | 25                | 280                |  | 0.00235   | 1450   |                  |    |     | x     |      |    | x |
| 030.     | 30                | 250                |  | 0.00182   | 2490   |                  |    | x   | x     | x    | x  |   |
| 040.     | 40                | 250                | 1000 A @ 250 VAC<br>400 A @ 150 VDC                                      | 0.0014  | 22925  |                  |    |     | x     |      | x  |   |


\* 350A@280VAC interrupting rating available for 10A, 15A and 20A.  
 \*\* 50A@280VAC for 25A. Add suffix '280'. Example: 0324020.MX280P.  
 \*\*\* I<sup>2</sup>t test at 10x rated current

### Temperature Re-rating Curve

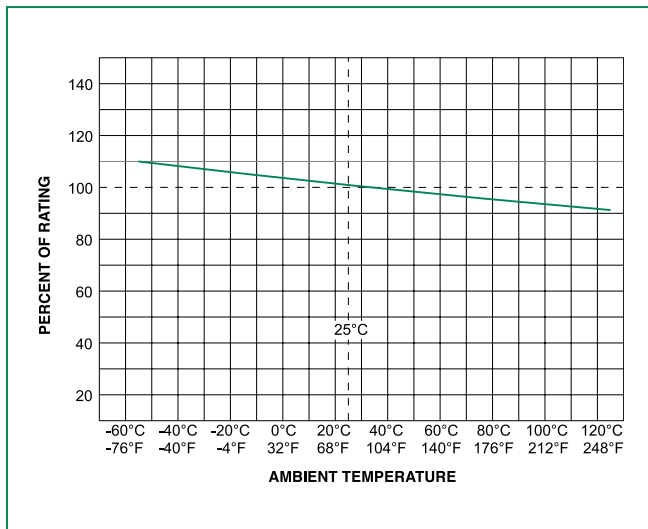


Note:  
 Rerating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

### Average Time Current Curves

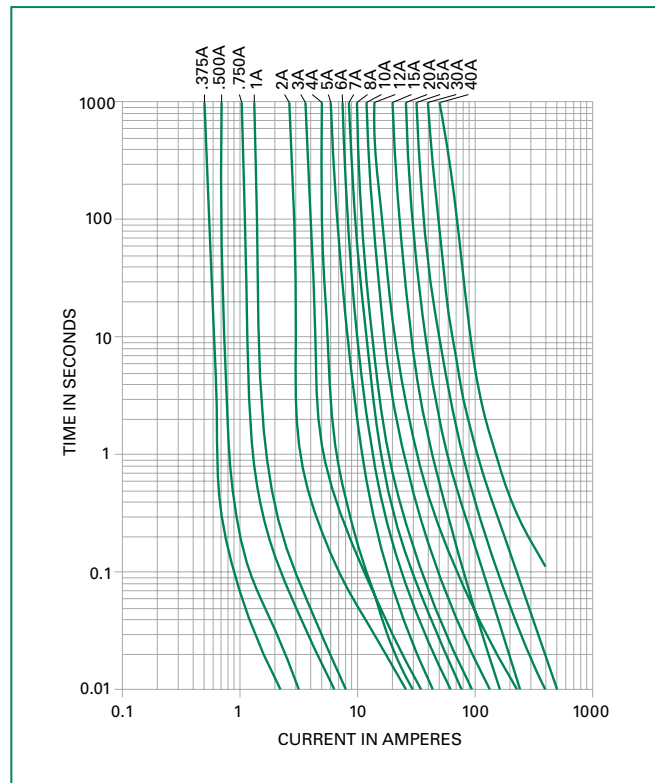

### Soldering Parameters - Wave Soldering

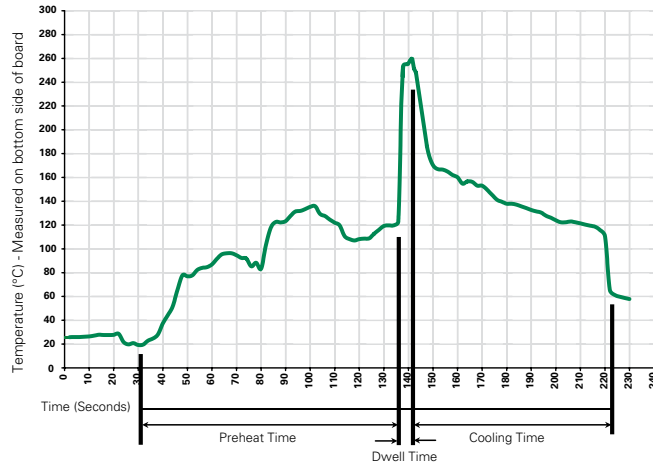

### Recommended Process Parameters:

| Wave Parameter  | Lead-Free Recommendation |
|---|--------------------------|
| <b>Preheat:</b><br>(Depends on Flux Activation Temperature) (Typical Industry Recommendation) |                          |
| Temperature Minimum:  | 100°C                    |
| Temperature Maximum:  | 150°C                    |
| Preheat Time:   | 60-180 seconds           |
| <b>Solder Pot Temperature:</b>  | 260°C Maximum            |
| <b>Solder Dwell Time:</b>   | 2-5 seconds              |

### Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350°C +/- 5°C  
 Heating Time: 5 seconds max.

**Note: These devices are not recommended for IR or Convection Reflow process.**


### Product Characteristics

|                          |   |
|--------------------------|---|
| <b>Materials</b>         | <b>Body:</b> Ceramic<br><b>Cap:</b> Nickel-plated Brass<br><b>Leads:</b> Tin-plated Copper            |
| <b>Terminal Strength</b> | MIL-STD-202, Method 211, Test Condition A   |
| <b>Solderability</b>     | MIL-STD-202 Method 208  |
| <b>Product Marking</b>   | <b>Cap1:</b> Brand logo, current and voltage ratings<br><b>Cap2:</b> Series and agency approval marks |


|                              |   |
|------------------------------|---|
| <b>Operating Temperature</b> | -55°C to +125°C   |
| <b>Thermal Shock</b>         | MIL-STD-202, Method 107, Test Condition B (5 cycles, -65°C to +125°C)                                   |
| <b>Vibration</b>             | MIL-STD-202, Method 201   |
| <b>Humidity</b>              | MIL-STD-202, Method 103, Test Condition A (High RH (95%) and Elevated temperature (40°C) for 240 hours) |
| <b>Salt Spray</b>            | MIL-STD-202, Method 101, Test Condition B   |

### Dimensions

Measurements displayed in millimeters (inches)

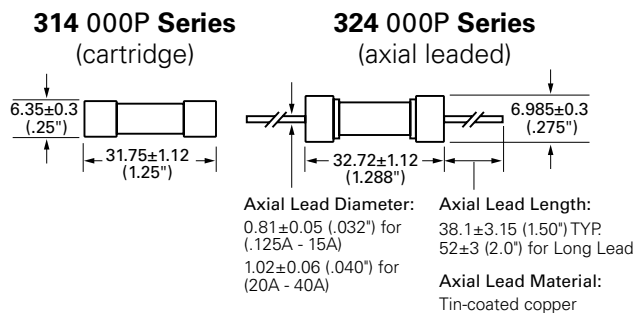

### Part Numbering System

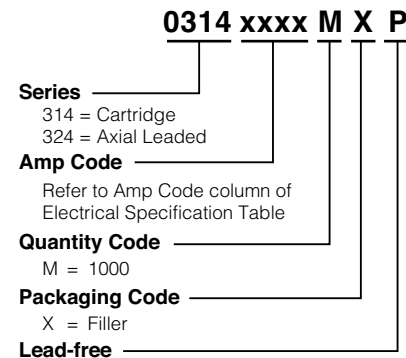

### Packaging

| Packaging Option  | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width |
|-------------------|-------------------------|----------|---------------------------|--------------|
| <b>314 Series</b> |                         |          |                           |              |
| Bulk              | N/A                     | 5        | VX                        | N/A          |
| Bulk              | N/A                     | 100      | HX                        | N/A          |
| Bulk              | N/A                     | 1000     | MX                        | N/A          |
| Bulk              | N/A                     | 1000     | MX52L<br>(long lead)      | N/A          |
| Bulk              | N/A                     | 1000     | MXCC                      | N/A          |
| Bulk              | N/A                     | 1000     | MX52LE<br>(long lead)     | N/A          |
| <b>324 Series</b> |                         |          |                           |              |
| Bulk              | N/A                     | 5        | VX                        | N/A          |
| Bulk              | N/A                     | 100      | HX                        | N/A          |
| Bulk              | N/A                     | 1000     | MX                        | N/A          |
| Bulk              | N/A                     | 1000     | MX280                     | N/A          |
| Bulk              | N/A                     | 1000     | MX52<br>(long lead)       | N/A          |
| Bulk              | N/A                     | 1000     | MXF24                     | N/A          |

### Recommended Accessories

| Accessory Type | Series                 | Description   | Max Application Voltage | Max Application Amperage |
|----------------|------------------------|---|-------------------------|--------------------------|
| Holder         | <a href="#">155100</a> | Twist-Lock In-Line Fuseholder   | 32                      | 20                       |
|                | <a href="#">342</a>    | Traditional Panel Mount Fuseholder  | 250                     | 20                       |
|                | <a href="#">346</a>    | Panel Mount Flip-Top Shock-Safe Fuseholder                                | 250                     | 15                       |
|                | <a href="#">345</a>    | Shock-Safe Fuseholder with PC Mount, Solder Mount and Panel Mount options | 250                     | 20                       |
| Block          | <a href="#">354</a>    | Low Profile OMNI-BLOK® Fuse Block   | 600                     | 30                       |
|                | <a href="#">359</a>    | High Current Screw Terminal Fuse Block                                    |                         | 30                       |
| Clip           | <a href="#">122</a>    | High Current Traditional PC Board Fuse Clip                               | 1000                    | 30                       |
|                | <a href="#">101</a>    | Rivet/Eyelet Type Fuse Clip   | 1000                    | 15                       |

Notes:  
 1. Do not use in applications above rating.  
 2. Please refer to fuseholder data sheet for specific re-rating information.  
 3. Please contact factory for applications greater than the max voltage and amperage shown.

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 0314015.MXP](#) on WIN SOURCE

 [Littelfuse Inc.](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management