



**THE DATASHEET OF
AP3581BMPTR-G1**



Description

The AP3581A/B/C is a compact synchronous – rectified bulk controller specifically designed to operate from 5V/12V supply and deliver high-quality output voltage as low as 0.6V (AP3581A) or 0.8V (AP3581B/C). The AP3581A/B/C operates at fixed frequency of 300kHz (AP3581A/B) or 200kHz (AP3581C) and provides an optimal level of integration to reduce size and cost of the power supply.

This controller integrates internal MOSFET drivers that support 12V+12V bootstrapped voltage for high- efficiency power conversion. The bootstrap diode is built-in to simplify the circuit design and minimize external part count.

This controller provides single feedback loop, voltage-mode control with fast transient response. The error amplifier features a 10MHz gain-bandwidth product and 6V/μs slew rate which enables high converter bandwidth for fast transient performance.


Other features include internal soft-start, under voltage protection, over current protection and shutdown function. With afore-mentioned functions, this part provides customers a compact, high efficiency, well-protected and cost-effective solutions.

The AP3581A/B/C is available in PSOP-8 package.

Features

- Supply Voltage: 5V/12V
 V_{IN} Input Range: 3.0V to 13.2V
 0.6V/0.8V to 80% of V_{IN} Output Range
 Internal Reference: 0.6V/0.8V
- Simple Single-Loop Control
 Voltage-Mode PWM Control
 Duty Cycle: 0% to 80%
 Fast Transient Response
- 10MHz High-Bandwidth Error Amplifier with 6V/μs Slew Rate
- Fixed Oscillator Frequency: 300kHz/200kHz
- Lossless, Programmable Over Current Protection
 (Uses Lower MOSFET $R_{DS(ON)}$)
- Start-Up into Pre-biased Output
- Built-In Thermal Shutdown
- Built-In Soft-Start
- Over Current/Voltage Protection
- Under Voltage Protection
- Integrated Boot Diode


Pin Assignments

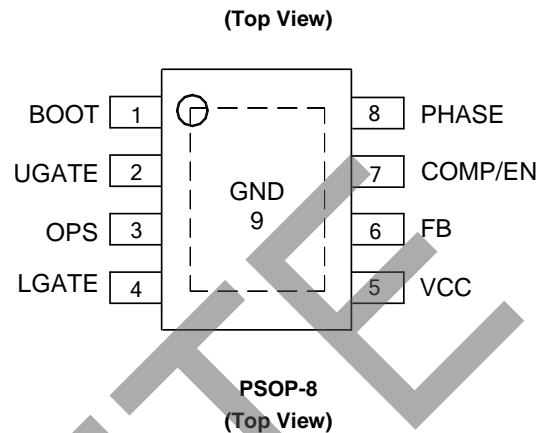

Applications

- Power Supplies for Microprocessors/Peripherals
 PCs, Embedded Controllers, Memory Supplies
 DSP and Core Communications Processor Supplies
- Subsystem Power Supplies
 PCI, AGP, Graphics Cards, Digital TV
 SSTL-2 and DDR/2/3 SDRAM Bus Termination Supply
- Cable Modems, Set Top Boxes, and DSL Modems
- Industrial Power Supplies and General Purpose Supplies
- 5V/12V Input DC-DC Regulators
- Low-Voltage Distributed Power Supplies

Typical Applications Circuit

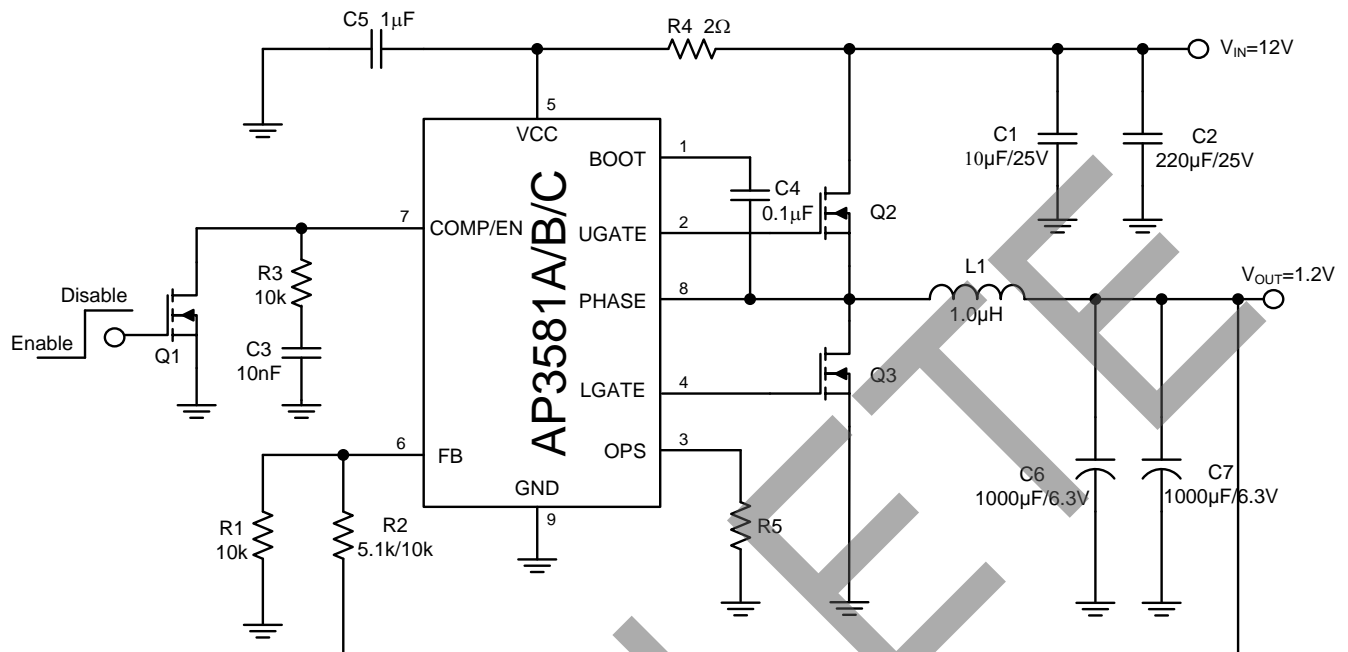


Pin Descriptions

Pin Number	Pin Name	Function
1	BOOT	Bootstrap pin. Connect a bootstrap capacitor (Typically from 0.1μF to 0.47μF) from this pin to PHASE pin to create a BOOT voltage suitable to drive a standard N-Channel MOSFET
2	UGATE	Upper-gate drive pin. Connect this pin to the upper MOSFET gate providing the gate drive. This pin is monitored by the adaptive shoot-through protection circuitry to determine when the upper MOSFET has been turned off
3	OPS	Over-current setting pin. Connecting a resistor (ROCS _{ET}) between OPS and GND to set the over-current trigger point
4	LGATE	Lower-gate drive pin. Connect LGATE to the lower MOSFET gate providing the gate drive for the lower MOSFET. This pin is monitored by the adaptive shoot-through protection circuitry to determine when the lower MOSFET has turned off
5	VCC	Bias supply pin. Provides a 5V or 12V bias supply for the chip from this pin. The pin should be bypassed with a capacitor to GND
6	FB	Feedback pin. This pin is the inverting input of the internal error amplifier. Use FB pin, in combination with the COMP pin, to compensate the voltage control feedback loop of the converter. A resistor divider from output to GND is used to set the output voltage
7	COMP/EN	Compensation and disable pin, this pin is the output of the error amplifier. Pull COMP pin low will shut down the IC
8	PHASE	PHASE pin. This pin connects to the source of the upper MOSFET and the drain of the lower MOSFET. This pin is also monitored by the adaptive shoot-through protection circuitry to determine when the upper MOSFET has turned off
9	GND	Exposed pad as ground pin. Represents the signal and power ground for the IC. Tie this pin to the ground island/plane through the lowest impedance connection available

OBSOLETE – PART DISCONTINUED

Functional Block Diagram

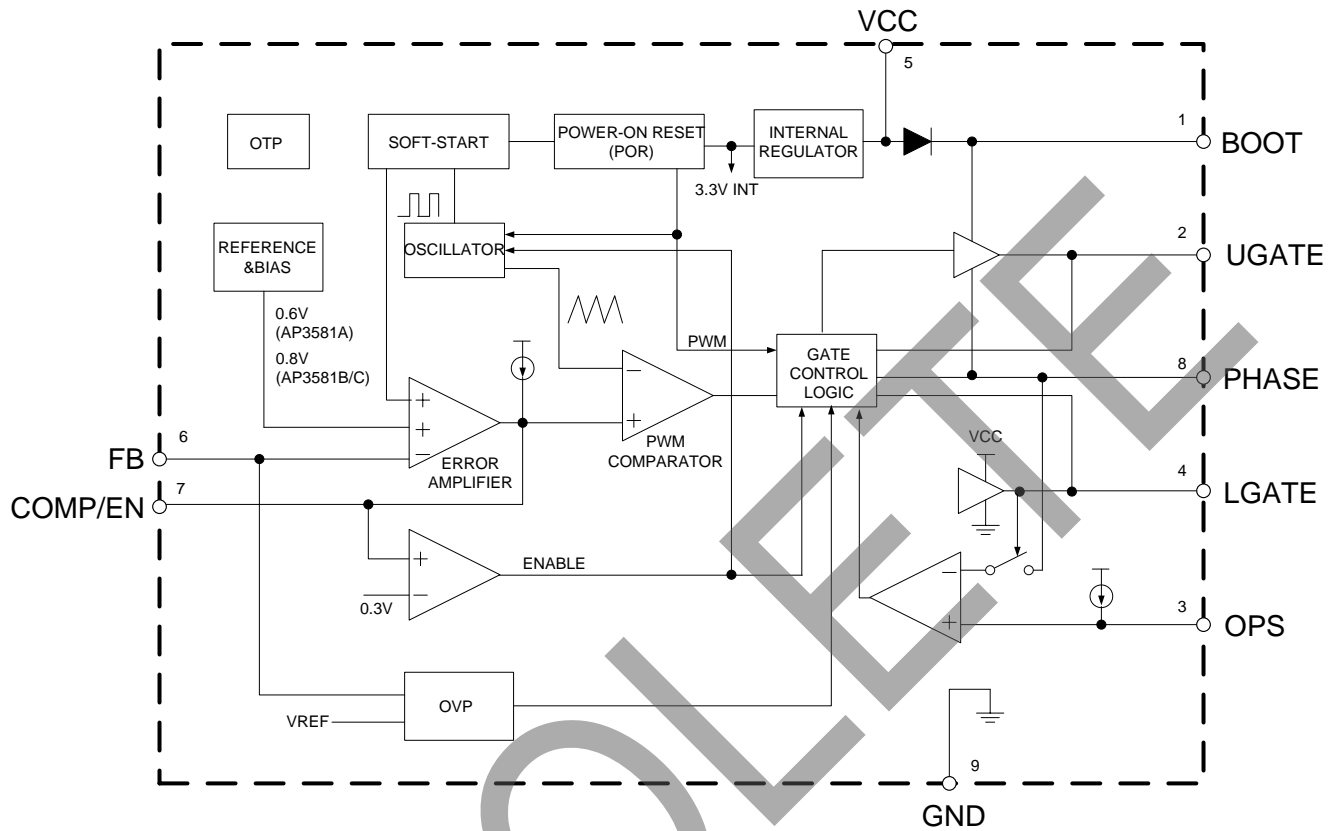

OBSOLETE – PART DISCONTINUED

OBSOLETE

Absolute Maximum Ratings (Note 1)

Symbol	Parameter	Value	Unit
V _{CC}	Supply Voltage	-0.3 to 15	V
V _{BOOT}	BOOT Voltage	-0.3 to V _{PHASE} +15	V
V _{UGATE}	Voltage from UGATE to PHASE	-0.3 to 15	V
V _{PHASE} , V _{LGATE}	Voltage from PHASE, LGATE Pin to GND	-1 to 15	V
–	Voltage on Other Separate Pin	-0.3 to 6	V
θ _{JA}	Thermal Resistance	50	°C/W
T _J	Operating Junction Temperature	-40 to +125	°C
T _{STG}	Storage Temperature	-65 to +150	°C
T _{LEAD}	Lead Temperature (Soldering, 10 sec)	+260	°C
–	ESD (Human Body Model) (Note 2)	2000	V
–	ESD (Machine Model) (Note 2)	200	V

- Notes:
- Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.
 - Devices are ESD sensitive. Handling precaution recommended.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{CC}	Supply Input Voltage	4.5	13.2	V
T _J	Operating Junction Temperature Range	-40	+125	°C
T _A	Operating Ambient Temperature	-40	+85	°C

Electrical Characteristics ($V_{CC}=12V$, $T_A=+25^{\circ}C$, unless otherwise specified.)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
SUPPLY INPUT						
V_{CC}	Supply Voltage	–	4.5	–	13.2	V
I_{CC}	Supply Current	UGATE and LGATE Pin Open; $V_{CC}=12V$, Switching	–	5	–	mA
I_{CC_Q}	Quiescent Supply Current	$V_{FB}=V_{REF}+0.1V$, No Switching	–	4	–	mA
V_{IN}	Power Input Voltage	–	3.0	–	13.2	V
POWER ON RESET						
V_{POR}	V_{CC} Rising Threshold	V_{CC} Rising	4.0	4.2	4.4	V
V_{POR_HYS}	V_{CC} Threshold Hysteresis	–	–	500	–	mV
OSCILLATOR						
f_{OSC}	Oscillator Frequency	AP3581A/B	270	300	330	kHz
		AP3581C	180	200	220	
ΔV_{OSC}	Ramp Amplitude	$V_{CC}=12V$	–	1.8	–	V
ERROR AMPLIFIER						
G_{DC_OL}	Open Loop DC Gain (Note 3)	–	55	70	–	dB
G_{BW}	Gain Bandwidth (Note 3)	–	–	10	–	MHz
SR	Slew Rate (Note 3)	–	3	6	–	V/ μs
–	Transconductance	–	–	800	1100	$\mu A/V$
–	Output Source Current	$V_{FB}<V_{REF}$	80	120	–	μA
–	Output Sink Current	$V_{FB}>V_{REF}$	80	120	–	μA
PWM CONTROLLER GATE DRIVERS						
I_{UG_SRC}	Upper Gate Source Current	$V_{BOOT}-V_{PHASE}=12V$, $V_{BOOT}-V_{UGATE}=6V$	–	-1	–	A
I_{UG_SNK}	Upper Gate Sink Current	$V_{BOOT}-V_{PHASE}=12V$, $V_{BOOT}-V_{UGATE}=6V$	–	1.5	–	A
R_{UGATE}	Upper Gate Sink Resistance	50mA Sink Current, $V_{BOOT}-V_{PHASE}=12V$	–	1.6	3.2	Ω
I_{LG_SRC}	Lower Gate Source Current	$V_{CC}-V_{LGATE}=6V$	–	-1	–	A
I_{LG_SNK}	Lower Gate Sink Current	$V_{LGATE}=6V$	–	1.5	–	A
R_{LGATE}	Lower Gate Sink Resistance	50mA Sink Current, $V_{CC}=12V$	–	1	2	Ω
–	PHASE Falling to LGATE Rising Delay	$V_{PHASE}<1.2V$ to $V_{LGATE}>1.2V$	–	50	–	ns

Note: 3. Not tested, guaranteed by design.

OBSOLETE – PART DISCONTINUED
Electrical Characteristics (Cont.)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
–	LGATE Falling to UGATE Rising Delay	$V_{LGATE} < 1.2V$ to $(V_{UGATE} - V_{PHASE}) > 1.2V$	–	50	–	ns
–	Minimum Duty Cycle	–	–	0	–	%
–	Maximum Duty Cycle	–	75	80	85	%
REFERENCE VOLTAGE						
V_{FB}	Feedback Voltage	AP3581A	0.591	0.6	0.609	V
		AP3581B/C	0.788	0.8	0.812	V
PROTECTION						
V_{FB_UVP}	Under Voltage Protection	–	0.3	0.4	0.5	V
I_{OPS}	Over Current Source	–	30	40	50	μA
t_{SS}	Soft-start Interval	AP3581A	–	2.0	–	ms
		AP3581B	–	2.7	–	
		AP3581C	–	3.6	–	
$V_{COMP/EN}$	Enable Threshold	–	0.25	0.30	0.35	V
T_{OTSD}	Thermal Shutdown	–	–	+160	–	$^{\circ}C$
T_{HYS}	Thermal Shutdown Hysteresis	–	–	+20	–	$^{\circ}C$

OBSOLETE


OBSOLETE – PART DISCONTINUED

Performance Characteristics


Line Regulation

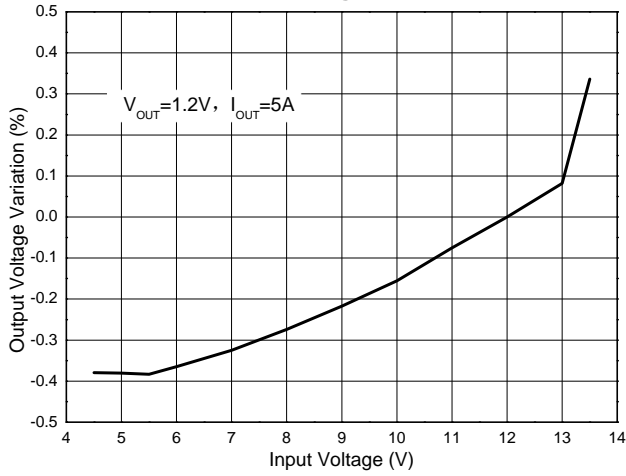


Load Regulation

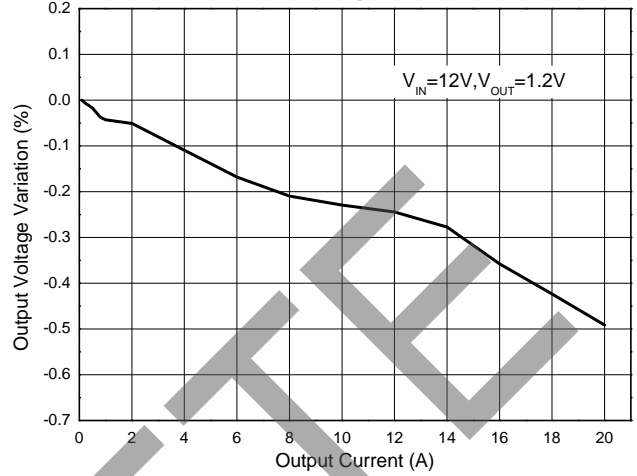


Switching Frequency vs. Temperature

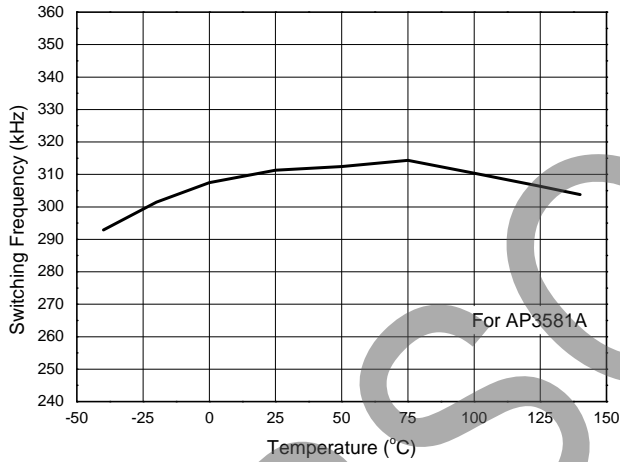


Switching Frequency vs. Input Voltage

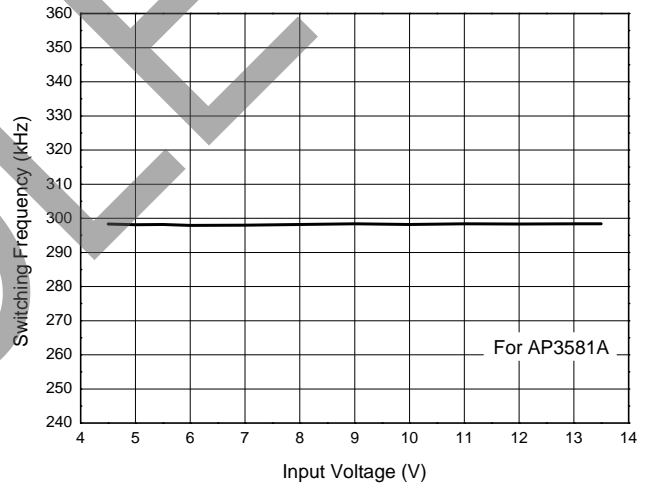

Feedback Voltage vs. Temperature

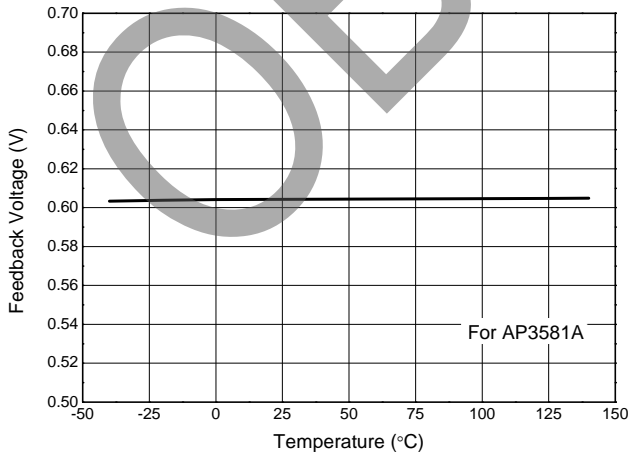


Feedback Voltage vs. Input Voltage

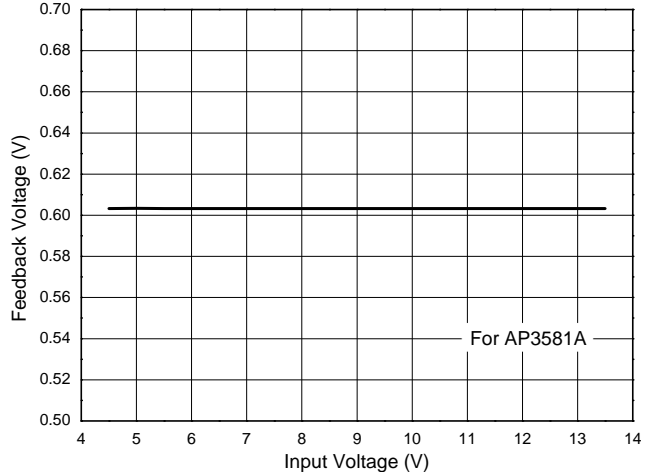

OBSOLETE – PART DISCONTINUED


Performance Characteristics (Cont.)

Power-on Waveform
($V_{IN}=12V$, $V_{OUT}=1.2V$, $I_{OUT}=0A$)

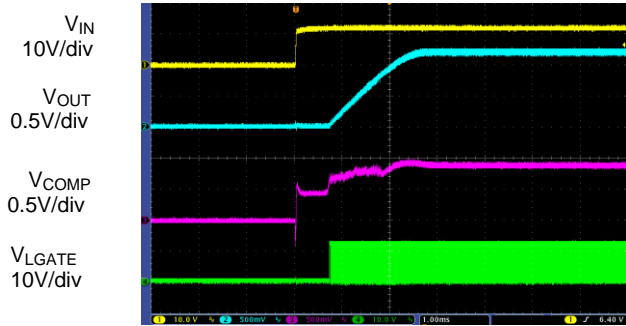

Time 1ms/div

Power-off Waveform
($V_{IN}=12V$, $V_{OUT}=1.2V$, $I_{OUT}=20A$)

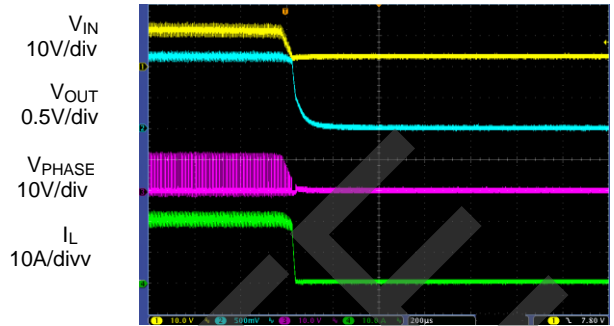


Time 200µs/div

Enable Waveform
($V_{IN}=12V$, $V_{OUT}=1.2V$, $I_{OUT}=0A$)




Time 1ms/div

Disable Waveform
($V_{IN}=12V$, $V_{OUT}=1.2V$, $I_{OUT}=20A$)

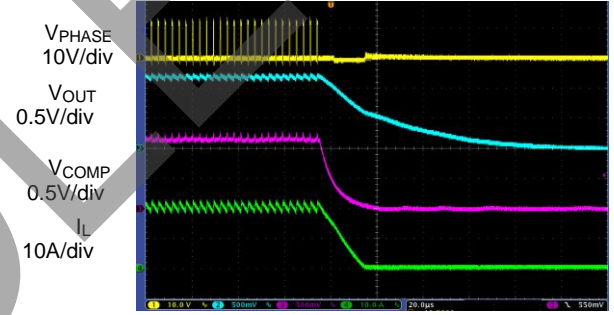


Time 20µs/div

Load Transient Response
($V_{IN}=12V$, $V_{OUT}=1.2V$, $I_{OUT}=0A$ to $10A$)

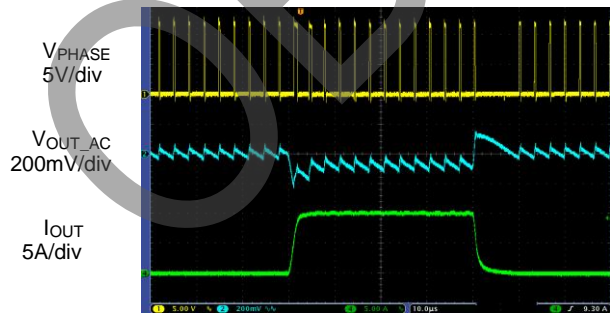

Time 10µs/div

Load Transient Response
($V_{IN}=12V$, $V_{OUT}=1.2V$, $I_{OUT}=0A$ to $20A$)

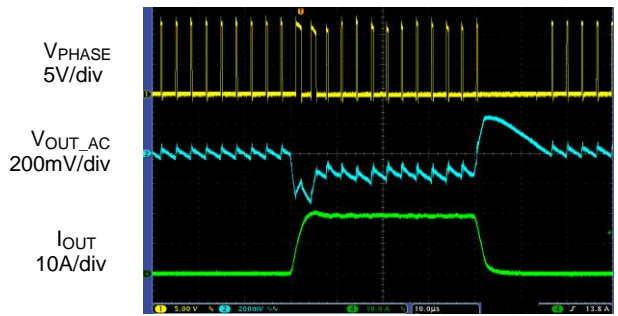


Time 10µs/div

OBSOLETE – PART DISCONTINUED


Performance Characteristics (Cont.)

UGATE Turn Off Waveforms
($V_{CC}=V_{IN}=12V$, $V_{OUT}=1.2V$, $I_{OUT}=20A$)

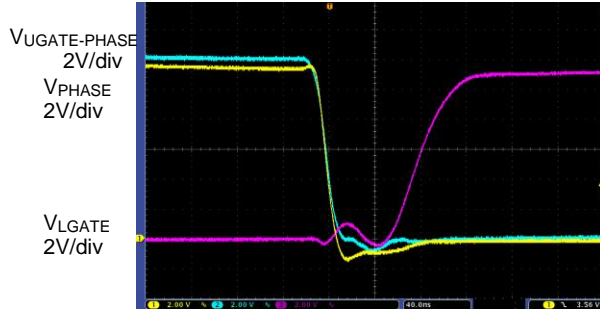


Time 40ns/div

UGATE Turn On Waveforms
($V_{CC}=V_{IN}=12V$, $V_{OUT}=1.2V$, $I_{OUT}=20A$)

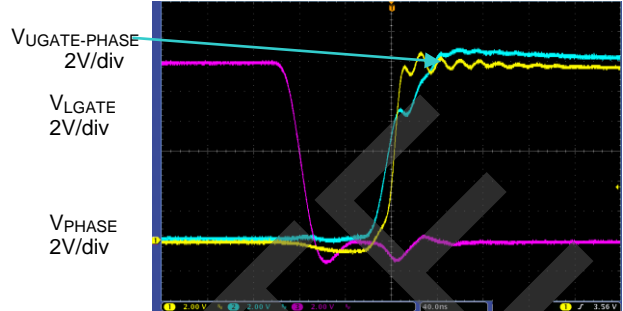


Time 40ns/div

Over Current Protection
($V_{IN}=12V$, $V_{OUT}=1.2V$ to $0V$, $I_{OUT}=0A$)

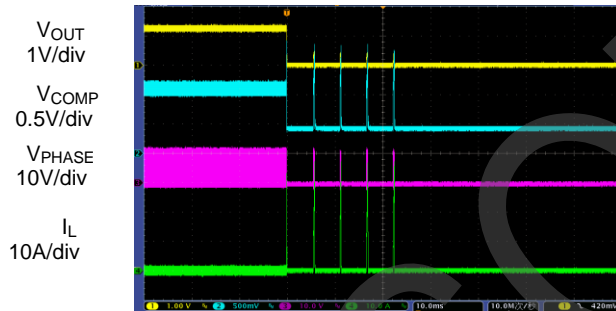

Time 10ms/div


Over Voltage Protection
($V_{IN}=12V$, $V_{OUT}=1.2V$, $I_{OUT}=20A$)

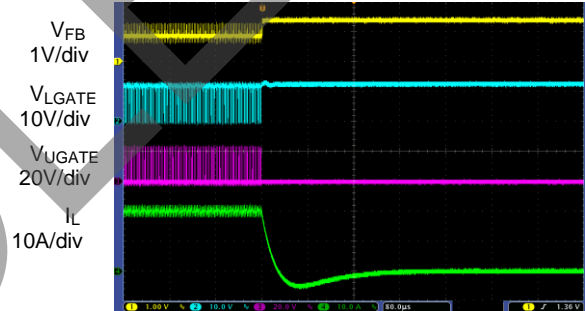

Time 80µs/div

OBSOLETE

Ordering Information

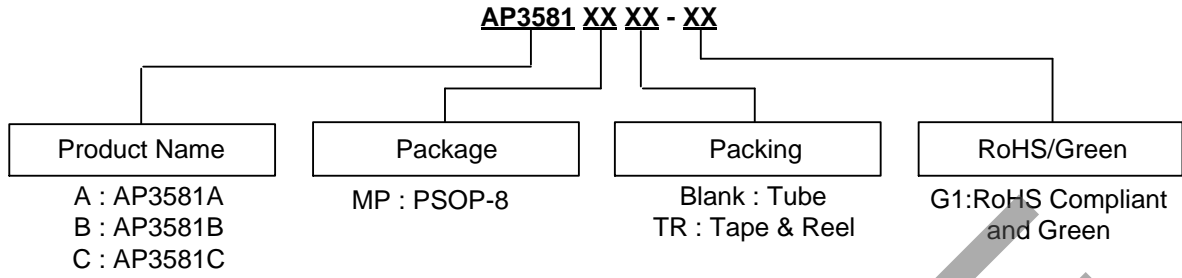


Package	Temperature Range	Part Number	Marking ID	Packing Type
PSOP-8	-40 to +85°C	AP3581AMP-G1	3581AMP-G1	Tube
		AP3581AMPTR-G1	3581AMP-G1	Tape and Reel
		AP3581BMP-G1	3581BMP-G1	Tube
		AP3581BMPTR-G1	3581BMP-G1	Tape and Reel
		AP3581CMP-G1	3581CMP-G1	Tube
		AP3581CMPTR-G1	3581CMP-G1	Tape and Reel

OBSOLETE

OBSOLETE – PART DISCONTINUED

Package Outline Dimensions (All dimensions in mm(inch).)

(1) Package Type: PSOP-8

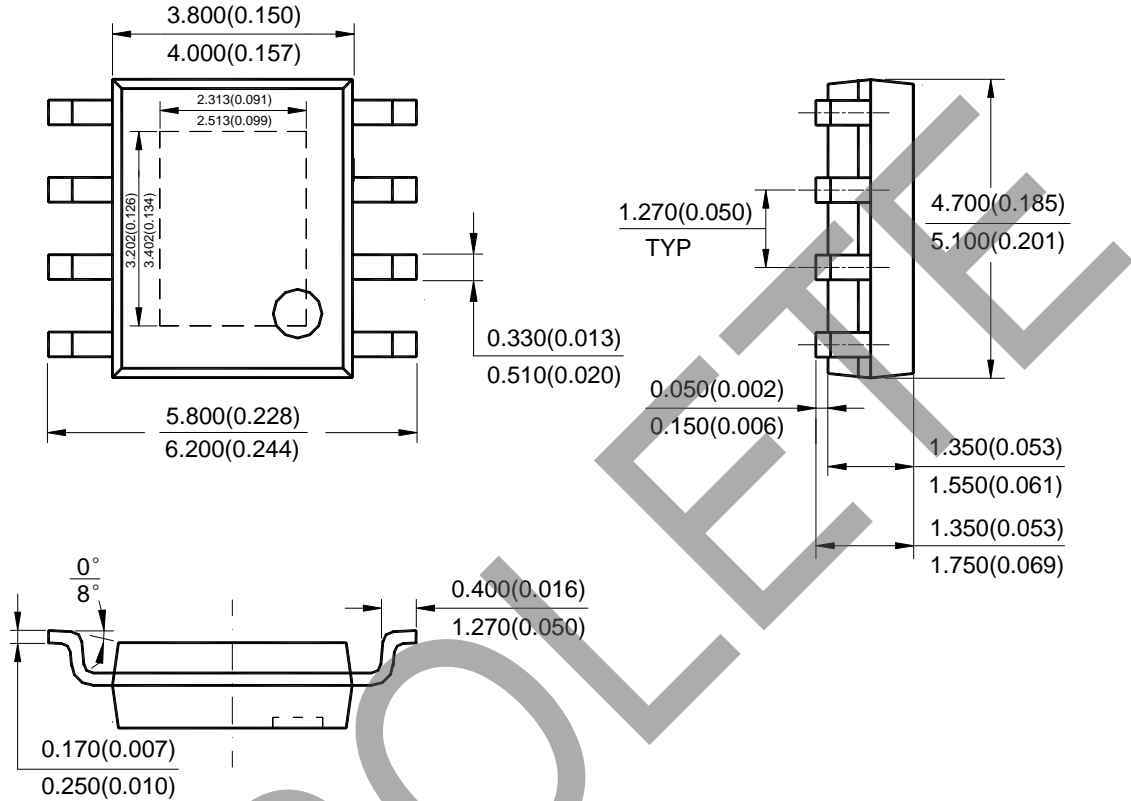


Note: Eject hole, oriented hole and mold mark is optional.

OBSOLETE – PART DISCONTINUED

OBSOLETE

Suggested Pad Layout

(1) Package Type: PSOP-8

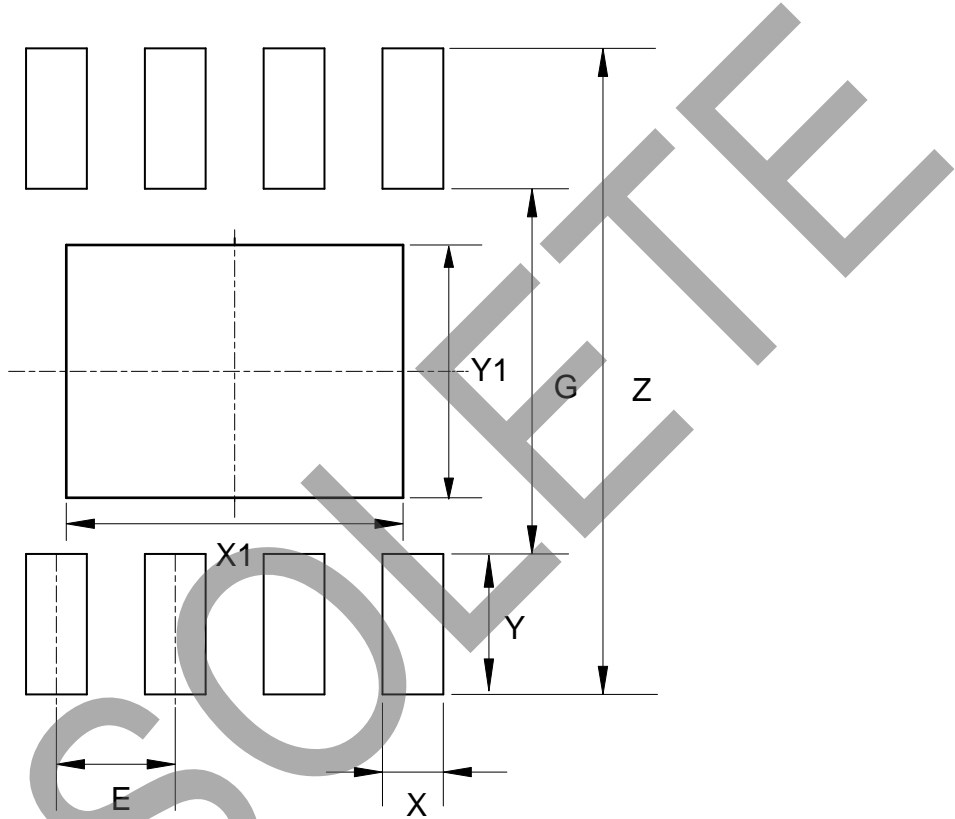

Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)
Value	6.900/0.272	3.900/0.154	0.650/0.026	1.500/0.059
Dimensions	X1 (mm)/(inch)	Y1 (mm)/(inch)	E (mm)/(inch)	---
Value	3.600/0.142	2.700/0.106	1.270/0.050	---

OBSOLETE – PART DISCONTINUED

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.



Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View AP3581BMPTR-G1 on WIN SOURCE](#)
-  [Diodes Incorporated Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management