



THE DATASHEET OF SST2HH-D30




A. System Overview

Hyper-V™ In-Line Cable Ties – Weather Resistant Nylon 6.6

B1. Cable Ties

- Fixed and flexible two-wedge locking design provides a low threading force
- Teeth on both sides of cable tie body provide additional locking strength and improved flexibility to conform to irregular bundle shapes such as securing cables to cable tray systems
- Releasable head position for temporary bundling of cables prior to final locking; no need to replace ties when adding cables/wires to the bundle
- Teeth on full length of body support a wide range of bundle diameters

- Bending serrations on the tip of the tie allow the tip to be easily formed into an arc, enabling installer to “fish” the tie around the bundle in a confined space
- Threading hole in the tip of the tie allows an installer to hook the tip with a simple device to pull the tie through spaces with limited access
- In-Line tie design for parallel-entry of the tie into head resulting in a lower profile on cable bundles
- Complementary mounts shown below

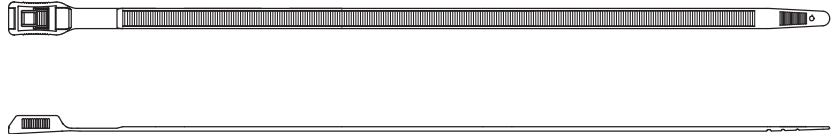

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

| Part Number | Length | | Width | | Thickness | | Max. Bundle Dia. | | Min. Loop Tensile Strength | | Recommended Installation Tool | Std. Pkg. Qty. | Std. Ctn. Qty. |
|------------------|--------|-----|-------|-----|-----------|-----|------------------|-----|----------------------------|-----|--|----------------|----------------|
| | In. | mm | In. | mm | In. | mm | In. | mm | Lbs. | N | | | |
| HV965-C0 | 10.4 | 265 | .350 | 8.9 | .076 | 1.9 | 2.60 | 65 | 160 | 710 | GTH, GS4H, GS4EH, PTH, STH2, ST3EH, STHV | 100 | 1000 |
| HV9100-C0 | 14.4 | 367 | .350 | 8.9 | .076 | 1.9 | 3.90 | 100 | 160 | 710 | | 100 | 1000 |
| HV9150-C0 | 20.7 | 525 | .350 | 8.9 | .076 | 1.9 | 5.90 | 150 | 160 | 710 | | 100 | 1000 |
| HV9250-C0 | 33.1 | 841 | .350 | 8.9 | .076 | 1.9 | 9.80 | 250 | 160 | 710 | | 100 | 1000 |

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

Hyper-V™ Cable Tie Mounts

- Tie mount has retaining tab within window to hold cable tie in position when pre-installed in the mount; low profile design keeps bundle close to mounting surface

- Masonry mounts are used to secure wire, cable, or tubing to masonry surfaces
- For outdoor use



HVTM

HVMPM

| Part Number | Material | Color | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-----------------------|---|-------|--|----------------|----------------|
| Tie Mounts | | | | | |
| HVTM3S10-C0 | Weather Resistant Nylon 6.6 | Black | #10 (6mm) screw | 100 | 500 |
| Masonry Mounts | | | | | |
| HVMPM32-C0 | Impact Modified Weather Resistant Nylon 6.6 | Black | Tree barb for .31" (7.9mm) hole diameter | 100 | 500 |

Note: UL Recognized except HVTM mount.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SST2HH-D30 on WIN SOURCE](#)

 [Panduit Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management