




**THE DATASHEET OF**  
**2858328**



# F-MS 12-UD ST


Order No.: 2858328

Illustration shows the F-MS 12 ST version

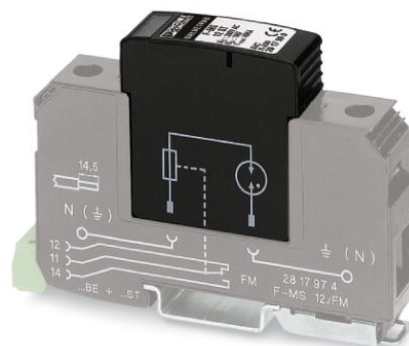

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2858328>

Surge protection plug type 2, with N-PE total current spark gap for base element.

Commercial data	
GTIN (EAN)	 4 017918 878078
Note	Made-to-order
sales group	J022
Pack	10 pcs.
Customs tariff	85363010

### Product notes

WEEE/RoHS-compliant since:  
02/16/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### Standards

Housing material	PA
Inflammability class acc. to UL 94	V0
Color	black
Standards for air and creepage distances	EN 60664-1 EN 61643-11

Degree of protection	IP20
Mounting type	On base element
Design	DIN rail module, two-section, divisible
Ambient temperature (operation)	-40 °C ... 80 °C
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.10
Message: Surge protection fault	Optical
Direction of action	N-PE
Width	17.70 mm
Height	54.50 mm
Length	52.40 mm
Pitch unit	1 Div.

**Protective circuit**

IEC category	II
	T2
EN type	T2
Nominal voltage $U_N$	230 V AC
Nominal DC sparkover voltage $U_{agn}$	500 V $\pm$ 20 %
Arrester rated voltage $U_C$	260 V AC
Arrester rated voltage $U_C$ (N-PE)	260 V AC
$U_T$ (TOV-proof)	1200 V AC (200 ms / N-PE)
Nominal frequency $f_N$	50 Hz
	60 Hz
Ground conductor current $I_{PE}$	$\leq 1 \mu A$
Standby power consumption $P_C$	0.3 mVA
Max. discharge surge current $I_{max}$ (8/20) $\mu s$	40 kA
Max. discharge surge current $I_{max}$ (8/20) $\mu s$ maximum (N-PE)	40 kA
Nominal discharge surge current $I_n$ (8/20) $\mu s$	20 kA
Nominal discharge surge current $I_n$ (8/20) $\mu s$ (N-PE)	20 kA
Lightning test current (10/350) $\mu s$ , charge	6 As
Lightning test current (10/350) $\mu s$ , peak value $I_{imp}$	12 kA
Impulse operate voltage at 6 kV (1.2/50) $\mu s$ (N-PE)	$\leq 1.5$ kV
Insulation resistance $R_{iso}$ :	$> 1$ G $\Omega$
Protection level $U_p$	$\leq 1.5$ kV

Protection level UP (N-PE)	≤ 1.5 kV
Residual voltage	≤ 150 V (at 5 kA)
Residual voltage (N-PE)	≤ 150 V (at 5 kA)
	≤ 400 V
	≤ 250 V (at 10 kA)
	≤ 100 V (at 3 kA)
Response time	≤ 100 ns
Response time (N-PE)	≤ 100 ns
Follow current quenching capacity I <sub>f</sub> (N-PE)	100 A (260 V)

**Connection, protective circuit**

Connection type IN	FLASHTRAB/VALVETRAB plug-in system
Connection type OUT	FLASHTRAB/VALVETRAB plug-in system

**Standards**

Standards/regulations	IEC 61643-1 2005
	DIN EN 61643-11 2002
	DIN EN 61643-11/A11 2007

**Certificates / Approvals**




Certification

CUL, GL, GOST, KEMA, UL


**Diagrams/Drawings**

Dimensioned drawing

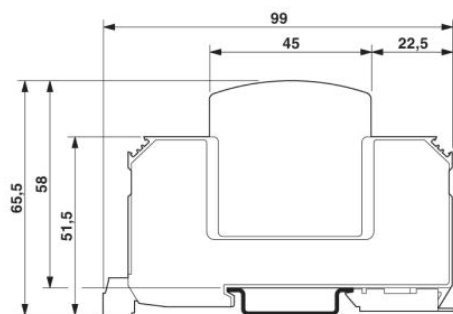

Circuit diagram

---

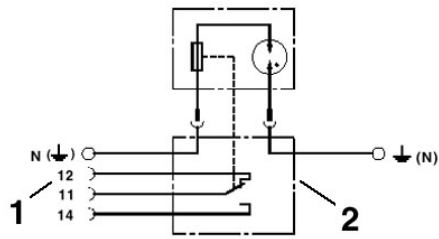

1 = Remote indicator contact  
2 = base element

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2858328 on WIN SOURCE](#)

 [Phoenix Contact](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management