



**THE DATASHEET OF  
IFX21401MBHTSA1**



# IFX21401

Low Dropout Voltage Tracking Regulator

IFX21401MB

## Data Sheet

Rev. 1.01, 2009-10-19


Standard Power



## 1 Overview

### Features

- 50 mA Output Current Capability
- Tiny and Thermally Enhanced-Package
- Accurate Output Voltage Tracking
- Stable with Small Output Capacitor
- Low Dropout Voltage, 300mV
- Combined Reference / Enable Input
- Low Current Consumption in Stand-by Mode
- Maximum Input Voltage  $-42\text{ V} \leq V_I \leq +45\text{ V}$
- Reverse Polarity Protection
- Output Short Circuit to Ground and Supply Protection
- Overtemperature Protection
- Temperature Range  $-40\text{ °C} \leq T_j \leq 125\text{ °C}$
- Green Product (RoHS compliant)

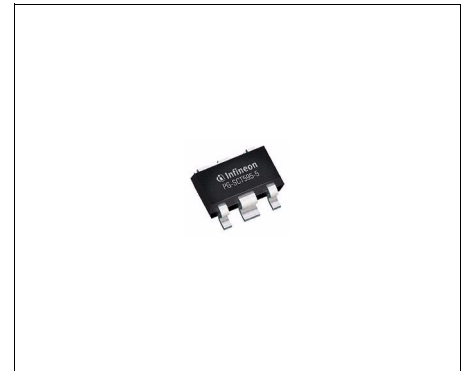

**PG-SCT595-5**

### Applications

- Manufacturing Automation
- Appliances
- HDTV Televisions
- Game Consoles
- Network Routers

For automotive and transportation applications, please refer to the Infineon TLE and TLF voltage regulator series.

### Functional Description

The IFX21401 is a monolithic integrated low dropout voltage tracker in a tiny SMD package PG-SCT595-5 with excellent thermal resistance. It is designed to supply off-board loads (e.g. sensors) in harsh environments. The IC protects itself in case of overload, overtemperature, reverse polarity as well as output short circuit to battery or ground.

Supply voltages up to  $V_I = 45\text{ V}$  are regulated to a reference voltage applied at the adjust input “ADJ” with high accuracy. The output “Q” is able to drive loads up to 50 mA.

In order to reduce the quiescent current to a minimum, the IFX21401 can be switched to stand-by mode by setting the adjust/enable input “ADJ/EN” to “low”.

| Type       | Package     | Marking |
|------------|-------------|---------|
| IFX21401MB | PG-SCT595-5 | T1      |

## 2 Block Diagram

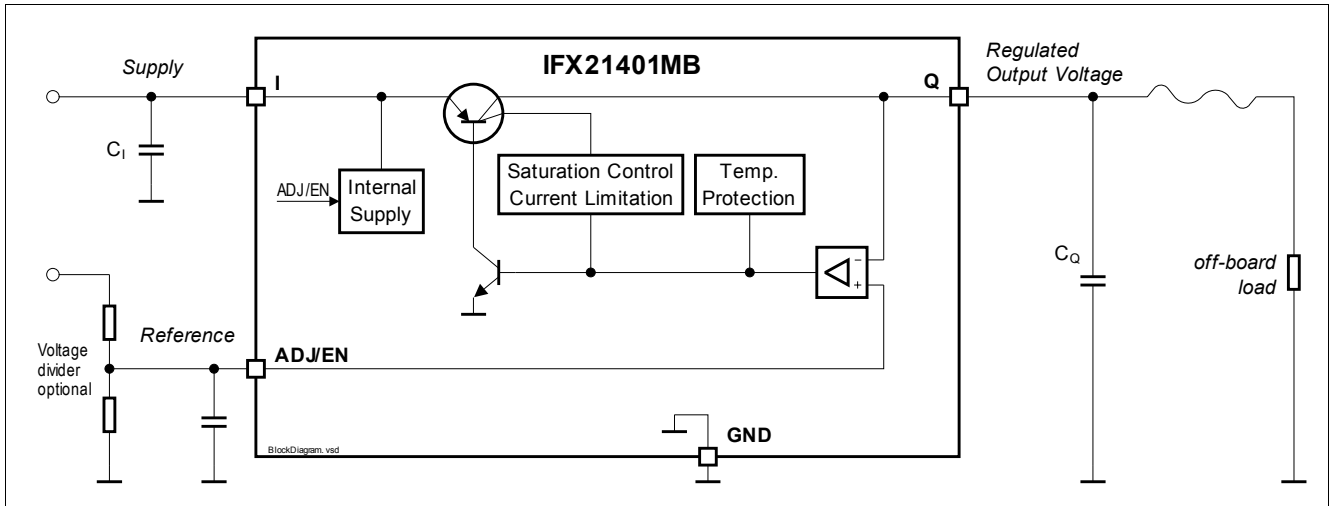


Figure 1 Block Diagram and Typical Application Circuit

## 3 Pin Configuration

### 3.1 Pin Assignment

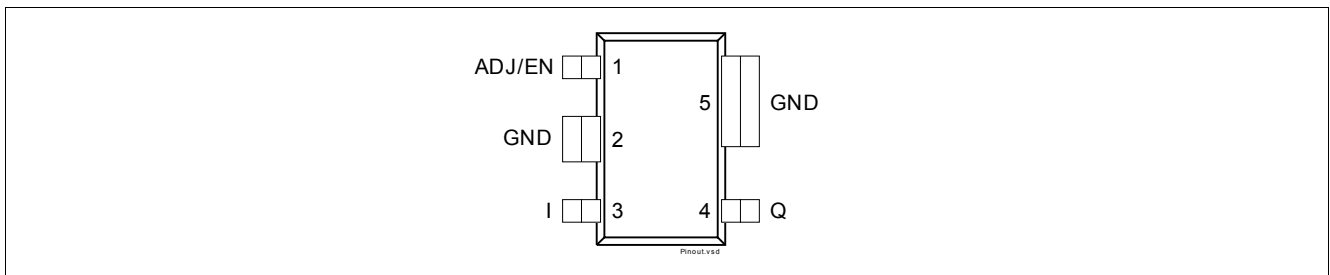


Figure 2 Pin Configuration Package PG-SCT595-5

### 3.2 Pin Definitions and Functions

| Pin | Symbol | Function  |
|-----|--------|---|
| 1   | ADJ/EN | <b>Adjust / Enable.</b><br>Connect the reference to this pin. A low signal disables the IC; a high signal switches it on. The reference voltage can be connected directly or by a voltage divider for lower output voltages. For compensating line influences, a capacitor close to the IC pins is recommended. |
| 2   | GND    | <b>Ground Reference.</b><br>Internally connected to Pin 5. Connect to heatsink area.  |
| 3   | I      | <b>Input.</b><br>IC supply. For compensating line influences, a capacitor close to the IC pins is recommended.  |
| 4   | Q      | <b>Tracker Output.</b><br>Block to GND with a capacitor close to the IC terminals, respecting capacitance and ESR requirements given in the table "Functional Range".   |
| 5   | GND    | <b>Ground Reference.</b><br>Internally connected to Pin 2. Connect to heatsink area.  |

## 4 General Product Characteristics

### 4.1 Absolute Maximum Ratings

#### Absolute Maximum Ratings <sup>1)</sup>

$-40\text{ °C} \leq T_j \leq 150\text{ °C}$ ; all voltages with respect to ground (unless otherwise specified).

| Pos.                      | Parameter             | Symbol        | Limit Values |      | Unit | Conditions        |
|---------------------------|-----------------------|---------------|--------------|------|------|-------------------|
|                           |                       |               | Min.         | Max. |      |                   |
| <b>Voltages</b>           |                       |               |              |      |      |                   |
| 4.1.1                     | Input voltage         | $V_I$         | -42          | 45   | V    | –                 |
| 4.1.2                     | Output voltage        | $V_Q$         | -1           | 40   | V    | –                 |
| 4.1.3                     | Adjust / Enable Input | $V_{ADJ/EN}$  | -0.3         | 40   | V    | –                 |
| <b>Temperatures</b>       |                       |               |              |      |      |                   |
| 4.1.4                     | Junction Temperature  | $T_j$         | -40          | 150  | °C   | –                 |
| 4.1.5                     | Storage Temperature   | $T_{stg}$     | -50          | 150  | °C   | –                 |
| <b>ESD Susceptibility</b> |                       |               |              |      |      |                   |
| 4.1.6                     | ESD Resistivity       | $V_{ESD,HBM}$ | -3           | 3    | kV   | HBM <sup>2)</sup> |
| 4.1.7                     |                       | $V_{ESD,CDM}$ | -2           | 2    | kV   | CDM <sup>3)</sup> |

1) Not subject to production test, specified by design.

2) ESD susceptibility, Human Body Model "HBM" according to EIA/JESD 22-A114B

3) ESD susceptibility, Charged Device Model "CDM" according to EIA/JESD22-C101 or ESDA STM5.3.1

*Note: Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*

*Note: Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.*

## 4.2 Functional Range

| Pos.  | Parameter   | Symbol       | Limit Values |      | Unit | Conditions      |
|-------|---|--------------|--------------|------|------|-----------------|
|       |   |              | Min.         | Max. |      |                 |
| 4.2.1 | Input Voltage   | $V_I$        | 4            | 40   | V    | –               |
| 4.2.1 | Adjust / Enable Input Voltage<br>(Voltage Tracking Range) | $V_{ADJ/EN}$ | 2.5          | 36   | V    | –               |
| 4.2.2 | Junction Temperature                                      | $T_j$        | -40          | 125  | °C   | –               |
| 4.2.3 | Output Capacitor Requirements                             | $C_Q$        | 1            | –    | µF   | – <sup>1)</sup> |
| 4.2.4 |   | $ESR_{CQ}$   | –            | 3    | Ω    | – <sup>2)</sup> |

1) The minimum output capacitance requirement is applicable for a worst case capacitance tolerance of 30%

2) relevant ESR value at  $f = 10$  kHz

*Note: Within the functional range the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the related electrical characteristics table.*

## 4.3 Thermal Resistance

| Pos.  | Parameter                   | Symbol      | Limit Value |      |      | Unit | Conditions  |
|-------|-----------------------------|-------------|-------------|------|------|------|---|
|       |                             |             | Min.        | Typ. | Max. |      |   |
| 4.3.5 | Junction to Ambient         | $R_{thJA}$  | –           | 81   | –    | K/W  | 2s2p board <sup>1)</sup>                            |
| 4.3.1 |                             |             | –           | 217  | –    | K/W  | Footprint only <sup>2)</sup>                        |
| 4.3.2 |                             |             | –           | 117  | –    | K/W  | 300 mm <sup>2</sup> PCB heatsink area <sup>2)</sup> |
| 4.3.3 |                             |             | –           | 103  | –    | K/W  | 600 mm <sup>2</sup> PCB heatsink area <sup>2)</sup> |
| 4.3.4 | Junction to Soldering Point | $R_{thJSP}$ | –           | 30   | –    | K/W  | Pins 2, 5 fixed to $T_A$                            |

1) Specified  $R_{thJA}$  value is according to JESD51-2,-5,-7 at natural convection on FR4 2s2p board; The product (chip+package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 2 inner copper layers (2 x 70µm Cu, 2 x 35µm Cu). Where applicable a thermal via array under the package contacted the first inner copper layer.

2) Package mounted on PCB FR4; 80 x 80 x 1.5 mm; 35 µm Cu, 5 µm Sn; horizontal position; zero airflow. Not subject to production test; specified by design.

## 5 Electrical Characteristics

### 5.1 Tracking Regulator

The output voltage  $V_Q$  is controlled by comparing it to the voltage applied at pin ADJ/EN and driving a PNP pass transistor accordingly. The control loop stability depends on the output capacitor  $C_Q$ , the load current, the chip temperature and the poles/zeros introduced by the integrated circuit. To ensure stable operation, the output capacitor's capacitance and its equivalent series resistor ESR requirements given in the table "Functional Range" have to be maintained. For details see also the typical performance graph "Output Capacitor Series Resistor  $ESR_{CQ}$  vs. Output Current  $I_Q$ ". Also, the output capacitor shall be sized to buffer load transients.

An input capacitor  $C_1$  is recommended to buffer line influences. Connect the capacitors close to the IC terminals.

Protection circuitry prevent the IC as well as the application from destruction in case of catastrophic events. These safeguards contain output current limitation, reverse polarity protection as well as thermal shutdown in case of overtemperature.

In order to avoid excessive power dissipation beyond the capability of the pass element and the package, the maximum output current is decreased at high input voltages.

The overtemperature protection circuit prevents the IC from immediate destruction under fault conditions (e. g. output continuously short-circuited) by reducing the output current. Please note that a junction temperature above 150 °C is outside the maximum ratings and reduces the IC lifetime.

The IFX21401 is protected from a reverse (i.e. negative polarity) input voltage. During reverse input voltage there is a small of current flowing into the IC and thermal shutdown protection is not operating. For reverse current details refer to the electrical characteristics table and typical performance graphs.

**Table 1 Electrical Characteristics Tracking Regulator**

$V_1 = 13.5\text{ V}$ ;  $V_{ADJ/EN} \geq 2.5\text{ V}$ ;  $-40\text{ °C} \leq T_j \leq 125\text{ °C}$ ; all voltages with respect to ground (unless otherwise specified).

| Pos.  | Parameter                               | Symbol          | Limit Values |      |      | Unit | Conditions   |
|-------|---|-----------------|--------------|------|------|------|--|
|       |   |                 | Min.         | Typ. | Max. |      |  |
| 5.1.1 | Output Voltage Tracking Accuracy        | $\Delta V_Q$    | -5           | –    | 5    | mV   | $1\text{ mA} \leq I_Q \leq 10\text{ mA}$ ;<br>$6\text{ V} \leq V_1 \leq 16\text{ V}$ |
| 5.1.2 |   |                 | -25          | –    | 25   | mV   | $1\text{ mA} \leq I_Q \leq 50\text{ mA}$ ;<br>$6\text{ V} \leq V_1 \leq 28\text{ V}$ |
| 5.1.3 |   |                 | -25          | –    | 25   | mV   | $1\text{ mA} \leq I_Q \leq 10\text{ mA}$ ;<br>$6\text{ V} \leq V_1 \leq 40\text{ V}$ |
| 5.1.4 | Load Regulation steady-state            | $ dV_{Q,load} $ | –            | –    | 15   | mV   | $I_Q = 1\text{ mA to } 30\text{ mA}$ ;   |
| 5.1.5 | Line Regulation steady-state            | $ dV_{Q,line} $ | –            | –    | 10   | mV   | $V_1 = 6\text{ V to } 40\text{ V}$ ;<br>$I_Q = 10\text{ mA}$                         |
| 5.1.6 | Power Supply Ripple Rejection           | $PSRR$          | –            | 48   | –    | dB   | $f_{ripple} = 100\text{ Hz}$ ;<br>$V_{ripple} = 1\text{ Vpp}^1$                      |
| 5.1.7 | Dropout Voltage<br>$V_{dr} = V_1 - V_Q$ | $V_{dr}$        | –            | 100  | 300  | mV   | $I_Q = 10\text{ mA}$<br>$V_{ADJ} \geq 4\text{ V}^2$                                  |
| 5.1.8 | Output Current Limitation               | $I_{Q,max}$     | 51           | 85   | 120  | mA   | $V_Q = (V_{ADJ} - 0.1\text{ V})$   |

## Electrical Characteristics

**Table 1 Electrical Characteristics Tracking Regulator**
 $V_I = 13.5 \text{ V}$ ;  $V_{\text{ADJ/EN}} \geq 2.5 \text{ V}$ ;  $-40 \text{ }^\circ\text{C} \leq T_j \leq 125 \text{ }^\circ\text{C}$ ; all voltages with respect to ground (unless otherwise specified).

| Pos.   | Parameter                                 | Symbol | Limit Values |      |      | Unit | Conditions   |
|--------|---|--------|--------------|------|------|------|--|
|        |   |        | Min.         | Typ. | Max. |      |  |
| 5.1.9  | Reverse Current                           | $I_Q$  | -5           | -1   | –    | mA   | $V_I = 0 \text{ V}$ ;<br>$V_Q = 16 \text{ V}$ ;<br>$V_{\text{ADJ}} = 5 \text{ V}$  |
| 5.1.10 | Reverse Current at Negative Input Voltage | $I_I$  | -10          | -2   | –    | mA   | $V_I = -16 \text{ V}$ ;<br>$V_Q = 0 \text{ V}$ ;<br>$V_{\text{ADJ}} = 5 \text{ V}$ |

*Overtemperature Protection:*

|        |                                  |                   |     |   |     |                  |   |
|--------|----------------------------------|-------------------|-----|---|-----|------------------|---|
| 5.1.11 | Junction Temperature Equilibrium | $T_{j,\text{eq}}$ | 151 | – | 200 | $^\circ\text{C}$ | $T_j$ increasing due to power dissipation generated by the IC <sup>1)</sup> |
|--------|----------------------------------|-------------------|-----|---|-----|------------------|---|


1) Parameter not subject to production test; specified by design.

 2) Measured when the output voltage  $V_Q$  has dropped 100 mV from its nominal value.


**Typical Performance Characteristics Tracking Regulator**

$V_{ADJ/EN} = 5\text{ V}$  (unless otherwise noted)


**Output Voltage  $V_Q$  vs. Adjust Voltage  $V_{ADJ}$**

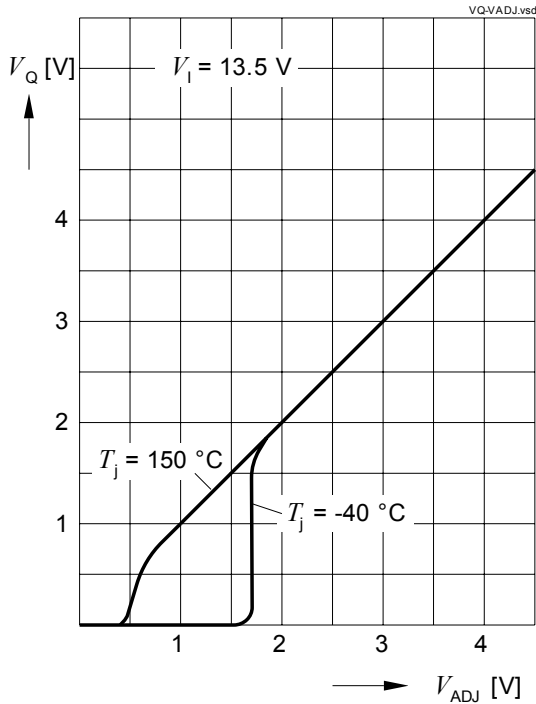


**Output Voltage  $V_Q$  vs. Input Voltage  $V_I$**

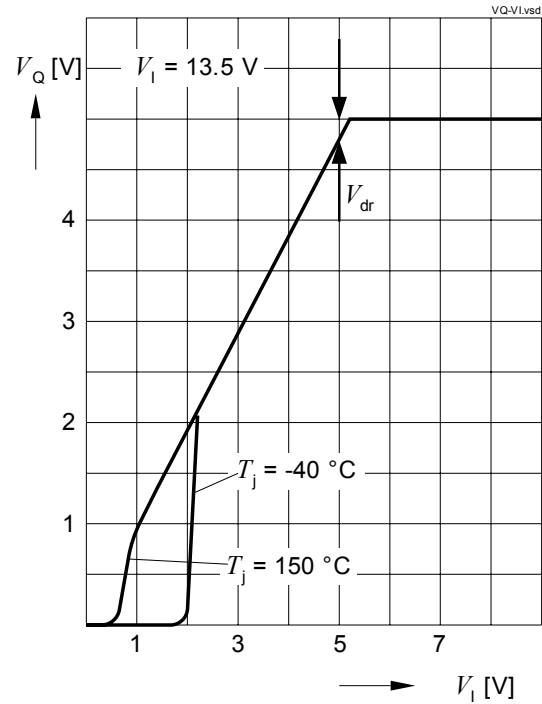

**Maximum Output Current  $I_Q$  vs. Input Voltage  $V_I$**

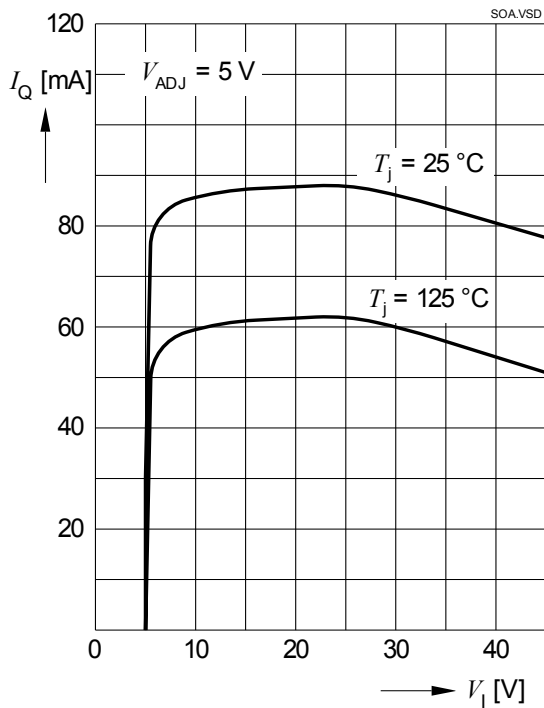


**Line Regulation  $dV_{Q,line}$  vs. Input Voltage Change  $dV_I$**

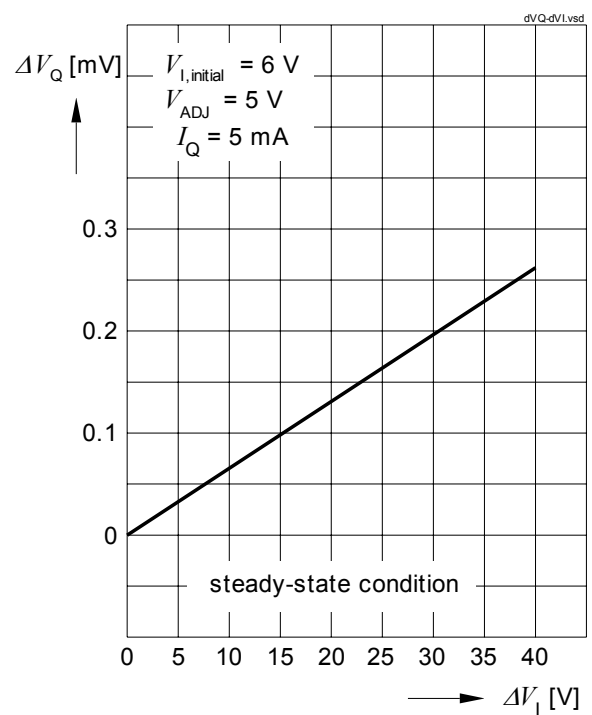


**Typical Performance Characteristics Tracking Regulator**

$V_{ADJ/EN} = 5\text{ V}$  (unless otherwise noted)


**Load Regulation  $dV_{Q,line}$  vs. Output Current Change  $dI_Q$**

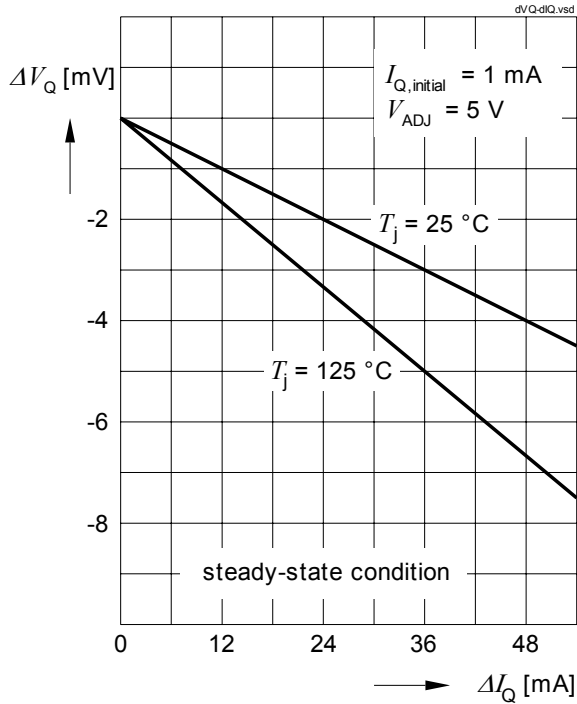


**Output Capacitor Series Resistor  $ESR_{CQ}$  vs. Output Current  $I_Q$**

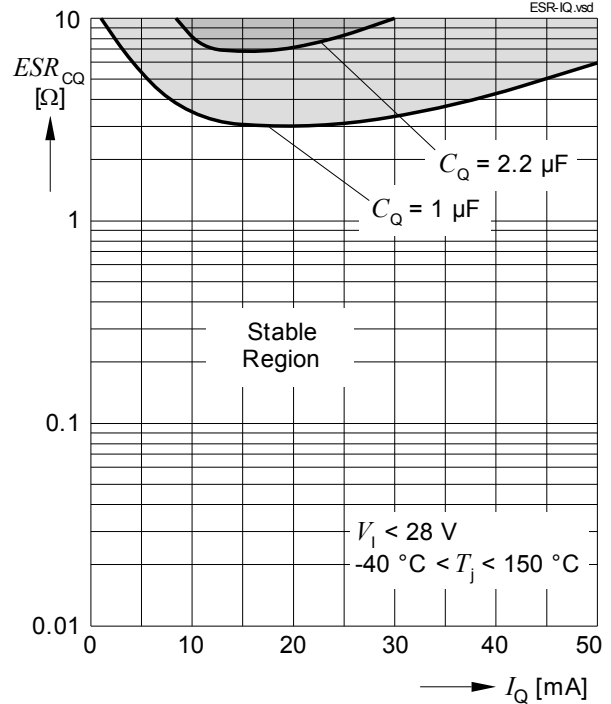

**Line Transient Response**

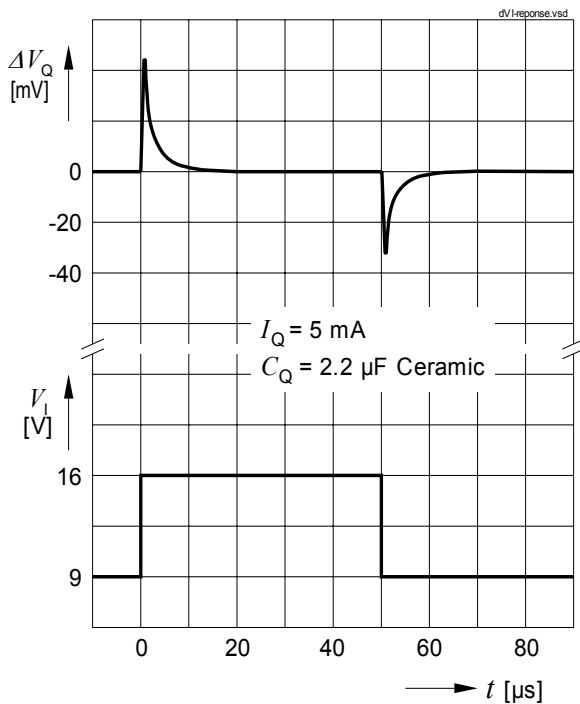


**Load Transient Response**

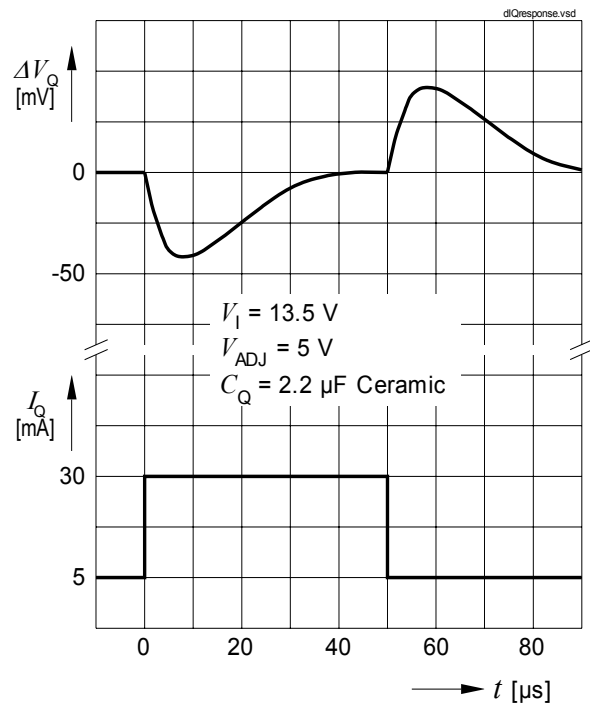


**Typical Performance Characteristics Tracking Regulator**

$V_{ADJ/EN} = 5\text{ V}$  (unless otherwise noted)


**Tracking Accuracy  $\Delta V_Q$  vs. Junction Temperature  $T_j$**

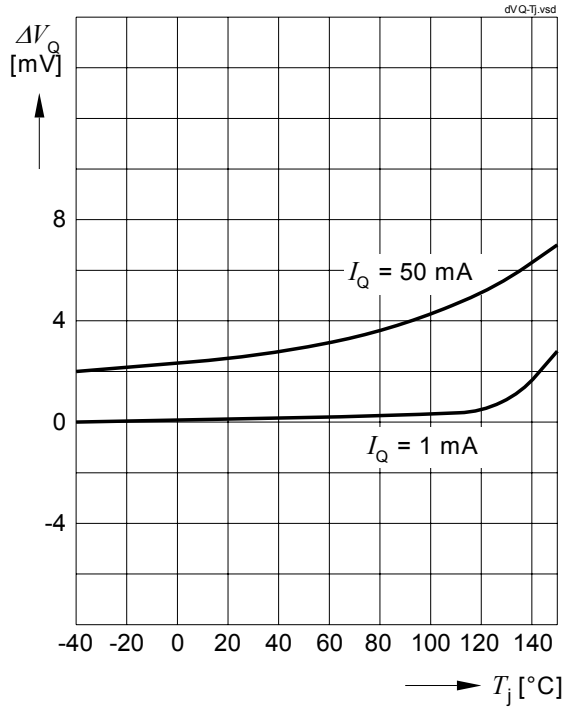


**Dropout Voltage  $V_{dr}$  vs. Output Current  $I_Q$**

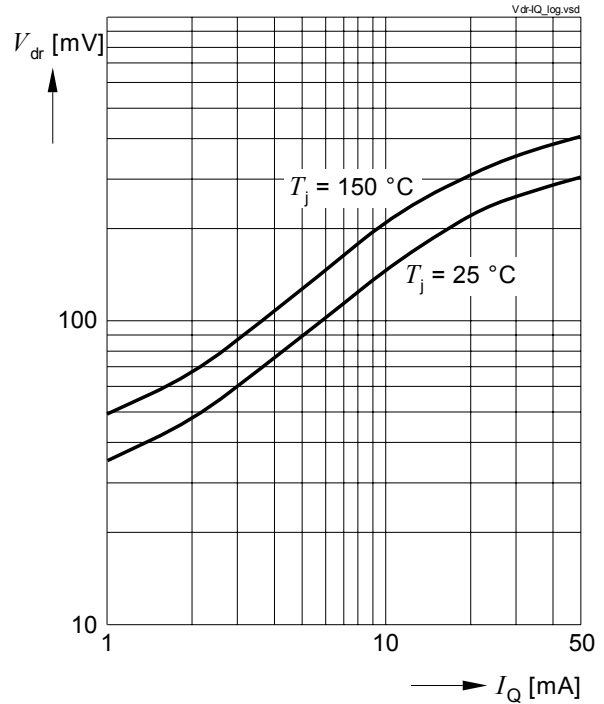

**Dropout Voltage  $V_{dr}$  vs. Junction Temperature  $T_j$**

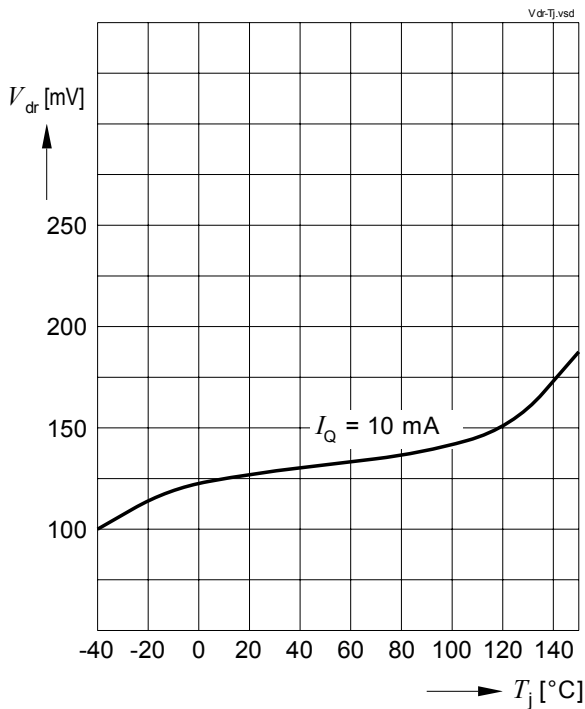


**Output Current Limitation  $I_{Q,max}$  vs. Output Voltage  $V_Q$**

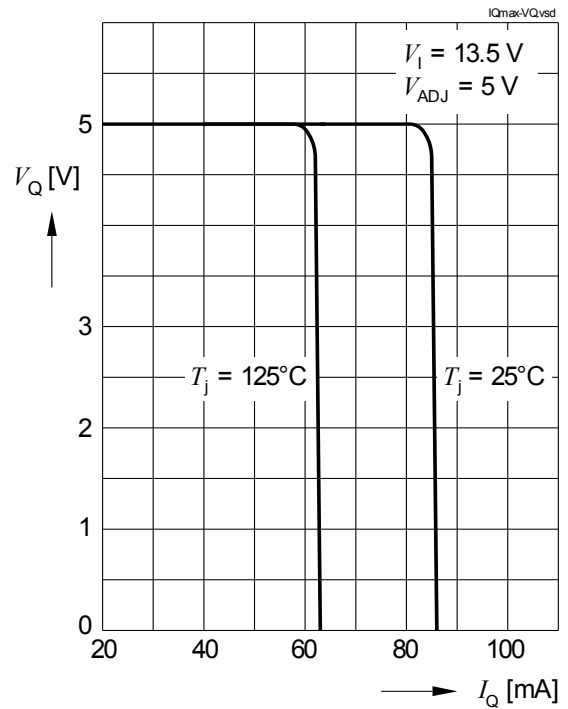


**Typical Performance Characteristics Tracking Regulator**

$V_{ADJ/EN} = 5\text{ V}$  (unless otherwise noted)


**Reverse Output Current  $I_Q$  vs. Output Voltage  $V_Q$**

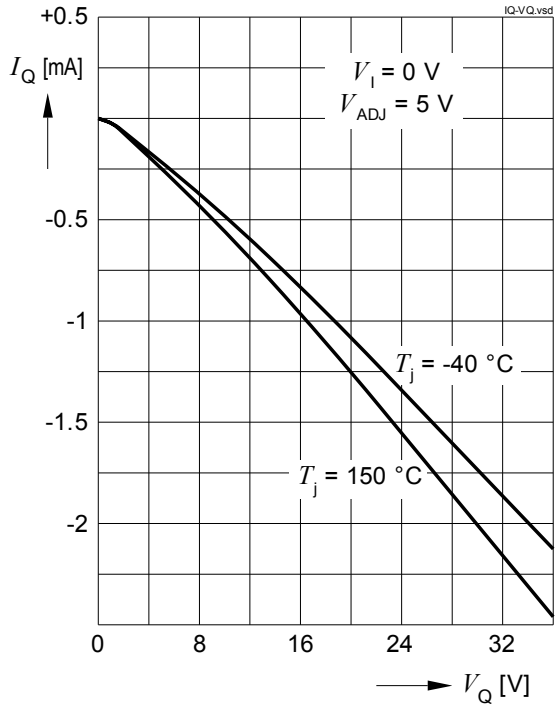

**Reverse Current  $I_I$  vs. Input Voltage  $V_I$**

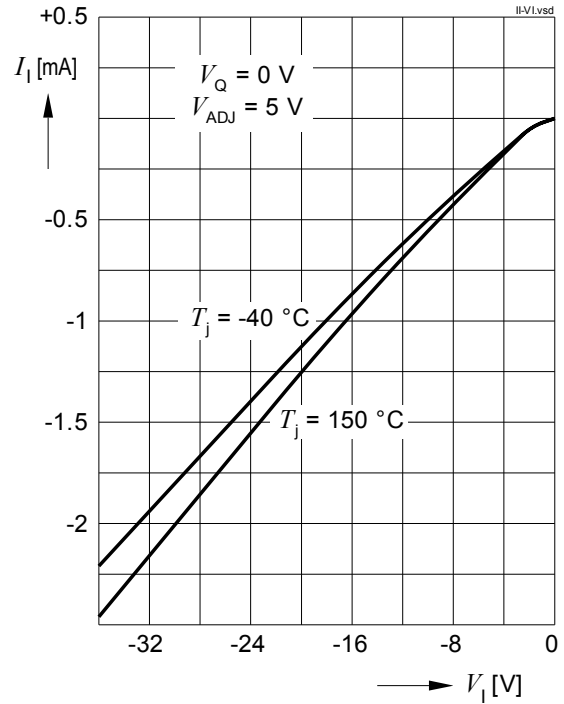

**Power Supply Ripple Rejection  $PSRR$**

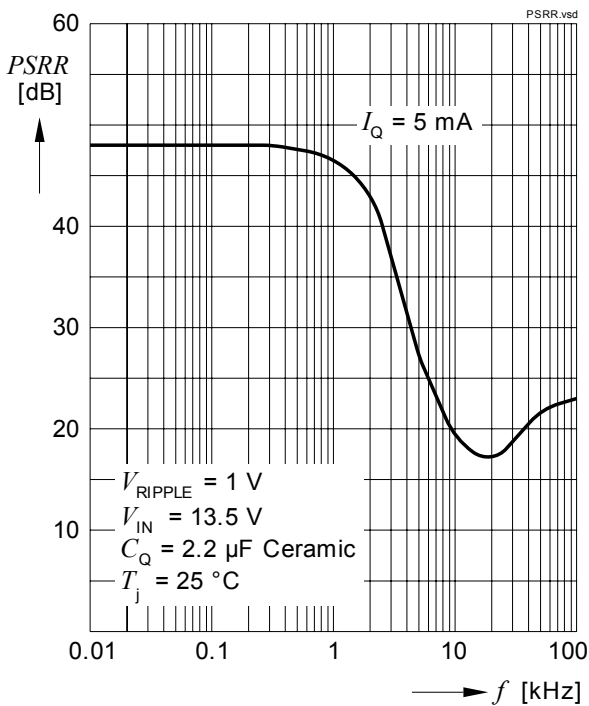

## 5.2 Current Consumption

**Table 2 Electrical Characteristics Current Consumption**


$V_I = 13.5\text{ V}$ ;  $V_{\text{ADJ/EN}} \geq 2.5\text{ V}$ ;  $-40\text{ }^\circ\text{C} \leq T_j \leq 125\text{ }^\circ\text{C}$ ; all voltages with respect to ground (unless otherwise specified).

| Pos.  | Parameter   | Symbol   | Limit Values |      |      | Unit          | Conditions   |
|-------|---|----------|--------------|------|------|---------------|--|
|       |   |          | Min.         | Typ. | Max. |               |  |
| 5.2.1 | Quiescent Current Stand-by Mode                       | $I_{q1}$ | –            | 10   | 20   | $\mu\text{A}$ | $V_{\text{ADJ/EN}} \leq 0.4\text{ V}$ ;<br>$T_j \leq 85\text{ }^\circ\text{C}$ |
| 5.2.2 | Current Consumption                                   | $I_{q2}$ | –            | 140  | 200  | $\mu\text{A}$ | $I_Q \leq 1\text{ mA}$ ;   |
| 5.2.3 | $I_q = I_I - I_Q$                                     |          | –            | 3    | 5    | $\text{mA}$   | $I_Q \leq 30\text{ mA}$ ;  |
| 5.2.4 | Current Consumption Dropout Region; $I_q = I_I - I_Q$ | $I_{q3}$ | –            | 1    | 2    | $\text{mA}$   | $V_{\text{ADJ}} = V_I = 5\text{ V}$ ;<br>$I_Q = 0\text{ mA}$                   |


### Typical Performance Characteristics Current Consumption

$V_{\text{ADJ/EN}} = 5\text{ V}$  (unless otherwise noted)


**Current Consumption  $I_{q1}$ ,  $I_{q2}$  vs. Junction Temperature  $T_j$**

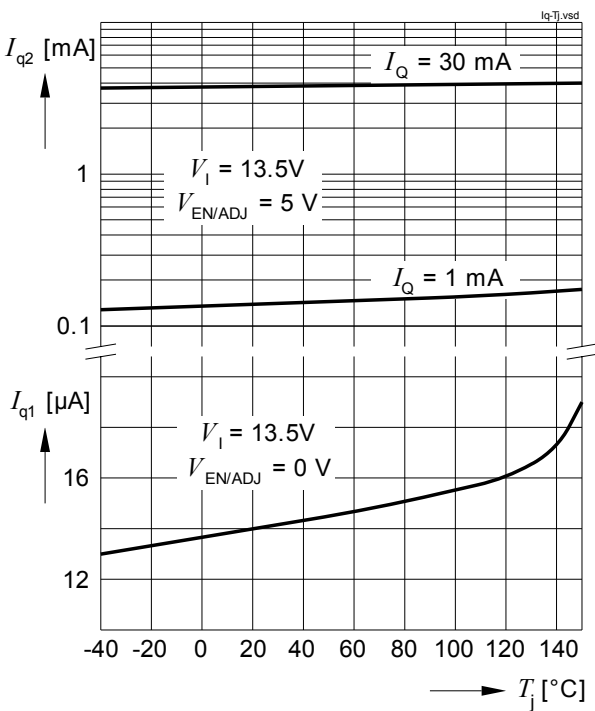

**Current Consumption  $I_{q2}$  vs. Output Current  $I_Q$**

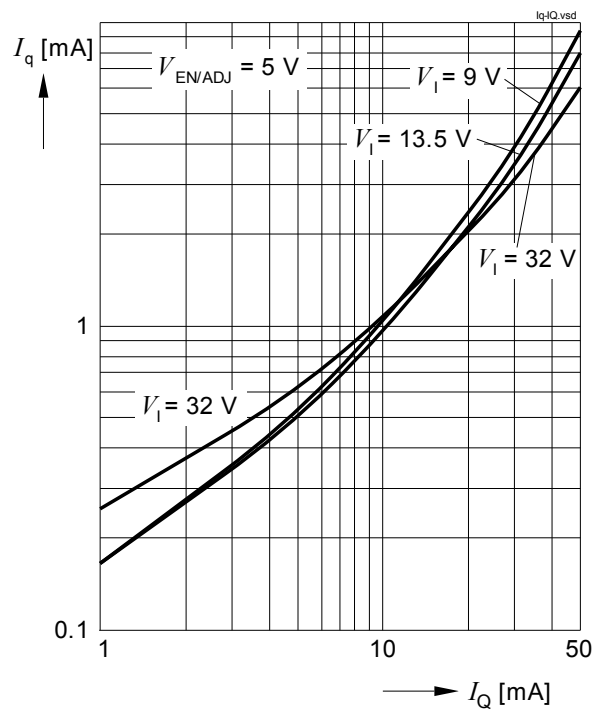

**Current Consumption  $I_{q2}$  vs. Input Voltage  $V_I$**

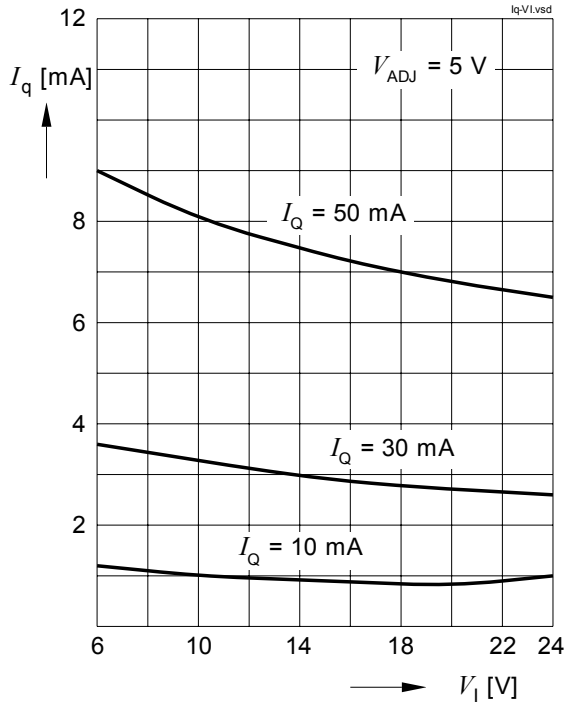

### 5.3 Adjust / Enable Input

In order to reduce the quiescent current to a minimum, the IFX21401MB can be switched to stand-by mode by setting the adjust/enable input “ADJ/EN” to “low”.

**Table 3 Electrical Characteristics Adjust / Enable**

$V_I = 13.5\text{ V}$ ;  $V_{ADJ} \geq 2.5\text{ V}$ ;  $-40\text{ }^\circ\text{C} \leq T_j \leq 125\text{ }^\circ\text{C}$ ;


all voltages with respect to ground, positive current flowing into pin (unless otherwise specified).

| Pos.  | Parameter   | Symbol         | Limit Values |      |      | Unit          | Conditions                         |
|-------|---|----------------|--------------|------|------|---------------|------------------------------------|
|       |   |                | Min.         | Typ. | Max. |               |                                    |
| 5.3.1 | Adjust / Enable Input Current                       | $I_{ADJ}$      | –            | 0.1  | 0.5  | $\mu\text{A}$ | $V_{ADJ} = 5\text{ V}$ ;           |
| 5.3.2 | Adjust / Enable Low Signal Valid                    | $V_{ADJ,low}$  | –            | –    | 0.4  | V             | $V_Q = 0\text{ V}$ ;               |
| 5.3.3 | Adjust / Enable High Signal Valid (Tracking Region) | $V_{ADJ,high}$ | 2.5          | –    | 36   | V             | $ V_Q - V_{ADJ}  < 25\text{ mV}$ ; |

#### Typical Performance Characteristics Adjust / Enable Input

$V_{ADJ/EN} = 5\text{ V}$  (unless otherwise noted)

#### Startup Sequence

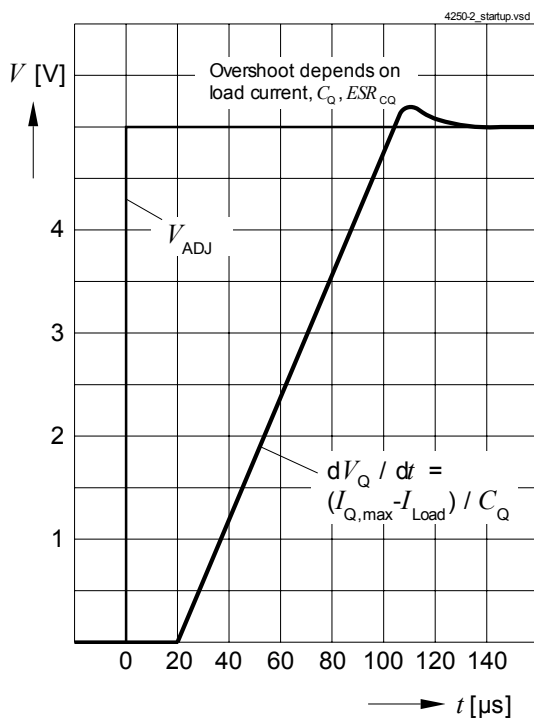

## 6 Package Outlines

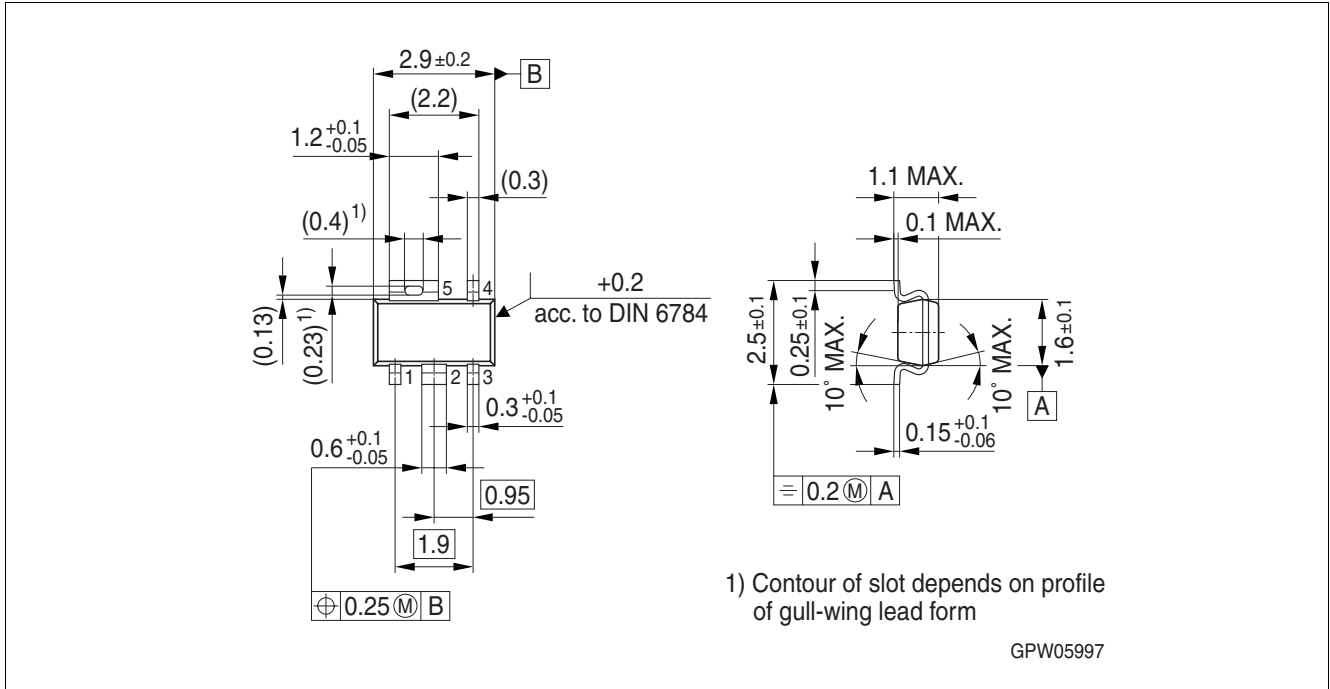


Figure 3 Outline PG-SCT595-5

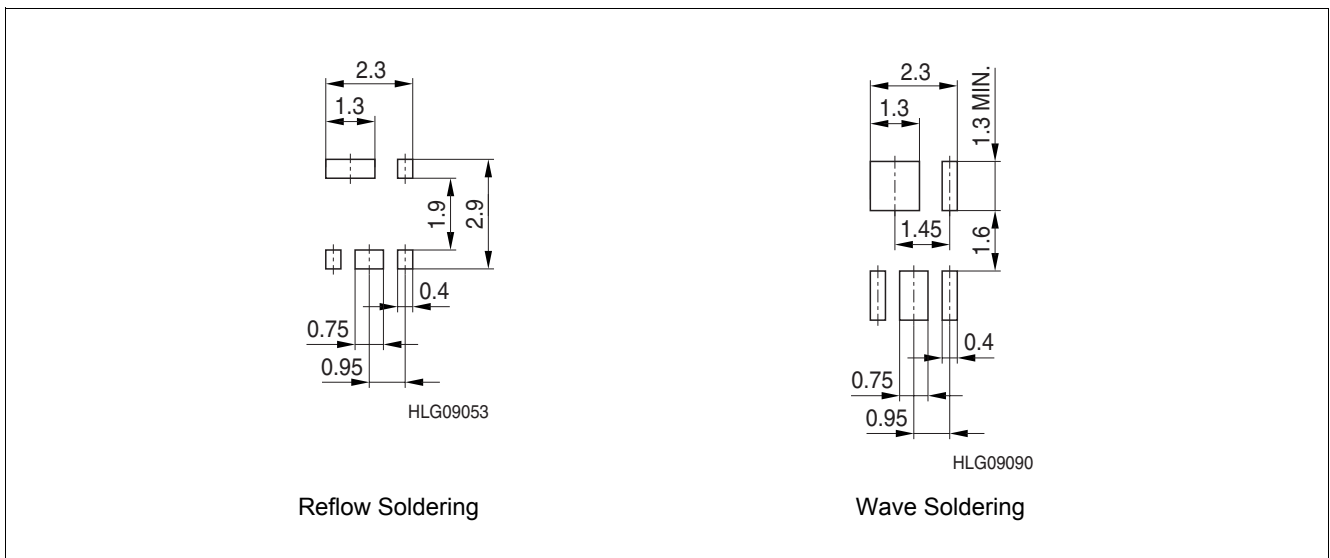


Figure 4 Footprint PG-SCT595-5

### Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e. Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

For further information on packages, please visit our website:

<http://www.infineon.com/packages>

Dimensions in mm

## 7 Revision History

| Revision | Date       | Changes   |
|----------|------------|---|
| 1.01     | 2009-10-19 | Coverpage changed<br>Overview page: Inserted reference statement to TLE/TLF series. |
| 1.0      | 2009-04-28 | Initial Release   |

**Edition 2009-10-19**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2009 Infineon Technologies AG  
All Rights Reserved.**

### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View IFX21401MBHTSA1 on WIN SOURCE](#)
-  [Infineon Technologies Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management