THE DATASHEET OF

MAX4487AUD

www.win-source.net 0086-755-83957316

Click here to ask about the production status of specific part numbers.

MAX4484/MAX4486/ MAX4487

Single/Dual/Quad, Low-Cost, Single-Supply 7MHz, Rail-to-Rail Op Amps

General Description

The MAX4484/MAX4486/MAX4487 single/dual/quad low-cost general-purpose op amps operate from a single +2.7V to +5.5V supply. The op amps are unity-gain stable with a 7MHz gain-bandwidth product, capable of driving an external 2kΩ load with rail-to-rail output swing. The amplifiers are stable with capacitive loads of up to 100pF. The MAX4484/MAX4486/MAX4487 are specified from -40°C to +125°C, making them suitable for a variety of harsh environments.

The single MAX4484 is available in the ultra-small 5-pin SC70, while the dual MAX4486 is packaged in the space-saving 8-pin SOT23 and µMAX® packages. The quad MAX4487 is available in the 14-pin SO and TSSOP packages.

Applications

- Single-Supply Zero-Crossing Detector
- Instruments and Terminals
- Portable Communicators
- Electronic Ignition Modules
- Infrared Receivers for Remote Controls
- Sensor Signal Detection

µMAX is a registered trademark of Maxim Integrated Products, Inc..

Features

- 7MHz Unity-Gain Stable Bandwidth
- Stable for Capacitive Loads Up to 100pF
- +2.7V to +5.5V Single-Supply Voltage Range
- Ground-Sensing Inputs
- Outputs Swing Rail-to-Rail
- No Phase Reversal for Overdriven Inputs
- 85dB A_{VOL} with 2kΩ Load
- 0.01% THD with 2kΩ Load
- Available in Space-Saving Packages
  - 5-Pin SC70 (MAX4484)
  - 8-Pin SOT23 (MAX4486)

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX4484AXK-T	-40°C to +125°C	5 SC70-5	ABQ
MAX4484AUK-T	-40°C to +125°C	5 SOT23-5	ADPE
MAX4486ASA	-40°C to +125°C	8 SO	—
MAX4486AUA	-40°C to +125°C	8 µMAX	—
MAX4487AUD	-40°C to +125°C	14 TSSOP	—
MAX4487ASD	-40°C to +125°C	14 SO	—

Pin Configurations/Functional Diagrams

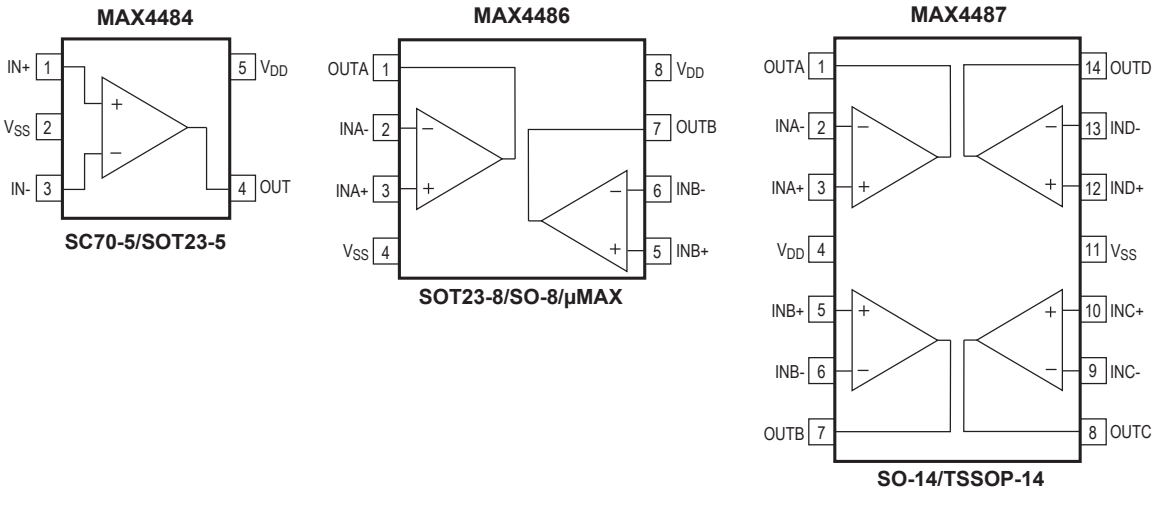

maxim integrated™

Absolute Maximum Ratings

Power Supply Voltage (V_{DD} to V_{SS}).....-0.3V to +6V
All Other Pins .....(V_{SS} - 0.3V) to (V_{DD} + 0.3V)
Output Short-Circuit Duration (OUT shorted to V_{DD} or V_{SS}) .....Continuous
Continuous Power Dissipation (T_A = +70°C)
5-Pin SC70 (derate 3.1mW/°C above +70°C).....247mW
5-Pin SOT23 (derate 7.1mW/°C above +70°C) 571mW
8-Pin SOT23 (derate 9.1mW/°C above +70°C) 727mW
8-Pin SO (derate 5.88mW/°C above +70°C).....471mW
8-Pin µMAX (derate 4.5mW//°C above +70°C).....362mW
14-Pin TSSOP (derate 9.1mW/°C above +70°C).....727mW
14-Pin SO (derate 8.33mW/°C above +70°C).....667mW
Operating Temperature Range..... -55°C to +125°C
Junction Temperature.....+150°C
Storage Temperature Range..... -65°C to +150°C
Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics—T_A = +25°C

(V_{DD} = +5.0V, V_{SS} = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L = ∞ to V_{DD}/2, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage Range	V_{DD}	Inferred from PSRR test		2.7		5.5	V
Supply Current per Amplifier	I_{DD}	V_{DD} = +2.7V			1.9		mA
		V_{DD} = +5.0V			2.2	3.5	
Input Offset Voltage	V_{OS}	MAX4484			±0.3	±5.0	mV
		MAX4486			±0.3	±7.0	
		MAX4487			±0.3	±9.0	
Input Bias Current	I_B	(Note 1)			±0.1	100	pA
Input Offset Current	I_{OS}	(Note 1)			±0.1	100	pA
Input Resistance	R_{IN}	Differential or common mode			1000		GΩ
Input Common-Mode Voltage Range	V_{CM}	Inferred from CMRR test		V_{SS}		V_{DD} - 1.3	V
Common-Mode Rejection Ratio	CMRR	V_{SS} ≤ V_{CM} ≤ V_{DD} - 1.3V		67	83		dB
Power-Supply Rejection Ratio	PSRR	+2.7V ≤ V_{DD} ≤ +5.5V		70	85		dB
Large-Signal Voltage Gain	A_{VOL}	V_{SS} + 0.3V ≤ V_{OUT} ≤ V_{DD} - 0.3V, R_L = 1kΩ	R_L = 100kΩ		98		dB
			R_L = 2kΩ	76	85		
Output Voltage High	V_{OH}	Specified as $\lvert V_{DD} - V_{OH} \rvert$	R_L = 100kΩ		3		mV
			R_L = 2k		15	30	
Output Voltage Low	V_{OL}	Specified as $\lvert V_{OL} - V_{SS} \rvert$	R_L = 100kΩ		1		mV
			R_L = 2kΩ		20	50	
Output Short-Circuit Current	I_{SC}	Sourcing			27		mA
		Sinking			33		
Gain-Bandwidth Product	GBW				7		MHz
Phase Margin	ϕm				55		degrees
Gain Margin	Gm				12		dB
Slew Rate	SR				20		V/µs

Electrical Characteristics—T_A = +25°C

(V_{DD} = +5.0V, V_{SS} = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L = ∞ to V_{DD}/2, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Input Voltage-Noise Density	e_n	f = 10kHz			29		nV/√Hz
Input Current-Noise Density	i_n	f = 10kHz			1		fA/√Hz
Capacitive-Load Stability	C_{LOAD}	A_V = +1V/V (Note 1)		100			pF
Power-On Time	t_{ON}				1		µs
Input Capacitance	C_{IN}				2		pF
Total Harmonic Distortion	THD	f = 10kHz, V_{OUT} = $2V_{P-P}$, A_V = +1V/V	R_L = 100kΩ		0.006		%
			R_L = 2kΩ		0.01		
Settling Time to 0.01%	t_S	V_{OUT} = 4V step, A_V = +1V/V			450		ns

Electrical Characteristics—T_A = -40°C to +125°C

(V_{DD} = +5.0V, V_{SS} = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L = ∞ to V_{DD}/2, unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage Range	V_{DD}	Inferred from PSRR test		2.7		5.5	V
Supply Current per Amplifier	I_{DD}					4.0	mA
Input Offset Voltage	V_{OS}	MAX4484				±8.5	mV
		MAX4486				±10.0	
		MAX4487				±11.0	
Input Offset Voltage Drift	TC_{VOS}				±6		µV/°C
Input Bias Current	I_B	(Note 1)				±100	pA
Input Offset Current	I_{OS}	(Note 1)				±100	pA
Input Common-Mode Voltage Range	V_{CM}	Inferred from CMRR test		V_{SS}		V_{DD} - 1.4	V
Common-Mode Rejection Ratio	CMRR	V_{SS} ≤ V_{CM} ≤ V_{DD} - 1.4V	T_A = -40°C to +85°C	65			dB
			T_A = -40°C to +125°C	62			
Power-Supply Rejection Ratio	PSRR	+2.7V ≤ V_{DD} ≤ +5.5V	T_A = -40°C to +85°C	67			dB
			T_A = -40°C to +125°C	64			
Large-Signal Voltage Gain	A_{VOL}	V_{SS} + 0.3V ≤ V_{OUT} ≤ V_{DD} - 0.3V, R_L = 2kΩ	T_A = -40°C to +85°C	66			dB
			T_A = -40°C to +125°C	62			
Output Voltage High	V_{OH}	$\lvert V_{DD} - V_{OUT} \rvert$, R_L = 2kΩ	T_A = -40°C to +85°C			100	mV
			T_A = -40°C to +125°C			100	
Output Voltage Low	V_{OL}	$\lvert V_{OUT} - V_{SS} \rvert$ R_L = 2kΩ	T_A = -40°C to +85°C			100	mV
			T_A = -40°C to +125°C			250	

Note 1: Guaranteed by design.
Note 2: Specifications are 100% tested at T_A = +25°C (exceptions marked). All temperature limits are guaranteed by design.

Typical Operating Characteristics

(V_{DD} = +5V, V_{SS} = 0V, V_{CM} = V_{DD}/2, R_L = ∞ to V_{DD}/2, unless otherwise noted.)

GAIN AND PHASE vs. FREQUENCY (C_L = 0)

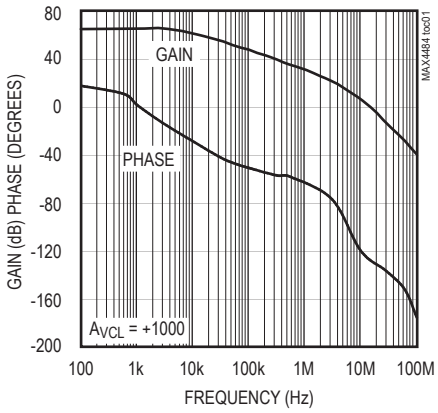

GAIN AND PHASE vs. FREQUENCY WITH CAPACITIVE LOAD

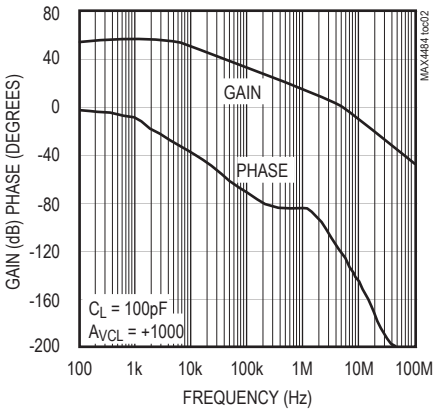

POWER-SUPPLY REJECTION RATIO vs. FREQUENCY

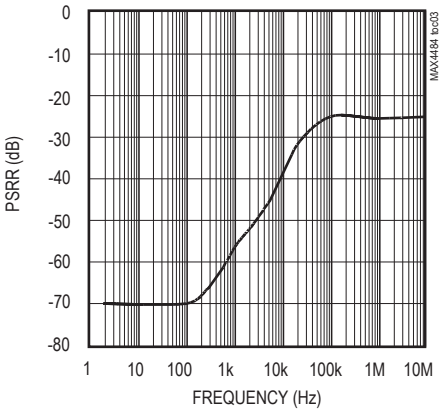

SUPPLY CURRENT vs. TEMPERATURE

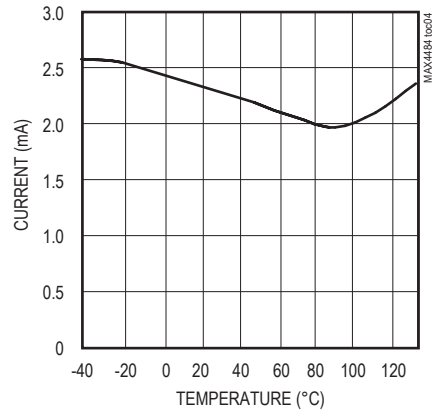

OUTPUT IMPEDANCE vs. FREQUENCY

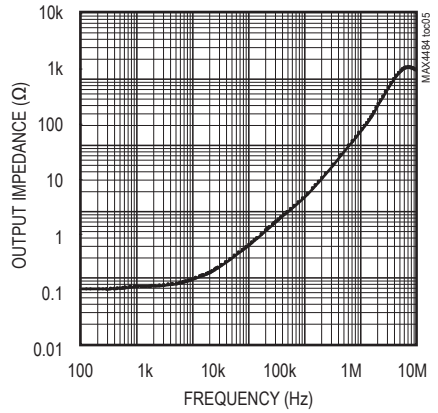

INPUT OFFSET VOLTAGE vs. TEMPERATURE

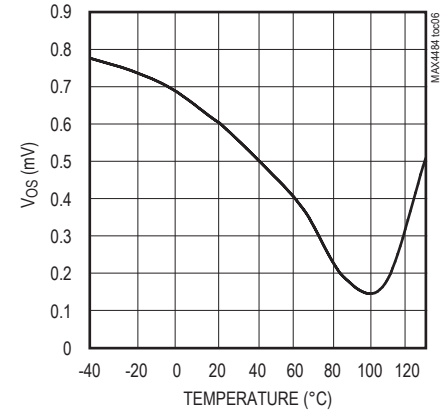

OUTPUT VOLTAGE HIGH vs. TEMPERATURE

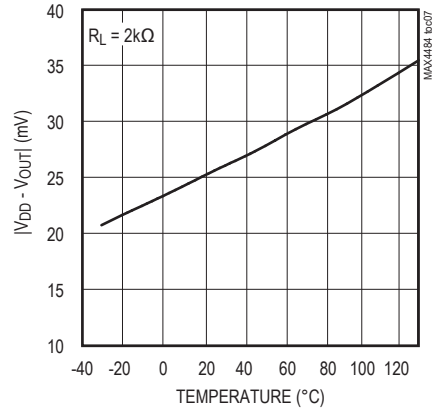

OUTPUT VOLTAGE LOW vs. TEMPERATURE

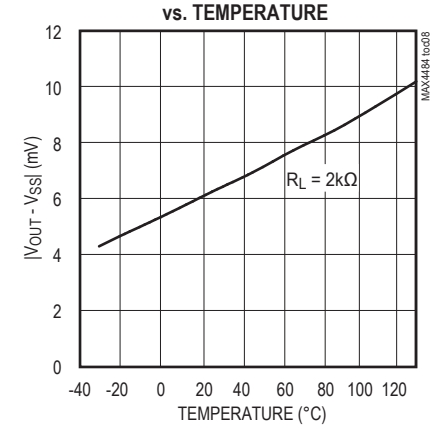

NONINVERTING SMALL-SIGNAL TRANSIENT RESPONSE

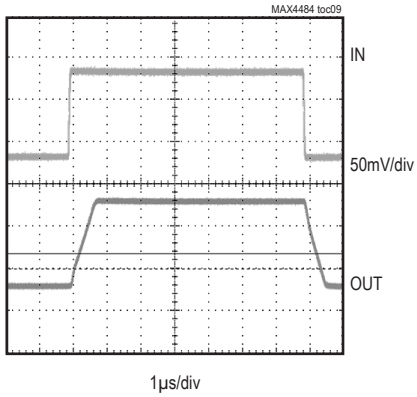

Typical Operating Characteristics (continued)

(V_{DD} = +5V, V_{SS} = 0V, V_{CM} = V_{DD}/2, R_L = ∞ to V_{DD}/2, unless otherwise noted.)

NONINVERTING LARGE-SIGNAL TRANSIENT RESPONSE

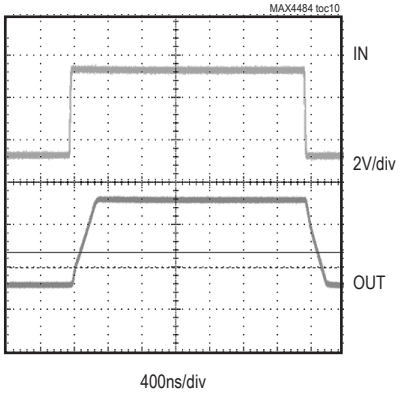

PERCENT OVERSHOOT vs. CAPACITIVE LOAD

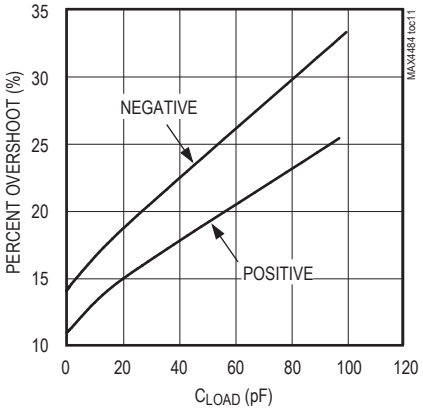

LARGE-SIGNAL GAIN vs. OUTPUT VOLTAGE LOW

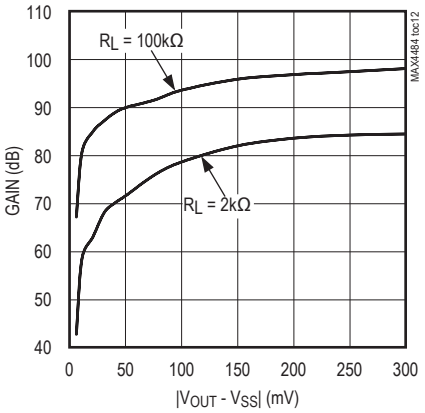

LARGE-SIGNAL GAIN vs. OUTPUT VOLTAGE HIGH

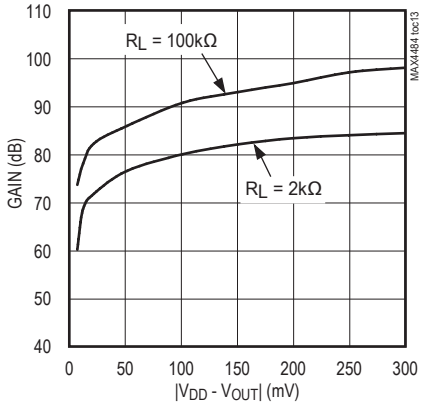

CROSSTALK vs. FREQUENCY

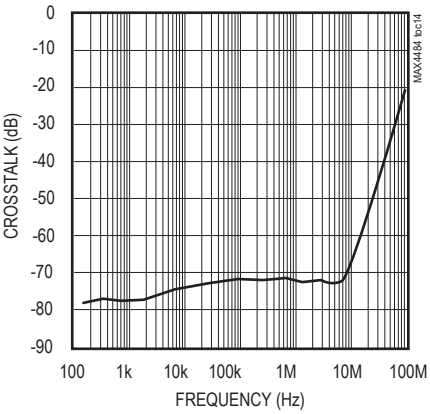

POWER-SUPPLY REJECTION RATIO vs. OPERATING VOLTAGE

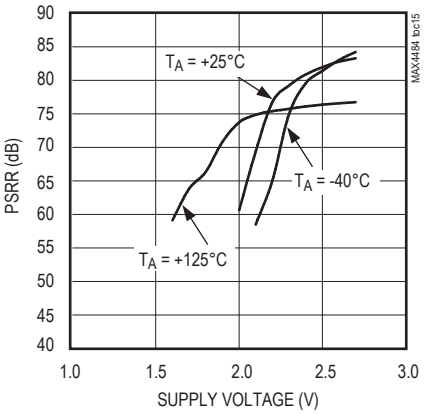

TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY

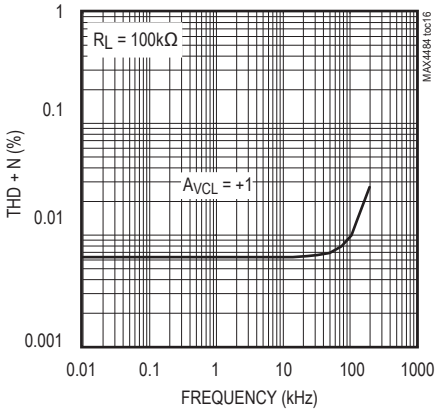

TOTAL HARMONIC DISTORTION PLUS NOISE vs. AMPLITUDE

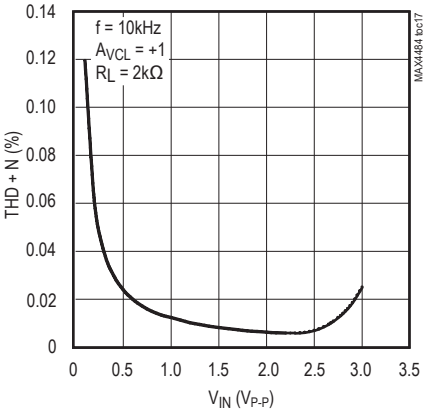

TOTAL HARMONIC DISTORTION PLUS NOISE vs. AMPLITUDE

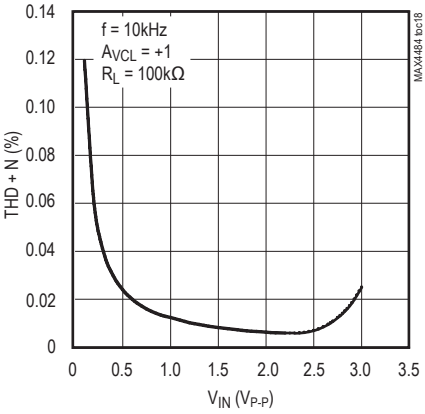

Pin Description

PIN			NAME	FUNCTION
MAX4484	MAX4486	MAX4487		
3	—	—	IN-	Inverting Amplifier Input
1	—	—	IN+	Noninverting Amplifier Input
4	—	—	OUT	Amplifier Output
—	2	2	INA-	Inverting Amplifier Input (Channel A)
—	3	3	INA+	Noninverting Amplifier Input (Channel A)
—	1	1	OUTA	Amplifier Output (Channel A)
—	6	6	INB-	Inverting Amplifier Input (Channel B)
—	5	5	INB+	Noninverting Amplifier Input (Channel B)
—	7	7	OUTB	Amplifier Output (Channel B)
—	—	9	INC-	Inverting Amplifier Input (Channel C)
—	—	10	INC+	Noninverting Amplifier Input (Channel C)
—	—	8	OUTC	Amplifier Output (Channel C)
—	—	13	IND-	Inverting Amplifier Input (Channel D)
—	—	12	IND+	Noninverting Amplifier Input (Channel D)
—	—	14	OUTD	Amplifier Output (Channel D)
2	4	11	V_{SS}	Negative Power-Supply Voltage
5	8	4	V_{DD}	Positive Power-Supply Voltage

Detailed Description

Rail-to-Rail Output Stage

The MAX4484/MAX4486/MAX4487 can drive a 2kΩ load and still swing within 50mV of the supply rails. Figure 1 shows the output swing of the MAX4484 configured with A_V = +1V/V.

Driving Capacitive Loads

Driving a capacitive load can cause instability in many op amps, especially those with low quiescent current. The MAX4484/MAX4486/MAX4487 are unity-gain stable for a range of capacitive loads up to 100pF. Figure 2 shows the response of the MAX4484 with an excessive capacitive load. Adding a series resistor between the output and the load capacitor (Figure 3) improves the circuit's response by isolating the load capacitance from the op amp's output.

Applications Information

Power Supplies and Layout

The MAX4484/MAX4486/MAX4487 operate from a single +2.7V to +5.5V power supply. Bypass the power supply with 0.1µF capacitor to ground. Good layout techniques optimize performance by decreasing the amount of stray capacitance at the op amp's inputs and outputs. To decrease stray capacitance, minimize trace lengths by placing external components close to the op amp's pins. Use surface-mount components for best results.

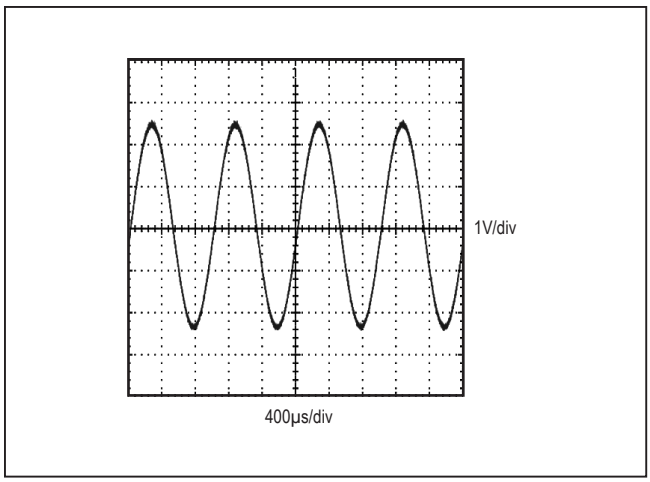

Figure 1. Rail-to-Rail Output Operation

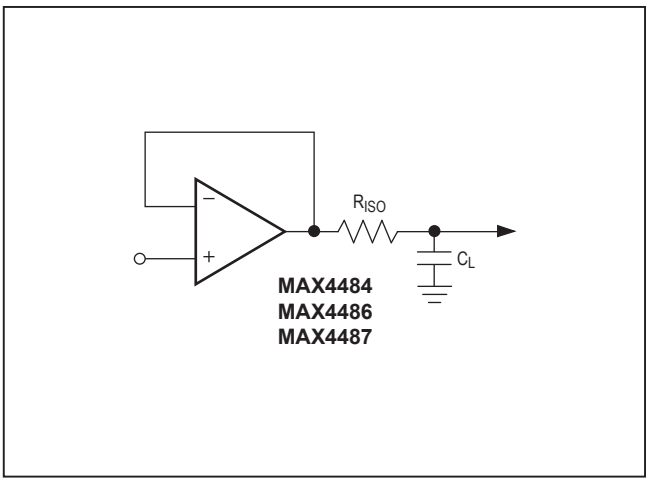

Figure 3. Capacitive-Load-Driving Circuit

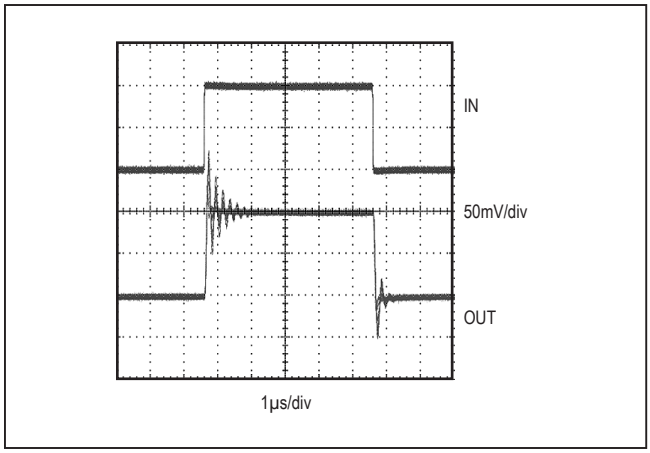

Figure 2. Small-Signal Transient Response with Excessive Capacitive Load (C_L = 270pF)

Package Information

For the latest package outline information and land patterns (footprints), go to **www.maximintegrated.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.	LAND PATTERN NO.
5 SC70	X5-1	**21-0076**	**90-0188**
5 SOT23	U5-1	**21-0057**	**90-0174**
8 µMAX	U8-1	**21-0036**	**90-0092**
8 SO	S8-2	**21-0041**	**90-0096**
8 SOT23	K8-5	**21-0078**	**90-0176**
14 TSSOP	U14-1	**21-0066**	**90-0113**
14 SO	S14-1	**21-0041**	**90-0112**

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	10/00	Initial release	—
1	5/14	Updated *General Description*	1
2	12/20	Updated *Ordering Information* and *Package Information* table	1, 7

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at https://www.maximintegrated.com/en/storefront/storefront.html.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View MAX4487AUD on WIN SOURCE
- Analog Devices Inc. Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management