



**THE DATASHEET OF
MP0037**



Manufactured from **Stainless Steel**, Bulgin's **extensive range** of vandal resistant security switches are designed with a **high resistance** to wear and tear, corrosion and harsh use in potentially hostile environments such as access control applications.

The front and rear panel mounted versions have three profiles –prominent, domed and low profile – with a choice of switching and IP66 & IP68 front panel sealing which combined together to meet the ergonomic, electrical and environmental demands of switch panel design. New additions of Black Anodised Alloy as well as Stainless Steel are now available - and where the ultimate strength of steel is not needed, there is a brass, chrome plated alternative. Low profile style switches are also now available with a latching, push on - push off, action.

The illuminated versions are available in dot and ring LED indication and a variety of illumination colours including bi-colour LED's. Newer versions also feature LED illumination driven by 6V, 12V & 24V together with rear of panel sealing, these options will add that extra dimension to control panel layouts and functionality.




| | |
|--|-----|
| Vandal Resistant Push Button | 288 |
| Voltage Selectors | 301 |
| Capacitive Switches | 320 |
| Piezo Switches | 321 |
| Miniature Stainless Steel Vandal Resistant | 327 |
| Rocker Switches | 333 |
| Toggle Switches | 339 |
| Refrigerator Switches | 366 |
| Slide Switches | 371 |
| | 376 |

Front Panel Mounting



MP0027


- 28mm diameter
- S.P.C.O. Microswitch
- 5A, 250Vac

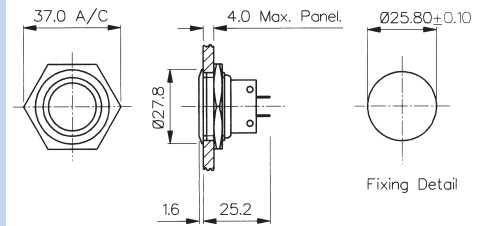

Front Panel Mounting

MP0038
Sealed to IP66

- Front Panel Sealed to IP66
- 28mm diameter
- S.P.C.O. Microswitch
- 5A, 250Vac

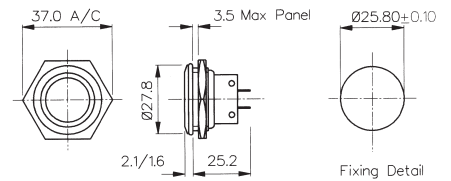


| Specifications | MP0027 | MP0038 |
|-----------------------------------|---|---|
| Terminations: | Solder Tags | Solder Tags |
| Switching: | S.P.C.O. Momentary Action (Microswitch) | S.P.C.O. Momentary Action (Microswitch) |
| Max. Rating: | 5A, 250Vac 2A, 28Vdc | 5A, 250Vac 2A, 28Vdc |
| Contact Resistance: | <10mΩ | <10mΩ |
| Insulation Resistance: | >10 ³ MΩ | >10 ³ MΩ |
| Dielectric Strength: | >2.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +70°C | -20°C to +70°C |
| Sealing (Front of panel only): | | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) |
| Operations Mechanical: | 1,000,000 (min) | 1,000,000 (min) |
| Electrical: | 35,000 (min) | 35,000 (min) |
| Operating Pressure: | 7.5N (typ) | 12.5N (typ) |
| Rear Nut Fixing Torque: | 2.5Nm | 1.13Nm |
| Materials Mouldings: | Glass Filled Nylon | Glass Filled Nylon |
| Tags/Terminations: | Brass, Tin Plated | Brass, Tin Plated |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Contacts: | Fine Silver | Fine Silver |
| Thread size: | 1.0" x 26TPI | 1.0" x 26TPI |
| RoHS | Compliant | Compliant |

Front Panel Mounting



MP0037
Sealed to IP68

- Front Panel Sealed to IP68
- 21.5mm diameter
- S.P. Push to Make
- 1A, 50Vac/dc
- Industry Standard Size

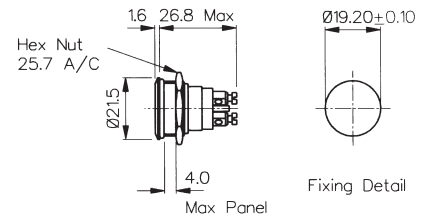


Front Panel Mounting



MP0031
Sealed to IP66

- Front Panel Sealed to IP66
- 21.5mm diameter
- S.P.C.O. Microswitch
- 5A, 250Vac

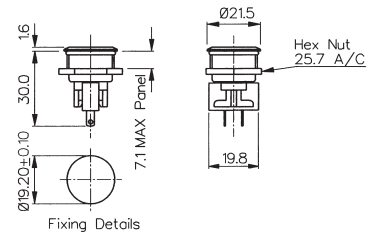


| Specifications | MP0037 | MP0031 |
|--------------------------------------|---|---|
| Terminations: | Screw Terminals | Solder Tags |
| Switching: | S.P. Push to make Momentary action | S.P.C.O. Momentary Action (Microswitch) |
| Max. Rating: | 1A, 50Vac/dc | 5A, 250Vac 2A, 28Vdc |
| Contact Resistance: | <10mΩ | <10mΩ |
| Insulation Resistance: | >10 ⁵ MΩ | >10 ³ MΩ |
| Dielectric Strength: | >1.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +70°C | -20°C to +70°C |
| Sealing (Front of panel only): | Protection Classification: IP68 EN 60529:1992+A2:2013 (Micro switch not sealed) | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) |
| IP68 rating 10M for 2 weeks test: | Passed | |
| Operations | | |
| Mechanical: | 1,000,000 (min) | 1,000,000 (min) |
| Electrical: | 30,000 (min) | 35,000 (min) |
| Operating Pressure: | 10N (typ) | 4.7N (typ) |
| Rear Nut Fixing Torque: | 0.57Nm | 0.57Nm |
| Materials | | |
| Mouldings: | Glass Filled Nylon | Glass Filled Nylon |
| Tags/Terminations: | Brass, Silver Plated | Brass, Tin Plated |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Contacts: | Brass, Silver Plated, Silver | Fine Silver |
| Thread size: | 0.747" x 26TPI | 0.747" x 26TPI |
| RoHS | Compliant | Compliant |

Front Panel Mounting



MPI001 - front panel seal to IP66

- Dot illumination
- 22mm diameter
- Single Contact push to make
- 50mA, 24Vdc contact rating
- Red, Green, Amber, Blue, White or dual colour illumination
- Bright daylight LEDs
- Independent LED terminals
- Front panel seal to IP66
- Integral supply resistors
- TVS protection

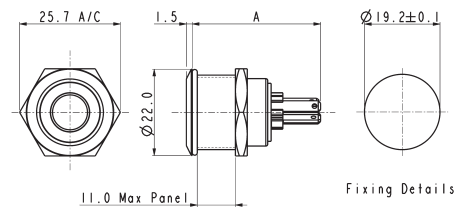

MPI001/TAG/COL A = 32.7
MPI001/TERM/COL A = 31.0 MAX.

Specifications


MPI001/Termination/Colour/Voltage

| | | | | | | | | |
|--------------------------------|--|---------|--------|---------|--------|-----------------|----------------|-----------------|
| Illumination style: | Dot | | | | | | | |
| Terminations: | /28 (2.8mm tabs), /TERM or /TE (screw terminals) | | | | | | | |
| Switching: | Single Contact, push to make, tactile (momentary action) | | | | | | | |
| Max. Switch Rating: | 50mA, 24Vdc | | | | | | | |
| LEDs (ratings @ 20mA) | | | | | | | | |
| Part No. | /RD | /GN | /AM | /BL | /WH | /D1 | /D4 | /D5 |
| Colours | Red | Green | Amber | Blue | White | Red/Green | Red/Blue | Green/Blue |
| Luminous Intensity | 900mcd | 2500mcd | 900mcd | 1500mcd | 900mcd | 2500mcd/5000mcd | 2000mcd/850mcd | 4000mcd/2000mcd |
| Forward Voltage | 1.85V | 3.5V | 2.3V | 3.5V | 3.6V | 2.05V/3.6V | 2.0V/3.6V | 3.6V/3.6V |
| Forward Current | 20mA | 20mA | 20mA | 20mA | 20mA | 20mA | 20mA | 20mA |
| Moulding Colour | Red | Green | Amber | Blue | White | Black | Black | Black |
| Illumination Voltage: | /no suffix No resistor fitted. An appropriate resistor must be series connected by the user. Voltages as above. | | | | | | | |
| | /6 | 6Vdc | | | | | | |
| | /12 | 12Vdc | | | | | | |
| | /24 | 24Vdc | | | | | | |
| Contact Resistance: | <100mΩ | | | | | | | |
| Insulation Resistance: | >10 ⁹ MΩ | | | | | | | |
| Dielectric Strength: | Contact to Panel >2.0kV Contact to Contact 1500 | | | | | | | |
| Operating Temp. Range: | -30°C to +70°C | | | | | | | |
| Sealing (Front of panel only): | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) | | | | | | | |
| Operations | | | | | | | | |
| Mechanical: | 750,000 (min) | | | | | | | |
| Electrical: | 35,000 (min) | | | | | | | |
| Operating Pressure: | 12N | | | | | | | |
| Rear Nut Fixing Torque: | 0.57Nm | | | | | | | |
| Screw Terminal Torque | 0.2Nm Max | | | | | | | |
| Materials | | | | | | | | |
| Switch assembly: | UL94V-0 rated Polyamide (Nylon) | | | | | | | |
| Tags: | Copper Alloy | | | | | | | |
| Terminals: | Copper Alloy | | | | | | | |
| Switch Body & Button: | Stainless Steel | | | | | | | |
| Lens and Lens Body: | Polycarbonate | | | | | | | |
| O ring: | Nitrile | | | | | | | |
| Internal seal: | Silicone | | | | | | | |
| Contact Plate: | Gold Plated | | | | | | | |
| Thread size: | 18.97mm x 26TPI | | | | | | | |



Compliant

Dual Colour LED Configuration




Front Panel Mounting



MPI002- front panel seal to IP66

- Ring illumination
- 22mm diameter
- Single Contact push to make
- 50mA, 24Vdc contact rating
- Red, Green, Amber, Blue, White or dual colour illumination
- Bright daylight LEDs
- Independent LED terminals
- Front panel seal to IP66
- Integral supply resistors
- TVS protection

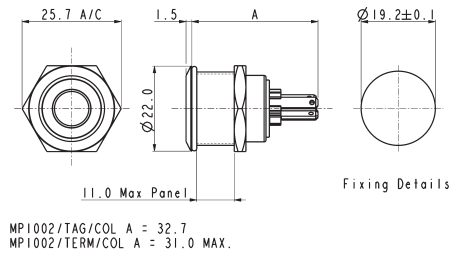

Specifications

MPI002/Termination/Colour/Voltage

| | | | | | | | | | | |
|--------------------------------|--|---------|--------|---------|--------|-----------------|----------------|-----------------|---------------|--|
| Illumination style: | Ring | | | | | | | | | |
| Terminations: | /28 (2.8mm tabs), /TERM or /TE (screw terminals) | | | | | | | | | |
| Switching: | Single Contact, push to make, tactile (momentary action) | | | | | | | | | |
| Max. Switch Rating: | 50mA, 24Vdc | | | | | | | | | |
| LEDs (ratings @ 20mA) | | | | | | | | | | |
| Part No. | /RD | /GN | /AM | /BL | /WH | /D1 | /D4 | /D5 | /D6 | |
| Colours | Red | Green | Amber | Blue | White | Red/Green | Red/Blue | Green/Blue | Green/White | |
| Luminous Intensity | 900mcd | 2500mcd | 900mcd | 1500mcd | 900mcd | 2500mcd/5000mcd | 2000mcd/850mcd | 4000mcd/2000mcd | 178mcd/450mcd | |
| Forward Voltage | 1.85V | 3.5V | 2.3V | 3.5V | 3.6V | 2.05V/3.6V | 2.0V/3.6V | 3.6V/3.6V | 3.4V/3.2V | |
| Forward Current | 20mA | 20mA | 20mA | 20mA | 20mA | 20mA | 20mA | 20mA | 20mA | |
| Moulding Colour | Red | Green | Amber | Blue | White | Black | Black | Black | Black | |
| Illumination Voltage: | /no suffix No resistor fitted. An appropriate resistor must be series connected by the user. Voltages as above. | | | | | | | | | |
| | /6 | 6Vdc | | | | | | | | |
| | /12 | 12Vdc | | | | | | | | |
| | /24 | 24Vdc | | | | | | | | |
| Contact Resistance: | <100mΩ | | | | | | | | | |
| Insulation Resistance: | >10 ³ MΩ | | | | | | | | | |
| Dielectric Strength: | Contact to Panel >2.0kV Contact to Contact 1500 | | | | | | | | | |
| Operating Temp. Range: | -30°C to +70°C | | | | | | | | | |
| Sealing (Front of panel only): | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) | | | | | | | | | |
| Operations | | | | | | | | | | |
| Mechanical: | 750,000 (min) | | | | | | | | | |
| Electrical: | 35,000 (min) | | | | | | | | | |
| Operating Pressure: | 12N | | | | | | | | | |
| Rear Nut Fixing Torque: | 0.57Nm | | | | | | | | | |
| Screw Terminal Torque | 0.2Nm Max | | | | | | | | | |


Materials

| | |
|-----------------------|---------------------------------|
| Switch assembly: | UL94V-0 rated Polyamide (Nylon) |
| Tags: | Copper Alloy |
| Terminals: | Copper Alloy |
| Switch Body & Button: | Stainless Steel |
| Lens and Lens Body: | Polycarbonate |
| O ring: | Nitrile |
| Internal seal: | Silicone |
| Contact Plate: | Gold Plated |
| Thread size: | 18.97mm x 26TPI |



Compliant

Dual Colour LED Configuration

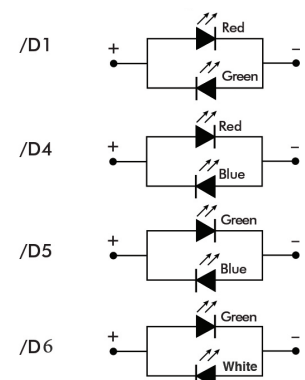


Rear Panel Sealed - Flying Leads



MPI002/FL/xx/x

- Dot or ring illumination
- 22mm diameter
- Single Contact push to make
- 50mA, 24Vdc contact rating
- Red, Green, Amber, Blue, White or dual colour illumination
- Bright daylight LEDs
- Independent LED terminals
- Front and rear panel seal to IP66
- Integral supply resistors
- TVS protection

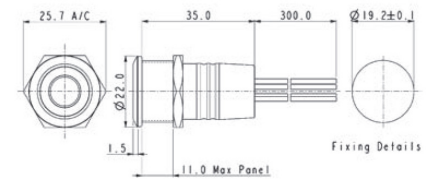


Flying lead colours: LED: red + and black - . Switch contacts: white.

Rear Panel Sealed - Solder Tags



MPI001/RP/xx/x

- Dot or ring illumination
- 22mm diameter
- Single Contact push to make
- 50mA, 24Vdc contact rating
- Red, Green, Amber, Blue & White illumination
- Bright daylight LEDs
- Independent LED terminals
- Front and rear panel seal to IP66
- Solder tag termination
- TVS protection

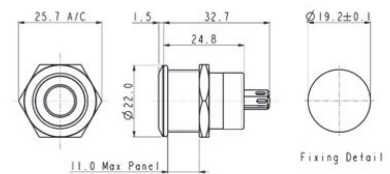

LED terminals marked + and -. Switch terminals unmarked.

| Specifications | MPI001/Termination/Colour/Voltage | MPI002/Termination/Colour/Voltage |
|--------------------------------|--|--|
| Illumination style: | Dot | Ring |
| Terminations: | /FL (Flying leads) /RP (Solder tags) | /FL (Flying leads) /RP (Solder tags) |
| Switching: | Single Contact, push to make, tactile (momentary action) | Single Contact, push to make, tactile (momentary action) |
| Max. Switch Rating: | 50mA, 24Vdc | 50mA, 24Vdc |
| LEDs (ratings @ 20mA) | | |
| Part No. | /RD /GN /AM /BL /WH | /RD /GN /AM /BL /WH |
| Colours | Red Green Amber Blue White | Red Green Amber Blue White |
| Luminous Intensity | 900mcd 2500mcd 900mcd 1500mcd 900mcd | 900mcd 2500mcd 900mcd 1500mcd 900mcd |
| Forward Voltage | 1.85V 3.5V 2.3V 3.5V 3.6V | 1.85V 3.5V 2.3V 3.5V 3.6V |
| Forward Current | 20mA 20mA 20mA 20mA 20mA | 20mA 20mA 20mA 20mA 20mA |
| Moulding Colour | Red Green Amber Blue White | Red Green Amber Blue White |
| Illumination Voltage: | /no suffix No resistor fitted. An appropriate resistor must be series connected by the user. Voltages as above. /6 6Vdc /12 12Vdc /24 24Vdc | /no suffix No resistor fitted. An appropriate resistor must be series connected by the user. Voltages as above. /6 6Vdc /12 12Vdc /24 24Vdc |
| Contact Resistance: | <100mΩ | <100mΩ |
| Insulation Resistance: | >10 ⁹ MΩ | >10 ⁹ MΩ |
| Dielectric Strength: | Contact to Panel >2.0kV Contact to Contact 1500 | Contact to Panel >2.0kV Contact to Contact 1500 |
| Operating Temp. Range: | -30°C to +70°C | -30°C to +70°C |
| Sealing (Front of panel only): | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) |
| Operations | | |
| Mechanical: | 750,000 (min) | 750,000 (min) |
| Electrical: | 35,000 (min) | 35,000 (min) |
| Operating Pressure: | 12N | 12N |
| Rear Nut Fixing Torque: | 0.57Nm | 0.57Nm |
| Materials | | |
| Switch assembly: | UL94V-0 rated Polyamide (Nylon) | UL94V-0 rated Polyamide (Nylon) |
| Tags: | Copper Alloy | Copper Alloy |
| Terminals: | Copper Alloy | Copper Alloy |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Lens and Lens Body: | Polycarbonate | Polycarbonate |
| O ring: | Nitrile | Nitrile |
| Internal seal: | Silicone | Silicone |
| Contact Plate: | Gold Plated | Gold Plated |
| Thread size: | 18.97mm x 26TPI | 18.97mm x 26TPI |
| | Compliant | Compliant |

| MPI / 005 / X / X / X / X / X / X | | | | | | | |
|-------------------------------------|----------------------------------|---|--|---|---|---|--|
| Series | Type | Actuator Type | Terminal | Switching Type | Material | Illumination | Voltage |
| 19mm Metal Push Button | 19mm Illuminated AV Switch | D = Dot Illumination R = Ring P = Illuminated Power O = Power Symbol / Ring | 28 = 2.8mm Plug Terminal TE = Screw Terminal | M = Momentary L = Latching | S = Stainless Steel A = Black Anodized Aluminum | BL GN RD AM WH Others on request | 12 = 12VAC Others Available on request |

Examples:

MPI005/D/28/L/S/BL/12 = 19mm Metal Push Button, Dot Illumination, 2.8mm Plug Terminal, Latching, Stainless Steel, Blue, 12 Volt

Note:


Power Symbol / Ring not available in black anodized aluminum

Front Panel Mounting



MPB038
Sealed to IP66

- Front Panel Sealed to IP66
- 28mm diameter
- S.P.C.O. Microswitch
- 5A, 250Vac

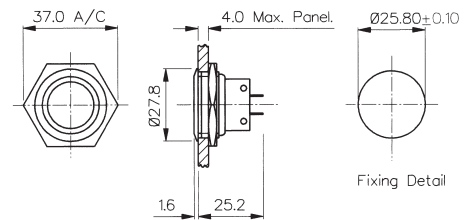


Front Panel Mounting




MPB031
Sealed to IP66

- Front Panel Sealed to IP66
- 21mm diameter
- S.P.C.O. Microswitch
- 5A, 250Vac

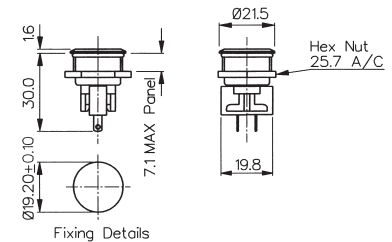


Front Panel Mounting



MPB037
Sealed to IP68

- Front Panel Sealed to IP68
- 21.5mm diameter
- S.P. Push to Make
- 1A, 50Vac/dc

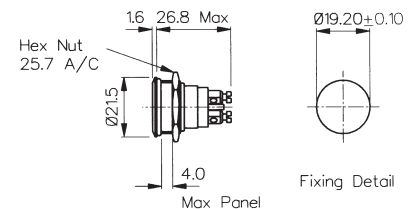


| Specifications | MPB038 | MPB031 | MPB037 |
|--------------------------------|---|---|---|
| Terminations: | Solder Tags | Solder Tags | Screw Terminals |
| Switching: | S.P.C.O. Momentary Action (Microswitch) | S.P.C.O. Momentary Action (Microswitch) | S.P. Push to make Momentary action |
| Max. Rating: | 5A, 250Vac. 2A, 28Vdc | 5A, 250Vac. 2A, 28Vdc | 1A, 50Vac/dc |
| Contact Resistance: | <10mΩ | <10mΩ | <10mΩ |
| Insulation Resistance: | >10 ³ MΩ | >10 ³ MΩ | >10 ⁵ MΩ |
| Dielectric Strength: | >2.0kVac | >2.0kVac | >1.0kVac |
| Operating Temp. Range: | -20°C to +70°C | -20°C to +70°C | -20°C to +70°C |
| Sealing (Front of panel only): | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) | Protection Classification: IP68 EN60529-1:1992 + A2:2013. (Micro switch not sealed) (10m for 2 weeks) |
| Operations | | | |
| Mechanical: | 1,000,000 (min) | 1,000,000 (min) | 1,000,000 (min) |
| Electrical: | 35,000 (min) | 35,000 (min) | 30,000 (min) |
| Operating Pressure: | 12.5N (typ) | 4.7N (typ) | 7.5N (typ) |
| Rear Nut Fixing Torque: | 1.13Nm | 0.57Nm | 0.57Nm |
| Materials | | | |
| Mouldings: | Glass Filled Nylon | Glass Filled Nylon | Glass Filled Nylon |
| Tags/Terminations: | Brass, Tin Plated | Brass, Tin Plated | Brass, Tin Plated |
| Switch Body & Button: | Brass | Brass | Brass |
| Contacts: | Fine Silver | Fine Silver | Brass, Silver Plated, Silver |
| Thread size: | 1.0" x 26TPI | 0.747" x 26TPI | 0.747" x 26TPI |
| RoHS | Compliant | Compliant | Compliant |

Front Panel Mounting - Low Profile



MP0050

- Front Panel Sealed to IP68
- Flush button
- 32.0mm diameter
- S.P.C.O. switching
- Momentary action
- 5A, 250Vac

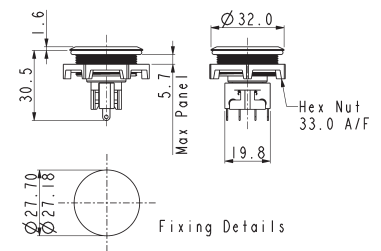


Front Panel Mounting - Protruding Profile



MP0050/2

- Front Panel Sealed to IP68
- Protruding button
- 32.0mm diameter
- S.P.C.O. switching
- Momentary action
- 5A, 250Vac

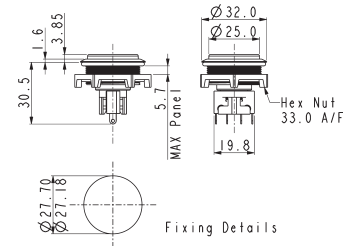


| Specifications | MP0050 | MP0050/2 |
|-----------------------------------|---|---|
| Terminations: | Solder Tags | Solder Tags |
| Switching: | S.P.C.O. Momentary Action (Microswitch) | S.P.C.O. Momentary Action (Microswitch) |
| Max. Rating: | 5A, 250Vac. 2A, 28Vdc | 5A, 250Vac. 2A, 28Vdc |
| Contact Resistance: | <10mΩ | <10mΩ |
| Insulation Resistance: | >10 ³ MΩ | >10 ³ MΩ |
| Dielectric Strength: | >2.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +70°C | -20°C to +70°C |
| Sealing (Front of panel only): | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) |
| Operations Mechanical: | 1,000,000 (min) | 1,000,000 (min) |
| Electrical: | 35,000 (min) | 35,000 (min) |
| Operating Pressure: | 4.7Nm | 4.7N (typ) |
| Rear Nut Fixing Torque: | 0.57Nm | 0.57Nm |
| Materials Mouldings: | Glass Filled Nylon | Glass Filled Nylon |
| Tags/Terminations: | Brass, Tin Plated | Brass, Tin Plated |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Contacts: | Fine Silver | Fine Silver |
| Thread size: | M27 x 1.0-6H | M27 x 1.0-6H |
| RoHS | Compliant | Compliant |

Front Panel Mounting



MP0027/3


- 28mm diameter
- Domed Profile
- S.P.C.O. Microswitch
- 5A, 250Vac

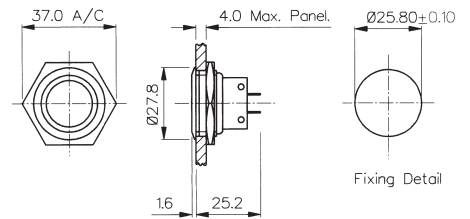

Front Panel Mounting

MP0038/3
Sealed to IP66

- Front Panel Sealed to IP66
- 28mm diameter
- Domed Profile
- S.P.C.O. Microswitch
- 5A, 250Vac

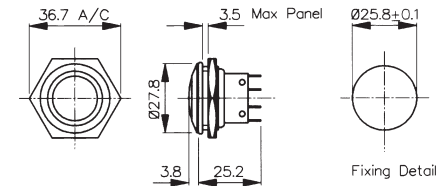


| Specifications | MP0027/3 | MP0038/3 |
|-----------------------------------|---|---|
| Terminations: | Solder Tags | Solder Tags |
| Switching: | S.P.C.O. Momentary Action (Microswitch) | S.P.C.O. Momentary Action (Microswitch) |
| Max. Rating: | 5A, 250Vac. 2A, 28Vdc | 5A, 250Vac. 2A, 28Vdc |
| Contact Resistance: | <10m Ω | <10m Ω |
| Insulation Resistance: | >10 ⁹ M Ω | >10 ⁹ M Ω |
| Dielectric Strength: | >2.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +70°C | -20°C to +70°C |
| Sealing (Front of panel only): | | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) |
| Operations | | |
| Mechanical: | 1,000,000 (min) | 1,000,000 (min) |
| Electrical: | 35,000 (min) | 35,000 (min) |
| Operating Pressure: | 7.5N (typ) | 12.5N (typ) |
| Rear Nut Fixing Torque: | 2.5Nm | 1.13Nm |
| Materials | | |
| Mouldings: | Glass Filled Nylon | Glass Filled Nylon |
| Tags/Terminations: | Brass, Tin Plated | Brass, Tin Plated |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Contacts: | Fine Silver | Fine Silver |
| Thread size: | 1.0" x 26TPI | 0.747" x 26TPI |
| RoHS | Compliant | Compliant |

Front Panel Mounting



MP0037/3
Sealed to IP68

- Front Panel Sealed to IP68
- 21.5mm diameter
- Domed Profile
- S.P. Push to Make
- 1A, 50Vac/dc

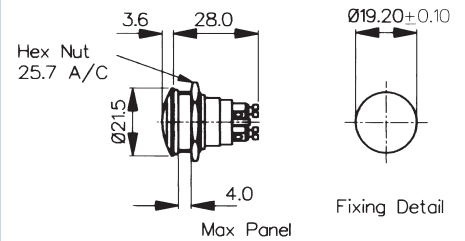


Front Panel Mounting



MP0031/3
Sealed to IP66

- Front Panel Sealed to IP66
- 21.5mm diameter
- Domed Profile
- S.P.C.O. Microswitch
- 5A, 250Vac

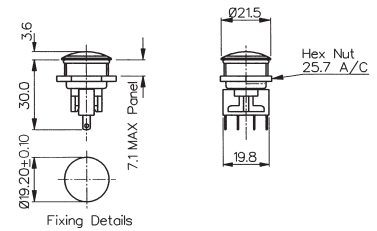


| Specifications | MP0037/3 | MP0031/3 |
|-----------------------------------|---|---|
| Terminations: | Screw Terminals | Solder Tags |
| Switching: | S.P. Push to make Momentary action | S.P.C.O. Momentary Action (Microswitch) |
| Max. Rating: | 1A, 50Vac/dc | 5A, 250Vac. 2A, 28Vdc |
| Contact Resistance: | <10mΩ | <10mΩ |
| Insulation Resistance: | >10 ⁵ MΩ | >10 ³ MΩ |
| Dielectric Strength: | >1.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +70°C | -20°C to +70°C |
| Sealing (Front of panel only): | Protection Classification: IP68 EN60529-1:1992 + A2:2013. (Micro switch not sealed) (10m for 2 weeks) | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) |
| Operations | | |
| Mechanical: | 1,000,000 (min) | 1,000,000 (min) |
| Electrical: | 35,000 (min) | 35,000 (min) |
| Operating Pressure: | 7.5N (typ) | 4.7N (typ) |
| Rear Nut Fixing Torque: | 2.5Nm | 0.57Nm |
| Materials | | |
| Mouldings: | Glass Filled Nylon | Glass Filled Nylon |
| Tags/Terminations: | Brass, Tin Plated | Brass, Tin Plated |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Contacts: | Brass, Silver Plated, Silver | Fine Silver |
| Thread size: | 0.747" x 26TPI | 0.747" x 26TPI |
| RoHS | Compliant | Compliant |

Front Panel Mounting



MP0027/2


- 28mm diameter
- Prominent Button
- S.P.C.O. Microswitch
- 5A, 250Vac

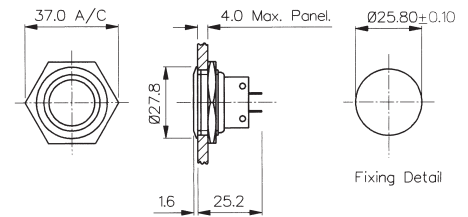

Front Panel Mounting

MP0038/2
Sealed to IP66

- Front Panel Sealed to IP66
- 28mm diameter
- Prominent Button
- S.P.C.O. Microswitch
- 5A, 250Vac

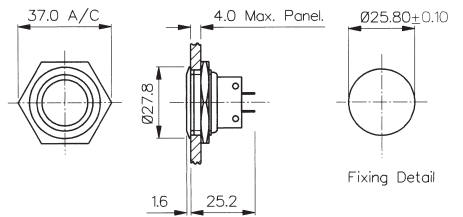


| Specifications | MP0027/2 | MP0038/2 |
|-----------------------------------|---|---|
| Terminations: | Solder Tags | Solder Tags |
| Switching: | S.P.C.O. Momentary Action (Microswitch) | S.P.C.O. Momentary Action (Microswitch) |
| Max. Rating: | 5A, 250Vac 2A, 28Vdc | 5A, 250Vac. 2A, 28Vdc |
| Contact Resistance: | <10mΩ | <10mΩ |
| Insulation Resistance: | >10 ³ MΩ | >10 ³ MΩ |
| Dielectric Strength: | >2.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +70°C | -20°C to +70°C |
| Sealing (Front of panel only): | | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) |
| Operations | | |
| Mechanical: | 1,000,000 (min) | 1,000,000 (min) |
| Electrical: | 35,000 (min) | 35,000 (min) |
| Operating Pressure: | 7.5N (typ) | 12.5N (typ) |
| Rear Nut Fixing Torque: | 2.5Nm | 1.13Nm |
| Materials | | |
| Mouldings: | Glass Filled Nylon | Glass Filled Nylon |
| Tags/Terminations: | Brass, Tin Plated | Brass, Tin Plated |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Contacts: | Fine Silver | Fine Silver |
| Thread size: | 1.0" x 26TPI | 1.0" x 26TPI |
| RoHS | Compliant | Compliant |

Front Panel Mounting



MP0037/2
Sealed to IP68

- Front Panel Sealed to IP68
- 21.5mm diameter
- Prominent Button
- S.P. Push to Make
- 1A, 50Vac/dc

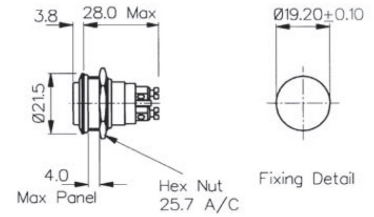


Front Panel Mounting



MP0031/2
Sealed to IP66

- Front Panel Sealed to IP66
- 21.5mm diameter
- Prominent Button
- S.P.C.O. Microswitch
- 5A, 250Vac

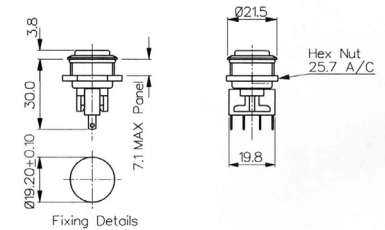


| Specifications | MP0037/2 | MP0031/2 |
|-----------------------------------|---|---|
| Terminations: | Screw Terminals | Solder Tags |
| Switching: | S.P. Push to make Slow momentary action | S.P.C.O. Momentary Action (Microswitch) |
| Max. Rating: | 1A, 50Vac/dc | 5A, 250Vac. 2A, 28Vdc |
| Contact Resistance: | <10mΩ | <10mΩ |
| Insulation Resistance: | >10 ⁵ MΩ | >10 ³ MΩ |
| Dielectric Strength: | >1.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +70°C | -20°C to +70°C |
| Sealing (Front of panel only): | Protection Classification: IP68 EN60529-1:1992 + A2:2013. (Micro switch not sealed) (10m for 2 weeks) | Protection Classification: IP66 EN60529-1:1992 + A2:2013. (Micro switch not sealed) |
| Operations Mechanical: | 1,000,000 (min) | 1,000,000 (min) |
| Electrical: | 35,000 (min) | 35,000 (min) |
| Operating Pressure: | 7.5N (typ) | 4.7N (typ) |
| Rear Nut Fixing Torque: | 0.57Nm | 0.57Nm |
| Materials Mouldings: | Glass Filled Nylon | Glass Filled Nylon |
| Tags/Terminations: | Brass, Tin Plated | Brass, Tin Plated |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Contacts: | Brass, Silver Plated, Silver | Fine Silver |
| Thread size: | 0.747" x 26TPI | 0.747" x 26TPI |
| RoHS | Compliant | Compliant |

Front Panel Mounting



MP0013
MP0033

- Proud Fitting
- 22mm diameter
- S.P. Push to Make
- 1A, 50V
- Brass, Chrome Plated Body, Stainless Steel Button
- MP0033 Internally Sealed

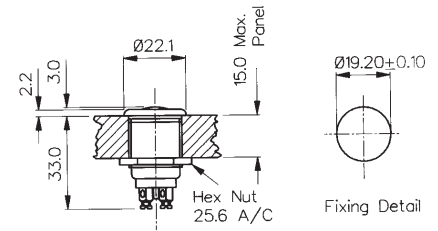


Front Panel Mounting



MP0013/2
MP0033/2

- Prominent Button
- 22mm diameter
- S.P. Push to Make
- 1A, 50V
- Brass, Chrome Plated Body, Stainless Steel Button
- MP0033/2 Internally Sealed

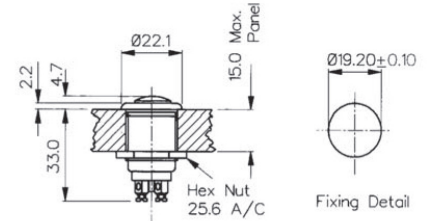


| Specifications | MP0013, MP0033 | MP0013/2, MP0033/2 |
|-----------------------------------|--|--|
| Terminations: | Screw Terminals | Screw Terminals |
| Switching: | S.P. Push to make Slow momentary action | S.P. Push to make Slow momentary action |
| Max. Rating: | 1A, 50Vac/dc | 1A, 50Vac/dc |
| Contact Resistance: | <15mΩ | <15mΩ |
| Insulation Resistance: | >10 ⁴ MΩ | >10 ⁴ MΩ |
| Dielectric Strength: | >2.5kVac | >2.5kVac |
| Operating Temp. Range: | -20°C to +85°C | -20°C to +85°C |
| Sealing (Front of panel only): | MP0033 only - internally sealed against ingress of water and dust. (IP68 Internal Testing) | MP0033/2 only - internally sealed against ingress of water and dust. (IP68 Internal Testing) |
| Materials | | |
| Mouldings: | Glass Filled Nylon | Glass Filled Nylon |
| Tags/Terminations: | Brass, Silver Plated | Brass, Silver Plated |
| Switch Body & Button: | Body: Brass, Chrome Plated Button: Stainless Steel | Body: Brass, Chrome Plated Button: Stainless Steel |
| Contacts: | Copper, Silver Plated | Copper, Silver Plated |
| Thread Size: | 0.747" x 26TPI | 0.747" x 26TPI |
| RoHS | Compliant | Compliant |

Flush Profile



MP0042/1

- 18mm bezel diameter
- 16mm panel hole
- S.P. Push to make
- Polished finish
- 2A, 36Vdc

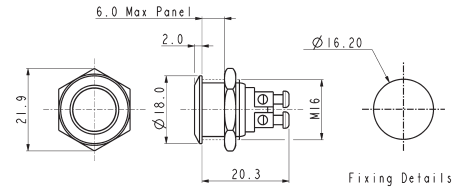


Domed Profile



MP0042/2

- 18mm bezel diameter
- 16mm panel hole
- S.P. Push to make
- Polished finish
- 2A, 36Vdc

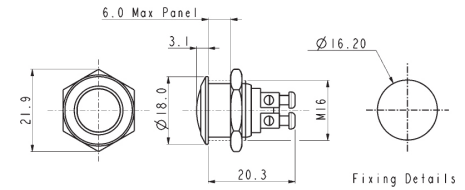


Prominent Button



MP0042/3

- 18mm bezel diameter
- 16mm panel hole
- S.P. Push to make
- Polished finish
- 2A, 36Vdc

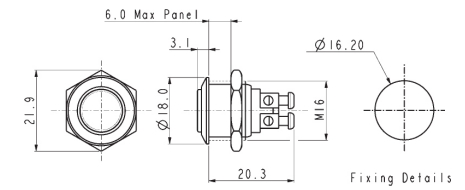


| Specifications | MP0042/1 | MP0042/2 | MP0042/3 |
|-------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Terminations: | Screw Terminals | Screw Terminals | Screw Terminals |
| Switching: | S.P. Push to make | S.P. Push to make | S.P. Push to make |
| Max. Rating: | 2A, 36Vdc | 2A, 36Vdc | 2A, 36Vdc |
| Contact Resistance: | 50mΩ at 1A, 2V | 50mΩ at 1A, 2V | 50mΩ at 1A, 2V |
| Insulation Resistance: | >10 ⁹ MΩ @ 500Vdc | >10 ⁹ MΩ @ 500Vdc | >10 ⁹ MΩ @ 500Vdc |
| Dielectric Strength: | >2.0kVac | >2.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +55°C | -20°C to +55°C | -20°C to +55°C |
| Operations | | | |
| Mechanical: | 1,000,000 (min) | 1,000,000 (min) | 1,000,000 (min) |
| Electrical: | 100,000 (min) | 100,000 (min) | 100,000 (min) |
| Rear Nut Fixing Torque: | 12Nm | 12Nm | 12Nm |
| Materials | | | |
| Mouldings: | Nylon | Nylon | Nylon |
| Tags/Terminations: | Brass, Silver Plated | Brass, Silver Plated | Brass, Silver Plated |
| Switch Body & Button: | Stainless Steel (Polished) | Stainless Steel (Polished) | Stainless Steel (Polished) |
| Contacts: | Silver | Silver | Silver |
| Thread size: | Gold Plated Brass version available | Gold Plated Brass version available | Gold Plated Brass version available |
| Sealing: | IP65 | IP65 | IP65 |
| Impact Rating: | IK08 | IK08 | IK08 |
| RoHS | Compliant | Compliant | Compliant |

Low Profile



MP0045/1D

- 18mm bezel diameter
- 16mm fixing hole diameter
- D.P.C.O
- 1A, 110Vac & 0.5A, 220Vac
- 1A, 12Vdc & 1A, 24Vdc

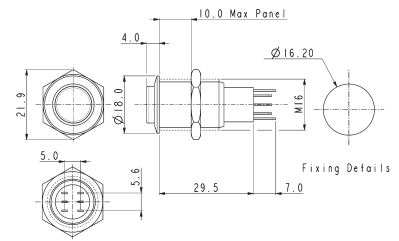


Prominent Button



MP0045/3D

- 18mm bezel diameter
- 16mm fixing hole diameter
- D.P.C.O
- 1A, 110Vac & 0.5A, 220Vac
- 1A, 12Vdc & 1A, 24Vdc

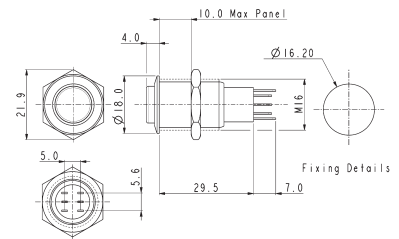


Specifications

MP0045/1D0NN000/Sealing

MP0045/3D0NN000/Sealing

| | | |
|-------------------------|---|---|
| Terminations: | Solder tags | Solder tags |
| Switching: | D.P.C.O Momentary Action | D.P.C.O Momentary Action |
| Sealing: | IP67 IP40 | IP67 IP40 |
| Part No. | /S BLANK | /S BLANK |
| Max. Rating: | 1A, 110Vac & 0.5A, 220Vac 1A, 12Vdc & 1A, 24Vdc | 1A, 110Vac & 0.5A, 220Vac 1A, 12Vdc & 1A, 24Vdc |
| Contact Resistance: | 50mΩ max. @ 1A, 2V | 50mΩ max. @ 1A, 2V |
| Insulation Resistance: | >10 ³ MΩ @ 500Vdc | >10 ³ MΩ @ 500Vdc |
| Dielectric Strength: | > 2.0kVac | > 2.0kVac |
| Operating Temp. Range: | -20°C to +55°C | -20°C to +55°C |
| Operations | | |
| Mechanical: | 200,000 (min) | 200,000 (min) |
| Electrical: | 30,000 (min) | 30,000 (min) |
| Rear Nut Fixing Torque: | 12Nm | 12Nm |
| Materials | | |
| Mouldings: | Nylon | Nylon |
| Tags/Terminations: | Brass, Silver Plated | Brass, Silver Plated |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Contacts: | Silver | Silver |
| Variants: | Nickel Plated Brass version available Details on request | Nickel Plated Brass version available Details on request |
| RoHS | Compliant | Compliant |



Contact Layout

Soldering Instructions:


- Soldering time less than 3 seconds
- Do not push on the terminals
- Recommended cuspidal soldering iron. Temperature around 280°C

Low Profile



MP0045/1E

- 18mm bezel diameter
- 16mm fixing hole diameter
- D.P.C.O.
- 1A, 110Vac & 0.5A, 220Vac
- 1A, 12Vdc & 1A, 24Vdc

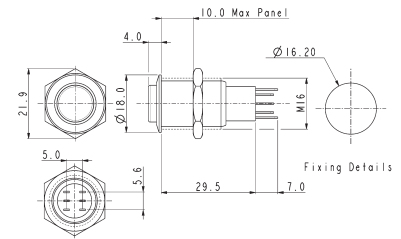


Prominent Button



MP0045/3E

- 18mm bezel diameter
- 16mm fixing hole diameter
- D.P.C.O.
- 1A, 110Vac & 0.5A, 220Vac
- 1A, 12Vdc & 1A, 24Vdc

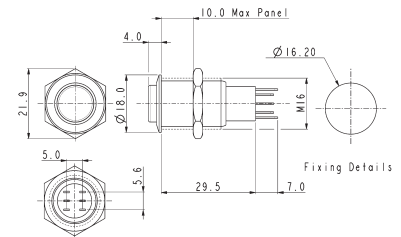


Specifications

MP0045/1E0NN000/Sealing

MP0045/3E0NN000/Sealing

| | | |
|-------------------------|--|--|
| Terminations: | Solder Tags | Solder Tags |
| Switching: | D.P.C.O. - Latching Action | D.P.C.O. - Latching Action |
| Sealing: | IP67 IP40 | IP67 IP40 |
| Part No. | /S BLANK | /S BLANK |
| Max. Rating: | 1A, 110Vac & 0.5A, 220Vac 1A, 12Vdc & 1A, 24Vdc | 1A, 110Vac & 0.5A, 220Vac 1A, 12Vdc & 1A, 24Vdc |
| Contact Resistance: | 50mΩ max. @ 1A, 2V | 50mΩ max. @ 1A, 2V |
| Insulation Resistance: | >10 ³ MΩ @ 500Vdc | >10 ³ MΩ @ 500Vdc |
| Dielectric Strength: | >2.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +55°C | -20°C to +55°C |
| Operations | | |
| Mechanical: | 200,000 (min) | 200,000 (min) |
| Electrical: | 30,000 (min) | 30,000 (min) |
| Rear Nut Fixing Torque: | 12Nm | 12Nm |
| Materials | | |
| Mouldings: | Nylon | Nylon |
| Tags/Terminations: | Brass, Tin Plated | Brass, Tin Plated |
| Switch Body & Button: | Stainless Steel (Polished) | Stainless Steel (Polished) |
| Contacts: | Silver | Silver |
| Thread size: | Nickel Plated Brass version Details on request | Nickel Plated Brass version Details on request |
| RoHS | Compliant | Compliant |



Contact Layout

Soldering Instructions:


- Soldering time less than 3 seconds.
- Do not push on the terminals.
- Recommended cuspidal soldering iron. Temperature around 280°C.

Front Panel Mounting



MP0045/1D1

- Dot Illuminated
- 18mm bezel diameter
- D.P.C.O.
- 1A, 110Vac & 0.5A, 220Vac
- 1A, 12Vdc & 1A, 24Vdc
- Red, Green, Amber or Blue Illumination
- Separate LED Terminals

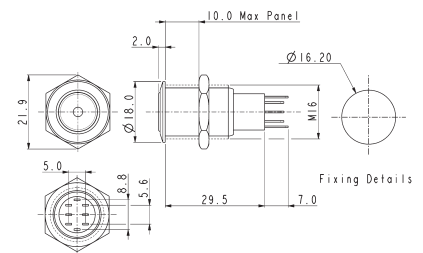


Front Panel Mounting



MP0045/1D2

- Ring Illuminated
- 18mm bezel diameter
- D.P.C.O.
- 1A, 110Vac & 0.5A, 220Vac
- 1A, 12Vdc & 1A, 24Vdc
- Red, Green, Amber or Blue Illumination
- Separate LED Terminals

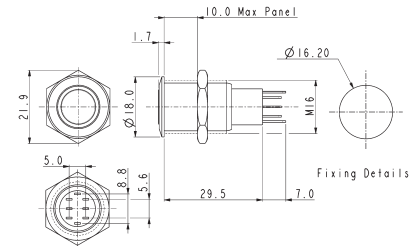


Specifications

MP0045/1D1/Colour/Voltage/Sealing

MP0045/1D2/Colour/Voltage/Sealing

| | | |
|-------------------------|--|--|
| Terminations: | Solder Tags | Solder Tags |
| Illumination: | Dot | Ring |
| Switching: | D.P.C.O. Momentary Action | D.P.C.O. Momentary Action |
| Sealing: | IP67 IP40 | IP67 IP40 |
| Part No. | /S BLANK | /S BLANK |
| Max. Switch Rating: | 1A, 110Vac & 0.5A, 220Vac 1A, 12Vdc & 1A, 24Vdc | 1A, 110Vac & 0.5A, 220Vac 1A, 12Vdc & 1A, 24Vdc |
| LEDs | | |
| Colours | Red Green Amber Blue | Red Green Amber Blue |
| Part No. | /RD /GN /AM /BL | /RD /GN /AM /BL |
| Voltage | 12Vdc 220Vdc | 12Vdc 220Vdc |
| Part No. | /012 /220 | /012 /220 |
| Contact Resistance: | 50mΩ max. @ 1A, 2Vdc | 50mΩ max. @ 1A, 2Vdc |
| Insulation Resistance: | >10 ³ MΩ @ 500Vac | >10 ³ MΩ @ 500Vac |
| Dielectric Strength: | >2.0kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +55°C | -20°C to +55°C |
| Operations | | |
| Mechanical: | 200,000 (min) | 200,000 (min) |
| Electrical: | 30,000 (min) | 30,000 (min) |
| Rear Nut Fixing Torque: | 12Nm | 12Nm |
| Materials | | |
| Mouldings: | Nylon | Nylon |
| Tags: | Brass, Silver Plated | Brass, Silver Plated |
| Switch Body & Button: | Stainless Steel (Polished) | Stainless Steel (Polished) |
| Variants | Prominent Button, details on request | Prominent Button, details on request |
| RoHS | Compliant | Compliant |



Contact Layout

Soldering Instructions:


- Soldering time less than 3 seconds.
- Do not push on the terminals.
- Recommended cuspidal soldering iron. Temperature around 280°C.

Front Panel Mounting



MP0045/1E1

- Dot Illuminated
- 18mm bezel diameter
- D.P.C.O.
- 1A, 110Vac & 0.5A, 220Vac
- 1A, 12Vdc & 1A, 24Vdc
- Red, Green, Amber or Blue Illumination
- Separate LED Terminals

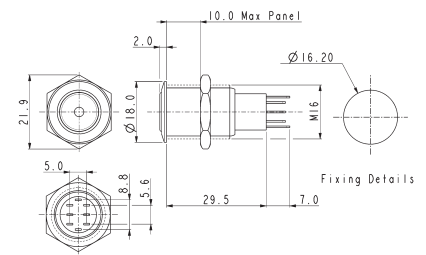


Front Panel Mounting



MP0045/1E2

- Ring Illuminated
- 18mm bezel diameter
- D.P.C.O.
- 1A, 110Vac & 0.5A, 220Vac
- 1A, 12Vdc & 1A, 24Vdc
- Red, Green, Amber or Blue Illumination
- Separate LED Terminals

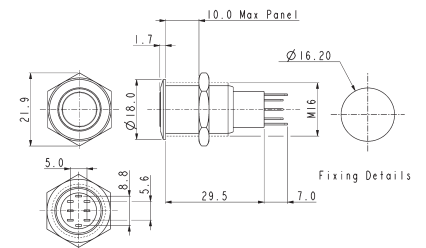

Specifications

MP0045/1E1/Colour/Voltage/Sealing

MP0045/1E2/Colour/Voltage/Sealing

Terminations: Solder Tags

Solder Tags

Illumination: Dot

Ring

Switching: D.P.C.O. Latching Action

D.P.C.O. Latching Action

Sealing: IP67 IP40
Part No. /S BLANKIP67 IP40
/S BLANKMax. Switch Rating: 1A, 110Vac & 0.5A, 220Vac
1A, 12Vdc & 1A, 24Vdc1A, 110Vac & 0.5A, 220Vac
1A, 12Vdc & 1A, 24VdcLEDs
Colours Red Green Amber Blue
Part No. /RD /GN /AM /BLRed Green Amber Blue
/RD /GN /AM /BLVoltage 12Vdc 220Vdc
Part No. /012 /22012Vdc 220Vdc
/012 /220

Contact Resistance: 50mΩ max. @ 1A, 2Vdc

50mΩ max. @ 1A, 2Vdc

Insulation Resistance: >10³ MΩ @ 500Vac>10³ MΩ @ 500Vac

Dielectric Strength: >2.0kVac

>2.0kVac

Operating Temp. Range: -20°C to +55°C

-20°C to +55°C

Operations
Mechanical: 200,000 (min)
Electrical: 30,000 (min)200,000 (min)
30,000 (min)


Rear Nut Fixing Torque: 12Nm

12Nm

Materials
Mouldings: Nylon
Tags: Brass, Silver Plated
Switch Body & Button: Stainless Steel (Polished)
Variants: Prominent Button, details on requestNylon
Brass, Silver Plated
Stainless Steel (Polished)
Prominent Button, details on request

RoHS Compliant

Compliant



Contact Layout

Soldering Instructions:

- Soldering time less than 3 seconds.
- Do not push on the terminals.
- Recommended cuspidal soldering iron. Temperature around 280°C.

Manufactured from Stainless Steel, Bulgin's extensive range of **vandal resistant security switches** are designed with a **high resistance** to wear and tear, corrosion and harsh use in potentially **hostile environments** such as access control applications.

- Front and rear panel mounted versions
- Vandal switches available in prominent, domed and low profile
- Various switching options such as latching, push on - push off, action.
- IP66, 68 front panel sealing options
- Dot and ring LED illuminated versions
- Illumination voltages 6, 12 and 24V sources,
- Variety of illumination colours and are now available with front and rear of panel sealing options.



Switches 8300 Vandal Resistant Switches

Designed to IP66



H8300RP - - -

Key Features

- Momentary or latching action
- Ratings up to 12(12) @ 250Vac
- Single and double Contacts
- Stainless steel button & bezel
- Vandal resistant construction
- Choice of body styles
- 19.2mm or 22.5mm mounting holes
- Front panel sealed to IP66
- Raised, flat or domed actuator options

Approvals and specifications

16(4)A 250Vac T85, 1E4 (10,000 Operations)
 12(12)A 250Vac T105, 1E4 (10,000 Operations)
 8(8)A 250Vac T105, 5E4 (50,000 Operations)
 6(6)A 250Vac T125, 5E4 (50,000 Operations)


12A 250Vac DP, 13A 250Vac SP
 250Vac 1hp, 125Vac 1/2hp
 UL 85°C, file E45221, CSA file LR10990

In house test:
10(10)A 250Vac—Indicative rating only

3mm contact gap.

Dimensions

8300RP (H terminals shown)

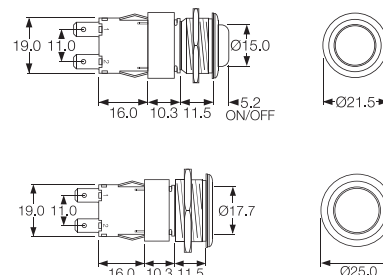

| Terminal | Function | Actuator | Body Code |
|------------------------------|---|---|---|
| C H | 8300 (alternate) Single Contact ON - OFF | R (for P body only) Raised top (stainless steel) | |
| K T | 8301 (momentary ON) Single Contact ON - OFF | | |
| V X | 8350 (alternate) Double Contact ON - OFF 8351 (momentary ON) Double Contact ON - OFF | V Flat top (stainless steel) | P (for R actuator only) Stainless steel, Soft profile bezel M Stainless steel |

Switches
0911 Vandal Resistant Switches

Designed to IP66



C0911VA - - -

Key Features

- Snap action switches
- Ratings up to 16A, 250Vac
- Round and rectangular buttons
- Single Contact C/O Switch


Approvals and specifications

- ⚡ 16(4)A 250Vac 5E4 T85
- UL Ⓢ 16A 125/250Vac 3/4hp T85 50E3
 125V 1/2 HP, 250V 3/4 HP, 0.4A 125Vdc, 0.2A 250Vdc

Approvals apply to switch mechanism only.
 μ contact gap.

Dimensions

C0911VA

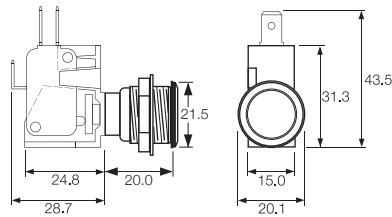

| Terminal | Function | Actuator | Body Code |
|----------|--|--|---|
| | <p>0911 (momentary) ON - ON</p> | <p>V Flat top (stainless steel)</p> | <p>A</p> <p>Stainless steel Chamfer profile bezel</p> <p>Panel cut-out Panel thickness up to 8.0mm</p> |

Bulgin's broad line of pushbutton switches are available in various sizes and configurations. This includes a variety of illumination and terminal options as well as several with high inductive power ratings suitable for motor driven applications. These switches can be found in many markets including home appliances, commercial, medical, audio and security.

- Miniature, round and rectangular push button switches available
- Ratings up to 16A, 250V ac
12(12)A 250V ac rating also available
- Latching and momentary actions
- Choice of actuators
(custom option also available)
- Square and Round Mounting Styles




Front Panel Mounting



MP0012/Col

- 22mm diameter
- Prominent Button
- S.P. Push to Make
- Screw Terminals
- Brass, Chrome Plated Body, Glass Filled Nylon Button

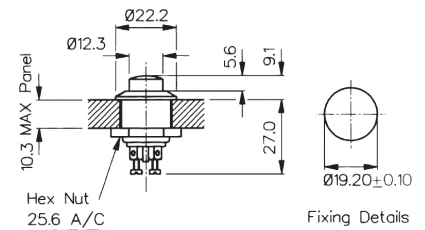


Front Panel Mounting




MP0012/1/Col

- 22mm diameter
- Recessed Button
- S.P. Push to Make
- Screw Terminals
- Brass, Chrome Plated Body, Glass Filled Nylon Button

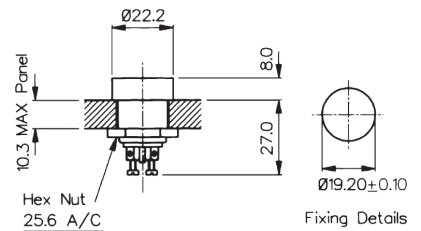


Rear Panel Mounting



MP0016

- S.P. Push to Make
- Solder Tags
- 1A, 28Vac/dc
- Brass Nickel Plated Body, Glass Filled Nylon Button

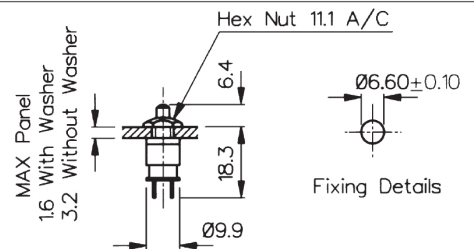

| Specifications | MP0012/Colour | MP0012/1/Colour | MP0016/Colour |
|---------------------------|---|---|---|
| Terminations: | Screw Terminals | Screw Terminals | Solder Tags |
| Switching: | S.P. Push to Make Slow Momentary Action | S.P. Push to Make Slow Momentary Action | S.P. Push to Make Slow Momentary Action |
| Max. Rating: | 0.25A. 250Vac, 1A. 110Vac, 2A. 12Vac/dc | 0.25A. 250Vac, 1A. 110Vac, 2A. 12Vac/dc | 1A 28Vac/dc (non-inductive) |
| Contact Resistance: | <15mΩ | <15mΩ | <15mΩ |
| Insulation Resistance: | >10 ⁴ MΩ | >10 ⁴ MΩ | >10 ⁴ MΩ |
| Dielectric Strength: | >2.5kVac | >2.5kVac | >2.0kVac |
| Operating Temp. Range: | -20°C to +85°C | -20°C to +85°C | -20°C to +85°C |
| Operation Pressure (typ): | 9.18 newtons | 9.18 newtons | 6.22 newtons |
| Materials | | | |
| Moulding: | Glass Filled Nylon Brass, | Glass Filled Nylon Brass, | Glass Filled Nylon Brass, |
| Body: | Brass, Chrome Plated | Brass, Chrome Plated | Brass, Chrome Plated |
| Contacts/Terms: | Brass, Silver Plated | Brass, Silver Plated | Brass, Silver Plated |
| Variant | Button Colour: Standard - Black, /RD (Red) | Button Colour: Standard - Black, /RD (Red) | Button Colour: Standard - Black, /RD (Red) |
| RoHS | Compliant | Compliant | Compliant |

8300 Series Push Button

8(8)A 250Vac & 12(12)A 250Vac



Key Features

- Miniature push button
- 8A Inductive current rating
- Ratings up to 12(12)A, 250V ac (H suffix)
- Illuminated and nonilluminated
- Single and double Contact
- Latching and momentary
- Slotted actuator for custom buttons
- Industry standard panel cutout
- Panel cut out: 19.3 x 12.9

Approvals and specifications

16(4)A 250Vac T85, 1E4 (10,000 Operations)
 12(12)A 250Vac T105, 1E4 (10,000 Operations)
 8(8)A 250Vac T105, 5E4 (50,000 Operations)
 6(6)A 250Vac T125, 5E4 (50,000 Operations)

8350, 8351, 8353, 8354
 12A 250Vac DR, 250Vac 1hp, 125Vac 1/2hp

8300, 8301, 8303, 8304
 13A 250Vac SP, 250Vac 1hp, 125Vac 1/2hp

UL 85°C, file E45221, CSA file LR10990


In house test:
10(10)A 250Vac—Indicative rating only

3mm contact gap.


| Terminal | Function | Actuator | Body Code | Body Colour | | | | | | | | |
|---|--|---|---|---------------------------|-------------|-----------|-----------|-----------|-----------|-----------|-----------|--|
| <p>C</p> | <p>Approvals & ratings vary with function Single Contact switches use terminals 1 & 2 (& 3)</p> | | Panel cut-out ** Bezel | | | | | | | | | |
| | <p>8300 Single Contact ON - OFF</p> | <p>A Standard actuator</p> | <p>B Standard body</p> | <p>B Black</p> | | | | | | | | |
| | <p>8301 Single Contact ON - OFF (momentary ON)</p> | <p>H Slotted for custom caps</p> | | <p>W White</p> | | | | | | | | |
| <p>H</p> | | <p>Slots for snap-in buttons</p> | | | | | | | | | | |
| <p>A</p> <p>As "H" but right angle 4.8 x 0.8</p> | <p>8303 Single Contact ON - OFF With Light</p> | <p>C Square actuator</p> | <p>E Softline style body with radiused bezel</p> <p>Cut-outs must be punched in the direction of insertion</p> | | | | | | | | | |
| | <p>8304 Single Contact ON - OFF (momentary ON) with light</p> | <p>E Radiused actuator</p> | <p>Dimensions for snap-in fixing</p> <table border="1"> <thead> <tr> <th>Panel thickness</th> <th>Dimension X</th> </tr> </thead> <tbody> <tr> <td>0.75-1.24</td> <td>19.1/19.2</td> </tr> <tr> <td>1.25-1.99</td> <td>19.3/19.4</td> </tr> <tr> <td>2.00-3.00</td> <td>19.7/19.8</td> </tr> </tbody> </table> | Panel thickness | Dimension X | 0.75-1.24 | 19.1/19.2 | 1.25-1.99 | 19.3/19.4 | 2.00-3.00 | 19.7/19.8 | |
| Panel thickness | Dimension X | | | | | | | | | | | |
| 0.75-1.24 | 19.1/19.2 | | | | | | | | | | | |
| 1.25-1.99 | 19.3/19.4 | | | | | | | | | | | |
| 2.00-3.00 | 19.7/19.8 | | | | | | | | | | | |
| | <p>8350 Double Contact ON - OFF</p> | <p>F Small round actuator</p> | | | | | | | | | | |
| <p>K</p> | <p>8351 Double Contact ON - OFF (momentary ON)</p> | <p>J Smooth curved actuator</p> | | | | | | | | | | |
| | <p>8353 Double Contact ON - OFF With light</p> | | | | | | | | | | | |
| <p>T</p> <p>Solder</p> | <p>8354 Double Contact ON - OFF (momentary ON) with light</p> | <p>M</p> | | | | | | | | | | |
| | <p>8355 Single Contact ON - OFF Isolated light - switched C, E & M actuators only</p> | <p>D Large round actuator</p> | | | | | | | | | | |
| <p>X</p> <p>PCB 0.8 Sq</p> | <p>8356 Single Contact ON - OFF Isolated light - unswitched C, E & M actuators only</p> | <p>All actuators except H available lit</p> | | | | | | | | | | |
| <p>V</p> <p>Dual Plug PCB (Call sales for mounting dims)</p> | | | | | | | | | | | | |

Dimensions

Actuator A
Body B



Actuator J
Body E



Examples



H8350AB ---
T8350AB ---




H8353JE ---
T8353JE ---



H8353EB ---
T8353EB ---




H8353CB ---
T8353CB ---

| Actuator Colour | Lamp Voltage | Legend | Legend Colour | Options |
|-------------------|-----------------------------|--------|---------------|--|
| LIT | | | | |
| A Amber | — None | | | <p>H 12(12)A 250Vac switch rating</p> <p>Finish Matt finish standard except on J and D actuators which are gloss</p> <p>Colour Call sales for custom colours A full range is available for large orders</p> <p>Legend printing Select from the examples or call sales for custom legends.</p> <p>Special buttons Some of the many options are shown Call sales for the full range</p> <p>L167 Protective cover</p>  <p>Snaps on to switch bodies fitted with "A" or "J" style actuators, this reduces panel thickness by 0.8mm</p> <p>BioCote Antimicrobial Additive Moulded components have antimicrobial properties using BioCote silver ion technology.</p> |
| C Clear | 2 125V Neon | | | |
| G Green | 3 250V Neon | | | |
| R Red | 7 12V Filament | | | |
| UNLIT | 8 24V Filament | | | |
| B Black | | | | |
| R Red | | | | |
| W White | | | | |

8200 Series Push Button

8(8)A 250Vac & 12(12)A 250Vac



Key Features

- ⬡ Miniature push button
- ⬡ 8A Inductive current rating
- ⬡ Ratings up to 12(12)A, 250V ac (H suffix)
- ⬡ Without button
- ⬡ Sub panel mount
- ⬡ Push on, solder or PCB terminals
- ⬡ Latching and momentary

Approvals and specifications

- ⚡ 16(4)A 250Vac T85, 1E4 (10,000 Operations)
- 12(12)A 250Vac T105, 1E4 (10,000 Operations)
- 8(8)A 250Vac T105, 5E4 (50,000 Operations)
- 6(6)A 250Vac T125, 5E4 (50,000 Operations)


12A 250Vac
250Vac 1hp, 125Vac 1/2hp
 UL 85°C, file E45221, CSA file LR10990

3mm contact gap.


| Terminal | Function | Actuator | Body Code |
|--|---|--|---|
| <p>C</p> <p>6.3 x 0.8 10.1</p> | <p>1 2 3 4</p> <p>Approvals & ratings vary with function Single Contact switches use terminals 1 & 2 (& 3)</p> <p>8200 Single Contact ON - OFF</p> | <p>A</p> <p>Standard actuator for snap-on custom adaptors</p> <p>B</p> <p>Flat top actuator</p> <p>C</p> <p>Curved top actuator</p> <p>Examples of possible actuation methods</p> <p>Using a Snap on adaptor</p> <p>Using a Hinged Actuator</p> | <p>A</p> <p>Standard body</p> <p>See dimensioned drawings for details</p> <p>C</p> <p>As standard body but with side support peg for use with M PCB terminals</p> <p>X and V PCB terminals. Additional dummy terminals may be supplied for extra support.</p> |
| <p>H</p> <p>4.8 x 0.8 8.5</p> <p>A</p> <p>7.6 As "H" but right angle 4.8 x 0.8</p> | <p>8201 Single Contact ON - OFF (momentary ON)</p> | <p>C</p> <p>2.8 x 0.8 8.5 2.6 1.5</p> | <p>C</p> <p>2.8 x 0.8 8.5 2.6 1.5</p> |
| <p>T</p> <p>2.6 1.5 7.0 Solder</p> <p>V</p> <p>3.7 Ctrs 4.3 Dual Plug PCB (Call sales for mounting dims)</p> | <p>8250 Double Contact ON - OFF</p> | <p>X</p> <p>4.5 7.0 PCB 0.8 Sq</p> | <p>8251 Double Contact ON - OFF (momentary ON)</p> |

Dimensions


'A' body with 'H' 4.8 terminals




Example of possible mounting styles

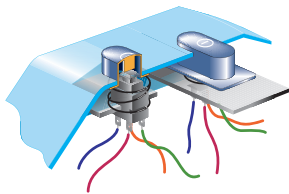

'A' body with 'A' right angle 4.8 terminals

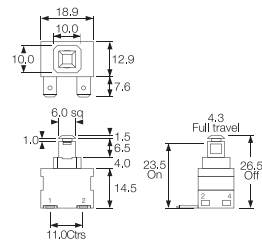


Alternative Actuator



Impact washer resists damage from excessive operator force

'C' body with 'M' right angle PCB terminals



Examples



C8250AA ---
with impact
washer M1226



X8201AA ---



K8200AA ---



A8200AA ---



M8200AC ---



Example of M8200AC

7000 Series Push Button

16A 250Vac



Key Features

- Round and rectangular push button switches
- Ratings up to 16A, 250V ac
- Latching and momentary
- Illuminated & non-illuminated
- Matching indicators
- Low profile version
- Panel cut outs: 25.0 dia 27.2 x 22.3

Approvals and specifications

- CE 16(4)A 250Vac T85/55
8(8)A 250Vac T85/55
 - UL CSA 16A Non Ind, 250Vac 1hp, 125Vac 1/2hp
UL 65°C, file no. E45221, CSA file no. LR10990
- 3mm contact gap.


| Terminal | Function | Actuator | Body Code |
|-----------------|---|--|--|
| <p>C</p> | <p>1 2 3 4 Approvals & ratings vary with function Single Contact switches use terminals 1 & 2 (& 3)</p> <p>7000 Single Contact ON - OFF</p> <p>7001 Single Contact (momentary) ON - OFF</p> <p>7003 Single Contact (with light) ON - OFF</p> <p>7004 Single Contact (momentary) with light ON - OFF</p> | <p>A Round actuator shown in F body</p> <p>A Round actuator shown in G body</p> <p>B Round actuator - medium shown in F body</p> <p>C Round actuator - long shown in F body</p> <p>D Round actuator - sub panel mount</p> <p>S Rectangular actuator Shown in "A" body N/A for 7030</p> | <p>Panel cut-outs</p> <p>F H G</p> <p>Body types fit either cut-out</p> <p>A</p> <p>Cut-outs must be punched in the direction of insertion</p> |
| <p>H</p> | <p>7050 Double Contact ON - OFF</p> <p>7051 Double Contact with light ON - OFF</p> <p>7053 Double Contact with light ON - OFF</p> <p>7054 Double Contact (momentary ON) with light ON - OFF</p> <p>7030 Indicator UL E63363 CSA LR29381</p> | <p>4</p> <p>2</p> <p>4</p> <p>2</p> <p>4</p> <p>2</p> <p>4</p> <p>2</p> | <p>3</p> <p>1</p> <p>3</p> <p>1</p> <p>3</p> <p>1</p> |

Dimensions

Panel thickness:

A - 0.8 - 2.5mm

F, G, H - 0.8 - 5.0mm

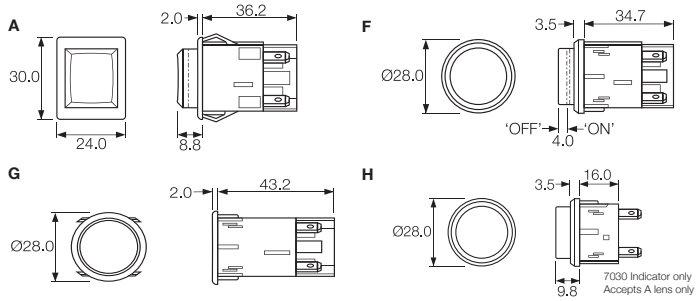

Examples



C7000AF ---



C7003AF ---



C7050SA ---



C7053AG ---

| Body Colour | Actuator Colour | Lamp Voltage | Legend | Legend Colour | Options |
|-------------------|-------------------|-----------------------------|--------|---------------|---|
| B Black | A Amber | — None | | | <p>Finish Matt finish is standard on bodies. Gloss finish is standard on actuators.</p> <p>Colour Call sales for custom colours. A full range is available for large orders.</p> <p>Legend printing A wide range is available or call sales for custom legends.</p> <p>Lamp voltage Call sales for details of available voltages.</p> <p>Weatherproof housing (E) Additional housing which fits round body switches with an oversize housing with a clear silicone cover designed to IP65. Mounting hole dia: 38.0mm</p> |
| W White | C Clear | 2 125V Neon | | | |
| | G Green | 3 250V Neon | | | |
| | R Red | 7 12V Filament | | | |
| | | 8 24V Filament | | | |
| | B Black | UNLIT | | | |
| | R Red | | | | |
| | W White | | | | |
| | | | | | |
| | | | | | |

0911 Push Button Switches

0.5A 250Vac



Key Features

- Snap action switches
- Ratings up to 16A, 250Vac
- Round and rectangular buttons


Approvals and specifications

16(4)A 250Vac 5E4 T85

16A 125/250Vac 3/4hp T85 50E3
125V 1/2 HP, 250V 3/4 HP, 0.4A 125Vdc, 0.2A 250Vdc

Approvals apply to switch mechanism only.
μ contact gap.

Dimensions

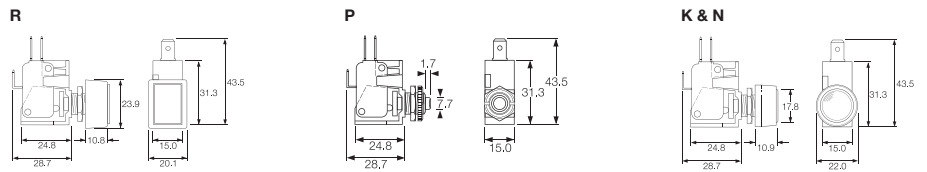

| Terminal | Function | Actuator | Body Code | Options |
|----------|--|--|--|--|
| | <p>0911 (momentary) ON - ON</p> | <p>R Rectangular bezel</p> <p>P Short</p> <p>K with satin chrome bezel</p> <p>N with nylon bezel</p> | <p>Panel Cut-out</p> <p>Panel thickness Both nuts 2.5mm No backnut 4.0mm</p> | <p>Call factory for custom colours</p> |



Key Features


- Self wiping contacts
- Slow make & break
- Momentary action
- Choice of switch circuits
- Choice of actuators

Approvals and specifications

In house test:
0.5A 250Vac T85 – Indicative rating only


Dimensions

Dimensions (mm) Nylon S and L actuators

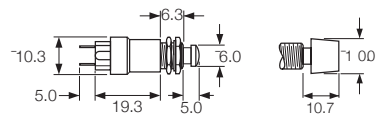

Neck thread - 40 TPI Whit. Actuator travel - 2.5 max

Stainless steel V actuator (IP66)



Neck thread - 26 TPI Whit. Actuator travel - 2.5 max


| Terminal | Function | Actuator | Body Code | Options |
|-----------------|--|---|---|---|
| <p>T</p> | <p>0916</p> <p>Black base SP ON - OFF (momentary)</p> | <p>S Small Actuator</p> | <p>Panel Cut-out (L & S Actuators)</p> | <p>Finish</p> <p>Gloss finish for L and S actuators.</p> |
| | <p>0917 50V only</p> <p>Brown base SP ON - OFF (momentary 1 side)</p> | <p>L Large Actuator</p> | <p>Panel thickness Both nuts - 2.5mm No Backnut - 4.0</p> | <p>Colour</p> <p>Call sales for custom colours. A full range is available for large orders.</p> |
| | <p>0918</p> <p>White base SP ON - OFF (momentary OFF)</p> | <p>V Vandal Resistant IP66 Flattop Stainless Steel</p> | <p>Panel Cut-out (Stainless Steel V Actuator) Panel thickness - 8.0mm</p> | |
| | <p>0919</p> <p>Black base DP ON - OFF (momentary 1 side)</p> | | | |
| | <p>0920</p> <p>White base DP ON - OFF (momentary ON)</p> | | | |

120/140V Voltage Selector



VS0001

- 2.8 series tabs/solder tags
- Square Front Bezel
- 6.3A

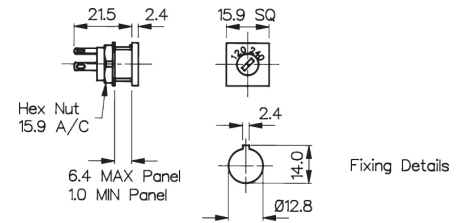


120/140V Voltage Selector




VS0002


- 2.8 series tabs/Solder tags
- Round Front Bezel
- 6.3A

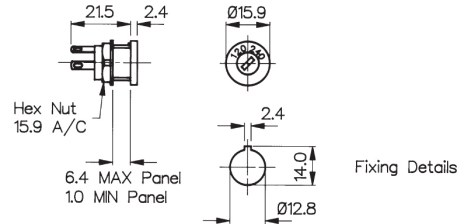

Connection Parallel 120V



Connection Series 240V



| Specifications | VS0001 | VS0002 |
|------------------------|------------------------------------|------------------------------------|
| Max. Rating: | 6.3A, 120 / 240 | 6.3A, 120 / 240 |
| Insulation Resistance: | >106 MΩ | >106 MΩ |
| Termination: | 2.8 series tabs/solder tags | 2.8 series tabs/solder tags |
| Temperature Range: | -20°C to +85°C | -20°C to +85°C |
| Materials: | | |
| Mouldings: | Glass Filled Nylon UL94V-1 | Glass Filled Nylon UL94V-1 |
| Tags: | Brass, Silver Plated | Brass, Silver Plated |
| Contacts: | Copper Silver Alloy | Copper Silver Alloy |
| Variants: | Other markings, details on request | Other markings, details on request |
| | RoHS | Compliant |

Activated by the touch of a finger, our **Capacitive Switches** are ideal for many repetitive applications requiring a **rugged sealed** and **easy** to use switch solution.




- ⊞ Sealed to IP68 and IP69K
- ⊞ Momentary or latching functions
- ⊞ Large or thin ring illumination options
- ⊞ Long life operation – 50 million of cycles
- ⊞ 16, 19, 22 or 25mm diameter options
- ⊞ Easy to use and clean
- ⊞ Extremely robust and durable – IK10 rated
- ⊞ No operating force required – ideal for repetitive applications
- ⊞ Activated by the touch of a finger – even with surgeon gloves
- ⊞ Natural, black and red anodised options as well as 316L stainless steels

16mm Illuminated



MC16

- Illuminated
- 300 mm lead

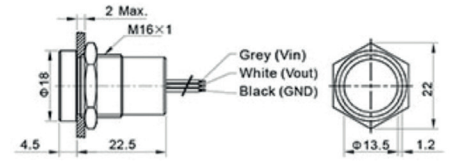


Specification

MC16

| | |
|-----------------------------------|---|
| Type | Momentary / Latching |
| Materials | Case: Aluminium, Anodised and Stainless Steel |
| | Multi-wire leads section 0.22mm ² (length 300mm) |
| Maximum Current / Voltage Rating: | 500mA at 5V, 12V or 24VDC |
| Supply Voltage | 5, 12 or 24 VDC |
| Contact Resistance | 20mΩ |
| LED state for output image option | 1 LED: The LED is ON when output is closed. 2 LEDs: First colour is ON when the output is open. Second colour is ON when the output is closed. |
| Actuating force, typically | Zero Newton's (Touch Sensitive) |
| Life cycle | >50 Million |

Panel Cutout Dimensions

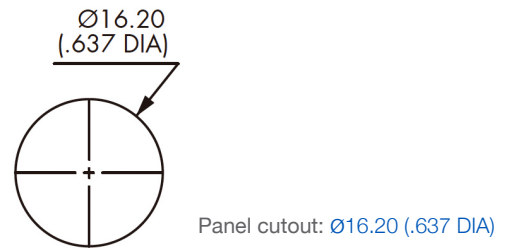

Environmental Specification

| | |
|-----------------------|--------------------------------------|
| Sealing | IP68 (2m depth for >30mins) IP69K |
| Operating temperature | -25°C to +55°C |
| RoHS | Compliant |

Circuit Specification


See wiring diagrams on page 326

19mm Illuminated



MC19

- Illuminated
- 300 mm lead

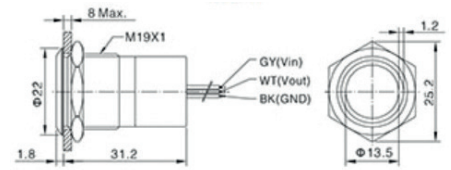


Specification

MC19

| | |
|-----------------------------------|---|
| Type | Momentary / Latching |
| Materials | Case: Aluminium, Anodised and Stainless Steel |
| | Multi-wire leads section 0.22mm ² (length 300mm) |
| Maximum Current / Voltage Rating: | 500mA at 5V, 12V or 24VDC |
| Supply Voltage | 5, 12 or 24 VDC |
| Contact Resistance | 20mΩ |
| LED state for output image option | 1 LED: The LED is ON when output is closed. 2 LEDs: First colour is ON when the output is open. Second colour is ON when the output is closed. |
| Actuating force, typically | Zero Newton's (Touch Sensitive) |
| Life cycle | >50 Million |

Panel Cutout Dimensions



Panel cutout: Ø19.20 (.756 DIA)

Environmental Specification

| | |
|-----------------------|--------------------------------------|
| Sealing | IP68 (2m depth for >30mins) IP69K |
| Operating temperature | -25°C to +55°C |
| RoHS | Compliant |

Circuit Specification


See wiring diagrams on page 326

22mm Illuminated



MC22

- Illuminated
- 300 mm lead

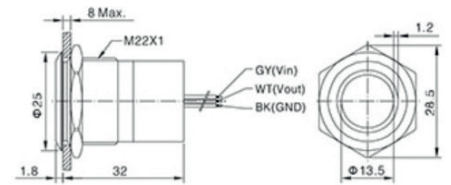


Specification

MC22

| | |
|-----------------------------------|---|
| Type | Momentary / Latching |
| Materials | Case: Aluminium, Anodised and Stainless Steel |
| | Multi-wire leads section 0.22mm ² (length 300mm) |
| Maximum Current / Voltage Rating: | 500mA at 5V, 12V or 24VDC |
| Supply Voltage | 5, 12 or 24 VDC |
| Contact Resistance | 20mΩ |
| LED state for output image option | 1 LED: The LED is ON when output is closed. 2 LEDs: First colour is ON when the output is open. Second colour is ON when the output is closed. |
| Actuating force, typically | Zero Newton's (Touch Sensitive) |
| Life cycle | >50 Million |

Panel Cutout Dimensions



Panel cutout: $\varnothing 22.20$ (.874 DIA)

Environmental Specification

| | |
|-----------------------|--------------------------------------|
| Sealing | IP68 (2m depth for >30mins) IP69K |
| Operating temperature | -25°C to +55°C |
| RoHS | Compliant |

Circuit Specification


See wiring diagrams on page 326

25mm Illuminated



MC25

- Illuminated
- 300 mm lead

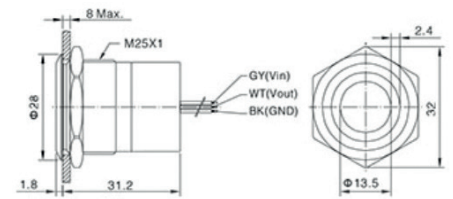

Specification

MC25

| | |
|-----------------------------------|---|
| Type | Momentary / Latching |
| Materials | Case: Aluminium, Anodised and Stainless Steel |
| Maximum Current / Voltage Rating: | 500mA at 5V, 12V or 24VDC |
| Supply Voltage | 5, 12 or 24 VDC |
| Contact Resistance | 20mΩ |
| LED state for output image option | 1 LED: The LED is ON when output is closed. 2 LEDs: First colour is ON when the output is open. Second colour is ON when the output is closed. |
| Actuating force, typically | Zero Newton's (Touch Sensitive) |
| Life cycle | >50 Million |

Panel Cutout Dimensions



Panel cutout: Ø25.20 (.992 DIA)

Environmental Specification

| | |
|-----------------------|--------------------------------------|
| Sealing | IP68 (2m depth for >30mins) IP69K |
| Operating temperature | -25°C to +55°C |
| RoHS | Compliant |

Circuit Specification

See wiring diagrams on page 326

Part No System

| MC | XX | X | X | X | XX | XX |
|---------------------------------------|--|---|--|---|---|--|
| Series MC-Capacitive Switch | Switch Size 16 = 16mm 19 = 19mm 22 = 22mm 25 = 25mm | Switch Function M = Momentary L = Latching | Switch Status O = Normally Open C = Normally Closed | Colour / Material B = Black Anodised R = Red Anodised S = Stainless Steel | LED Colours GN = GREEN (1 LED) RD = RED (1 LED) AM = AMBER (1 LED) RG = RED + GREEN (2 LEDS) GR = GREEN + RED (2 LEDS) Blank = Non-illuminated | Voltage 05 = 5VDC 24 = 24VDC * No Suffix = 12VDC |

Note:
 2 LED's option: when the output circuit open, first LED color lights. Second LED lights when the output circuit closes

Examples:
 MC16MOSRD = 16mm, Stainless Steel, Momentary Normally Open, Red Illumination, 12VDC
 MC22LOBRG24 = 22mm, Black Anodised, Catching Normally Open, Red and Green Illumination, 24VDC

Circuit Specifications

| Wiring Diagrams | | | | Legend |
|--|------------------|------------------|------------------|--|
| | 1 LED | | 2 LEDS | |
| | Output Indicator | Output Indicator | Output Indicator | |
| OFF-ON (momentary) Normally Open | | | | Grey Vin Black black GND White Vout Wire colours may vary. Always refer to the label on the switch. |
| ON-OFF (momentary) Normally Closed | | | | |
| OFF-ON (latching) Normally Open | | | | |
| ON-OFF (latching) Normally Closed | | | | |

Other switches are available upon request*

Unlike traditional switches Piezo switches have **no moving mechanical parts** making them **extremely durable**, withstanding millions of actuations and requiring little to no maintenance.



Piezo Switches
16mm Stainless Steel

Non Illuminated




16MM Stainless Steel Non Illuminated



MPZ016

- Non Illuminated
- 20 cm lead
- Flathead or Guided profile

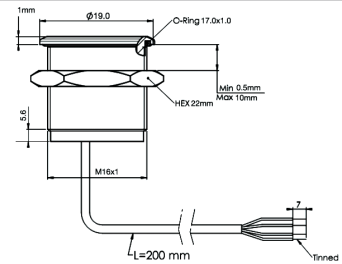

Specification

MPZ016


| | |
|----------------------------------|---|
| Type | Momentary |
| Material | Stainless Steel (Aluminium upon request) |
| Maximum Voltage | 24V AC/DC |
| Switch Resistance "ON" | <1Ω |
| Switch Resistance "OFF" | 5MΩ |
| Capacitance | 100pF |
| Switching current (momentary) | 1A Max |
| Switching current (prolonged) | 300 mA |
| Switching pulse time (momentary) | up to 0.3 sec |
| Actuating force, typically | 3-5 N |
| Life cycle | >10 Million |

Environmental Specification

| | |
|-----------------------|----------------|
| Sealing | IP68; IP69K |
| Operating temperature | -40°C to +85°C |
| Vibration resistance | 5-500Hz/9.4m |
| Shock resistance | 75g (g-force) |
| RoHS | Compliant |

Circuit Specification

16MM Stainless Steel Non Illuminated



| | |
|----------------|-----------|
| Switch voltage | 24V AC/DC |
| Switch Current | 1A Max |
| Power Supply | 24V AC/DC |

Piezo Switches
19mm Stainless Steel

Illuminated and Non Illuminated




19MM Stainless Steel Illuminated



MPZI019

- Blue Illumination
- 20 cm lead
- Flathead




19MM Stainless Steel Non Illuminated



MPZ019

- Non Illumination
- 20 cm lead
- Flathead



Specification

MPZ019, MPZI019


| | |
|----------------------------------|---|
| Type | Momentary |
| Material | Stainless Steel (Aluminium upon request) |
| Maximum Voltage | 24V AC/DC |
| Switch Resistance "ON" | <1Ω |
| Switch Resistance "OFF" | 5MΩ |
| Capacitance | 100pF |
| Switching current (momentary) | 1A Max |
| Switching current (prolonged) | 300 mA |
| Switching pulse time (momentary) | up to 0.3 sec |
| LED Illumination | 24V AC/DC |
| Actuating force, typically | 3-5 N |
| Life cycle | >10 Million |

Environmental Specification

| | |
|-----------------------|----------------|
| Sealing | IP68; IP69K |
| Operating temperature | -40°C to +85°C |
| Vibration Resistances | 5-500Hz/9.4m |
| Shock resistance | 75g (g-force) |
| RoHS | Compliant |


Circuit Specification

19MM Stainless Steel Non Illuminated



Switch voltage 24V AC/DC
 Switch Current 1A Max
 Power Supply 24V AC/DC

19MM Stainless Steel Illuminated



Switch voltage 24 V AC/DC
 Switch Current 1A Max
 Colour* Illuminated 24V AC/DC
 Power Supply 24V AC/DC

Piezo Switches 22mm Stainless Steel

Illuminated and Non Illuminated




22MM Stainless Steel Non Illuminated



MPZ022

- Non Illumination
- 20 cm lead
- Flathead

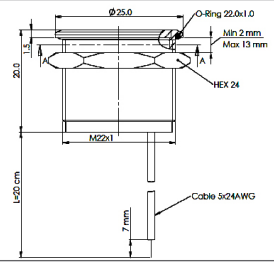


22MM Stainless Steel Illuminated



MPZI022

- Red or Green Illumination
- 1 colour
- 20 cm lead
- Flathead

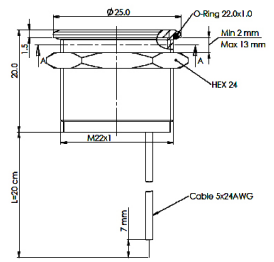


22MM Stainless Steel Illuminated



MPZI022

- Red and Green Illumination
- (2 colour)
- 20 cm lead
- Flathead

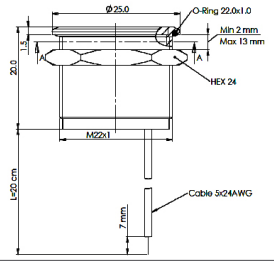

Specification

MPZ022, MPZI022

| | |
|----------------------------------|---|
| Type | Momentary |
| Material | Stainless Steel (Aluminium upon request) |
| Maximum Voltage | 24V AC/DC |
| Switch Resistance "ON" | <1Ω |
| Switch Resistance "OFF" | 5MΩ |
| Capacitance | 100pF |
| Switching current (momentary) | 1A Max |
| Switching current (prolonged) | 300 mA |
| Switching pulse time (momentary) | up to 0.3 sec |
| LED Illumination | 24V AC/DC |
| Actuating force, typically | 3-5 N |
| Life cycle | >10 Million |

Environmental Specification

| | |
|-----------------------|----------------|
| Sealing | IP68; IP69K |
| Operating temperature | -40°C to +85°C |
| Vibration Resistances | 5-500Hz/9.4m |
| Shock resistance | 75g (g-force) |
| RoHS | Compliant |


Circuit Specification

22MM Stainless Steel Non Illuminated




Switch Voltage 24 AC/DC
Switch Current 1A Max
Power Supply 24V AC/DC

22MM Stainless Steel Illuminated 1 colour



Switch Voltage 24V AC/DC
Switch Current 1A Max
Color* Illuminated 24V AC/DC
Power Supply 24 AC/DC

22MM Stainless Steel Illuminated 2 colour



Switch Voltage 24V AC/DC
Switch Current 1A Max
Color* Illuminated 24V AC/DC
Power Supply 24 AC/DC

Part No System

| | | | | | | | | | | |
|---|---|--|---|---|---|--|---|---------------------------|---|--|
| MPZ | / | 016 | / | X | / | XX | / | X | / | X |
| Series MPZ - Non Illuminated MPZI- Illuminated | | Body Diameter 016 = 16mm 019 = 19mm 022 = 22mm | | Profile F = Flat Head G = Guided Profile | | Colour BL = Blue RD = Red GN = Green D1 = Red and green | | Led Voltage 24v | | Type L = Latching Toggle (No Suffix= Momentary) |


Examples:

MPZ022/F = Non Illuminated Piezo, 22mm, Flathead

MPZI022/F/RD/24 = Illuminated Piezo, 22mm, Flathead, Red Illumination, 24 volt


MPZI022/G/BL/24/L = Illuminated Piezo, 22mm, Guided Profile, Blue Illumination, 24 volt, Latching Toggle

Circuit Specifications

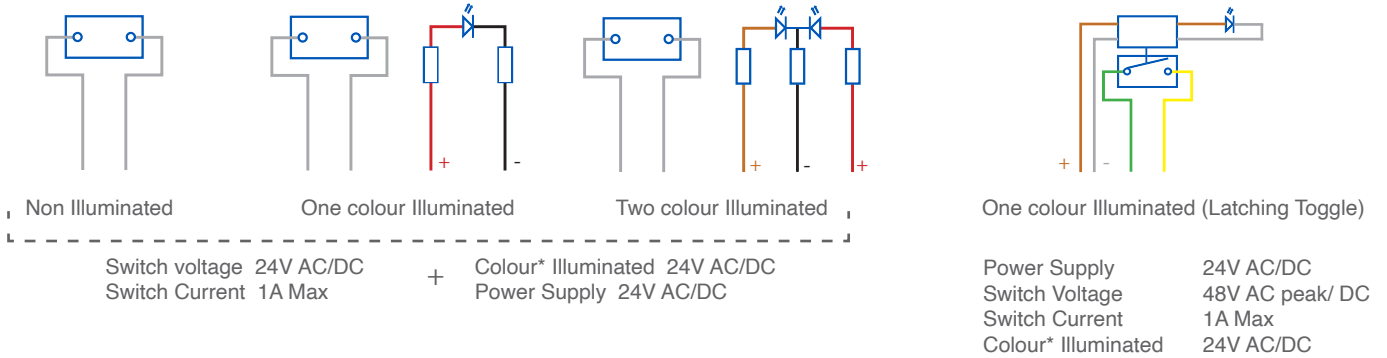

Other switches are available upon request*

MAV0120

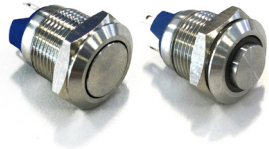


MAV0120/1



MAV0120/3

- Prominent and Flush Profile
- 12mm Diameter
- 2A, 36 dc
- IP67 (Front of Panel Only)

Prominent Profile



Flush Profile



Specification

MAV0120/1

MAV0120/3

| | | |
|-------------------------------|------------------------|------------------------|
| Terminations: | P - Solder Tabs | P - Solder Tabs |
| Switching: | S.P. Push to make | S.P. Push to make |
| Max Rating: | 2A, 36Vdc | 2A, 36Vdc |
| Contact Resistance: | ≥50MΩ | ≥50MΩ |
| Insulation Resistance: | ≥1000MΩ | ≥1000MΩ |
| Dielectric Strength: | 1500V, AC 50Hz, 5 Secs | 1500V, AC 50Hz, 5 Secs |
| Operating Temp Range: | *-25°C ~ +55°C | *-25°C ~ +55°C |
| Operations | | |
| Mechanical: | 500,000 (min) | 500,000 (min) |
| Electrical: | 200,000 (min) | 200,000 (min) |
| Sealing (Front of Panel Only) | IP67 | IP67 |
| Shock Resistance | IK08 | IK08 |
| Rear Nut Fixing Torque: | 0.6Nm | 0.6Nm |
| Materials | | |
| Mouldings: | PA | PA |
| Tags/Terminations: | Copper, Gold Plated | Copper, Gold Plated |
| Switch Body & Button: | Stainless Steel | Stainless Steel |
| Contacts: | Silver Alloy | Silver Alloy |
| Thread size: | M12x0.75 | M12x0.75 |
| RoHS | Compliant | Compliant |

12mm Switches
Miniature Domed Metal Vandal Resistant

None Illuminated - Metal Dome




MMP0120



MMP0120

- Raised Domed Profile
- 12mm Diameter
- 2A, 36Vac
- IP65 or IP67 (Front of Panel Only)

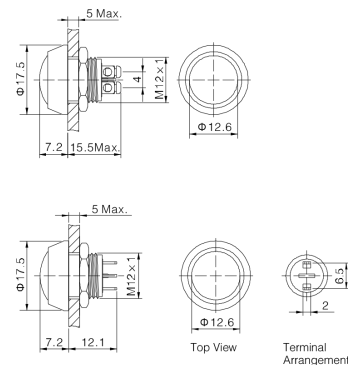

Specification

MMP0120/S

MMP0120/N



| | | |
|-------------------------------|---------------------------------------|---------------------------------------|
| Terminations: | P - Solder Tabs S - Screw Terminal | P - Solder Tabs S - Screw Terminal |
| Switching: | S.P. Push to make | S.P. Push to make |
| Max Rating: | 2A, 36Vdc | 2A, 36Vdc |
| Contact Resistance: | ≥50MΩ | ≥50MΩ |
| Insulation Resistance: | ≥1000MΩ | ≥1000MΩ |
| Dielectric Strength: | 1500V, AC 50Hz, 5 Secs | 1500V, AC 50Hz, 5 Secs |
| Operating Temp Range: | *-25°C ~ +55°C | *-25°C ~ +55°C |
| Operations | | |
| Mechanical: | 500,000 (min) | 500,000 (min) |
| Electrical: | 200,000 (min) | 200,000 (min) |
| Sealing (Front of Panel Only) | IP65 or IP67 | IP65 or IP67 |
| Shock Resistance | IK08 | IK08 |
| Rear Nut Fixing Torque: | 0.3Nm | 0.3Nm |
| Materials | | |
| Mouldings: | PBT | PBT |
| Tags/Terminations: | Brass, Silver Plated | Brass, Silver Plated |
| Switch Body & Button: | /SS Stainless Steel | /N - Nickel Plated Brass |
| Contacts: | Silver Alloy | Silver Alloy |
| Thread size: | M12x1 | M12x1 |
| RoHS | Compliant | Compliant |

MMP0120/A



MMP0120/A

- Raised Domed Profile
- PBT Material
- 12mm Diameter
- 2A, 36Vac
- IP65 or IP67 (Front of Panel Only)

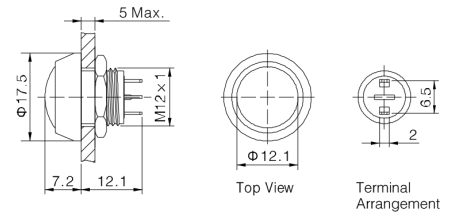

Specification

MMP0120/A


| | |
|-------------------------------|--|
| Terminations: | P - Solder Tabs S - Screw Terminal |
| Switching: | S.P. Push to make |
| Max Rating: | 2A, 36Vdc |
| Contact Resistance: | ≥50MΩ |
| Insulation Resistance: | ≥1000MΩ |
| Dielectric Strength: | 1500V, AC 50Hz, 5 Secs |
| Operating Temp Range: | *-25°C ~ +55°C |
| Operations | |
| Mechanical: | 1,000,000 (min) |
| Electrical: | 200,000 (min) |
| Sealing (Front of Panel Only) | IP65 or IP67 |
| Shock Resistance | IK08 |
| Rear Nut Fixing Torque: | 0.3Nm |
| Materials | |
| Mouldings: | PBT |
| Tags/Terminations: | Brass, Silver Plated |
| Switch Body | /A Black Anodised |
| Switch Button: | /NB Nickel Plated Brass /RD RED PBT /GN GREEN PBT /BL BLUE PBT /BK BLACK PBT |
| Contacts: | Silver Alloy |
| Thread size: | M12x1 |
| RoHS | Compliant |

MMPI0120



MMPI0120

- Raised Domed Profile
- Dot Illumination
- Bright daylight LEDs
- 12mm Diameter
- 2A, 36Vac
- IP65 (Front of Panel Only)

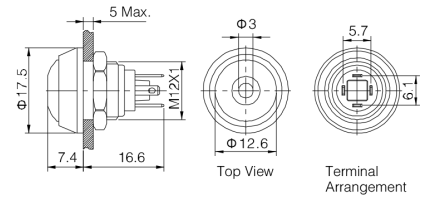

Specification

MMPI0120

| | | | | | |
|-------------------------------|---|-----------------|---------------------|---------------------------------------|---------------------------------------|
| Terminations: | P - Solder Tabs | | | | |
| Switching: | S.P. Push to make | | | | |
| Max Rating: | 2A, 36Vdc | | | | |
| LED Ratings | | | | | |
| Part No. | SS-RD | SS-GN | NN-RD | ABK-RD | AG-RD |
| Colours | Red | Green | Red | Red | Red |
| Luminous Intensity | | | | | |
| Forward Voltage | 1.8V | 2.8V | 1.8V | 1.8V | 1.8V |
| Forward Current | | | | | |
| Moulding Current | 15mA | 15mA | 15mA | 15mA | 15mA |
| Illumination Voltage | /no suffix - No resistor fitted. An Appropriate resistor must be series connected by the user. Voltages as above | | | | |
| | /12 | | | | |
| Contact Resistance: | $\geq 50M\Omega$ | | | | |
| Insulation Resistance: | $\geq 1000M\Omega$ | | | | |
| Dielectric Strength: | 1500V, AC 50Hz, 5 Secs | | | | |
| Operating Temp. Range: | *-25°C ~ +55°C | | | | |
| Operations | | | | | |
| Mechanical: | 1,000,000 (min) | | | | |
| Electrical: | 200,000 (min) | | | | |
| Sealing (Front of Panel Only) | IP65 | | | | |
| Shock Resistance | IK08 | | | | |
| Rear Nut Fixing Torque: | 0.3Nm | | | | |
| Materials | | | | | |
| Mouldings: | PBT | | | | |
| Tags/Terminations: | Brass, Silver Plated | | | | |
| Switch Body & Button: | Stainless Steel | Stainless Steel | Nickel Plated Brass | Black Anodized Body, Black PBT Button | Black Anodized Body, Green PBT Button |
| Contacts: | Silver Alloy | | | | |
| Thread size: | M12x1 | | | | |
| RoHS | Compliant | | | | |

12mm Miniature Vandal Resistant Stainless Steel Switch

| | | | | | |
|--------------------------|---|--|--|---|---|
| MAV0120 | X | X | X | X | X |
| Series MAV0120 | Button 1 = Flush 3 = Prominent | Switching Type D = Momentary | Type of Illumination Blank = None 1 = Dot 2 = Ring | Illumination Colour Blank = None RD = RED GN = GREEN BL = BLUE AM = AMBER/YELLOW OR = ORANGE | Lamp Voltage Blank = None 012 = 12V 024 = 24V |

Examples:

MAV0120/3D = 12mm Prominent Actuator, Momentary, Non Illuminated
 MAV0120/3D1BL024 = 12mm Prominent Actuator, Momentary, Blue Dot Illuminated, 24V
 MAV0120/3D2GN012 = 12mm Prominent Actuator, Momentary, Green Ring Illuminated, 12V

12mm Miniature Metal/Plastic Domed Pushbutton Switch

| | | | | | | |
|--|--|--|---|---|--|---|
| MMPXXX | X | X | X | X | X | X |
| Series MMP0120 = Non Illuminated MMP10120 = Illuminated | Body Material S = Stainless Steel N = Nickel Plated Brass A = Black Anodized | Button Material & Colour SS = Stainless Steel NB = Nickel Plated Brass RD = RED PBT GN = GREEN PBT BL = BLUE PBT BK = BLACK PBT | Sealing Blank = IP65 67 = IP67 IP67 (non-illuminated only) | Illumination Colour Blank = None RD = RED GN = GREEN BL = BLUE AM = AMBER/YELLOW OR = ORANGE | Lamp Voltage Blank = None 012 = 12V 024 = 24V Other voltages require external resistor | Termination S = Screw Terminals P= Solder Terminals (2.0mm x 0.5mm) |

Examples:

MMP0120/SSSS = 12mm, Non Illuminated, All Stainless Steel, IP65, Screw Terminals
 MMP0120/ARD67/S = 12mm, Non Illuminated, Black anodized body, Red PBT button, IP67, screw terminals
 MMP10120/NNBRD012P = 12mm, Illuminated, All Nickel Plated Brass with 12V Red Dot illumination, IP65, Plug Terminals





Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MP0037 on WIN SOURCE](#)

 [Bulgin Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management