THE DATASHEET OF

IXTN30N100L

www.win-source.net 0086-755-83957316

IXYS

Linear™ Power MOSFET w/ Extended FBSOA

IXTN30N100L

V_{DSS} = 1000V
I_{D25} = 30A
$R_{DS(on)}$ ≤ 450mΩ

N-Channel Enhancement Mode
Avalanche Rated



miniBLOC
E153432



G = Gate D = Drain
S = Source

Either Source Terminal S can be used as the Source Terminal or the Kelvin Source (Gate Return) Terminal.

Symbol	Test Conditions		Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C		1000	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ		1000	V
V_{GSS}	Continuous		±30	V
V_{GSM}	Transient		±40	V
I_{D25}	T_C = 25°C		30	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}		70	A
I_A	T_C = 25°C		30	A
E_{AS}	T_C = 25°C		2	J
P_D	T_C = 25°C		800	W
T_J			-55 ... +150	°C
T_{JM}			150	°C
T_{stg}			-55 ... +150	°C
V_{ISOL}	50/60 Hz, RMS	t = 1 Minute	2500	V~
	I_{ISOL} ≤ 1mA	t = 1 Second	3000	V~
M_d	Mounting Torque		1.5/13	Nm/lb.in.
	Terminal Connection Torque		1.3/11.5	Nm/lb.in.
Weight			30	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 1mA	1000			V
$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250μA	3.0		5.5	V
I_{GSS}	V_{GS} = ±30V, V_{DS} = 0V			±200	nA
I_{DSS}	V_{DS} = V_{DSS}, V_{GS} = 0V			50	μA
	T_J = 125°C			1	mA
$R_{DS(on)}$	V_{GS} = 20V, I_D = 0.5 • I_{DSS}, Note 1			450	mΩ

Features

- MiniBLOC with Aluminium Nitride Isolation
- Designed for Linear Operation
- International Standard Package
- Avalanche Rated
- Molding Epoxy Meets UL94 V-0 Flammability Classification

Advantages

- Easy to Mount
- Space Savings
- High Power Density

Applications

- Programmable Loads
- Current Regulators
- DC-DC Converters
- Battery Chargers
- DC Choppers
- Temperature and Lighting Controls

© 2012 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 20V, I_D = 0.5 • I_{DSS}, Note 1	6	10	15	S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		13.7		nF
C_{oss}			980		pF
C_{rss}			115		pF
$t_{d(on)}$	**Resistive Switching Times** V_{GS} = 15V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{DSS} R_G = 2Ω (External)		36		ns
t_r			70		ns
$t_{d(off)}$			100		ns
t_f			78		ns
$Q_{g(on)}$	V_{GS} = 20V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{DSS}		545		nC
Q_{gs}			86		nC
Q_{gd}			165		nC
R_{thJC}				0.156	°C/W
R_{thCS}			0.05		°C/W

SOT-227B (IXTN) Outline

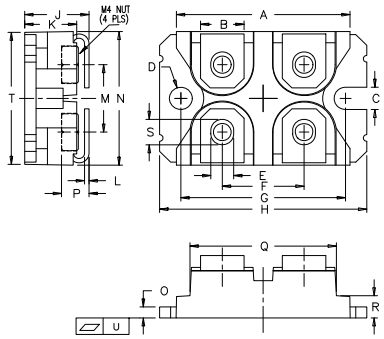

(M4 screws (4x) supplied)

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	1.240	1.255	31.50	31.88
B	.307	.323	7.80	8.20
C	.161	.169	4.09	4.29
D	.161	.169	4.09	4.29
E	.161	.169	4.09	4.29
F	.587	.595	14.91	15.11
G	1.186	1.193	30.12	30.30
H	1.496	1.505	38.00	38.23
J	.460	.481	11.68	12.22
K	.351	.378	8.92	9.60
L	.030	.033	0.76	0.84
M	.496	.506	12.60	12.85
N	.990	1.001	25.15	25.42
O	.078	.084	1.98	2.13
P	.195	.235	4.95	5.97
Q	1.045	1.059	26.54	26.90
R	.155	.174	3.94	4.42
S	.186	.191	4.72	4.85
T	.968	.987	24.59	25.07
U	-.002	.004	-0.05	0.1

Safe-Operating-Area Specification

Symbol	Test Conditions	Characteristic Values Min.	Typ.	Max.	
SOA	V_{DS} = 600V, I_D = 0.5A, T_C = 90°C	300			W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			30	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			120	A
V_{SD}	I_F = I_S, V_{GS} = 0V, Note 1			1.5	V
t_{rr}	I_F = I_S, -di/dt = 100A/µs V_R = 100V, V_{GS} = 0V		1000		ns

Note 1. Pulse test, t ≤ 300µs, duty cycle, d ≤ 2%.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 4,860,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537

Fig. 1. Output Characteristics @ T_J = 25ºC

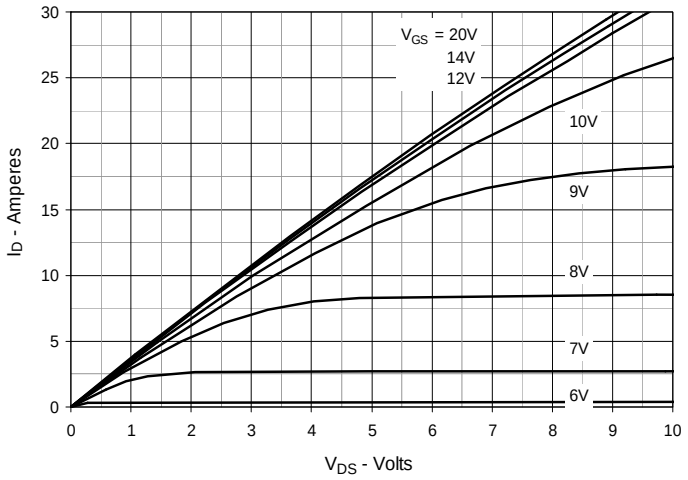

Fig. 2. Extended Output Characteristics @ T_J = 25ºC

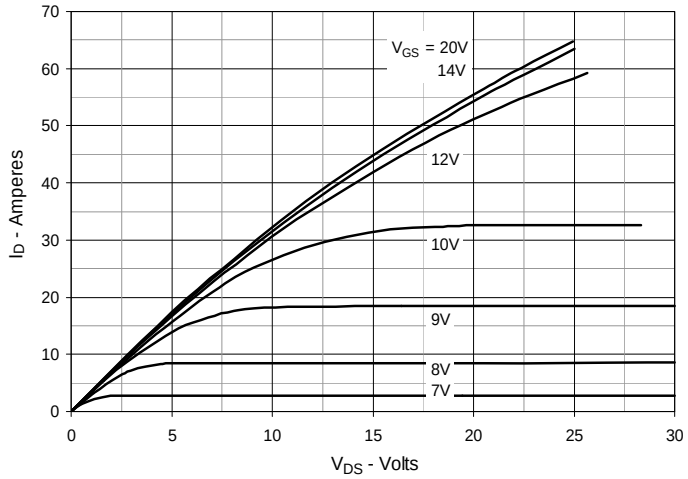

Fig. 3. Output Characteristics @ T_J = 125ºC

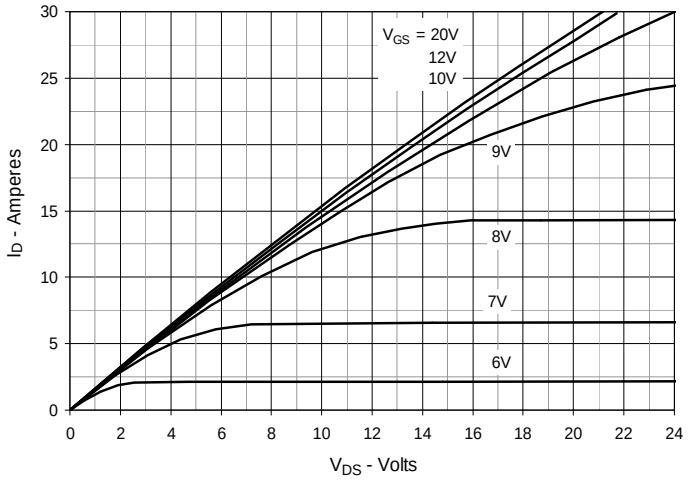

Fig. 4. $R_{DS(on)}$ Normalized to I_D = 15A Value vs. Junction Temperature

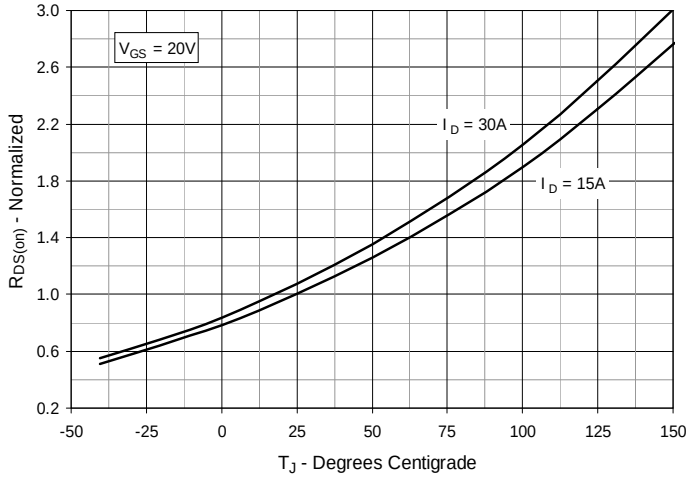

Fig. 5. $R_{DS(on)}$ Normalized to I_D = 15A Value vs. Drain Current

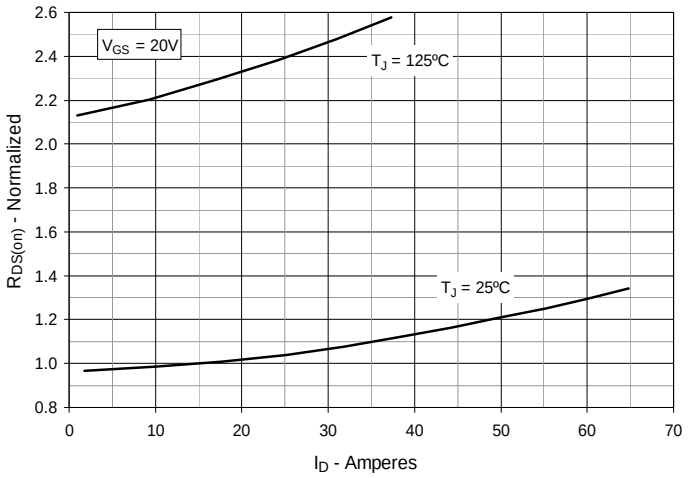

Fig. 6. Maximum Drain Current vs. Case Temperature

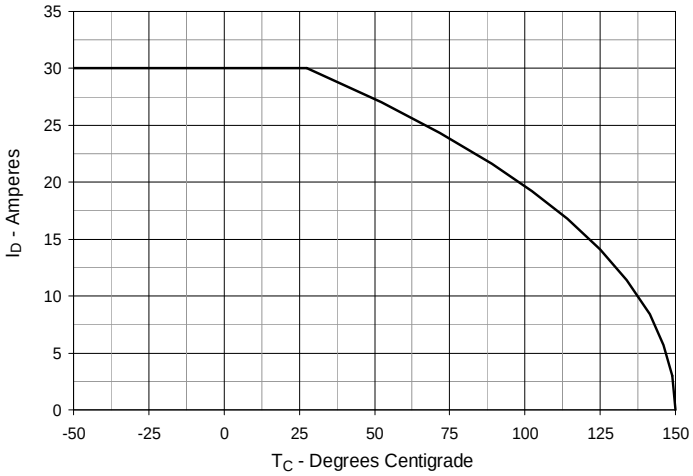

© 2012 IXYS CORPORATION, All Rights Reserved

Fig. 7. Input Admittance

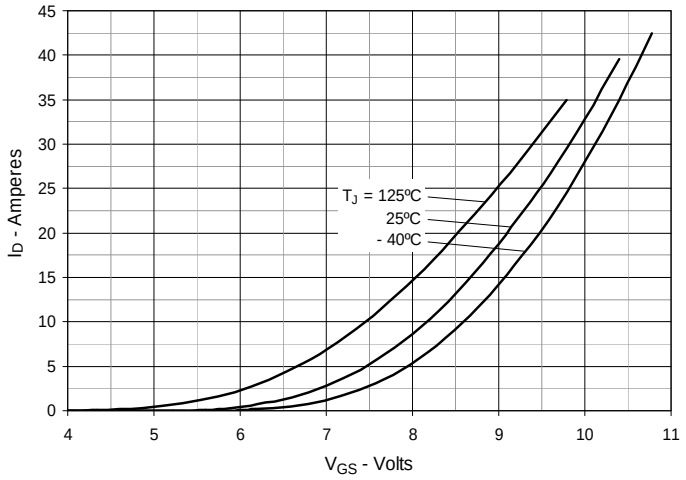

Fig. 8. Transconductance

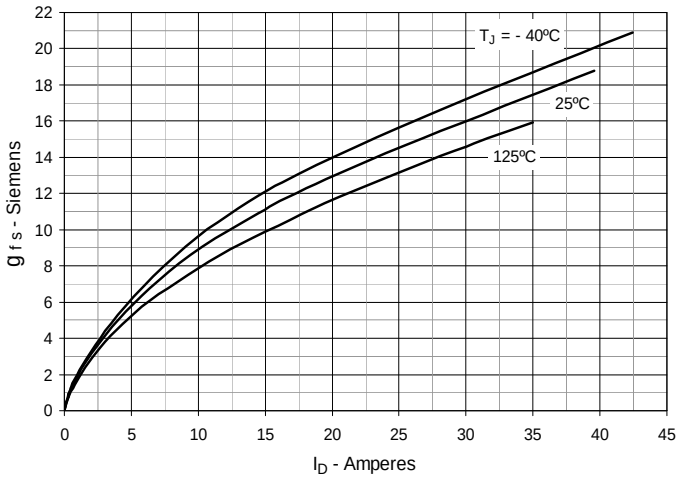

Fig. 9. Forward Voltage Drop of Intrinsic Diode

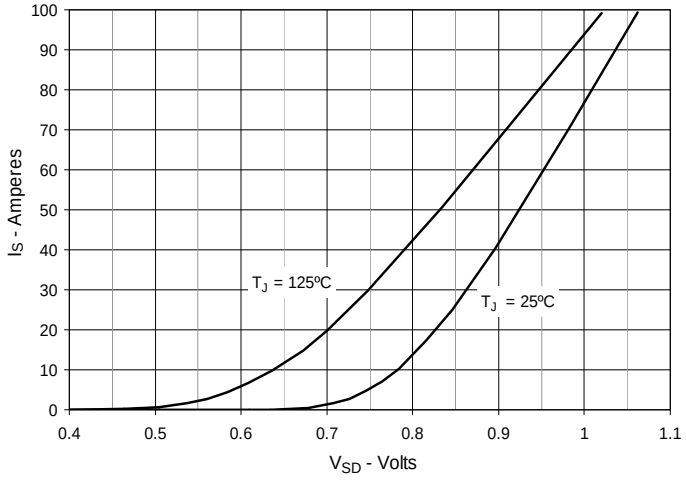

Fig. 10. Gate Charge

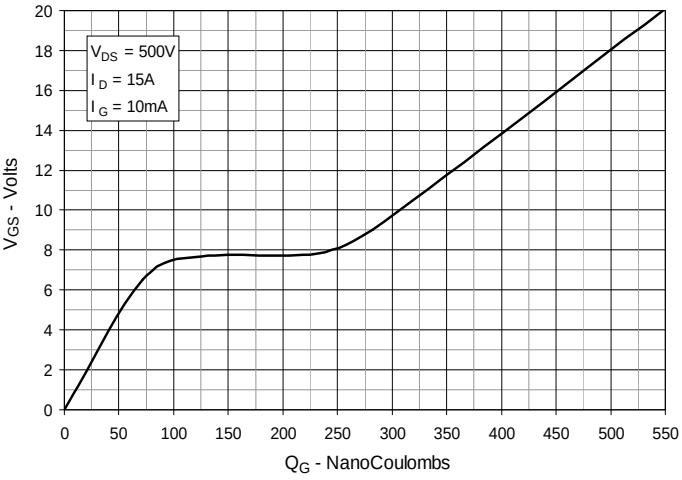

Fig. 11. Capacitance

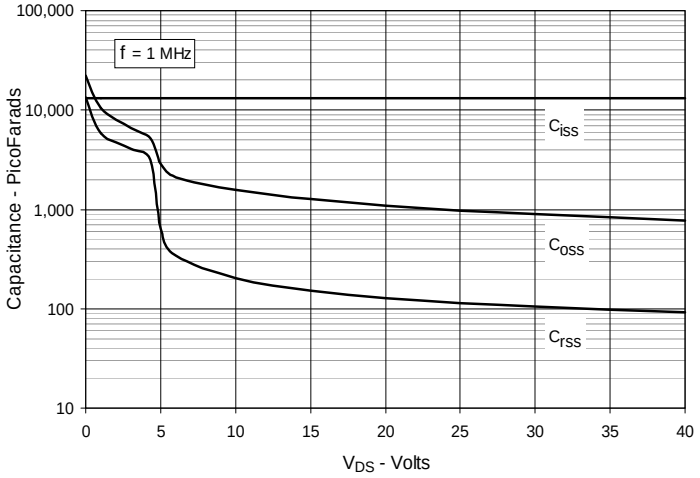

Fig. 12. Maximum Transient Thermal Impedance

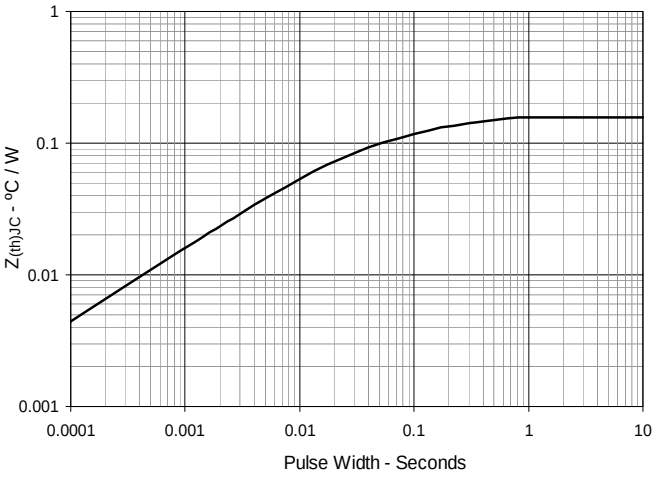

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Forward-Bias Safe Operating Area @ T_C = 25ºC

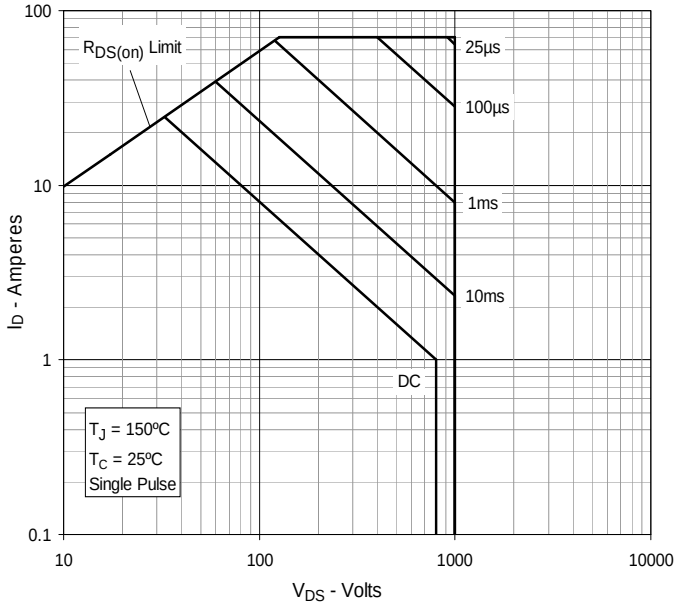

Fig. 14. Forward-Bias Safe Operating Area @ T_C = 90ºC

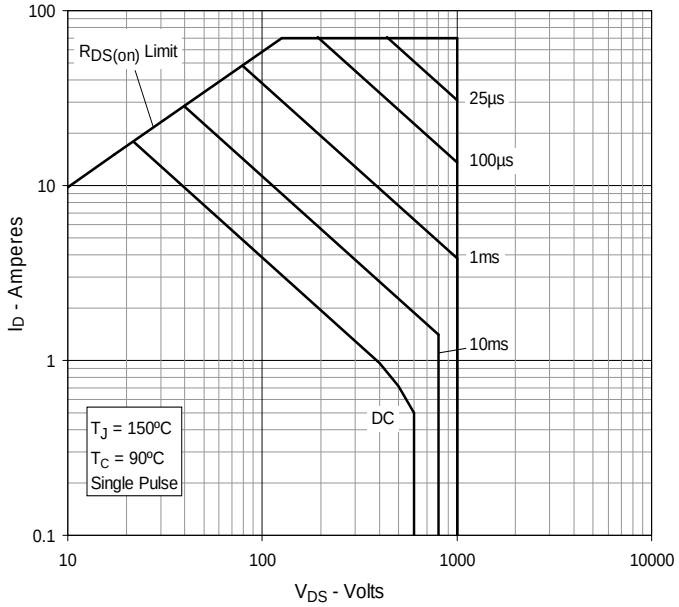

© 2012 IXYS CORPORATION, All Rights Reserved

IXYS
A Littelfuse Technology

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View IXTN30N100L on WIN SOURCE
- IXYS Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management