


TrenchP™
Power MOSFET
IXTN120P20T


 P-Channel Enhancement Mode
 Avalanche Rated
 Fast Intrinsic Rectifier


$$V_{DSS} = -200V$$

$$I_{D25} = -106A$$

$$R_{DS(on)} \leq 30m\Omega$$

$$t_{rr} \leq 300ns$$

 miniBLOC
 E153432

 G = Gate D = Drain
 S = Source

Either Source Terminal S can be used as the Source Terminal or the Kelvin Source (Gate Return) Terminal.

| Symbol | Test Conditions | Maximum Ratings | |
|---------------|--|-----------------|------------|
| V_{DSS} | $T_J = 25^\circ C$ to $150^\circ C$ | - 200 | V |
| V_{DGR} | $T_J = 25^\circ C$ to $150^\circ C$, $R_{GS} = 1M\Omega$ | - 200 | V |
| V_{GSS} | Continuous | ± 15 | V |
| V_{GSM} | Transient | ± 25 | V |
| I_{D25} | $T_C = 25^\circ C$ | -106 | A |
| I_{DM} | $T_C = 25^\circ C$, Pulse Width Limited by T_{JM} | - 400 | A |
| I_A | $T_C = 25^\circ C$ | -100 | A |
| E_{AS} | $T_C = 25^\circ C$ | 3 | J |
| dv/dt | $I_S \leq I_{DM}$, $V_{DD} \leq V_{DSS}$, $T_J \leq 150^\circ C$ | 10 | V/ns |
| P_D | $T_C = 25^\circ C$ | 830 | W |
| T_J | | -55 ... +150 | $^\circ C$ |
| T_{JM} | | 150 | $^\circ C$ |
| T_{stg} | | -55 ... +150 | $^\circ C$ |
| V_{ISOL} | 50/60 Hz, RMS, $t = 1$ minute | 2500 | V~ |
| | $I_{ISOL} \leq 1mA$, $t = 1s$ | 3000 | V~ |
| M_d | Mounting Torque for Base Plate | 1.5/13 | Nm/lb.in. |
| | Terminal Connection Torque | 1.3/11.5 | Nm/lb.in. |
| Weight | | 30 | g |

Features

- International Standard Package
- Low Intrinsic Gate Resistance
- miniBLOC with Aluminum Nitride Isolation
- Avalanche Rated
- Extended FBSOA
- Fast Intrinsic Rectifier
- Low $R_{DS(ON)}$ and Q_G

Advantages

- Easy to Mount
- Space Savings
- High Power Density

Applications

- High-Side Switching
- Push Pull Amplifiers
- DC Choppers
- Automatic Test Equipment
- Current Regulators
- Battery Charger Applications

| Symbol | Test Conditions ($T_J = 25^\circ C$ Unless Otherwise Specified) | Characteristic Values | | |
|--------------|---|-----------------------|------|-------------------------------|
| | | Min. | Typ. | Max. |
| BV_{DSS} | $V_{GS} = 0V$, $I_D = -250\mu A$ | - 200 | | V |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$, $I_D = -250\mu A$ | - 2.5 | | - 4.5 V |
| I_{GSS} | $V_{GS} = \pm 15V$, $V_{DS} = 0V$ | | | ± 200 nA |
| I_{DSS} | $V_{DS} = V_{DSS}$, $V_{GS} = 0V$ $T_J = 125^\circ C$ | | | - 25 μA - 300 μA |
| $R_{DS(on)}$ | $V_{GS} = -10V$, $I_D = 60A$, Note 1 | | | 30 m Ω |


| Symbol | Test Conditions ($T_J = 25^\circ\text{C}$ Unless Otherwise Specified) | Characteristic Values | | |
|--------------|---|-----------------------|------|-------------------------|
| | | Min. | Typ. | Max. |
| g_{fs} | $V_{DS} = -10\text{V}, I_D = -60\text{A}$, Note 1 | 85 | 145 | S |
| C_{iss} | $V_{GS} = 0\text{V}, V_{DS} = -25\text{V}, f = 1\text{MHz}$ | | 73 | nF |
| C_{oss} | | | 2550 | pF |
| C_{rss} | | | 480 | pF |
| $t_{d(on)}$ | Resistive Switching Times $V_{GS} = -10\text{V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = -60\text{A}$ $R_G = 1\Omega$ (External) | | 90 | ns |
| t_r | | | 85 | ns |
| $t_{d(off)}$ | | | 200 | ns |
| t_f | | | 50 | ns |
| $Q_{g(on)}$ | $V_{GS} = -10\text{V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = -60\text{A}$ | | 740 | nC |
| Q_{gs} | | | 220 | nC |
| Q_{gd} | | | 120 | nC |
| R_{thJC} | | | | 0.15 $^\circ\text{C/W}$ |
| R_{thCS} | | 0.05 | | $^\circ\text{C/W}$ |

Source-Drain Diode

| Symbol | Test Conditions ($T_J = 25^\circ\text{C}$ Unless Otherwise Specified) | Characteristic Values | | |
|----------|--|-----------------------|------|---------------|
| | | Min. | Typ. | Max. |
| I_S | $V_{GS} = 0\text{V}$ | | | -120 A |
| I_{SM} | Repetitive, Pulse Width Limited by T_{JM} | | | -480 A |
| V_{SD} | $I_F = -100\text{A}, V_{GS} = 0\text{V}$, Note 1 | | | -1.4 V |
| t_{rr} | $I_F = -60\text{A}, -di/dt = -100\text{A}/\mu\text{s}$ $V_R = -100\text{V}, V_{GS} = 0\text{V}$ | | | 300 ns |
| Q_{RM} | | | 3.3 | μC |
| I_{RM} | | | 25.6 | A |

Note 1. Pulse test, $t \leq 300\mu\text{s}$, duty cycle, $d \leq 2\%$.

SOT-227B (IXTN) Outline

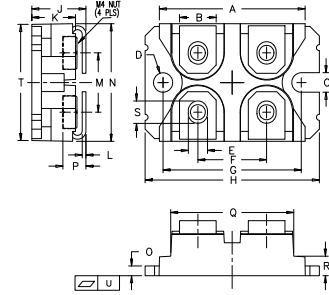

(M4 screws (4x) supplied)

| SYM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.240 | 1.255 | 31.50 | 31.88 |
| B | .307 | .323 | 7.80 | 8.20 |
| C | .161 | .169 | 4.09 | 4.29 |
| D | .161 | .169 | 4.09 | 4.29 |
| E | .161 | .169 | 4.09 | 4.29 |
| F | .587 | .595 | 14.91 | 15.11 |
| G | 1.186 | 1.193 | 30.12 | 30.30 |
| H | 1.496 | 1.505 | 38.00 | 38.23 |
| J | .460 | .481 | 11.68 | 12.22 |
| K | .351 | .378 | 8.92 | 9.60 |
| L | .030 | .033 | 0.76 | 0.84 |
| M | .496 | .506 | 12.60 | 12.85 |
| N | .990 | 1.001 | 25.15 | 25.42 |
| O | .078 | .084 | 1.98 | 2.13 |
| P | .195 | .235 | 4.95 | 5.97 |
| Q | 1.045 | 1.059 | 26.54 | 26.90 |
| R | .155 | .174 | 3.94 | 4.42 |
| S | .186 | .191 | 4.72 | 4.85 |
| T | .968 | .987 | 24.59 | 25.07 |
| U | -.002 | .004 | -0.05 | 0.1 |

PRELIMINARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from data gathered during objective characterizations of preliminary engineering lots; but also may yet contain some information supplied during a pre-production design evaluation. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

| | | | | | | | | | |
|-----------|-----------|-----------|-----------|--------------|--------------|--------------|--------------|--------------|-------------|
| 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665 | 6,404,065 B1 | 6,683,344 | 6,727,585 | 7,005,734 B2 | 7,157,338B2 |
| 4,860,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123 B1 | 6,534,343 | 6,710,405 B2 | 6,759,692 | 7,063,975 B2 | |
| 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728 B1 | 6,583,505 | 6,710,463 | 6,771,478 B2 | 7,071,537 | |

Fig. 1. Output Characteristics @ $T_J = 25^\circ\text{C}$

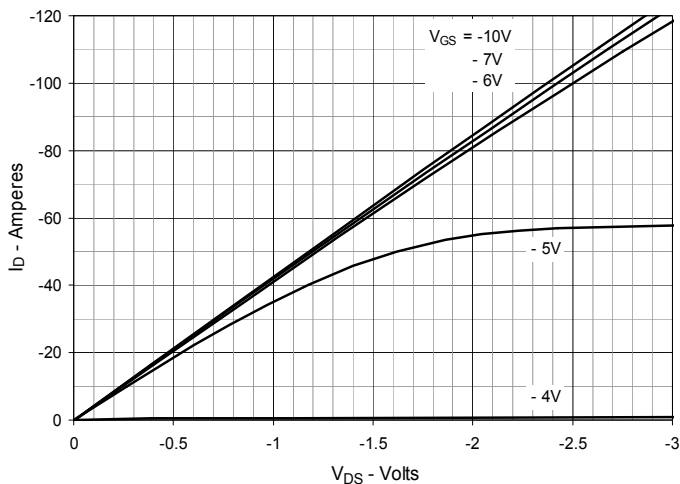


Fig. 2. Extended Output Characteristics @ $T_J = 25^\circ\text{C}$

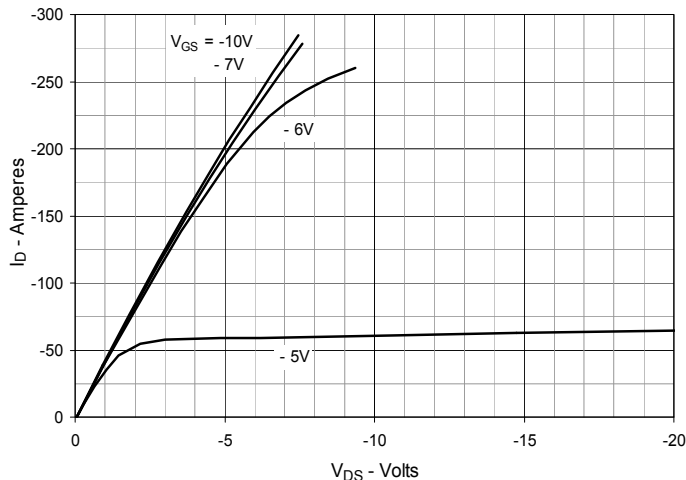


Fig. 3. Output Characteristics @ $T_J = 125^\circ\text{C}$

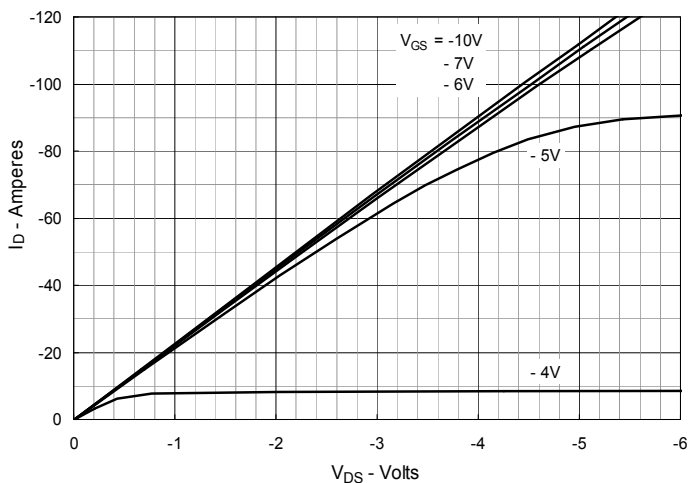


Fig. 4. $R_{DS(on)}$ Normalized to $I_D = -60\text{A}$ Value vs. Junction Temperature

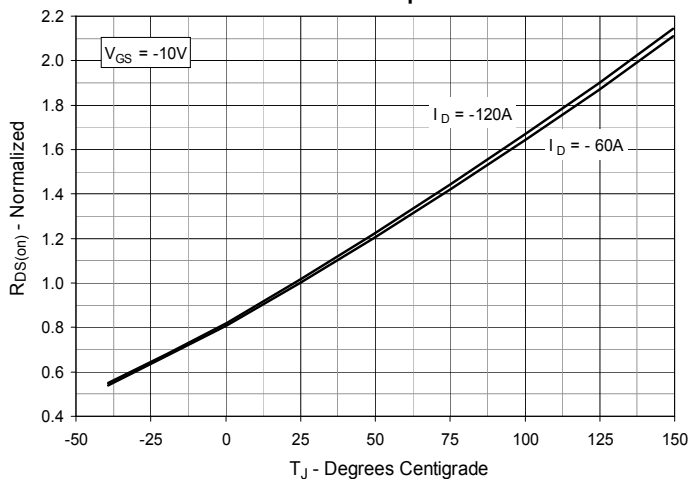


Fig. 5. $R_{DS(on)}$ Normalized to $I_D = -60\text{A}$ Value vs. Drain Current

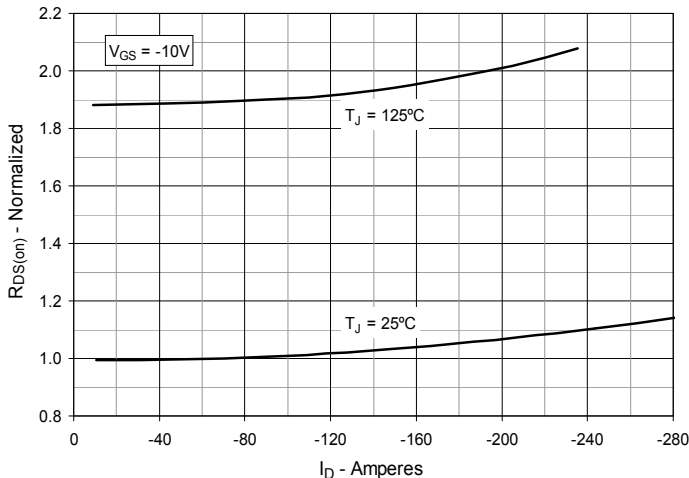


Fig. 6. Maximum Drain Current vs. Case Temperature

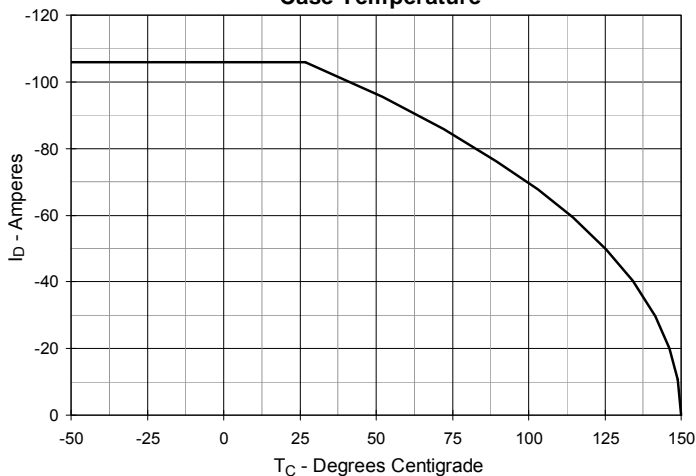


Fig. 7. Input Admittance

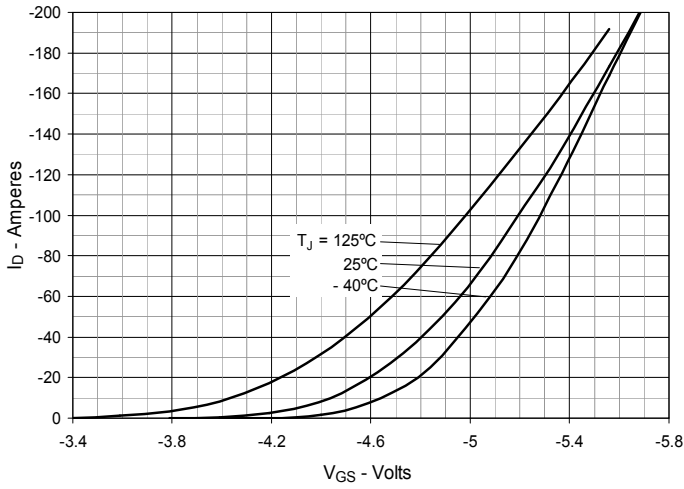


Fig. 8. Transconductance

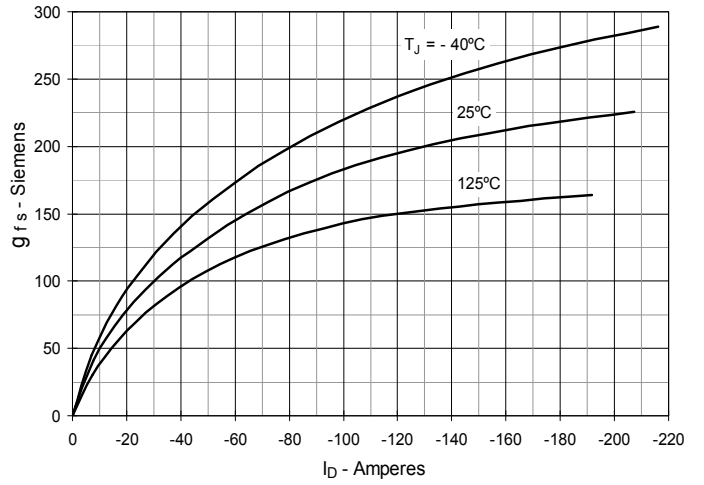


Fig. 9. Forward Voltage Drop of Intrinsic Diode

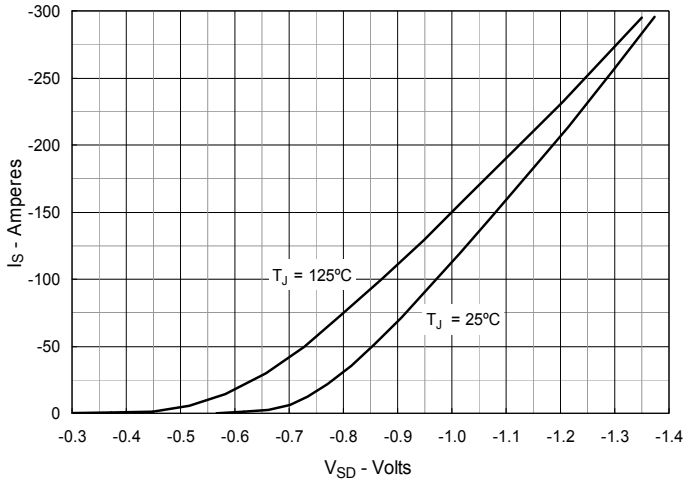


Fig. 10. Gate Charge

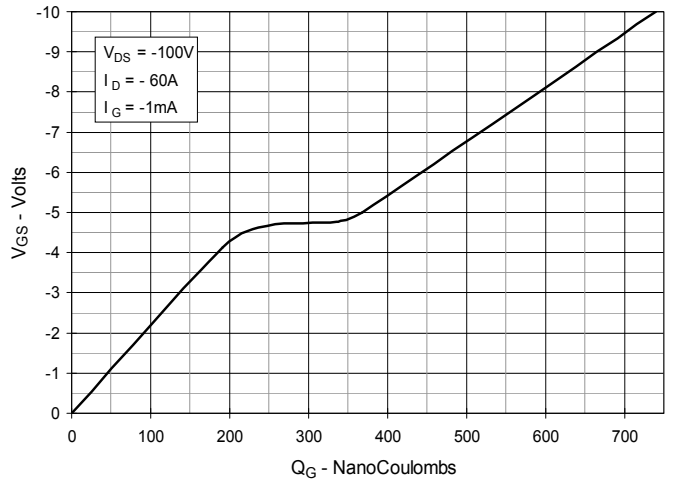


Fig. 11. Capacitance

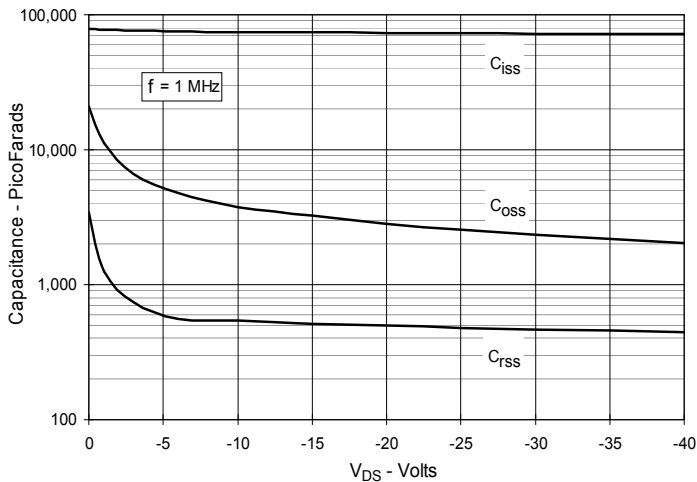


Fig. 12. Forward-Bias Safe Operating Area

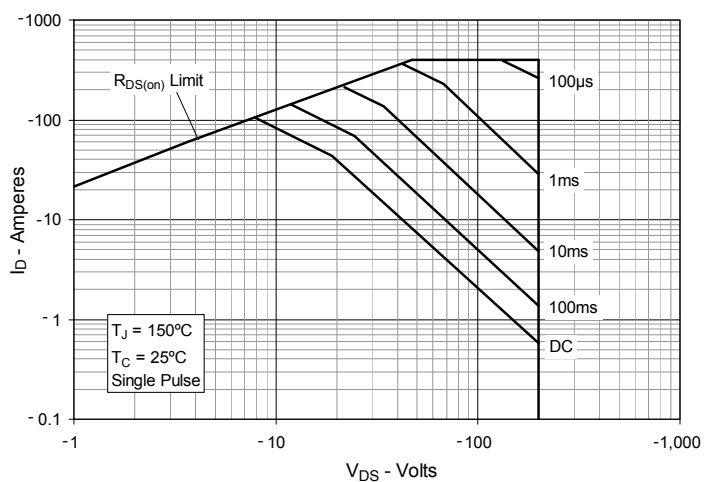


Fig. 13. Resistive Turn-on Rise Time vs. Junction Temperature

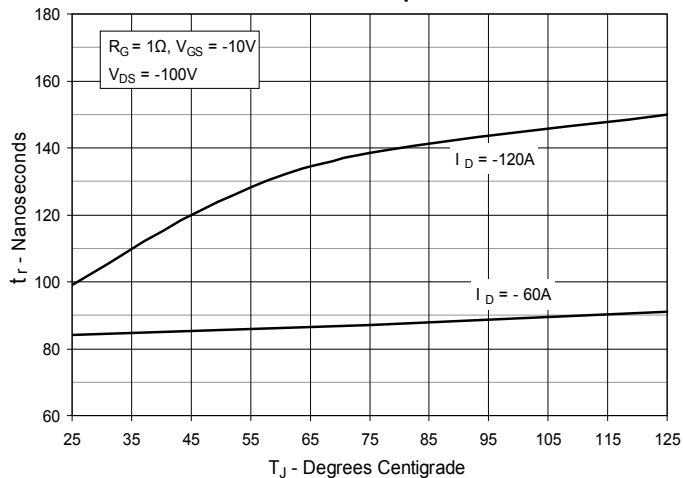


Fig. 14. Resistive Turn-on Rise Time vs. Drain Current

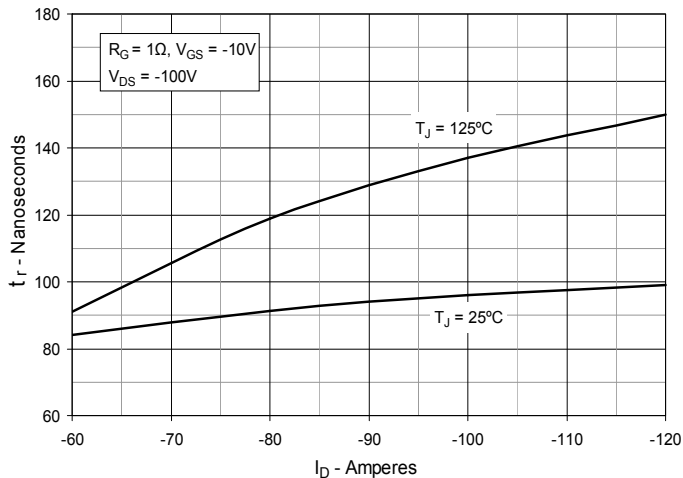


Fig. 15. Resistive Turn-on Switching Times vs. Gate Resistance

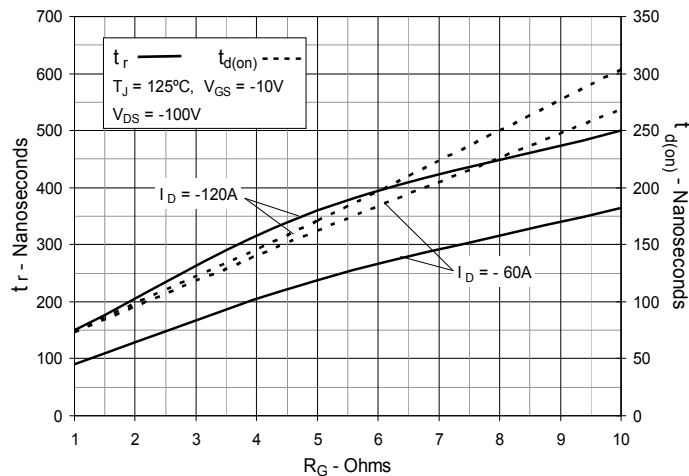


Fig. 16. Resistive Turn-off Switching Times vs. Junction Temperature

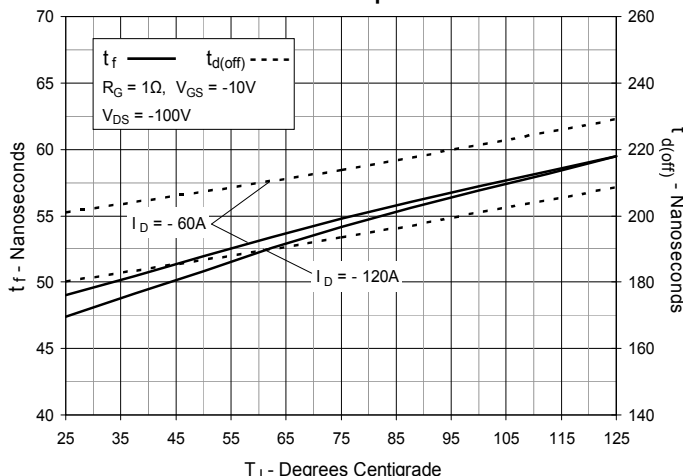


Fig. 17. Resistive Turn-off Switching Times vs. Drain Current

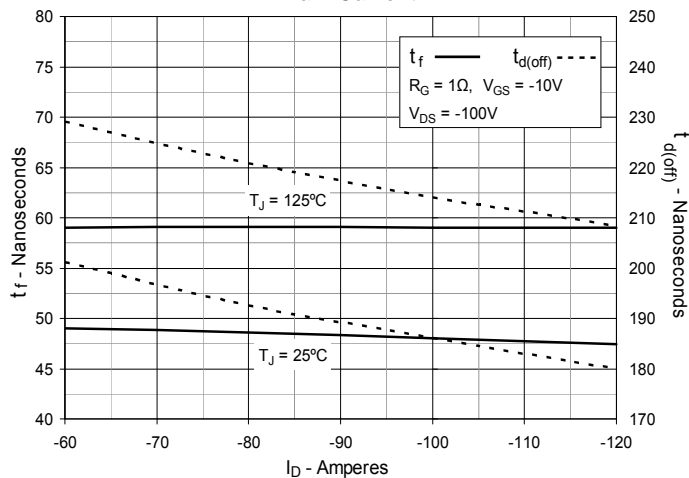


Fig. 18. Resistive Turn-off Switching Times vs. Gate Resistance


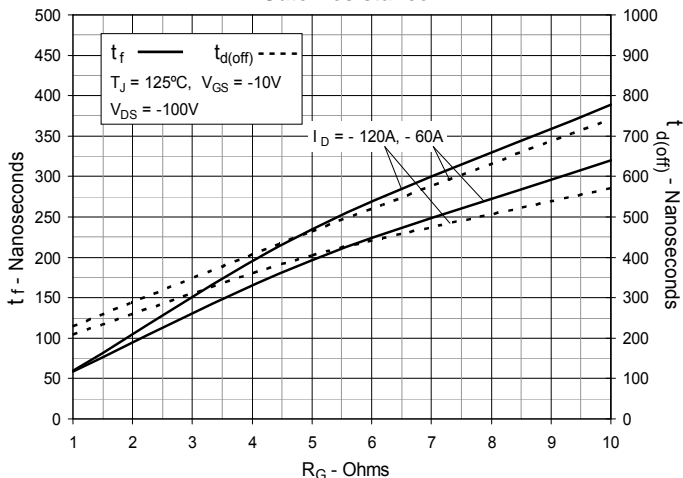


Fig. 19. Maximum Transient Thermal Impedance



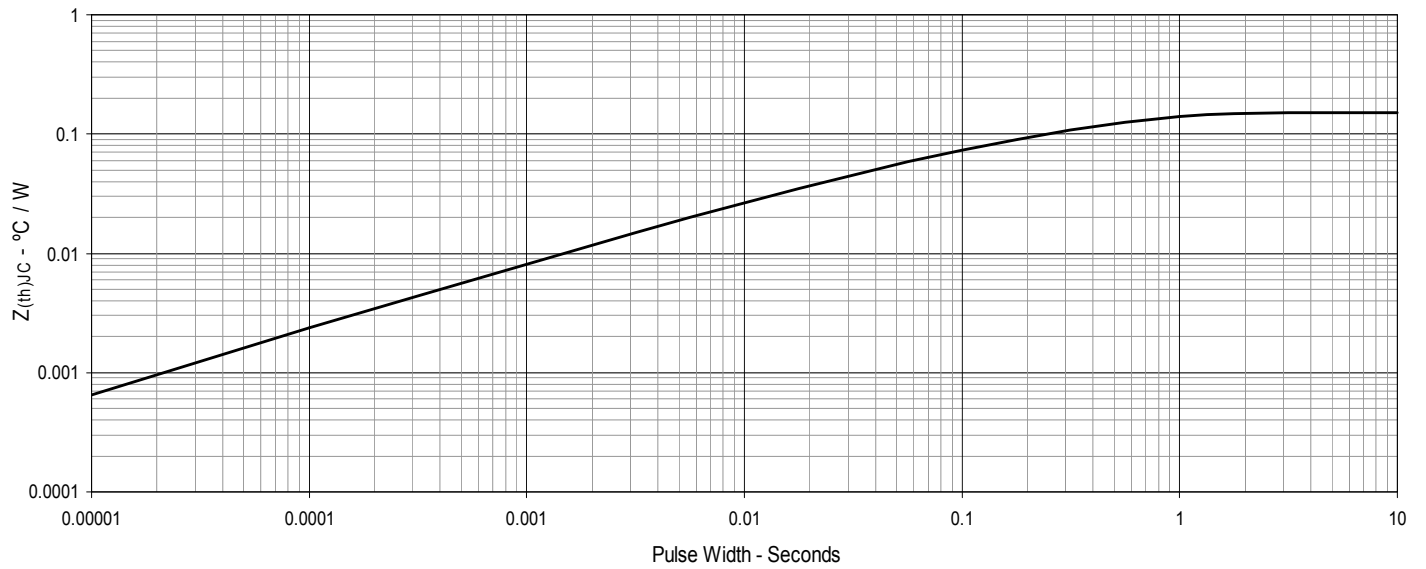

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View IXTN120P20T on WIN SOURCE](#)

 [IXYS Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management