



**THE DATASHEET OF
DDTD122LU-7-F**




Features

- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDTB)
- Built-In Biasing Resistors
- **Lead Free/RoHS Compliant (Note 2)**
- **"Green" Device, Note 3 and 4**

Mechanical Data


- Case: SOT-323
- Case Material: Molded Plastic, "Green" Molding Compound, Note 4. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagram
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Marking Information: See Table Below & Page 3
- Ordering Information: See Page 3
- Weight: 0.006 grams (approximate)

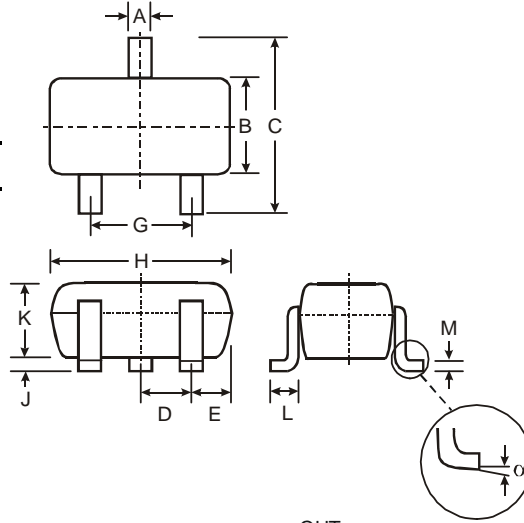

| SOT-323 | | |
|----------|--------------|------|
| Dim | Min | Max |
| A | 0.25 | 0.40 |
| B | 1.15 | 1.35 |
| C | 2.00 | 2.20 |
| D | 0.65 Nominal | |
| E | 0.30 | 0.40 |
| G | 1.20 | 1.40 |
| H | 1.80 | 2.20 |
| J | 0.0 | 0.10 |
| K | 0.90 | 1.00 |
| L | 0.25 | 0.40 |
| M | 0.10 | 0.18 |
| α | 0° | 8° |

All Dimensions in mm

| P/N | R1 (NOM) | R2 (NOM) | MARKING |
|-----------|----------------|--------------|---------|
| DDTD122LU | 0.22K Ω | 10K Ω | N75 |
| DDTD142JU | 0.47K Ω | 10K Ω | N76 |
| DDTD122TU | 0.22K Ω | OPEN | N77 |
| DDTD142TU | 0.47K Ω | OPEN | N78 |

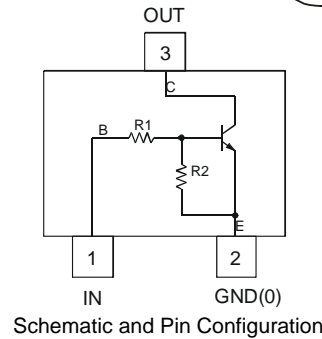

Maximum Ratings @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|---|-----------------------------------|-------------|------|
| Supply Voltage, (3) to (2) | V _{CC} | 50 | V |
| Input Voltage, (1) to (2) | V _{IN} | -5 to +6 | V |
| Input Voltage, (2) to (1) | V _{EBO (MAX)} | 5 | V |
| Output Current | I _C | 500 | mA |
| Power Dissipation | P _d | 200 | mW |
| Thermal Resistance, Junction to Ambient Air | R _{θJA} | 625 | °C/W |
| Operating and Storage Temperature Range | T _j , T _{STG} | -55 to +150 | °C |

- Notes:
1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. No purposefully added lead.
 3. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 4. Product manufactured with Date Code 0627 (week 27, 2006) and newer are built with Green Molding Compound. Product manufactured prior to Date Code 0627 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

R1, R2 Types

| Characteristic | | Symbol | Min | Typ | Max | Unit | Test Condition |
|-------------------------|------------------------|--------------|------------|-----|------------|---------|--|
| Input Voltage | DDTD122LU DDTD142JU | $V_{I(off)}$ | 0.3 0.3 | — | — | V | $V_{CC} = 5V, I_O = 100\mu A$ |
| | DDTD122LU DDTD142JU | $V_{I(on)}$ | — | — | 2.0 2.0 | V | $V_O = 0.3V, I_O = 20mA$ $V_O = 0.3V, I_O = 20mA$ |
| Output Voltage | | $V_{O(on)}$ | — | — | 0.3V | V | $I_O/I_I = 50mA/2.5mA$ |
| Input Current | DDTD122LU DDTD142JU | I_I | — | — | 28 13 | mA | $V_I = 5V$ |
| Output Current | | $I_{O(off)}$ | — | — | 0.5 | μA | $V_{CC} = 50V, V_I = 0V$ |
| DC Current Gain | DDTD122LU DDTD142JU | G_I | 56 56 | — | — | — | $V_O = 5V, I_O = 50mA$ |
| Gain-Bandwidth Product* | | f_T | — | 200 | — | MHz | $V_{CE} = 10V, I_E = 5mA, f = 100MHz$ |


* Transistor - For Reference Only

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

R1-Only, R2-Only Types

| Characteristic | | Symbol | Min | Typ | Max | Unit | Test Condition |
|--------------------------------------|------------------------|---------------|------------|------------|------------|---------|--|
| Collector-Base Breakdown Voltage | | BV_{CBO} | 50 | — | — | V | $I_C = 50\mu A$ |
| Collector-Emitter Breakdown Voltage | | BV_{CEO} | 40 | — | — | V | $I_C = 1mA$ |
| Emitter-Base Breakdown Voltage | DDTD122TU DDTD142TU | BV_{EBO} | 5 | — | — | V | $I_E = 50\mu A$ $I_E = 50\mu A$ |
| Collector Cutoff Current | | I_{CBO} | — | — | 0.5 | μA | $V_{CB} = 50V$ |
| Emitter Cutoff Current | DDTD122TU DDTD142TU | I_{EBO} | — — | — | 0.5 0.5 | μA | $V_{EB} = 4V$ |
| Collector-Emitter Saturation Voltage | | $V_{CE(sat)}$ | — | — | 0.3 | V | $I_C = 50mA, I_B = 2.5mA$ |
| DC Current Transfer Ratio | DDTD122TU DDTD142TU | h_{FE} | 100 100 | 250 250 | 600 600 | — | $I_C = 5mA, V_{CE} = 5V$ |
| Gain-Bandwidth Product* | | f_T | — | 200 | — | MHz | $V_{CE} = 10V, I_E = -5mA, f = 100MHz$ |

* Transistor - For Reference Only

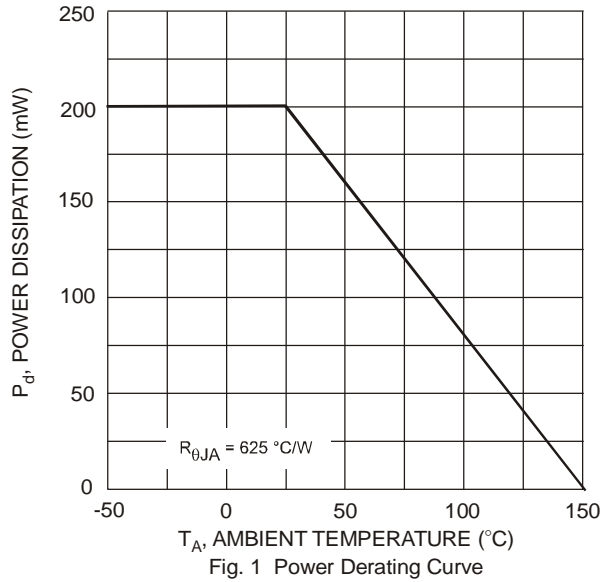


Ordering Information (Note 4 & 5)

| Device | Packaging | Shipping |
|---------------|-----------|------------------|
| DDTD122LU-7-F | SOT-323 | 3000/Tape & Reel |
| DDTD142JU-7-F | SOT-323 | 3000/Tape & Reel |
| DDTD122TU-7-F | SOT-323 | 3000/Tape & Reel |
| DDTD142TU-7-F | SOT-323 | 3000/Tape & Reel |

Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



NXX = Product Type Marking Code
 See Page 1 Table
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

| Year | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | N | P | R | S | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View DDTD122LU-7-F on WIN SOURCE](#)
- ⊖ [Diodes Incorporated Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management