



**THE DATASHEET OF
RS3-0505S**



Features

Regulated Converters

- 2:1 and 3:1 wide input voltage ranges
- 1kVDC, 2kVDC and 3kVDC isolation
- UL94V-0 package material
- Continuous short circuit protection
- Low ripple and noise
- CTRL On/Off
- Efficiency up to 83%

RS3-S(D)(Z)

3 Watt
SIP8
Single and Dual
Output



UL60950-1 certified
CAN/CSA C22.2 No. 60950-1-07 certified
IEC/EN60950-1 certified
IEC/EN60601-1 certified
CB Report

Description

Very high power density, 2:1 or 3:1 input voltage range and a wide operating temperature range -40°C to +71°C and extra features such as On/Off control are just some of the characteristics of this converter which is ideal for highly sophisticated industrial designs. The RS3 is available with 2kV or 3kV isolation options (1kVDC is standard).

Selection Guide

| Part Number | nom. Input Voltage [VDC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ. [%] | max. Capacitive Load ⁽¹⁾ [µF] |
|-------------|--------------------------|----------------------|---------------------|---------------------|--|
| RS3-xx3.3S | 4.5-9, 9-18 | 3.3 | 600 | 73-75 | 4700 |
| | 18-36, 36-72 | | | 77-78 | |
| RS3-xx05S | 4.5-9, 9-18 | 5 | 600 | 76-79 | 4700 |
| | 18-36, 36-72 | | | 80-81 | |
| RS3-xx09S | 4.5-9, 9-18 | 9 | 333 | 77-80 | 3300 |
| | 18-36, 36-72 | | | 81-82 | |
| RS3-xx12S | 4.5-9, 9-18 | 12 | 250 | 80-81 | 2200 |
| | 18-36, 36-72 | | | 83 | |
| RS3-xx15S | 4.5-9, 9-18 | 15 | 200 | 80-81 | 2200 |
| | 18-36, 36-72 | | | 83 | |
| RS3-xx3.3D | 4.5-9, 9-18 | ±3.3 | ±300 | 73-75 | ±2200 |
| | 18-36, 36-72 | | | 75 | |
| RS3-xx05D | 4.5-9, 9-18 | ±5 | ±300 | 76-80 | ±2200 |
| | 18-36, 36-72 | | | 80-81 | |
| RS3-xx09D | 4.5-9, 9-18 | ±9 | ±167 | 77-81 | ±2200 |
| | 18-36, 36-72 | | | 81 | |
| RS3-xx12D | 4.5-9, 9-18 | ±12 | ±125 | 78-83 | ±1000 |
| | 18-36, 36-72 | | | 83 | |
| RS3-xx15D | 4.5-9, 9-18 | ±15 | ±100 | 79-83 | ±1000 |
| | 18-36, 36-72 | | | 83 | |
| RS3-xx3.3SZ | 9-27 | 3.3 | 600 | 73 | 4700 |
| | 20-60 | | | 74 | |
| RS3-xx05SZ | 9-27 | 5 | 600 | 76-79 | 4700 |
| | 20-60 | | | 78 | |
| RS3-xx09SZ | 9-27 | 9 | 333 | 77 | 3300 |
| | 20-60 | | | 79 | |
| RS3-xx12SZ | 9-27 | 12 | 250 | 80 | 2200 |
| | 20-60 | | | 80 | |
| RS3-xx15SZ | 9-27 | 15 | 200 | 80 | 2200 |
| | 20-60 | | | 80 | |
| RS3-xx3.3DZ | 9-27 | ±3.3 | ±300 | 73 | ±2200 |
| | 20-60 | | | 74 | |
| RS3-xx05DZ | 9-27 | ±5 | ±300 | 77 | ±2200 |
| | 20-60 | | | 78 | |
| RS3-xx09DZ | 9-27 | ±9 | ±167 | 79 | ±2200 |
| | 20-60 | | | 79 | |
| RS3-xx12DZ | 9-27 | ±12 | ±125 | 80 | ±1000 |
| | 20-60 | | | 80 | |
| RS3-xx15DZ | 9-27 | ±15 | ±100 | 80 | ±1000 |
| | 20-60 | | | 80 | |

Notes:

Note1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage on the converter

Model Numbering



Notes:

Note2: add „Z“ for 3:1 Input Voltage (24= 9-27VDC or 48= 20-60VDC)

Note3: add suffix „/H2“ for 2kVDC isolation or „/H3“ for 3kVDC isolation, without suffix = standard 1kVDC isolation

Ordering Examples:

| | | | | | |
|--------------|----------|---------|--------|-------------------|-----------------|
| RS3-053.3S | 4.5-9Vin | 3.3Vout | Single | 2:1 Input Voltage | 1kVDC Isolation |
| RS3-1212D/H2 | 9-18Vin | ±12Vout | Dual | 2:1 Input Voltage | 2kVDC Isolation |
| RS3-2415D/H3 | 9-27Vin | ±15Vout | Dual | 3:1 Input Voltage | 3kVDC Isolation |



Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

| BASIC CHARACTERISTICS | | | | | |
|------------------------------|-----------------------|-----------------|--|--------|---------|
| Parameter | Condition | | Min. | Typ. | Max. |
| Input Voltage Range | 2:1 Input | 5VDC | 4.5VDC | | 9VDC |
| | | nom. Vin= 12VDC | 9VDC | | 18VDC |
| | 3:1 Input | 24VDC | 18VDC | | 36VDC |
| | | 48VDC | 36VDC | | 72VDC |
| Quiescent Current | nom. Vin= | 24VDC | 9VDC | 35mA | |
| | | 48VDC | 20VDC | 25mA | |
| Minimum Load ⁽⁴⁾ | | | 10% | | |
| ON/OFF CTRL | DC-DC ON DC-DC OFF | | open or high impedance external V _{CTRL} = 5-12VDC + 1N4148 and 68Ω resistor | | |
| Internal Operating Frequency | 20% to 100% full load | | | 200kHz | |
| Output Ripple and Noise | 20MHz BW | | | | 50mVp-p |

Notes:

Note4: Operation below 10% load won't harm the converter, but specifications may not be met


Efficiency vs. Load

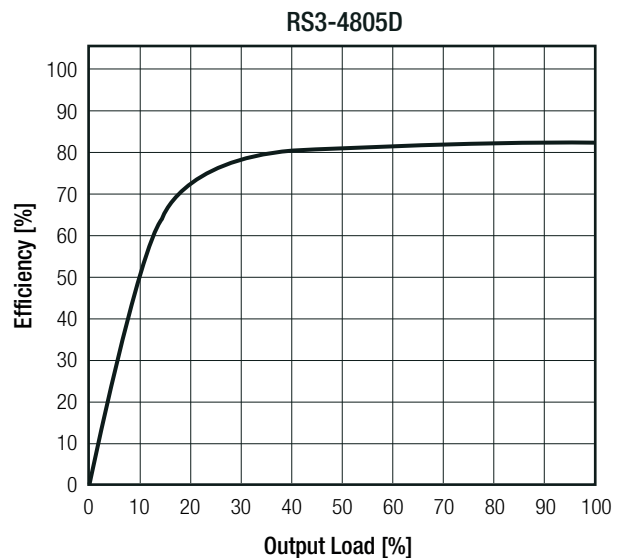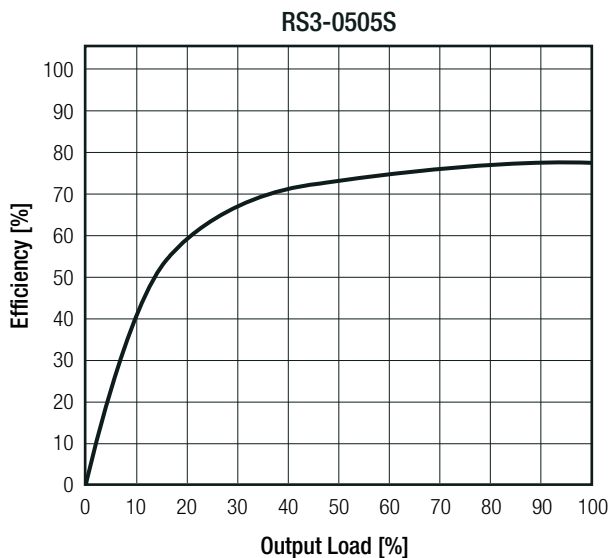

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

ON/OFF CTRL

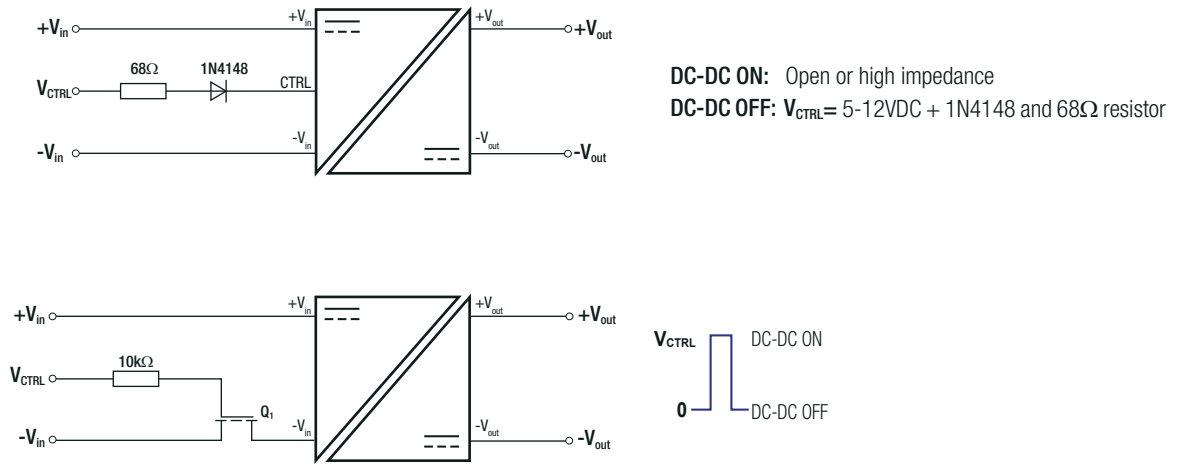


REGULATIONS

| Parameter | Condition | Value |
|-----------------|----------------------------------|------------|
| Output Accuracy | | ±2.0% typ. |
| Line Regulation | low line to high line, full load | ±0.5% max. |
| Load Regulation | 20% to 100% load | 0.5% typ. |

PROTECTIONS

| Parameter | Type | Value |
|----------------------------------|--|--|
| Short Circuit Protection (SCP) | below 100mΩ | continuous, auto recovery |
| Isolation Voltage ⁽⁵⁾ | standard without suffix | tested for 1 second rated for 1 minute 1kVDC 500VAC/60Hz |
| | /H2 version | tested for 1 second rated for 1 minute 2kVDC 1kVAC/60Hz |
| | /H3 version | tested for 1 second rated for 1 minute 3kVDC 1.5kVAC/60Hz |
| Isolation Resistance | | 1GΩ min. |
| Isolation Capacitance | standard version without suffix /H2 and /H3 version | 200pF max. 30pF max. |
| Insulation Grade | | functional (CB-IEC/EN60601-1) basic (CB-IEC/EN60950-1) |

Protection Circuit

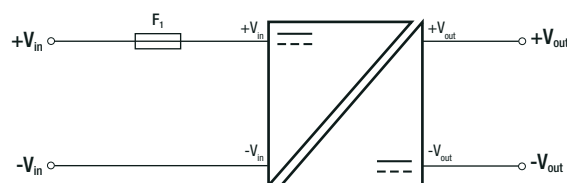

Notes:

Note5: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note6: To protect the converter under all fault conditions, an input fuse is required. Quick-fuses should be rated at 2x-3x the nominal input current, time -delay fuses at 1.5x the nominal input current


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

ENVIRONMENTAL

| Parameter | Condition | | Value |
|-----------------------------|---|-------|------------------------------|
| Operating Temperature Range | full load @ free air convection (see graph) | | -40°C to +71°C |
| Operating Altitude | | | 5000m |
| Operating Humidity | non-condensing | | 95% RH max. |
| Pollution Degree | | | PD2 |
| MTBF | according to MIL-HDBK-217F, G.B. | +25°C | 3303 x 10 ³ hours |
| | | +71°C | 745 x 10 ³ hours |

Derating Graph

(@ Chamber and free air convection)

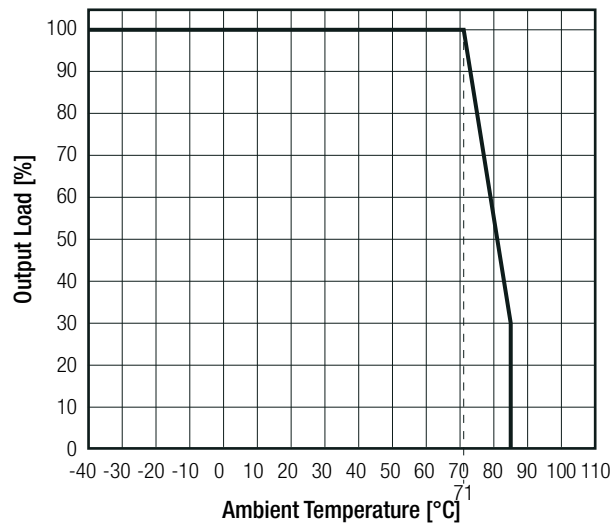

SAFETY AND CERTIFICATIONS


| Certificate Type (Safety) | Report / File Number | Standard |
|---|----------------------|---|
| Information Technology Equipment, General Requirements for Safety (LVD) | SPCLVD1605077-10 | IEC60950-1, 2nd Edition, AM2: 2013 EN60950-1, 2nd Edition, A2:2013 |
| Information Technology Equipment, General Requirements for Safety (CB) | L0339L49-CB-1-B1 | IEC60950-1:2005, 2nd Edition + A2:2013 |
| Information Technology Equipment, General Requirements for Safety | E224736-A33-UL | UL60950-1, 2nd Edition, 2014 CAN/CSA C22.2 No. 60950-1-07 |
| Medical Electric Equipment, General Requirements for Safety and Essential Performance | WD-SE-R-180675-A0 | IEC60601-1:2005 + C2:2007 + A1:2012, 3rd Edition EN60601-1:2006 + A1:2013 + A12:2014 |
| EAC | RU-AT.AB49.B.09571 | TP TC 004/2011 |
| RoHS2 | | RoHS 2011/65/EU + AM2015/863 |

| EMC Compliance | Condition | Standard / Criterion |
|--|---|--------------------------------------|
| Electromagnetic compatibility of multimedia equipment - Emission requirements ⁽⁷⁾ | with external filter (see filter suggestion below) | EN55032, Class A EN55032, Class B |

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

EMC Filtering Suggestions according to EN55032

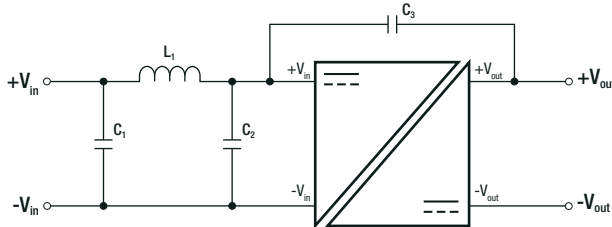

Notes:

Note8: Filter suggestions are valid for indicated part numbers only.
For other part numbers, please contact RECOM tech support for advice.

Component List Class A

| MODEL | C1 | C2, C3 | L1 |
|------------|------|--------|-------------------------------------|
| RS3-0505S | 10µF | N/A | 3.9µH choke RLS-397 |
| RS3-0512S | | | |
| RS3-243.3S | | | |
| RS3-4805S | | | |



Component List Class B

| MODEL | C1 | C2 | C3 | L1 |
|------------|------|------|-------|-------------------------------------|
| RS3-0505S | 10µF | N/A | N/A | 5.6µH choke RLS-567 |
| RS3-0512S | | | | |
| RS3-243.3S | | 10µF | 330pF | |
| RS3-4805S | | | | |

DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|-------------------|------------------------|---|
| Material | case potting PCB | non-conductive black plastic, (UL94V-0) epoxy, (UL94V-0) FR4, (UL94V-0) |
| Dimension (LxWxH) | | 21.8 x 9.2 x 11.1mm |
| Weight | | 4.7g typ. |

Dimension Drawing (mm)

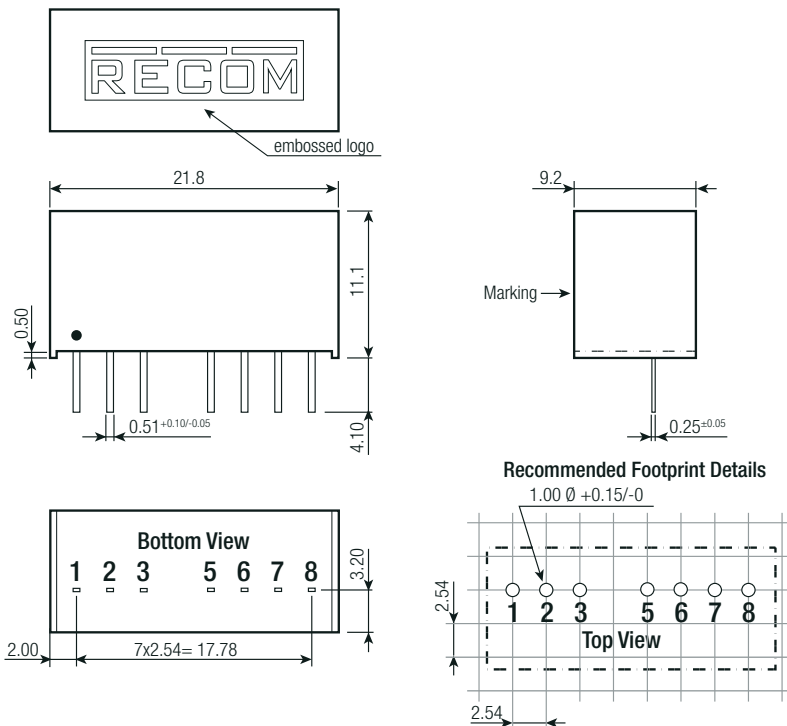

Pinning information

| Pin # | Single | Dual |
|-------|---------------------|---------------------|
| 1 | -Vin | -Vin |
| 2 | +Vin | +Vin |
| 3 | CTRL ^(®) | CTRL ^(®) |
| 5 | NC | NC |
| 6 | +Vout | +Vout |
| 7 | -Vout | Com |
| 8 | NC ^(®) | -Vout |

NC= No Connection
Tolerances: xx.x ±0.5mm
xx.xx ±0.25mm

Notes:

Note8: This pin provides an Off function which puts the converter into a low power mode. When the pin is 'high' the converter is OFF and when the pin is open the converter is ON. There is no allowed low state for this pin. (refer to „ON/OFF CTRL“ on page 3)

Note9: This pin is used internally. No external connection allowed



Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

| PACKAGING INFORMATION | | |
|-----------------------------|----------------|-----------------------|
| Parameter | Type | Value |
| Packaging Dimension (LxWxH) | tube | 520.0 x 17.0 x 10.0mm |
| Packaging Quantity | tube | 22pcs |
| Storage Temperature Range | | -55°C to +125°C |
| Storage Humidity | non-condensing | 95% RH max. |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View RS3-0505S on WIN SOURCE](#)
-  [Recom Power Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management