




**THE DATASHEET OF  
TDN 5-0921WISM**



- Ultra compact SMD package  
13.2 x 9.1 x 10.2 mm
- I/O-isolation 1'600 VDC
- Fully regulated outputs
- Operating temperature range  
-40°C to +75°C
- Short circuit protection
- Remote On/Off
- Designed to meet IEC/EN/UL 62368-1  
(not certified)
- 3-year product warranty



The TDN 5WISM Series redefines the power density of high performance DC/DC converters. The cubical package of only 1.23 cm<sup>3</sup> encloses a sophisticated circuit which provides 5 Watt output power without any compromise regarding reliability and functionality. They operate up to 50°C environment temperature at full load or up to 70°C with a 50% load de-rating. With 1'600 VDC I/O-isolation voltage, external On/Off and short current protection, they cover a wide range of application when space is limited. The input of the converters is designed for a wide voltage range (4:1) and minimum load is not required. The functional I/O-isolation system is designed to meet IEC/EN/UL 62368-1 (not certified) with a test voltage (60 s) of 1'600 VDC.

| Models         |                                |                             |                  |          |                  |                 |
|----------------|--------------------------------|-----------------------------|------------------|----------|------------------|-----------------|
| Order Code     | Input Voltage Range            | Output 1                    |                  | Output 2 |                  | Efficiency typ. |
|                |                                | Vnom                        | I <sub>max</sub> | Vnom     | I <sub>max</sub> |                 |
| TDN 5-0910WISM | 4.5 - 13.2 VDC<br>(9 VDC nom.) | 3.3 VDC                     | 1'000 mA         |          |                  | 76 %            |
| TDN 5-0911WISM |                                | 5 VDC                       | 1'000 mA         |          |                  | 80 %            |
| TDN 5-0919WISM |                                | 9 VDC                       | 555 mA           |          |                  | 81 %            |
| TDN 5-0912WISM |                                | 12 VDC                      | 420 mA           |          |                  | 83 %            |
| TDN 5-0913WISM |                                | 15 VDC                      | 333 mA           |          |                  | 83 %            |
| TDN 5-0915WISM |                                | 24 VDC                      | 210 mA           |          |                  | 83 %            |
| TDN 5-0921WISM |                                | +5 VDC                      | 500 mA           | -5 VDC   | 500 mA           | 80 %            |
| TDN 5-0922WISM |                                | +12 VDC                     | 210 mA           | -12 VDC  | 210 mA           | 83 %            |
| TDN 5-0923WISM |                                | +15 VDC                     | 168 mA           | -15 VDC  | 168 mA           | 83 %            |
| TDN 5-2410WISM |                                | 9 - 36 VDC<br>(24 VDC nom.) | 3.3 VDC          | 1'000 mA |                  |                 |
| TDN 5-2411WISM | 5 VDC                          |                             | 1'000 mA         |          |                  | 80 %            |
| TDN 5-2419WISM | 9 VDC                          |                             | 555 mA           |          |                  | 81 %            |
| TDN 5-2412WISM | 12 VDC                         |                             | 420 mA           |          |                  | 83 %            |
| TDN 5-2413WISM | 15 VDC                         |                             | 333 mA           |          |                  | 83 %            |
| TDN 5-2415WISM | 24 VDC                         |                             | 210 mA           |          |                  | 83 %            |
| TDN 5-2421WISM | +5 VDC                         |                             | 500 mA           | -5 VDC   | 500 mA           | 80 %            |
| TDN 5-2422WISM | +12 VDC                        |                             | 210 mA           | -12 VDC  | 210 mA           | 83 %            |
| TDN 5-2423WISM | +15 VDC                        |                             | 168 mA           | -15 VDC  | 168 mA           | 84 %            |
| TDN 5-4810WISM | 18 - 75 VDC<br>(48 VDC nom.)   |                             | 3.3 VDC          | 1'000 mA |                  |                 |
| TDN 5-4811WISM |                                | 5 VDC                       | 1'000 mA         |          |                  | 81 %            |
| TDN 5-4819WISM |                                | 9 VDC                       | 555 mA           |          |                  | 81 %            |
| TDN 5-4812WISM |                                | 12 VDC                      | 420 mA           |          |                  | 83 %            |
| TDN 5-4813WISM |                                | 15 VDC                      | 333 mA           |          |                  | 83 %            |
| TDN 5-4815WISM |                                | 24 VDC                      | 210 mA           |          |                  | 83 %            |
| TDN 5-4821WISM |                                | +5 VDC                      | 500 mA           | -5 VDC   | 500 mA           | 80 %            |
| TDN 5-4822WISM |                                | +12 VDC                     | 210 mA           | -12 VDC  | 210 mA           | 83 %            |
| TDN 5-4823WISM |                                | +15 VDC                     | 168 mA           | -15 VDC  | 168 mA           | 84 %            |

### Input Specifications

|                          |              |  |
|--------------------------|--------------|--|
| Input Current            | - At no load | 9 Vin models: <b>80 mA typ.</b><br>24 Vin models: <b>30 mA typ.</b><br>48 Vin models: <b>15 mA typ.</b>  |
| Surge Voltage            |              | 9 Vin models: <b>15 VDC max.</b> (1 s max.)<br>24 Vin models: <b>50 VDC max.</b> (1 s max.)<br>48 Vin models: <b>100 VDC max.</b> (1 s max.)   |
| Reflected Ripple Current |              | 9 Vin models: <b>40 mAp-p typ.</b><br>24 Vin models: <b>20 mAp-p typ.</b><br>48 Vin models: <b>15 mAp-p typ.</b>   |
| Recommended Input Fuse   |              | 9 Vin models: <b>2'500 mA</b> (slow blow)<br>24 Vin models: <b>1'250 mA</b> (slow blow)<br>48 Vin models: <b>630 mA</b> (slow blow)<br>(The need of an external fuse has to be assessed in the final application.) |
| Input Filter             |              | <b>Internal Capacitor</b>  |

### Output Specifications

|                          |  |   |
|--------------------------|--|---|
| Voltage Set Accuracy     |  | <b>±1% max.</b>   |
| Regulation               | - Input Variation (Vmin - Vmax)<br>- Load Variation (0 - 100%)<br>- Cross Regulation (25% / 100% asym. load) | single output models: <b>0.2% max.</b><br>dual output models: <b>0.2% max.</b><br>single output models: <b>1% max.</b><br>dual output models: <b>1% max.</b> (Output 1)<br><b>1% max.</b> (Output 2)<br>dual output models: <b>5% max.</b>  |
| Ripple and Noise         | - 20 MHz Bandwidth   | <b>75 mVp-p typ.</b>  |
| Capacitive Load          | - single output<br><br><br><br><br><br><br><br><br><br>- dual output   | 3.3 Vout models: <b>4'400 µF max.</b><br>5 Vout models: <b>2'200 µF max.</b><br>9 Vout models: <b>1'470 µF max.</b><br>12 Vout models: <b>1'220 µF max.</b><br>15 Vout models: <b>1'000 µF max.</b><br>24 Vout models: <b>470 µF max.</b><br>5 / -5 Vout models: <b>1'000 / 1'000 µF max.</b><br>12 / -12 Vout models: <b>680 / 680 µF max.</b><br>15 / -15 Vout models: <b>440 / 440 µF max.</b> |
| Minimum Load             |  | <b>Not required</b>   |
| Temperature Coefficient  |  | <b>±0.02 %/K max.</b>   |
| Start-up Time            |  | <b>10 ms typ. / 20 ms max.</b>  |
| Short Circuit Protection |  | <b>Continuous, Automatic recovery</b>   |
| Transient Response       | - Response Time  | <b>500 µs typ.</b> (25% Load Step)  |

### Safety Specifications

|           |                             |   |
|-----------|-----------------------------|---|
| Standards | - IT / Multimedia Equipment | <b>Designed for IEC/EN/UL 62368-1</b> (not certified) |
|-----------|-----------------------------|---|

### EMC Specifications

|               |                       |  |
|---------------|-----------------------|--|
| EMI Emissions | - Conducted Emissions | <b>EN 55032 class A</b> (with external filter)<br><b>EN 55032 class B</b> (with external filter)                         |
|               | - Radiated Emissions  | <b>EN 55032 class A</b> (with external filter)<br><b>EN 55032 class B</b> (with external filter)                         |
|               |                       | External filter proposal: <a href="http://www.tracopower.com/overview/tdn5wism">www.tracopower.com/overview/tdn5wism</a> |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

|              |                             |   |
|--------------|-----------------------------|---|
| EMS Immunity | - Electrostatic Discharge   | Air: EN 61000-4-2, $\pm 8$ kV, perf. criteria A     |
|              | - RF Electromagnetic Field  | Contact: EN 61000-4-2, $\pm 6$ kV, perf. criteria A |
|              | - EFT (Burst) / Surge       | EN 61000-4-3, 10 V/m, perf. criteria A              |
|              |                             | EN 61000-4-4, $\pm 2$ kV, perf. criteria A          |
|              |                             | EN 61000-4-5, $\pm 1$ kV, perf. criteria A          |
|              | - Conducted RF Disturbances | Ext. input component: KY 220 $\mu$ F, 100 V         |
|              | - PF Magnetic Field         | EN 61000-4-6, 10 Vrms, perf. criteria A             |
|              |                             | Continuous: EN 61000-4-8, 100 A/m, perf. criteria A |
|              |                             | 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A       |

## General Specifications

|                            |  |  |
|----------------------------|--|--|
| Relative Humidity          |  | 95% max. (non condensing)  |
| Temperature Ranges         | - Operating Temperature                    | -40°C to +75°C   |
|                            | - Case Temperature                         | +105°C max.  |
|                            | - Storage Temperature                      | -55°C to +125°C  |
| Power Derating             | - High Temperature                         | Depending on model   |
|                            | See application note:                      | <a href="http://www.tracopower.com/overview/tdn5wism">www.tracopower.com/overview/tdn5wism</a>                 |
| Cooling System             |  | Natural convection (20 LFM)  |
| Remote Control             | - Current Controlled Remote (passive = on) | On: open circuit   |
|                            |  | Off: 2 to 4 mA current (no internal resistor)  |
|                            |  | Refers to 'Remote' and '-Vin' Pin  |
|                            | External circuit proposal:                 | <a href="http://www.tracopower.com/info/current-remote.pdf">www.tracopower.com/info/current-remote.pdf</a>     |
|                            | - Off Idle Input Current                   | 2.5 mA max.  |
| Switching Frequency        |  | 100 kHz min. (PFM)   |
| Insulation System          |  | Functional Insulation  |
| Isolation Test Voltage     | - Input to Output, 60 s                    | 1'600 VDC  |
| Isolation Resistance       | - Input to Output, 500 VDC                 | 1'000 M $\Omega$ min.  |
| Isolation Capacitance      | - Input to Output, 100 kHz, 1 V            | 50 pF max.   |
| Reliability                | - Calculated MTBF                          | 2'960'000 h (9 Vin models)   |
|                            |  | 2'280'000 h (other models)   |
|                            |  | (MIL-HDBK-217F, ground benign)   |
| Moisture Sensitivity (MSL) |  | Level 2 (J-STD-033C)   |
| Washing Process            |  | According to Cleaning Guideline  |
|                            |  | <a href="http://www.tracopower.com/info/cleaning.pdf">www.tracopower.com/info/cleaning.pdf</a>                 |
| Environment                | - Vibration                                | MIL-STD-810F   |
|                            | - Thermal Shock                            | MIL-STD-810F   |
| Housing Material           |  | Non-conductive Plastic (UL 94 V-0 rated)   |
| Base Material              |  | Non-conductive FR4 (UL 94 V-0 rated)   |
| Potting Material           |  | Silicone (UL 94 V-0 rated)   |
| Pin Material               |  | Copper   |
| Pin Foundation Plating     |  | Nickel (2 - 3 $\mu$ m)   |
| Pin Surface Plating        |  | Tin (3 - 5 $\mu$ m), matte   |
| Housing Type               |  | Plastic Case   |
| Mounting Type              |  | PCB Mount  |
| Connection Type            |  | SMD (Surface-Mount Device)   |
| Footprint Type             |  | SMD8   |
| Soldering Profile          |  | Lead-Free Reflow Soldering (acc. J-STD-020E)   |
|                            |  | 245°C max. (Tp)  |
|                            |  | 10 s max. (tp, at Tp - 5°C)  |
|                            |  | 90 s max. (tL, time above 217°C)   |
|                            | See application note:                      | <a href="http://www.tracopower.com/info/reflow-soldering.pdf">www.tracopower.com/info/reflow-soldering.pdf</a> |
| Weight                     |  | 2.7 g  |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

[www.tracopower.com/info/reach-declaration.pdf](http://www.tracopower.com/info/reach-declaration.pdf)

- RoHS Declaration

REACH SVHC list compliant

REACH Annex XVII compliant

[www.tracopower.com/info/rohs-declaration.pdf](http://www.tracopower.com/info/rohs-declaration.pdf)

Exemptions: 7a, 7c-I

(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule))

- SCIP Reference Number


8fc743ba-ed28-4846-8011-e1e97ccb7dc7

### Supporting Documents

[Overview Link](#) (for additional Documents)

[www.tracopower.com/overview/tdn5wism](http://www.tracopower.com/overview/tdn5wism)

### Outline Dimensions

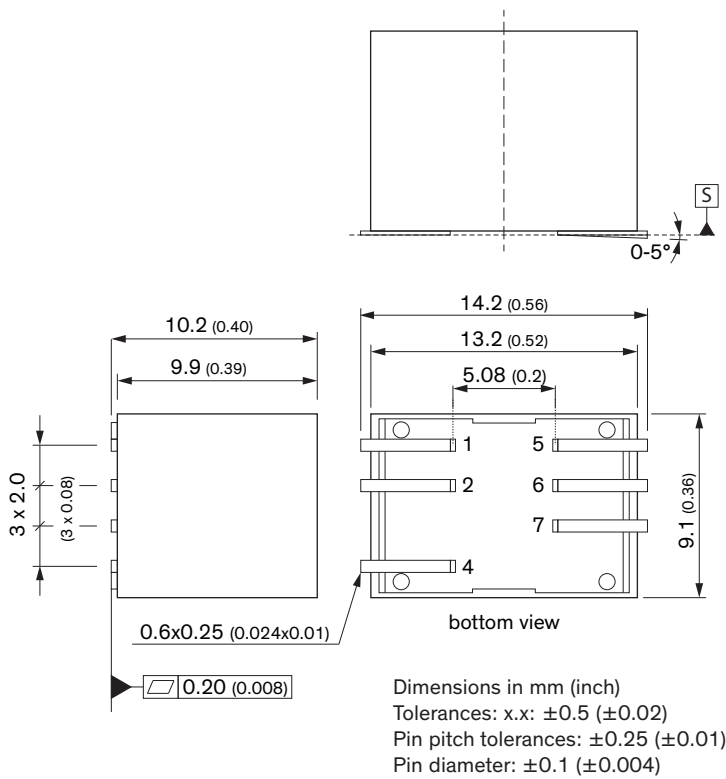


| Pinout |               |               |
|--------|---------------|---------------|
| Pin    | Single        | Dual          |
| 1      | +Vin (Vcc)    | +Vin (Vcc)    |
| 2      | -Vin (GND)    | -Vin (GND)    |
| 4      | Remote On/Off | Remote On/Off |
| 5      | NC            | -Vout         |
| 6      | -Vout         | Common        |
| 7      | +Vout         | +Vout         |

NC: Not connected



All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

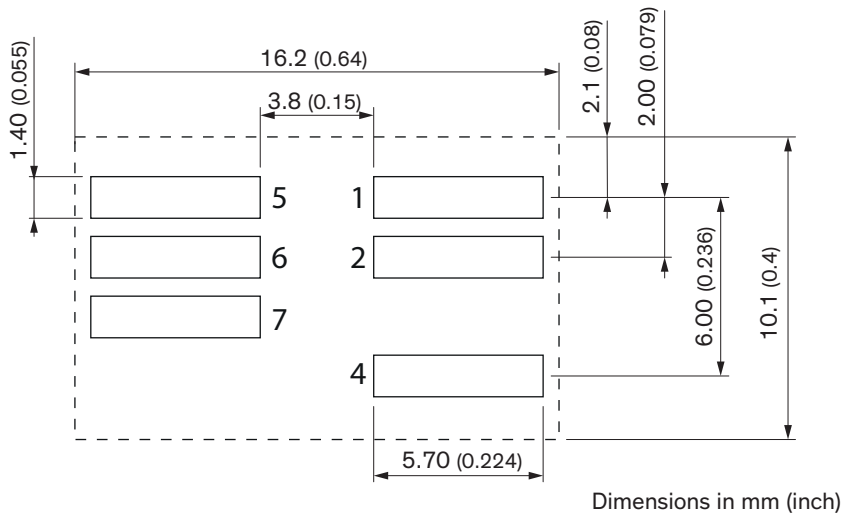**Recommended Solder Pad Layout**



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View TDN 5-0921WISM](#) on WIN SOURCE
-  [Traco Power](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management